

2020
MARINE CATALOG



Audiopipe ^{SWS} Self Mastering Systems

2020 CATALOG



300 watts

▲ **APSW-8505WTW/BTW**
8" Carbon Fiber Tower Speaker
With Built-In Compression Horn



▲ **APMP-T625LD**
Coaxial 2-Way Marine Speaker



▲ **APMRE-4095**
Mini Design 4 Channel MOSFET
Marine Amplifier

LOUD AND CLEAR

All Audiopipe products are designed, manufactured and tested to perform in harsh environments. From our entry level products to our high end series, Audiopipe is your best choice for competition level performance. We welcome you to Team Audiopipe.

For more information, please visit your authorized AUDIOPIPE DEALER.

Audiopipe SMS

2020
MARINE CATALOG

CONTENTS

LOUDSPEAKERS	01 - 08
TWEETERS & COAXIALS	09 - 12
SPEAKER RINGS/ LED LIGHTING	13 - 14
EL CAPITAN	15 - 16
AMPLIFIERS	17 - 20
HEADUNIT CONNECTIVITY DEVICES	21 - 22
MARINE GRADE SPEAKER CABLES	23 - 24
RCA CABLES/ KITS	25 - 26
MARINE SWITCHES	27 - 28
ACCESSORIES	29 - 30

Audiopipe SMS



APMP-623CHF**6" High Frequency Loudspeaker / Compression Horn**

- ▼ 250 Watts Power (P.M.P.O)
- ▼ 125 Watts Power (R.M.S)
- ▼ Frequency Response: 95-20,000Hz
- ▼ Sensitivity: 92dB
- ▼ 1.5" Kapton Voice Coil
- ▼ Liquid Metal Plastic Basket
- ▼ Mounting Depth: 75mm (3")
- ▼ Impedance: 4 Ohms
- ▼ 23 Oz. Magnet

**CARBON FIBER CONE****FOR INDOOR & OUTDOOR USE!****APMP-68CHF VC**

Replacement Coil for APMP-623CHF

**APMP-843CHF****8" High Frequency Loudspeaker / Compression Horn**

- ▼ 300 Watts Power (P.M.P.O)
- ▼ 150 Watts Power (R.M.S)
- ▼ Frequency Response: 80-20,000Hz
- ▼ Sensitivity: 95dB
- ▼ 1.5" Kapton Voice Coil
- ▼ Liquid Metal Plastic Basket
- ▼ Mounting Depth: 89mm (3-1/2")
- ▼ Impedance: 4 Ohms
- ▼ 43 Oz. Magnet

FOR INDOOR & OUTDOOR USE!**CARBON FIBER CONE****APMP-68CHF VC**

Replacement Coil for APMP-843CHF

**APMP-1043CHF****10" High Frequency Loudspeaker / Compression Horn**

- ▼ 400 Watts Power (P.M.P.O)
- ▼ 200 Watts Power (R.M.S)
- ▼ Frequency Response: 55-20,000Hz
- ▼ Sensitivity: 92dB
- ▼ 1.2" Kapton Voice Coil
- ▼ Liquid Metal Plastic Basket
- ▼ Mounting Depth: 102mm (4")
- ▼ Impedance: 4 Ohms
- ▼ 40 Oz. Magnet

APMP-1043CHF VC

Replacement Coil for APMP-1043CHF

**FOR INDOOR & OUTDOOR USE!****APMP-T625LD****6.5" Marine Coaxial**

- ▼ 250 Watts Power (P.M.P.O.)
- ▼ 125 Watts Power (R.M.S.)
- ▼ Frequency Response: 60-20,000Hz
- ▼ Sensitivity: 88dB
- ▼ 1.2" Kapton Voice Coil
- ▼ Liquid Metal Plastic Basket
- ▼ Mounting Depth: 81mm (3 1/4")
- ▼ Impedance: 4 Ohms
- ▼ 22 Oz Magnet
- ▼ LED Flashes to the Music

**APMP-T840LD****8" Marine Coaxial**

- ▼ 500 Watts Power (P.M.P.O.)
- ▼ 250 Watts Power (R.M.S.)
- ▼ Frequency Response: 50-20,000Hz
- ▼ Sensitivity: 90dB
- ▼ 1.5" Kapton Voice Coil
- ▼ Liquid Metal Plastic
- ▼ Mounting Depth: 98mm (3 7/8")
- ▼ Impedance: 4 Ohms
- ▼ 38 Oz Magnet
- ▼ LED Flashes to the Music

APMP-838CF

500 Watts 8" High Mid Frequency Loudspeaker

- 500 Watts Power (P.M.P.O.)
- 250 Watts Power (R.M.S.)
- Frequency Response: 45-10,000 Hz
- Sensitivity: 92 dB
- 1.5" TIL Voice Coil
- Liquid Metal Plastic Basket
- Mounting Depth: 98 mm (3-7/8")
- Impedance: 4 Ohms
- 38 oz Magnet



FOR INDOOR & OUTDOOR USE!

TITANIUM & WHITE GRILLS INCLUDED!

CARBON FIBER CONE



APMP-834CFF

300 Watts 8" High Mid Frequency Loudspeaker

- 300 Watts Power (P.M.P.O.)
- 150 Watts Power (R.M.S.)
- Frequency Response: 70-9,000 Hz
- Sensitivity: 90 dB
- 1.5" TIL Voice Coil
- Liquid Metal Plastic Basket
- Mounting Depth: 64 mm (2-1/2")
- Impedance: 4 Ohms
- 34 oz Magnet



FOR INDOOR & OUTDOOR USE!

TITANIUM & WHITE GRILLS INCLUDED!

CARBON FIBER CONE



APMP-620CF

250 Watts 6.5" High Mid Frequency Loudspeaker

- 250 Watts Power (P.M.P.O.)
- 125 Watts Power (R.M.S.)
- Frequency Response: 50-10,000 Hz
- Sensitivity: 90 dB
- 1.5" TIL Voice Coil
- Liquid Metal Plastic Basket
- Mounting Depth: 81 mm (3-1/4")
- Impedance: 4 Ohms
- 21 oz Magnet



TITANIUM & WHITE GRILLS INCLUDED!

FOR INDOOR & OUTDOOR USE!



CARBON FIBER CONE



APMP-618CFF

250 Watts 6.5" High Mid Frequency Loudspeaker

- 250 Watts Power (P.M.P.O.)
- 125 Watts Power (R.M.S.)
- Frequency Response: 75-10,000 Hz
- Sensitivity: 90 dB
- 1.5" TIL Voice Coil
- Liquid Metal Plastic Basket
- Mounting Depth: 55 mm (2-3/16")
- Impedance: 4 Ohms
- 18 oz Magnet



TITANIUM & WHITE GRILLS INCLUDED!

FOR INDOOR & OUTDOOR USE!



CARBON FIBER CONE

APSW-8505WTW

8" Carbon Fiber Tower Speaker

- 300 Watts Max Power (P.M.P.O.)
- 125 Watts Rated Power (R.M.S.)
- Frequency Response: 50Hz-22KHz
- Sensitivity: 90dB
- 2" 2-Layer Kapton Voice Coil
- IMPP Cone With Rubber Surround
- 3.5" Titanium Dome
- 40 Oz. Magnet
- Crossover: 12dB/Oct.
- Rotates 360°



SOLD by **PAIRS**

8"

300 watts

APSW-8505BTW

8" Carbon Fiber Tower Speaker

- 300 Watts Max Power (P.M.P.O.)
- 125 Watts Rated Power (R.M.S.)
- Frequency Response: 50Hz-22KHz
- Sensitivity: 90dB
- 2" 2-Layer Kapton Voice Coil
- IMPP Cone With Rubber Surround
- 3.5" Titanium Dome
- 40 Oz. Magnet
- Crossover: 12dB/Oct.
- Rotates 360°



Mounting Clamp Insert / Sizes:

1 3/4", 1 1/2", 1 7/8", 1 5/8", 2", 2 1/4", 2 1/2", 2 3/8"



APMP-600ETW

6" Marine Speaker Wakeboard Tower Enclosures

6"

- Speaker Fitting: 6" / 6-1/2" Speaker.
- Materials: Tough ABS, weather-proof empty enclosures with slotted mounting holes for different bolt patterns.
- Aiming: 22-degree axis rotation in either direction for aiming maximum sound quality.
- Fits Mounting Tube Sizes: 2-1/4", 2-3/8", 2-1/2", 2-5/8".
- Connectors: Satin nickel plated brass binding posts (screw to tighten style)
- Cable Grommet Supporting LED Installation
- Enclosure Dimensions: Φ180x223mm



6"

APMP-800ETW

8" Marine Speaker Wakeboard Tower Enclosures

8"

- Speaker Fitting: 8" Speaker.
- Materials: Tough ABS, weather-proof empty enclosures with slotted mounting holes for different bolt patterns.
- Aiming: 22-degree axis rotation in either direction for aiming maximum sound quality.
- Fits Mounting Tube Sizes: 2-1/4", 2-3/8", 2-1/2", 2-5/8".
- Connectors: Satin nickel plated brass binding posts (screw to tighten style)
- Cable Grommet Supporting LED Installation
- Enclosure Dimensions: Φ217x250mm



8"

NEW PRODUCT

APSW-1200MG

Enhanced Frequency Loudspeaker

- ▼ 1000 Watts Power (P.M.P.O.)
- ▼ 500 Watts Power (R.M.S.)
- ▼ Frequency Response: 25-2,000 Hz
- ▼ Sensitivity: 92dB
- ▼ 2.5" TIL Voice Coil
- ▼ Liquid Metal Plastic Strong as Steel Basket
- ▼ Mounting Depth: 140mm (5 1/16")
- ▼ Impedance: 4 Ohms
- ▼ 40 Oz Magnet

1200 watts

12"



CARBON FIBER CONE
WATER RESISTANT

FOR INDOOR & OUTDOOR USE!



APMP-1044CF

Enhanced Frequency Loudspeaker

- ▼ 400 Watts Power (P.M.P.O.)
- ▼ 200 Watts Power (R.M.S.)
- ▼ Frequency Response: 40-4,000 Hz
- ▼ Sensitivity: 92dB
- ▼ 2" Kapton Voice Coil
- ▼ Liquid Metal Plastic Strong as Steel Basket
- ▼ Mounting Depth: 3-7/16"
- ▼ Impedance: 4 Ohms
- ▼ 40 Oz Magnet

400 watts

10"



FOR INDOOR & OUTDOOR USE!

TITANIUM & WHITE GRILLS INCLUDED!

CARBON FIBER CONE

WATER RESISTANT



APSW-TW-KT RGB

LED Speaker Rings

- ▼ UV Protection
- ▼ Handles All Outdoor Weather Environments
- ▼ LED's are Pre-Mounted and Ready to Install
- ▼ Rings are Supplied with a Weather-Proof Connector
- ▼ Outer Edges are Frosted for a Consistent Glow Effect
- ▼ Ring Inner Dimension: 7"
- ▼ Ring Outer Dimension: 8.5"
- ▼ Colors: White, Red, Green & Blue



Includes 2 RINGS



WATER RESISTANT

- ▼ Made to fit APSW-8505WTW Tower Marine Speaker

APSW-E1250T

1" Marine Silk Dome Tweeter

- ▶ 100 Watts Power (P.M.P.O.)
- ▶ 50 Watts Power (R.M.S.)
- ▶ Frequency Response: 4k-25kHz
- ▶ Sensitivity: 91dB
- ▶ 1" High-Temperature Kapton Voice Coil
- ▶ Impedance: 4 Ohms
- ▶ Ferro Fluid Enhanced Voice Coil
- ▶ 25x4mm NdFeB Magnet Structure
- ▶ 12dB/OCT. High Pass Filter (HPF) "



Classic grills also included

**APSW-3750 /APSW-3755**3 3/4" Titanium
Marine Tweeter

300 watts

NEW
PRODUCT

- ▶ 150 Watts RMS/300 Watts Peak Power
- ▶ Frequency Response: 2k - 25 kHz
- ▶ Sensitivity: 99dB
- ▶ 1" High Temperature Kapton Voice Coil
- ▶ Impedance: 8 Ohms
- ▶ 3 3/4" ABS Plastic Horn with 1" Super Bullet Tweeter
- ▶ Ferro Fluid Enhanced Voice Coil
- ▶ 25 Oz. Magnet



ABS Plastic Housing

APSW-60326.5" Coaxial
Marine Speaker

- ▶ 200 Watts Power (P.M.P.O.)
- ▶ 100 Watts Power (R.M.S.)
- ▶ Frequency Response: 45-20 kHz
- ▶ Sensitivity: 90 dB
- ▶ Rubber Surround Piano Black IMPP Cone
- ▶ Titanium Dome Diaphragm High Performance Tweeter
- ▶ Mounting Depth: 70 mm (2 3/4")
- ▶ Impedance: 4 Ohms
- ▶ 15. Oz Magnet



200 watts



6.5"

APSW-66GM

Fiberglass Speaker Box

- ▶ Fits a 6 1/2" Speaker
- ▶ Color: White
- ▶ Size: 13.5" (L) x 8" (W) x 4" (H)



This fiberglass speaker box is a perfect fit under most gunnels.

*This item (APSW-62GM) is only a fiberglass speaker box.

It does not include a speaker.

APSW-8032T8" Coaxial
Marine Speaker

- ▶ 350 Watts Power (P.M.P.O.)
- ▶ 175 Watts Power (R.M.S.)
- ▶ Frequency Response: 45-25 kHz
- ▶ Sensitivity: 90 dB
- ▶ Impedance: 4 Ohms
- ▶ Rubber Surround Piano Black IMPP Cone
- ▶ Silk Dome Diaphragm High Performance Tweeter
- ▶ Mounting Depth: 90 mm (3 1/2")
- ▶ 22 Oz. Magnet



350 watts



8"



OLD NEWLY IMPROVED!

APSW-6932

6" x 9" Coaxial
Marine Speaker

- ▼ 300 Watts Power (P.M.P.O.)
- ▼ 150 Watts Power (R.M.S.)
- ▼ Frequency Response: 40-20 kHz
- ▼ Sensitivity: 93 dB
- ▼ Rubber Surround Piano Black IMPP Cone
- ▼ Titanium Dome Diaphragm High Performance Tweeter
- ▼ Mounting Depth: 92 mm (3 5/8")
- ▼ Impedance: 4 Ohms
- ▼ 20 Oz. Magnet

**APSW-1032V**

10" Marine Subwoofer

- ▼ 600 Watts Power (P.M.P.O.)
- ▼ 300 Watts Power (R.M.S.)
- ▼ Frequency Response: 32-2500Hz
- ▼ Sensitivity: 88dB
- ▼ Impedance: 4 Ohms
- ▼ 2.5" TIL Voice Coil
- ▼ Rubber Surround Piano Black IMPP Cone
- ▼ White ABS Basket
- ▼ Mounting Depth: 130mm (5 1/8")
- ▼ 56 Oz. Magnet


APMG-10BK
APMG-10WH
APMG-10TI

10" Grill

- ▼ Colors: Black / White / Titanium
- ▼ Compatible with **APSW-1031**
APSW-1032V

**NL-RI6550RGB**

6.5" LED Speaker Rings

- ▼ Durable Acrylic 12 mm Thickness
- ▼ Handle all outdoor weather environments
- ▼ LEDs are pre-mounted and ready to install
- ▼ Rings are supplied with a weather proof connector
- ▼ Outer edges are frosted for a consistent glow effect
- ▼ Made to fit APSW-6032 6.5" coaxial marine speaker

**NL-RI7050BL / NL-RI7050WH**

7" LED Speaker Rings

- ▼ Durable Acrylic 12 mm Thickness
- ▼ Handle all outdoor weather environments
- ▼ LEDs are pre-mounted and ready to install
- ▼ Rings are supplied with a weather proof connector
- ▼ Outer edges are frosted for a consistent glow effect
- ▼ Made to fit JL Audio MX770-CCX-CG-WH 7" coaxial marine speaker

**NL-RI8050RGB**

8" LED Speaker Rings

- ▼ Durable Acrylic 12 mm Thickness
- ▼ Handle all outdoor weather environments
- ▼ LEDs are pre-mounted and ready to install
- ▼ Rings are supplied with a weather proof connector
- ▼ Outer edges are frosted for a consistent glow effect
- ▼ Made to fit APSW-8032 8" Coaxial Marine Speakers

**NL-RI8850BL / NL-RI8850WH**

8.8" LED Speaker Rings

- ▼ Durable Acrylic 12 mm Thickness
- ▼ Handle all outdoor weather environments
- ▼ LEDs are pre-mounted and ready to install
- ▼ Rings are supplied with a weather proof connector
- ▼ Outer edges are frosted for a consistent glow effect

**NL-RI1050RGB**

10" LED Speaker Rings

- ▼ Durable Acrylic 12 mm Thickness
- ▼ Handle all outdoor weather environments
- ▼ LEDs are pre-mounted and ready to install
- ▼ Rings are supplied with a weather proof connector
- ▼ Outer edges are frosted for a consistent glow effect
- ▼ Made to fit APSW-1032 8" Coaxial Marine Speakers



NI-RIAPMP-6 RGB**LED Speaker Rings**

- ▾ UV Protection
- ▾ Durable Acrylic 12mm Thickness
- ▾ Handles all Outdoor Weather Environments
- ▾ LED's are Pre-Mounted and Ready to Install
- ▾ Rings are Supplied with a Weather-Proof Connector
- ▾ Outer Edges are Frosted for a Consistent Glow Effect
- ▾ Ring Inner Dimension: 5-7/8"
- ▾ Ring Outer Dimension: 7"
- ▾ Colors: White, Red, Green & Blue



- ▾ Compatible with APMP 6" Series

**NI-RIAPMP-8 RGB****LED Speaker Rings**

- ▾ UV Protection
- ▾ Durable Acrylic 12mm Thickness
- ▾ Handles all Outdoor Weather Environments
- ▾ LED's are Pre-Mounted and Ready to Install
- ▾ Rings are Supplied with a Weather-Proof Connector
- ▾ Outer Edges are Frosted for a Consistent Glow Effect
- ▾ Ring Inner Dimension: 7-1/4"
- ▾ Ring Outer Dimension: 8.5"
- ▾ Colors: White, Red, Green & Blue



- ▾ Compatible with APMP 8" Series

**APNL-FLX16MULTI****16' Flexible RGB LED Strip**

- ▾ Compatible with APNL-408CNT
- ▾ Cuttable every 3 LED
- ▾ Waterproof Socket
- ▾ Water-Tight Seal
- ▾ 16Ft. Harness
- ▾ High Grade Epoxy

**APNL-FLX8MULTI****8' Flexible RGB LED Strip**

- ▾ Compatible with APNL-408CNT
- ▾ Cuttable every 3 LED
- ▾ Waterproof Socket
- ▾ Water-Tight Seal
- ▾ 16Ft. Harness
- ▾ High Grade Epoxy



Compatible with Boats



All of our LED Strips come on a flexible circuit with an adhesive backing. They are customizable from 3 inches and longer. Durability, energy efficiency and practically maintenance-free; these qualities make this product ideal for so many types of applications.



Compatible with Cars

NL-464-BTK**Wireless Stream RGB LED Controller**

- ▾ One RGB LED APP Controller with 4 Outputs, Connectors and Remote in Turn on Wire
- ▾ Extra 6" Extension Cables x 4
- ▾ Voltage: 12V DC, Current: 10A"

NL-464-EXT**Extension Power Wire for NL-464-BTK**
13 ft Long (2) Pack**APNL-LST-EXT10****Extension Cable 10Ft.**

- ▾ Compatible with:
APNL-408CNT
APNL-FLX8MULTI
APNL-FLX16MULTI





TELL US YOUR GENERAL EXPERIENCE WITH AUDIOPIPE MARINE?

Great experience. Fast response from manufacturer warranty; Quick and accessible customer service.

WHEN DID YOU FIRST HEAR ABOUT AUDIOPIPE MARINE?

Around 2013.

WHY DID YOU CHOOSE AUDIOPIPE MARINE?

We have a great working relationship with the sales rep. at the time. We felt it was a well represented line with local service and warranty.

HOW LONG HAVE YOU BEEN WORKING WITH AUDIOPIPE MARINE?

About 7 years.

WHICH AUDIOPIPE MARINE PRODUCTS HAVE YOU HAD THE HIGHEST DEMAND FOR?

Amplifiers have always had the most demand here at El Capitan



WHAT KIND OF FEEDBACK DO YOU GET FROM YOUR CUSTOMERS IN REGARDS TO THE BRAND?

High quality products without breaking your pocket and great sounding system.

WHO IS YOUR TARGET CUSTOMER? AGE RANGE?... AND WHAT KIND OF APPLICATIONS IS THE PRODUCT USED IN? (PERSONAL, PROFESSIONAL OR COMPETITION)

There's not a specific age to listen to music. Even if it's for commercial, competition or personal use. Audiopipe Marine always has the right product.

1590 NW 27th Ave
305 635 7500
 Miami, FL 33125



APMRE-4150D

2500W Mini Design 4 Channel
MOSFET Marine Amplifier

- ▼ RMS @ 4 Ohm(<1% DISTORTION): 4 x 150W
- ▼ RMS @ 2 Ohm(<1% DISTORTION): 4 x 200W
- ▼ Maximum Power Output: 2 x 360W
- ▼ Frequency Response: 20~20 kHz
- ▼ Signal Noise Ratio: >80 dB
- ▼ Input Sensitivity Level: 0.2~6V
- ▼ LPF: 50~500 Hz
- ▼ HPF: 50~1.2 kHz
- ▼ Current Draw: 60A
- ▼ Minimum Load: 2 Ohms
- ▼ Components & PCB: Double Side Board
- ▼ Dimensions (WxHxD): 301 x 55 x 160 mm

2500 WATTS
P.M.P.O.
400 WATTS
R.M.S.

SWS
Salt Water Series

**APMRE-4095**

Mini Design 4 Channel MOSFET Marine Amplifier

- ▼ RMS @ 4 Ohm(<1% DISTORTION): 4 x 100W
- ▼ RMS @ 2 Ohm(<1% DISTORTION): 4 x 130W
- ▼ Maximum Power Output: 2 x 250W
- ▼ Frequency Response: 50~1.2kHz
- ▼ Signal Noise Ratio: >80dB
- ▼ Input Sensitivity Level: 0.2~6V
- ▼ LPF: 50~500Hz
- ▼ HPF: 50~1.2kHz
- ▼ Current Draw: 30A
- ▼ Minimum Load: 2 Ohms
- ▼ Components & PCB: Double Side Board
- ▼ Dimensions (WxHxD): 241x55x160mm

1300 WATTS
P.M.P.O.
520 WATTS
R.M.S.



SWS
Salt Water Series

APMRE-1500

Class D MOSFET Marine Amplifier

- ▼ RMS @ 4 Ohm(<1% DISTORTION): 376W
- ▼ RMS @ 2 Ohm(<1% DISTORTION): 648W
- ▼ RMS @ 1 Ohm(<1% DISTORTION): 1024W
- ▼ Input Level: 0.2~5V
- ▼ Frequency Response: 8~180Hz
- ▼ LPF: 40~180Hz
- ▼ SUBSONIC Filter: 5~50Hz
- ▼ Bass Boost Level: 0~12dB
- ▼ THD at 4 Ohm load 30% Rated Power: <0.15%
- ▼ Signal Noise Ratio: >70dB
- ▼ Best Efficiency: >85%
- ▼ Minimum Load: 1 Ohm
- ▼ Optional Remote: YES
- ▼ Bridgeable Protect System: YES
- ▼ Short Circuit Test (max. power): PASS
- ▼ Overheat Protect Temperature: 80° C/176° F
- ▼ Components & PCB: Double Side Board
- ▼ Transparent Insolation Connector: YES
- ▼ Dimension(WxHxD): 165x56x266.5mm

1000 WATTS



SWS
Salt Water Series

APSR-6185

3000W 6-Channel
Class D Amplifier

- ▼ Output Power(RMS)@1% 1KHz 14.4V
- ▼ Stereo@4 ohms - 6 x 185 Watts @ 73A
- ▼ Stereo@2 ohms - 6 x 290 Watts @ 138A
- ▼ Mono@4 ohms - 3 x 585 Watts @ 138A
- ▼ Frequency Response -3dB - 10Hz-20KHz
- ▼ Crossover Range High & Low Pass - 30Hz-300Hz 12dB/Octave
- ▼ Bass Boost - 0-12dB @ 27Hz-110Hz
- ▼ S/N Ratio(A wtg) - >85dB
- ▼ Input Sensitivity - 0.2V-6V
- ▼ Overvolt Protection - 16.5V
- ▼ Under-Voltage Protection - 8.5V
- ▼ Dimensions (L x W x H) - 343mm x 214mm x 64mm



6 Channel
3000 WATTS
P.M.P.O.
1500 WATTS
R.M.S.



APSR-4120

1500W 4-Channel
Class D Amplifier

- ▼ Output Power(RMS)@1% 1KHz 14.4V
- ▼ Stereo@4 ohms - 4 x 120 Watts @ 39A
- ▼ Stereo@2 ohms - 4 x 195 Watts @ 71A
- ▼ Mono@4 ohms - 2 x 390 Watts @ 71A
- ▼ Frequency Response -3dB - 10Hz-20KHz
- ▼ Crossover Range High & Low Pass 30Hz-300Hz 12dB/Octave
- ▼ Bass Boost - 0-12dB @ 27Hz-110Hz
- ▼ S/N Ratio(A wtg) - >85dB
- ▼ Input Sensitivity - 0.2V-6V
- ▼ Overvolt Protection - 16.5V
- ▼ Under-Voltage Protection - 8.5V
- ▼ Dimensions (L x W x H) - 283mm x 214mm x 64mm



4 Channel
1500 WATTS
P.M.P.O.
780 WATTS
R.M.S.



APSR-2150

1200W 2-Channel
Class D Amplifier

- ▼ Output Power(RMS)@1% 1KHz 14.4V
- ▼ Stereo@4 ohms - 2 x 150 Watts @ 25A
- ▼ Stereo@2 ohms - 2 x 260 Watts @ 48A
- ▼ Mono@4 ohms - 1 x 520 Watts @ 48A
- ▼ Frequency Response -3dB - 10Hz-20KHz
- ▼ Crossover Range High & Low Pass 30Hz-300Hz 12dB/Octave
- ▼ Bass Boost - 0-12dB @ 27Hz-110Hz
- ▼ S/N Ratio(A wtg) - >85dB
- ▼ Input Sensitivity - 0.2V-6V
- ▼ Overvolt Protection - 16.5V
- ▼ Under-Voltage Protection - 8.5V
- ▼ Dimension (L x W x H) - 223mm x 214mm x 64mm

2 Channel

1200 WATTS
P.M.P.O.
520 WATTS
R.M.S.

APSR-1000

1000W 1-Channel
Class D Amplifier

- ▼ Output Power(RMS)@1% 1KHz 14.4V
- ▼ Mono @4 ohms - 1 x 400 Watts @ 32A
- ▼ Mono @2 ohms - 1 x 720 Watts @63A
- ▼ Mono@1 ohms - 1 x 1020 Watts @105A
- ▼ Frequency Response -3dB - 10Hz-10KHz
- ▼ Low Pass - 30Hz-10KHz 24dB/Octave
- ▼ Subsonic - 10Hz-500Hz 24dB/Octave
- ▼ Bass Boost - 0-9dB @ 45Hz
- ▼ Phase - 0° - 180°
- ▼ S/N Ratio(A wtg) - >85dB
- ▼ Input Sensitivity - 0.2V-6V
- ▼ Overvolt Protection - 16.5V
- ▼ Under-Voltage Protection - 8.5V
- ▼ Dimensions (L x W x H) - 343mm x 214mm x 64mm



1 Channel

1000 WATTS

APSW-5000BTU

Marine AM/FM Player with Wireless Smartphone Connection

- ▼ 200 Watts
- ▼ High Power 50 Watts x 4
- ▼ Front / Rear RCA Output
- ▼ Aux Input
- ▼ Radio Data System
- ▼ Wireless Smartphone Connection to Stream your Music
- ▼ USB Playback



(Rubber Cover Included)



APSW-5007BTU

Marine AM/FM Player with Wireless Smartphone Connection

- ▼ 200 Watts
- ▼ High Power 50 Watts x 4
- ▼ Front / Rear RCA Output
- ▼ Aux Input
- ▼ Radio Data System
- ▼ Wireless Smartphone Connection to Stream your Music
- ▼ USB Playback



(Rubber Cover Included)



APSW-KT100BT

Marine Bluetooth Audio Receiver

- ▼ Completely Wireless Connection-Bluetooth® 4.0
- ▼ Connect to your Smart Device, Audio is Played via your Amplifier
- ▼ Single Knob Control for Volume
- ▼ (+/-) Track (+/-) Auxiliary Switching, Power (On/Off)
- ▼ Built-in Line Driver for 3x Voltage Output
- ▼ Flush Mount, Handlebar Mount
- ▼ 1" Mounting Hole
- ▼ Splash Proof Water Resistant Design with Conformal Coated



APSW-MT150BT

Marine Bluetooth Audio Receiver

- ▼ Completely Wireless Connection-Bluetooth® 4.0
- ▼ Connect to your Smart Device, Audio is played via your Amplifier
- ▼ Direct to Battery Fused hard Wire Installation with Ring Terminal
- ▼ Remote Trigger In/Out
- ▼ 1" Mounting Hole
- ▼ Waterproof Design and Tested for Marine Environment



AP-BTM-1200

Bluetooth Audio Receiver

- ▼ Blue/White - Remote out
- ▼ Red - (B+) - Power 12V
- ▼ Black - (B-) - Ground
- ▼ RCA - Audio Output



MARINE GRADE RCA CABLES

Audiopipe Marine RCA audio cables conveniently connect equipment such as; marine head units, amplifiers and audio processors.

UV protected white PVC jacket is flexible and make our cables easy to route through tight spaces.

Twisted-pair arrangement for outstanding sound transfer and superior noise reduction.



IP-CVR-USBMF-06

Waterproof 6' (1.8 m) Marine Grade Panel Mount Extension Cable USB Female to USB Male



APMR-300ANT

Marine Antenna (59")

- ▼ Application: AM/FM
- ▼ Antenna in White ABS Case: 32 cm (L) x 3.2 cm (W)
- ▼ Coaxial Cable 75 Ohms: Length 150 cm
- ▼ Motorola Type Connector



APMR-100ANT

Marine Antenna (40")

- ▼ Application: AM/FM
- ▼ Frequency: 550-1600 kHz
- ▼ Length: 40" (1016 mm)
- ▼ Motorola Type Connector



MSC-12-250TC /25TC/50TC

Flexible PVC Tin Copper-Plated
OFC Speaker Wire 12 AWG

- 12 Gauge
- 250 ft
- 2x252 / 0.12 TC
- OD 4.5x9



MSC-16-500TC

Flexible PVC Tin Copper-Plated
OFC Speaker Wire 16 AWG

- 16 Gauge
- 500 ft
- 2x100 / 0.12 TC
- OD 3.5x7



MSC-18-50TC

Flexible PVC Tin Copper-Plated
OFC Speaker Wire 18 AWG

- 18 Gauge
- 50 ft
- 2x63 / 0.12 TC
- OD 2.6x5.2



MSC-18-500TC

Flexible PVC Tin Copper-Plated
OFC Speaker Wire 18 AWG

- 18 Gauge
- 50 ft
- 2x63 / 0.12 TC
- OD 2.6x5.2



MSC-12-25TC

Flexible PVC Tin Copper-Plated
OFC Speaker Wire 12 AWG

- 12 Gauge
- 25 ft
- 2x252 / 0.12 TC
- OD 4.5x9



MSC-16-25TC/50TC

Flexible PVC Tin Copper-Plated
OFC Speaker Wire 16 AWG

- 16 Gauge
- 25 ft
- 2x100 / 0.12 TC
- OD 3.5x7



MPC-0-100TC BLK

Power Cable

- 100 ft
- 0 Gauge
- Black color
- Marine Grade

NEW PRODUCT



100% MARINE GRADE TINNED COPPER



MPC-0-100TC WHT

Power Cable

- 100 ft
- 0 Gauge
- White color
- Marine Grade

NEW PRODUCT



100% MARINE GRADE TINNED COPPER



**MPC-4-100TC BLK
MPC-4-100TC WHT**

Power Cable

- 100 ft
- 4 Gauge
- Marine Grade

NEW PRODUCT



100% MARINE GRADE TINNED COPPER

NEW PRODUCT



MPC-8-100TC

Power Cable

- 100 ft
- 8 Gauge
- Marine Grade

NEW PRODUCT



100% MARINE GRADE TINNED COPPER



MARINE GRADE RCA CABLES

Audiopipe Marine RCA audio cables conveniently connect equipment such as marine head units, amplifiers and audio processors.

UV protected white PVC jacket is flexible and make our cables easy to route through tight spaces. Twisted-pair arrangement for outstanding sound transfer and superior noise reduction.

2 CHANNEL RCA AUDIO CABLES

IP-2RCA-3

Oxygen Free 3' (0.9 m)
2-Channel Marine Grade
RCA Audio Cable



IP-2RCA-6

Oxygen Free 6' (1.8 m)
2-Channel Marine Grade
RCA Audio Cable



IP-2RCA-12

Oxygen Free 12' (3.7 m)
2-Channel Marine Grade
RCA Audio Cable



IP-2RCA-17

Oxygen Free 17' (5.2 m)
2-Channel Marine Grade
RCA Audio Cable



IP-2RCA-25

Oxygen Free 25' (7.6 m)
2-Channel Marine Grade
RCA Audio Cable



4 CHANNEL RCA AUDIO CABLES

IP-4RCA-12

Oxygen Free 12' (3.7 m)
4-Channel Marine Grade
RCA Audio Cable



IP-4RCA-25

Oxygen Free 25' (7.6 m)
4-Channel Marine Grade
RCA Audio Cable



IP-YF2M-06

Oxygen Free 6" (0.16 m)
Shielded Marine Grade
"Y" RCA Audio Cable



IP-YM2F-06

Oxygen Free 6" (0.16 m)
Shielded Marine Grade
"Y" RCA Audio Cable



PKMB-2100

Amplifier Installation Kit



- 12Ft. - 2 RCA Plugs to 2 RCA Plugs with Signal Wire
- 10Ft. - 4 AWG White Primary Wire
- 10Ft. - 4 AWG Black Primary Wire
- 100 AMP Breaker
- 25Ft. - 16 AWG White Speaker Wire
- Marine Grade Ring Terminal in White
- Black Spade Terminal Black
- Black Spade Terminal White
- Butt Splices 2 Pcs.
- 10 Assorted Cable Ties
- 3Ft. Split Loom Tubing

PKMB-2100



PKMB-1500

Amplifier Installation Kit



- 12Ft. - 2 RCA Plugs to 2 RCA Plugs with Signal Wire
- 10Ft. - 8 AWG White Primary Wire
- 10Ft. - 8 AWG Black Primary Wire
- 60 AMP Breaker
- 25Ft. - 18 AWG White Speaker Wire
- Marine Grade Ring Terminal in White
- Black Spade Terminal Black
- Black Spade Terminal White
- Butt Splices 2 Pcs.
- 10 Assorted Cable Ties
- 3Ft. Split Loom Tubing

PKMB-1500



IS-EP-WB123 BLU

Water-Proof Push On/Off Switch LED Indicator

IS-EP-WB123 RED

Water-Proof Push On/Off Switch LED Indicator

- Mounting Hole Size: Φ 16mm (5/8 Inch), Switch Rating: 3A/250AC, Switch Combination: 1NO 1NC
- Operation Type: Latching/ Self-Locking [Push it - ON, push it again - OFF]
- Power symbol LED can be on all the time or only when switch is on which depends on how you wire it.
- Great for Electric Switch, Relay, Power Button Switch, Critical Lights, Chassis Lamp, Fog Lamps, Door Switch, Led Switch or any circuit controls on over 500,000 cycles.
- High quality metal material and IP65 waterproof protection can be used in wet or dusty environment.



IS-EP-WS123 BLU

Water-Proof Push On/Off Switch

IS-EP-WS123 RED

Water-Proof Push On/Off Switch

- Mounting Hole Size: Φ 16mm (5/8 Inch), Switch Rating: 3A/250AC, Switch Combination: 1NO 1NC
- Operation Type: Latching/ Self-Locking [Push it - ON, push it again - OFF]
- Power symbol LED can be on all the time or only when switch is on which depends on how you wire it.
- Great for Electric Switch, Relay, Power Button Switch, Critical Lights, Chassis Lamp, Fog Lamps, Door Switch, Led Switch or any circuit controls on over 500,000 cycles.
- High quality metal material & IP65 waterproof protection can be used in wet or dusty environment.



ECSW-RSOF

Rocker Switch

- Marine Grade
- 2 Pins
- On-Off SPDT Rocker Switch
- 12V 20A DC
- 24V 10A DC



Sold Individually.

ECSW-MOU-SIN

Mounting Panel

- Compatible with:
- ECSW-RSOF-RED
 - ECSW-RSOF-BLU
 - ECSW-RSOF



Sold Individually.



ECSW-RSOF-RED

Rocker Switch

- Marine Grade
- 3 Pins
- On-Off SPDT Rocker Switch
- Red LED Status Indicator
- 12V 20A DC
- 24V 10A DC



Sold Individually.



ECSW-RSOF-BLU

Rocker Switch

- Marine Grade
- 3 Pins
- On-Off SPDT Rocker Switch
- Blue LED Status Indicator
- 12V 20A DC
- 24V 10A DC



Sold Individually.

ECSW-USB15

AUX Audio Input

- Aux Audio Input with 2.1A USB Charger




ECSW-MOU-MID

Mounting Panel Middle

- Compatible with:
- ECSW-RSOF-RED
 - ECSW-RSOF-BLU
 - ECSW-RSOF

Sold Individually.



ECSW-MOU-END

Mounting Panel End

- Compatible with:
- ECSW-RSOF-RED
 - ECSW-RSOF-BLU
 - ECSW-RSOF

Sold Individually.



IP-MB60A

Manually Resettable Circuit Breaker

- ▼ 60 AMP
- ▼ Marine Grade - Water Resistant
- ▼ High Heat / High Temp. Resistant
- ▼ 12V



Perfect for Marine & All-Terrain Vehicles!

IP-MB120A

Manually Resettable Circuit Breaker

- ▼ 120 AMP
- ▼ Marine Grade - Water Resistant
- ▼ High Heat / High Temp. Resistant
- ▼ 12V



Perfect for Marine & All-Terrain Vehicles!

40AWP-H



40A Waterproof 5 Pin Relay Switch Harness Set

- ▼ Waterproof: IP67
- ▼ Rated Load: 40A/14VDC
- ▼ Wire Length: 12cm
- ▼ Contact Wire: AWG12




STANDARD INSTALL IN A
36' - 42' BOAT

- ▼ APMP-T830LD (X 4)
- ▼ APSR-4120 (X 2)
- ▼ APMAR-1300 (X 1)
- ▼ PKMB-1500 (X 2)
- ▼ APSW-1032V (X 2)
- ▼ PMC-P1414 (X 1)
- ▼ APSW-5000BTU/50078TU (X1)
- ▼ SPLIT-3003RCA (X 1)

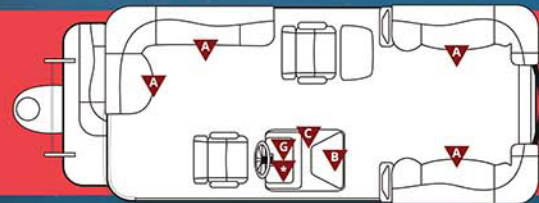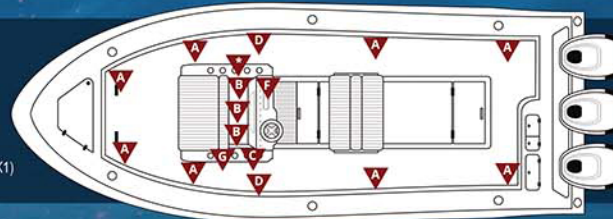

STANDARD INSTALL IN A
21' - 29' PONTOON

- ▼ APSW-6032 X 2
- ▼ APMRE-4095 X 1
- ▼ PKMB-1500 X 1
- ▼ LPMC-TBK X 1
- ▼ APSW-5000BTU

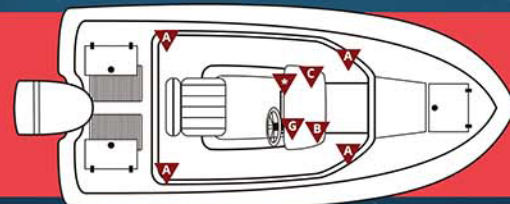

STANDARD INSTALL IN A
16' - 25' BAY BOAT

- ▼ APMP-T625LD X 2
- ▼ APSR-4120 X 1
- ▼ PKMB-1500 X 2
- ▼ LPMC-TBK X 1
- ▼ APSW-5000BTU

Selecting the right audio package is essential in achieving a great sounding environment. With the different products and models, this may seem confusing.

In order to simplify the selection process we have developed this simple to use guide. The legend corresponds to the generic boat diagrams. Each category lists the equipment we feel is the minimum needed to create a good sounding environment.

Keep in mind that there are many options to choose from for your boat. Consult your local dealer who has the experience and expertise to set you up with a great sounding system.

LEGEND

- | | |
|---------------------------|-----------------------------------|
| A SPEAKER | E MP3 WEATHERPROOF COVER |
| B AMPLIFIER | F POWER DISTRIBUTION BLOCK |
| C INSTALLATION KIT | G RADIO |
| D SUBWOOFER | H AUDIO SPLITTER |
| ▼ ADD-ON ACCESSORY | |

FELKCAM-6

Audiopipe UTV Rollbar Speaker Kit

- ▼ 6.5" Coaxial 2-Way Speakers
- ▼ 300 Watts Power (P.M.P.O.)
- ▼ 150 Watts Power (R.M.S.)
- ▼ Frequency Response: 50-20KHz
- ▼ Sensitivity: 90dB
- ▼ Rubber Surround w/ Carbon Fiber Cone
- ▼ Titanium Dome Diaphragm High-Performance Tweeter
- ▼ 21 Oz. Magnet

FELKCAM



ASB-8002CF

UTV Sound Bar

- ▼ Maximum Power: 300W
- ▼ Frequency Response: 60-20KHz
- ▼ 10 speakers Powersports Soundbar
 - 6x3" Full Range Marine Carbon Fiber Cone Speakers
 - 2x3" Full Range PP Cone Speakers
 - 2x2" Titanium Dome Tweeters
- ▼ Heavy Duty Extruded Aluminum Water Tight Housing



▼ Fully Intergrated 300Watts Class D Amplifier

▼ Built-In Wireless Connectivity With Source Control

▼ Auxiliary Input/Output

▼ Complete Wiring Harness Included

▼ Dimensions: 34"(L)x4"(W)x3.8"(H)

APT-1000.2

Class D Amplifier

- ▼ Output Power (RMS) @ 1% 1KHz 14.4V Stereo @ 4 OHMS: 2 X 100W Stereo @ 2 OHMS: 2 X 160W
- ▼ Freq. Response (-3dB): 20Hz - 20KHz
- ▼ Crossover Range High and Low Pass: 40Hz @ 12dB/OCT
- ▼ S/N Ratio (A wtg): >90dB
- ▼ Input Sensitivity: 0.2V - 10V
- ▼ Working Voltage: 9V - 16V
- ▼ Waterproof Level: IP67
- ▼ Dimensions: 192mm x 89mm x 40mm



APT-600.4

Full Range Class D Amplifier

- ▼ Output Power (RMS) @ 1% 1KHz 14.4V Stereo @ 4 OHMS: 4 X 60W Stereo @ 2 OHMS: 4 X 100W
- ▼ Freq. Response (-3dB): 20Hz - 20KHz
- ▼ Crossover Range High and Low Pass: 40Hz @ 12dB/OCT
- ▼ S/N Ratio (A wtg): >90dB
- ▼ Input Sensitivity: 0.2V - 10V
- ▼ Working Voltage: 9V - 16V
- ▼ Waterproof Level: IP67
- ▼ Dimensions: 217mm x 89mm x 40mm

