

How To Use The Quick-Reference Icons In This Catalog

A series of handy, quick-reference icons runs down the center of nearly every product page in this catalog. These icons allow you to determine the major features of a particular Peterson product at a glance and compare similar products to determine which one is right for you.

Below is a complete index of all the icons, along with a description of what each one means to you.

APPLICABLE TO ALL PRODUCTS



Item appears in the Peterson Master Catalog for the first time.



Item is available in our retail-friendly visual packaging.



Product is manufactured in the United States of America.



Item is submersible and especially suitable for use on boat trailers and other vehicles used around water.



One or more versions of this product are designed for use with 24-volt systems.



Denotes clearance/marker lights that are PC rated. For additional information on the PC rating, see page 268.




Indicates that a light has integrated retro-reflector functionality that meets applicable legal requirements.



One or more versions of this product are available with a quick-mount magnetic base.



Indicates that a product either meets ECE lighting requirements only, or meets both ECE and U.S. DOT requirements. See page 158.



FOR INCANDESCENT PRODUCTS



Indicates the number of bulbs in each incandescent light equipped with multiple bulbs.



Item is equipped with our long life VIBAR or VIBAR II shock-absorbing incandescent socket.




Indicates that Peterson offers an LED light of similar form and function.



Indicates that an incandescent bulb is equipped with a premium bulb with a life rating of up to 15,000 hours.

FOR LED PRODUCTS







Approved for Maxi-Seal® Defender® harness system's Lifetime Limited Corrosion Warranty. (Ask for details.)



Product is part of our new LumenX $^{\mbox{\tiny 0}}$ line of premium LED lights.



An LED product equipped with integrated hardwired leads, eliminating corrosion-prone connection at light housing.



LED warning light with high-intensity strobing diodes.



LED product is multi-volt compatible for use with both 12V and 24V systems.



Indicates a premium LED product with integrated voltage regulation circuitry for consistent output and long life.



One or more versions of this LED light feature a clear lens with diodes that light up in the appropriate color.































STOP, TURN & TAIL	4-33
LED Stop, Turn & Tail Lights LED Combination Rear Lights LED Trailer Light Kits Incandescent Stop, Turn & Tail Lights Incandescent Combination Rear Lights. Incandescent Trailer Light Kits	18–19 20 21–26 26–31
TURN SIGNALS	34-53
LED Turn Signals LED Auxiliary Turn Signals LED Mid-Turn Lights Incandescent Turn Signals	44 – 45 46 – 47
CLEARANCE, MARKER & ID	54-93
LED Clearance & Side Marker Lights LED Clearance & Side Marker Lights with Aux LED Auxiliary Marker & Accessory Lights Incandescent Clearance, Side Marker & Cab Lights LED Identification Bar Lights Incandescent Identification Bar Lights	74–75 76 77–91 92
BACK-UP, LICENSE, UTILITY & DOME	94-121
LED Back-Up Lights	. 100 – 101 102 . 103 – 107 . 108 – 112 . 113 – 119
SPECIALTY LIGHTING 1:	22-139
LED Headlights LED Work Lights LED Light Bars Incandescent Work Lights & Snow Plow Lights Halogen Fog, Driving & Off-Road Lights LED & Incandescent Tow Light Kits	. 123 – 131 . 132 – 133 . 134 – 136 . 137 – 138
WARNING & EMERGENCY 1-	40 – 157
LED Auxiliary Strobes	. 144 – 145 146 . 147 – 148 . 149 – 152 . 153 – 155 . 156 – 157
EUROPEAN (ECE) LIGHTING 1:	58-170
LED Headlights LED Combination Lights LED Round Lights LED Oval Lights LED Rectangular Lights LED Outline & Marker Lights LED Number Plate Lights ECE Reflectors	. 159 – 160 . 161 – 164 . 165 – 166 . 167 – 168 . 169 – 170

MOUNTING ACCESSORIES	171 – 194
Grommets, Brackets & Bezels	
ELECTRICAL ACCESSORIES	195-227
Flashers	
CONSPICUITY & REFLECTORS	228-239
Reflective Tape	232 – 233 234 234 – 238 239
RELATED ACCESSORIES	240-255
RELATED ACCESSORIES Convex Mirrors Universal Mirrors Replacement Mirror Heads Antennas Bearing Protectors Replacement Bulbs Replacement Lenses	240 – 241 242 – 243 244 – 245 246 – 247 248 248 – 250
Convex Mirrors Universal Mirrors Replacement Mirror Heads Antennas Bearing Protectors Replacement Bulbs	240 – 241 242 – 243 244 – 245 246 – 247 248 248 – 250
Convex Mirrors	
Convex Mirrors Universal Mirrors Replacement Mirror Heads Antennas Bearing Protectors Replacement Bulbs Replacement Lenses MERCHANDISING Plan-A-Gram Summary Lighted Wall Displays Header/Fixture Signs	

LED STOP TURN & TAIL





817-7/818-7 *LumenX*[®] LED 4" Round Stop, Turn & Tail Light














- · White diodes behind red lens.
- · Advanced optics fully illuminate lens.
- AMP-compatible connector integrated into housing.
- 818-7 has flange integrated into the housing.
- 817-7 has skirted weld joint for added protection against moisture.
- 9–16 volt operating range.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- 817 kit includes light, grommet and 817-49 plug.
- 818 kit includes light and 817-49 plug.

Order No.		Description	Pack Std	Carton
V818R-7		flange mount	Viz Pack	6
817R-7		grommet mount	poly pack	6
818R-7		flange mount	poly pack	6
817KR-7	KIT	grommet mount kit	poly pack	6
818KR-7	KIT	flange mount kit	poly pack	6
M817R-7		grommet mount	mfg. pack	50
M818R-7		flange mount	mfg. pack	50
426-18		grommet	poly pack	12
B426-18		grommet	mfg. pack	100
417-49		hardshell plug	poly pack	6
B417-49		hardshell plug	mfg. pack	100
817-49		molded plug	poly pack	12
B817-49		molded plug	mfg. pack	100



824-7/826-7 *LumenX*[®] LED 4" Round Stop, Turn & Tail Light












- · White diodes behind red lens.
- · Advanced optics fully illuminate lens.
- · Industry-standard PL3 socket integrated into housing.
- 824-7 has flange integrated into the housing.
- 826-7 has skirted weld joint for added protection against moisture.
- 9–16 volt operating range.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- 826 kit includes light, grommet and 431-491 plug.
- 824 kit includes light and 431-491 plug.

	Description	Pack	Std Carton
ΊΤ	grommet mount kit	Viz Pacl	k 6
IT	flange mount kit	Viz Pacl	k 6
	grommet mount	poly pac	ck 6
	flange mount	poly pac	ck 6
IT	grommet mount kit	poly pac	ck 6
IT	flange mount kit	poly pac	ck 6
	grommet mount	mfg. pad	ck 50
	flange mount	mfg. pad	ck 50
	grommet	poly pac	ck 12
	grommet	mfg. pad	ck 100
	plug	poly pac	ck 12
	plug	mfg. pad	ck 100
	IT IT	IT grommet mount kit IT flange mount kit grommet mount flange mount IT grommet mount kit IT flange mount kit grommet mount kit grommet mount flange mount grommet grommet plug	IT grommet mount kit Viz Pacl IT flange mount kit Viz Pacl grommet mount poly pac flange mount IT grommet mount kit poly pac IT grommet mount kit poly pac grommet mount kit poly pac grommet mount mfg. pac flange mount mfg. pac grommet poly pac grommet poly pac grommet poly pac







817-9/818-9 *LumenX*[®] LED 4" Round Stop, Turn & Tail Light














- · White diodes behind red lens.
- · Advanced optics fully illuminate lens.
- · AMP-compatible connector integrated into housing.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- 818-9 has flange integrated into the housing.
- 817-9 has skirted weld joint for added protection against moisture.
- 9-32 volt operating range is compatible with 12V and 24V vehicles.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- 817 kit includes light, grommet and 817-49 plug.
- 818 kit includes light and 817-49 plug.

Order No.		Description	Pack Std C	arton
817R-9		grommet mount	poly pack	6
818R-9		flange mount	poly pack	6
817KR-9	KIT	grommet mount kit	poly pack	6
818KR-9	KIT	flange mount kit	poly pack	6
M817R-9		grommet mount	mfg. pack	50
M818R-9		flange mount	mfg. pack	50
426-18		grommet	poly pack	12
B426-18		grommet	mfg. pack	100
417-49		hardshell plug	poly pack	6
B417-49		hardshell plug	mfg. pack	100
817-49		molded plug	poly pack	12
B817-49		molded plug	mfg. pack	100



824-9/826-9 *LumenX*[®] LED 4" Round Stop, Turn & Tail Light










- Voltage Regulated
- · White diodes behind red lens.
- · Advanced optics fully illuminate lens.
- Industry-standard PL3 socket integrated into housing.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- 824-9 has flange integrated into the housing.
- 826-9 has skirted weld joint for added protection against moisture.
- 9-32 volt operating range is compatible with 12V and 24V vehicles.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- 826 kit includes light, grommet and 431-491 plug.
- 824 kit includes light and 431-491 plug.

Order No.		Description	Pack	Std Carton
826R-9		grommet mount	poly p	ack 6
824R-9		flange mount	poly p	ack 6
826KR-9	KIT	grommet mount kit	poly p	ack 6
824KR-9	KIT	flange mount kit	poly p	ack 6
M826R-9		grommet mount	mfg. p	ack 50
M824R-9		flange mount	mfg. p	ack 50
426-18		grommet	poly p	ack 12
B426-18		grommet	mfg. p	ack 100
431-491		plug	poly p	ack 12
B431-491		plug	mfg. p	ack 100



LED STOP TURN & TAIL



820-7/823-7 LumenX® LED Oval Stop/Turn/Tail Light












- White diodes behind red lens.
- · Advanced optics fully illuminate lens.
- · AMP-compatible connector integrated into housing.
- 823-7 has flange welded to light, forming a single unit.
- 820 kit includes light, grommet and 817-49 plug.
- 823 kit includes light and 817-49 plug.
- 823RTL-7 version has integral narrower flange with recessed lens and two mounting holes positioned at ends for narrower rail applications.
- 9–16 volt operating range.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Meets FMVSS 108 req. in horizontal, vertical or any 360° position.

Order No.		Description	Pack	Std Carton
820R-7		grommet mount	poly pack	6
823R-7		flange mount	poly pack	6
823RTL-7		narrow, 2-screw flange	poly pacl	6
820KR-7	KIT	grommet mount kit	poly pack	6
823KR-7	KIT	flange mount kit	poly pack	6
M820R-7		grommet mount	mfg. pac	k 50
M823R-7		flange mount	mfg. pac	k 50
M823RTL-7		narrow, 2-screw flange	mfg. pac	k 50
421-18		grommet	poly pack	(12
B421-18		grommet	mfg. pac	k 100
417-49		hardshell plug	poly pacl	6
B417-49		hardshell plug	mfg. pac	k 100
817-49		molded plug	poly pacl	(12
B817-49		molded plug	mfg. pac	k 100

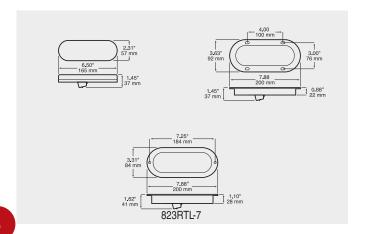





821-7/822-7 LumenX® LED Oval Stop/Turn/Tail Light












- · White diodes behind red lens.
- · Advanced optics fully illuminate lens.
- · Industry-standard PL3 socket integrated into housing.
- 822-7 has flange welded to light, forming a single unit.
- 9-16 volt operating range.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Meets FMVSS 108 requirements in horizontal, vertical or any 360° position.
- 821 kit includes light, grommet and 421-491 plug.
- 822 kit includes light and 421-491 plug.

Description	Pack S	td Carton
T grommet mount kit	Viz Pack	6
T flange mount kit	Viz Pack	6
grommet mount	poly pack	6
flange mount	poly pack	6
T grommet mount kit	poly pack	6
T flange mount kit	poly pack	6
grommet mount	mfg. pack	50
flange mount	mfg. pack	50
grommet	poly pack	12
grommet	mfg. pack	100
plug	poly pack	12
plug	mfg. pack	100
	IT grommet mount kit IT flange mount kit grommet mount flange mount IT grommet mount kit IT flange mount kit grommet mount flange mount grommet mount grommet grommet	IT grommet mount kit Viz Pack IT flange mount kit Viz Pack grommet mount poly pack flange mount IT grommet mount kit poly pack IT flange mount kit poly pack grommet mount mfg. pack flange mount flange mount flange mount grommet grommet poly pack grommet poly pack grommet poly pack grommet poly pack









820-10/823-10 LumenX® LED Oval Stop/Turn/Tail Light













- · White diodes behind red lens.
- · Advanced optics fully illuminate lens.
- · AMP-compatible connector integrated into housing.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- 823-10 has flange welded to light, forming a single unit.
- 9-32 volt operating range is compatible with 12V and 24V vehicles.
- Meets FMVSS 108 requirements in horizontal, vertical or any 360° position.
- 820 kit includes light, grommet and 817-49 plug.
- · 823 kit includes light and 817-49 plug.

Order No.		Description	Pack	Std Carton
820R-10		grommet mount	poly pac	k 6
823R-10		flange mount	poly pac	k 6
820KR-10	KIT	grommet mount kit	poly pac	k 6
823KR-10	KIT	flange mount kit	poly pac	k 6
M820R-10		grommet mount	mfg. pac	k 50
M823R-10		flange mount	mfg. pac	k 50
M823RTL-10		narrow, 2-screw flange	mfg. pac	k 50
421-18		grommet	poly pac	k 12
B421-18		grommet	mfg. pac	k 100
417-49		hardshell plug	poly pac	k 6
B417-49		hardshell plug	mfg. pac	k 100
817-49		molded plug	poly pac	k 12
B817-49		molded plug	mfg. pac	k 100

821-10/822-10 LumenX[®] LED Oval Stop/Turn/Tail Light












- White diodes behind red lens.
- · Advanced optics fully illuminate lens.
- · Industry-standard PL3 socket integrated into housing.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- 822-10 has flange welded to light, forming a single unit.
- 9-32 volt operating range is compatible with 12V and 24V vehicles.
- Meets FMVSS 108 requirements in horizontal, vertical or any 360° position.
- 821 kit includes light, grommet and 421-491 plug.
- 822 kit includes light and 421-491 plug.

Order No.	Description	Pack St	d Carton
821R-10	grommet mount	poly pack	6
822R-10	flange mount	poly pack	6
821KR-10	(IT grommet mount kit	poly pack	6
822KR-10	(IT flange mount kit	poly pack	6
M821R-10	grommet mount	mfg. pack	50
M822R-10	flange mount	mfg. pack	50
421-18	grommet	poly pack	12
B421-18	grommet	mfg. pack	100
421-491	plug	poly pack	12
B421-491	plug	mfg. pack	100



LED STOP TURN & TAIL









TRADITIONAL 38 DIODE PIRANHA®



417/418 Piranha® LED 4" Round Stop/Turn/Tail Light









- Original 36-diode Piranha multi-diode lens look.
- 418 has flange welded to light, forming a single unit.
- 417 has skirted weld joint for added protection against moisture.
- 9-16 volt operating range.
- · Reverse voltage protection prevents damage if mis-installed.
- Does not require "Top" positioning to meet FMVSS 108 standards.
- Lights have hardwired leads with a built-in PL3 3-wire adapter plug, except for M417R and M418R, which have stripped leads.
- · Viz Packs include LED light with built-in adapter plug.
- V417KR kit includes 417R-P light and 426-18 mounting grommet.
- · See page 38 for matching amber turn signal.

Description	Pack Std (Carton
red kit w/ adapter plug	Viz Pack	6
red w/ flange & adapter plug	Viz Pack	6
red w/ stripped leads	mfg. pack	50
red w/ flange & stripped leads	mfg. pack	50
red w/ adapter plug	mfg. pack	50
red w/ flange & adapter plug	mfg. pack	50
grommet	poly pack	12
grommet	mfg. pack	100
	red kit w/ adapter plug red w/ flange & adapter plug red w/ stripped leads red w/ flange & stripped leads red w/ adapter plug red w/ flange & adapter plug grommet	red kit w/ adapter plug Viz Pack red w/ flange & adapter plug red w/ stripped leads red w/ flange & stripped leads red w/ adapter plug mfg. pack red w/ adapter plug mfg. pack red w/ flange & adapter plug mfg. pack red w/ flange & adapter plug grommet poly pack

817-36/818-36 Piranha® LED 4" Round Stop/Turn/Tail Light

















- Original 36-diode Piranha multi-diode lens look.
- · AMP-compatible connector integrated into housing.
- · Advanced white diodes behind red lens.
- 818-36 has flange welded to light, forming a single unit.
- 817-36 has skirted weld joint for added protection against moisture.
- 9-16 volt operating range.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- V817KR-36 Viz-Pack kit includes light, grommet and 417-49 plug.
- See page 14 for clear lens version.
- · See page 38 for matching amber turn signal.

Order No.		Description	P	ack	Std Carton
V817KR-36	KIT	red, grommet mount	V	iz Pack	6
817R-36		red, grommet mount	р	oly pack	6
818R-36		red, flange mount	р	oly pack	6
M817R-36		red, grommet mount	m	nfg. pacl	k 50
M818R-36		red, flange mount	m	nfg. pacl	k 50
426-18		grommet	р	oly pack	(12
B426-18		grommet	m	nfg. pacl	k 100
417-49		hardshell plug	р	oly pack	6
B417-49		hardshell plug	m	nfg. pacl	k 100
817-49		molded plug	р	oly pacł	(12
B817-49		molded plug	m	nfg. pacl	k 100











TRADITIONAL 22 DIODE PIRANHA®



821-22/822-22 Piranha® LED Oval Stop/Turn/Tail Light










- Original 22-diode Piranha multi-diode lens look.
- · Advanced white diodes behind red lens.
- 822 has flange welded to light, forming a single unit.
- Industry-standard PL3 socket integrated into housing.
- V821KR-22 Viz-Pack kit includes light, grommet and 421-491 plug.
- 9-16 volt operating range.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Meets FMVSS 108 req. in horizontal, vertical or any 360° position.
- · See page 39 for matching amber turn signal.

Order No.		Description	Pack	Std Carton
V821R-22		red, grommet	Viz Pack	6
V821KR-22	KIT	red, grommet kit	Viz Pack	6
821R-22		red, grommet mount	poly pack	6
822R-22		red, flange mount	poly pack	6
M821R-22		red, grommet mount	mfg. pacl	k 50
M822R-22		red, flange mount	mfg. pacl	k 50
421-18		grommet	poly pack	12
B421-18		grommet	mfg. pacl	k 100
421-491		plug	poly pack	(12
B421-491		plug	mfg. pacl	k 100





TRADITIONAL 22 DIODE PIRANHA®



420/423/820-22/823-22 Piranha® LED Oval Stop/Turn/Tail Light















- Original 22-diode Piranha multi-diode lens look.
- · AMP-compatible connector integrated into housing.
- · Advanced white diodes behind red lens.
- 823-22 has flange welded to light, forming a single unit.
- 420 kit includes light, grommet, and 417-491 adapter harness with PL3 plug.
- 423 kit includes light and 417-491 adapter harness with PL3 plug.
- 9-16 volt operating range.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Meets FMVSS 108 req. in horizontal, vertical or any 360° position.
- See page 39 for matching amber turn signal.

Order No.		Description	Pack	Std Carton
V420KR	KIT	red, grommet kit	Viz Pack	6
V423KR	KIT	red, flange kit	Viz Pack	6
820R-22		red, grommet mount	poly pac	k 6
823R-22		red, flange mount	poly pac	k 6
M820R-22		red, grommet mount	mfg. pac	k 50
M823R-22		red, flange mount	mfg. pac	k 50
421-18		grommet	poly pac	k 12
B421-18		grommet	mfg. pac	k 100
417-49		hardshell plug	poly pac	k 6
B417-49		hardshell plug	mfg. pac	k 100
817-49		molded plug	poly pac	k 12
B817-49		molded plug	mfg. pac	k 100
417-491		adapter plug	poly pac	k 6
B417-491		adapter plug	mfg. pac	k 100





LED STOP TURN & TAIL























- Cyclops-style design integrates back-up light into stop/turn/tail light.
- Single bright white diode meets legal back-up light req. used in pairs.
- Available w/ integral AMP-compatible receptacles or hardwired leads.
- -7P versions have hardwired PL3 receptacle.
- Available in 9-16 volt or 9-32 (-MV) operating ranges.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- Kits include B880-49 and B417-49 plugs, plus grommet where req.

Order No.		Description	Pack	Std Carton
882K-7	KIT	grommet mount kit	poly pack	6
882K-7-MV	KIT	grommet mount kit, multi-volt	poly pack	6
883K-7	KIT	flange mount kit	poly pack	6
883K-7-MV	KIT	flange mount kit, multi-volt	poly pack	6
M882-7		grommet mount	mfg. pacl	< 50
M882-7-MV		grommet mount, multi-volt	mfg. pacl	ς 50
M882-7P		grommet mount, hardwired PL3	mfg. pacl	< 50
M883-7		flange mount	mfg. pacl	< 50
M883-7-MV		flange mount, multi-volt	mfg. pacl	ς 50
M883-7P		flange mount, hardwired PL3	mfg. pacl	ς 50
426-18		grommet	poly pack	12
B426-18		grommet	mfg. pacl	100
417-49		hardshell plug, 3-wire	poly pack	6
B417-49		hardshell plug, 3-wire	mfg. pacl	< 100
880-49		plug, single lead	poly pack	6
B880-49		plug, single lead	mfg. pacl	< 100

See pages 202-207 for additional plug options











880-7/881-7 LumenX® LED Oval Combo Stop, Turn, Tail & Back-Up Light















- Cyclops-style design integrates back-up light into stop/turn/tail light.
- Single bright white diode meets legal back-up light req. used in pairs.
- Available w/ integral AMP-compatible receptacles or hardwired leads.
- -7P versions have hardwired PL3 receptacle & blunt-cut back-up lead.
- Available in 9-16 volt or 9-32 (-MV) operating ranges.
- Meets FMVSS 108 reg. in horizontal, vertical or any 360° position.

Order No.		Description	Pack	Std Carton
880K-7	KIT	grommet mount kit	poly pack	6
880K-7-MV	KIT	grommet mount kit, multi-volt	poly pack	6
881K-7	KIT	flange mount kit	poly pack	6
881K-7-MV	KIT	flange mount kit, multi-volt	poly pack	6
M880-7		grommet mount	mfg. pacl	k 50
M880-7-MV		grommet mount, multi-volt	mfg. pacl	k 50
M880-7P		grommet mount, hardwired PL3	mfg. pacl	k 50
M880-PL3		grommet, hardwired, twin PL3s	mfg. pacl	k 50
M881-7		flange mount	mfg. pacl	k 50
M881-7-MV		flange mount, multi-volt	mfg. pacl	k 50
M881-7P		flange mount, hardwired PL3	mfg. pacl	k 50
421-18		grommet	poly pack	(12
B421-18		grommet	mfg. pacl	k 100
417-49		hardshell plug, 3-wire	poly pack	6
B417-49		hardshell plug, 3-wire	mfg. pacl	k 100
880-49		plug, single lead	poly pack	6
B880-49		hardshell plug, single lead	mfg. pacl	k 100
		1.00		

See pages 202-207 for additional plug options











814/816 Single Diode LED 4" Round Stop/Turn/Tail Light



- Single diode LED light with traditional incandescent lens look.
- · AMP-compatible connector integrated into housing.
- 9-16 volt operating range.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- 816R requires 426-18 grommet.
- 814R features gray housing with integral mounting flange.
- 814R flange has recessed lens.
- 417-49 or 817-49 plug required for installation.

Order No.	Description	Pack Std	Carton			
816R	grommet mount	poly pack	6			
814R	flange mount	poly pack	6			
M816R	grommet mount	mfg. pack	50			
M814R	flange mount	mfg. pack	50			
426-18	grommet	poly pack	12			
B426-18	grommet	mfg. pack	100			
417-49	hardshell plug	poly pack	6			
B417-49	hardshell plug	mfg. pack	100			
817-49	molded plug	poly pack	12			
B817-49	molded plug	mfg. pack	100			
0 000	0.000.0077					

See pages 202-207 for additional plug options









824/826 Single Diode LED 4" Round Stop/Turn/Tail Light



- Single diode LED light with traditional incandescent lens look.
- Industry-standard PL3 socket integrated into housing with locking tabs for added plug retention.
- Available in 9-16 volt or 9-32 (-MV) operating ranges.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- 826R requires 426-18 grommet.
- 824R features gray housing with integral mounting flange.
- 824R flange has recessed lens.
- 431-491 plug required for installation.

Order No.	Description	Pack Std	Carton
826R	grommet mount	poly pack	6
824R	flange mount	poly pack	6
826R-MV	grommet mount, multi-volt	poly pack	6
824R-MV	flange mount, multi-volt	poly pack	6
M826R	grommet mount	mfg. pack	50
M824R	flange mount	mfg. pack	50
M826R-MV	grommet mount, multi-volt	mfg. pack	50
M824R-MV	flange mount, multi-volt	mfg. pack	50
426-18	grommet	poly pack	12
B426-18	grommet	mfg. pack	100
431-491	plug	poly pack	12
B431-491	plug	mfg. pack	100

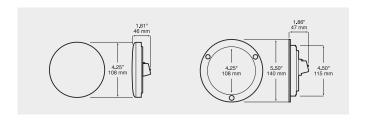



LED STOP TURN & TAIL









827 Single Diode LED 4" Round Stop/Turn/Tail Light w/ Reflex



- Single diode LED light w/traditional incandescent lens look.
- Features reflector optics around lens periphery, eliminating need to mount and maintain a separate reflector.
- Industry-standard PL3 socket integrated into housing.
- M827FR has flange welded to light, forming a single unit.
- 9-16 volt operating range.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- Requires 426-18 grommet and 431-491 plug for installation.
- 827KR kit contains mounting grommet and connecting plug.
- NOTE: Less than 75 sq. cm of effective, projected luminous lens area. For use on vehicles under 80" wide unless used in pairs per side.

Order No.		Description	Pack Std C	arton
827R		red with reflex	poly pack	6
827KR	KIT	red with reflex, kit	poly pack	12
M827R		red with reflex	mfg. pack	50
M827FR		red with reflex, flange mount	mfg. pack	50
426-18		grommet	poly pack	12
B426-18		grommet	mfg. pack	100
431-491		plug	poly pack	12
B431-491		plug	mfg. pack	100

829-7 LumenX[®] LED 4" Round Stop/Turn/Tail Light w/ Reflex













- · White diodes behind red lens.
- Optically advanced design fully illuminates lens.
- Industry-standard PL3 socket integrated into housing.
- Flange with reflector optics integrated into lens, eliminating need for separate reflector.
- 9-16 volt operating range.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- · Includes protective gasket.
- See page 98 for matching 829C-7 back-up light.

Order No.	Description	Pack Std (Carton
829R-7	flange mount with reflex	poly pack	6
M829R-7	flange mount with reflex	mfg. pack	50
431-491	plug	poly pack	12
B431-491	plug	mfg. pack	100

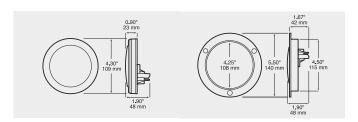











817/818CR-2 LED 4" Round Stop/Turn/Tail Light











- Features red diodes behind clear lens.
- · AMP-compatible connector integrated into housing.
- 9-32 volt operating range is compatible with 12V and 24V vehicles.
- 817CR-2 has skirted weld joint for added protection against moisture.
- 818CR-2 has flange welded to light, forming a single unit.
- See page 40 for matching amber turn signal.
- New design 817CR-9 & 818CR-9 coming soon.

Std Carton
6
6
k 50
k 50
(12
k 100
6
k 100
k

817CR-3 LED 4" Round Stop/Turn/Tail Light











- Features red diodes behind clear lens.
- · AMP-compatible connector integrated into housing.
- 9-16 volt operating range.
- Skirted weld joint for added protection against moisture.

Order No.	Description	Pack	Std Carton
M817CR-3	7 diodes w/clear lens	mfg. pac	k 50
426-18	grommet	poly pac	k 12
B426-18	grommet	mfg. pac	k 100
417-49	hardshell plug	poly pac	k 6
B417-49	hardshell plug	mfg. pac	k 100

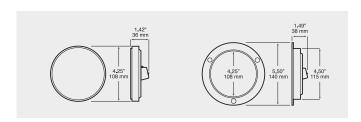



LED STOP TURN & TAIL









817CR-36/818CR-36 Piranha® LED 4" Round Stop/Turn/Tail Light















- Features red diodes behind clear lens.
- AMP-compatible connector integrated into housing.
- 9-16 volt operating range.
- 817CR-36 has skirted weld joint for added protection against moisture.
- 818CR-36 has flange welded to light, forming a single unit.
- Viz-Pack kit includes light, grommet and 417-49 plug.

Order No.		Description	Pack	Std Carton
V817KCR-36	KIT	red, grommet mount	Viz Pack	6
817CR-36		red, grommet mount	poly pac	k 6
818CR-36		red, flange mount	poly pac	k 6
M817CR-36		red, grommet mount	mfg. pac	k 50
M818CR-36		red, flange mount	mfg. pac	k 50
426-18		grommet	poly pac	k 12
B426-18		grommet	mfg. pac	k 100
417-49		hardshell plug	poly pac	k 6
B417-49		hardshell plug	mfg. pac	k 100

869 LED LED Thin-Line Stop/Turn/Tail Light









- Meets DOT requirements vertically, horizontally or at 45 degree angle.
- Thin-line design fits narrow channel applications.
- Perfect for light- and medium-duty enclosed trailers.
- Hardwired design eliminates the need for separate plug and reduces connection points.
- 9–16 volt operating range.
- Mounts on 14 1/4" centers.

Order No.	Description	Pack	Std Carton
869R	red	poly pac	ck 6
M869R	red	mfg. pad	ck 50

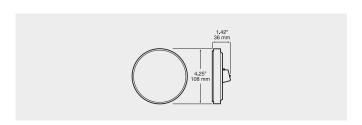









418R-4 LED Surface Mount 4" Round Stop Turn & Tail Light



- 9-16 volt operating range.
- Hardwired design eliminates the need for separate plug and reduces connection points.
- Surface mounting for quick and versatile installation.
- Accessory snap-on chrome bezel available.


Order No.	Description	Pack Std Ca	arton
418R-4	red surface mount	poly pack	6
M418R-4	red surface mount	mfg. pack	50
B418-10	chrome bezel	mfg. pack	50


423-4 LED Surface Mount Oval Stop/Turn/Tail Light



- Meets FMVSS 108 requirements when mounted horizontally or vertically.
- 9-32 volt operating range. (Viz-Pack version 12V only)
- Hardwired design eliminates the need for separate plug and reduces connection points.
- Surface mounting for quick and versatile installation.
- Decorative snap-on chrome bezel is included with Viz Pack kit or available as accessory for manufacturer pack.
- Amber auxiliary turn signal version also available. See page 44.
- White auxiliary light version also available. See page 119.

Order No.		Description	Pack	Std Carton
V423XR-4	KIT	12V red kit with bezel	Viz Pack	3
423R-4		multi-volt red	poly pacl	6
M423R-4		multi-volt red	mfg. pac	k 50
423-11		chrome bezel	poly pacl	κ 12
B423-11		chrome bezel	mfg. pac	k 50

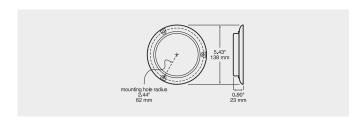

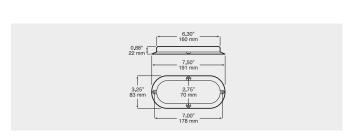

LED STOP TURN & TAIL







717 LED 7" Bus & Transit Stop/Turn/Tail Light











- Round, 7-inch size popular for bus and transit applications.
- · Sealed potted design.
- 9–32 volt operating range.
- Surface mount with standard 4-hole mounting pattern.
- Comes standard with mounting gasket providing additional protection between lamp and mounting surface.
- Hardwired leads are terminated with two .180 male bullets and one ring terminal for ground.
- Features reflex optics on lens eliminating need to mount and maintain a separate reflector.
- Matching amber turn signal available on page 44.
- Matching white back-up light available on page 99.

Order No.	Description	Pack Std Carton
717R	surface mount	poly pack 20

850-1 LED Rectangular Stop/Turn/Tail Light













- Certified to meet both FMVSS 108 (USA) & ECE (European) requirements in horizontal or vertical position.
- Sealed lens and housing meets IP67 ingress protection level.
- 9-32 volt operating range.
- Hardwired design eliminates the need for separate plug and reduces connection points.
- 850R has 6.5' leads, others have 300mm (11.8") leads.
- 850R-1P has hardwired PL3 plug.
- Matching amber turn signal available on page 44.
- Matching white back-up light available on page 99.

Order No.	Description	Pack Std	Carton
P850R-1	red, 12" leads	poly pack	6
850R	red, 6.5ft sheathed leads	mfg. pack	10
850R-1	red, 12" leads	mfg. pack	10
850R-1P	red, 12" leads w/ PL3 plug	mfg. pack	10
850-18	rubber grommet	poly pack	12
B850-18	rubber grommet	mfg. pack	100





318 LED Agricultural Stop, Tail, Turn & Warning Light



4-pin plug

- ASAE S279.17 compliant.
- Perfect for all agricultural applications.
- Combination lights function as both red stop and tail light and amber turn signal and flashing warning light.
- Works with all 12-volt vehicles.
- Can be mounted to vertical or horizontal surfaces.
- Available with stripped leads or 4-pin plug for easy installation.

Order No.	Description	Pack Std C	arton
318L	roadside, stripped leads	mfg. pack	16
318L-P	roadside, 4-pin plug	mfg. pack	16
318L-AMP	roadside, hardshell connector	mfg. pack	16
318R	curbside, stripped leads	mfg. pack	16
318R-P	curbside, 4-pin plug	mfg. pack	16
318R-AMP	curbside, hardshell connector	mfg. pack	16




319 LED Agricultural Stop/Turn/Tail Light



- ASAE S279.17 compliant.
- Perfect for all agricultural applications.
- Single-sided red stop and tail light.
- Works with all 12-volt vehicles.
- Can be mounted to vertical or horizontal surfaces.
- Stripped leads for easy installation.
- See matching 319AA amber turn signal/warning light on page 43.

Order No.	Description	Pack	Std Carton
319R	red, stripped leads	mfg. pa	ck 24





339 LED Round Single-Face Pedestal Stop/Turn/Tail Light



- Single stud pedestal mount.
- 3-wire electrical connection.
- Single 4" round acrylic lens.
- · Chrome die-cast housing.
- 339R-DEU has hardwired Deutsch-style connector
- Matching 338-2 amber/red and 339A amber turn signals available on page

Order No.	Description	Pack Std C	arton
V339R	red	Viz Pack	6
M339R	red	mfg. pack	24
M339R-DEU	red, hardwired connector	mfg. pack	24

LED COMBINATION REAR LIGHTS















- Combination LED stop, turn and tail light.
- Solid state construction—no bulbs to break or burn out.
- Fully sealed, submersible construction.
- Potted circuitry protects against moisture, corrosion, and vibration.
- Lower amp draw than incandescent lights.
- Designed to directly replace 440-series incandescent lights.
- M840L roadside light includes license light.
- Integral, dedicated side marker.
- Exceeds all DOT rear lighting and reflex requirements for trailers less than 80"

Order No.	Description	Pack Std Ca	rton
V840	without license light	Viz Pack	6
V840L	with license light	Viz Pack	6
840	without license light	poly pack	6
840L	with license light	poly pack	6
M840	without license light	mfg. pack	24
M840L	with license light	mfg. pack	24
















- · Combination LED stop, turn and tail light.
- Fully sealed, submersible construction.
- · Low profile, durable design.
- M844L roadside light includes license light.
- Exceeds all DOT rear lighting and reflex requirements for all trailers, including those 80" wide and over.
- Advanced lens optics for an evenly lit appearance.
- M844-BT3 has leads terminated with three .180 bullet connectors.
- Replacement lenses available.

Std Carton
6
6
6
6
24
24
24
10
10

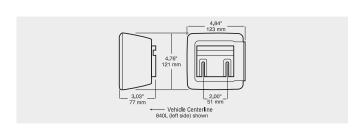







845 LED

Over 80" Wide Combination Rear Light w/ Back-Up



- · Combination stop, turn, tail and back-up light with integral reflex.
- "L" version includes LED license light.
- Potted LED circuitry protects against moisture and road-shock.
- Popular 3-stud mounting design fits a wide range of applications.

Order No.	Description	Pack Std C	arton
V845	without license light	Viz Pack	6
V845L	with license light	Viz Pack	6
845	without license light	box	12
845L	with license light	box	12


856 LED


Rectangular Over 80" Wide Combination Rear Light



- · Combination LED stop, turn and tail light.
- Solid state construction—no bulbs to break or burn out.
- Fully sealed, submersible construction.
- Potted circuitry protects against moisture, corrosion, and vibration.
- Lower amp draw than incandescent lights.
- Designed to directly replace 456-series incandescent lights.
- M856L roadside light includes license light.
- Integral, dedicated side marker diode.
- Carriage mounting bolts included.
- Exceeds all DOT rear lighting and reflex requirements for all trailers, including those 80" wide and over.

Order No.	Description	Pack Std Ca	rton
V856	without license light	Viz Pack	6
V856L	with license light	Viz Pack	6
856	without license light	poly pack	6
856L	with license light	poly pack	6
M856	without license light	mfg. pack	30
M856L	with license light	mfg. pack	30

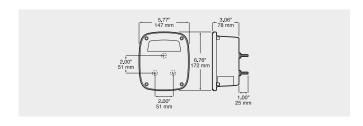



LED TRAILER LIGHT KITS



941 LED

Under 80" Wide Trailer Rear Light Kit











- Submersible LED rear lighting kit for trailers under 80" wide.
- Includes one each of our 840/840L LED tail lights plus 20' trailer harness, license bracket, mounting hardware, and installation instructions.
- Front side marker lights and side reflectors are necessary to meet DOT requirements.
- · Replacement harness available separately.
- · Attractive, secure visual pack.

Order No.		Description	Pack	Std Carton
V941	KIT	LED rear light kit	Viz Pack	2



944 LED Low Profile Over 80" Wide Rear Trailer Light Kit











- Submersible LED rear lighting kit for all trailers, including those 80" wide and
- Includes one each of our 844/844L LED tail lights plus 25' trailer harness, license bracket, mounting hardware, and installation instructions.
- Front side marker lights, ID lights and side reflectors are necessary to meet DOT requirements.
- · Low profile design.
- · Advanced lens optics for an evenly lit appearance.

Order No.		Description	Pack	Std Carton
V944	KIT	LED trailer light kit	Viz Pack	2
844-252		replacement rear lens	poly pacl	(10
844-253		replacement side lens	poly pacl	< 10



947 LED

Over 80" Wide Rear Trailer Light Kit















- Submersible rear lighting kit for all trailers 80" wide and over.
- Includes one each of our low profile 856/856L LED tail lights plus license bracket, mounting hardware, and installation instructions.
- Provides rear lighting and reflectors. Front side clearance/marker lights, side reflectors, and rear identification lights are necessary to meet all DOT requirements.
- · Replacement harness available separately.

Order No.		Description	Pack	Std Carton
V947	KIT	LED rear light kit	Viz Pack	4





306 Surface-Mount Stop/Turn/Tail Light



- Rectangular, surface-mount light functions as rear S/T/T light.
- For use on vehicles under 80" wide; has less than 75 sq. cm of effective, projected luminous lens area.
- Features polycarbonate lens, galvanized steel base plate, dual-filament bulb, and tough plastic guard to protect lead wires.
- Mounts on 3 1/2" centers and grounds through mounting screw.
- See matching 306A turn signal on page 49.
- See matching 393C back-up light on page 100.


Order No.	Description	Pack Std C	arton
V306R	red	Viz Pack	6
306R	red	poly pack	24
306-25R	red lens	poly pack	10
413-07	replacement pigtail	poly pack	25
2057	12 volt replacement bulb	referenc	e only


313-2 Single-Face Pedestal Stop/Turn/Tail Light



- Pedestal-mount, single-face light functions as S/T/T light.
- Durable, black plastic housing with snap-on red acrylic lens.
- Two lead wires exit through 1/2" diameter hollow mounting stud.
- Grounds through mounting stud.
- Interchangeable with competitive units.

Order No.	Description	Pack	Std Carton
V313-2	red	Viz Pack	6
313-2	red	poly pac	k 12
M313-2	red	mfg. pac	k 48
313-15R	red lens	poly pac	k 10
313-15BLK	black lens cover	poly pac	k 10
413-07	replacement pigtail	poly pac	k 25
2057	replacement bulb	reference only	

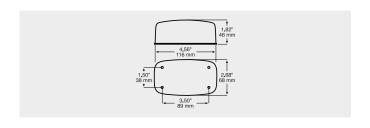



INCANDESCENT STOP TURN & TAIL








- ASAE S279.17 compliant.
- Perfect for all agricultural applications.
- 308 combination lights function as both red stop and tail light and amber turn signal and flashing warning light.
- · Single-sided red version functions as stop and tail light.
- · Works with all 12-volt vehicles.
- Can be mounted to vertical or horizontal surfaces.
- Rubber protective gasket seals unit from moisture and dust
- · Replaceable bulb and lens.
- Standard version has 4-pin plug (308) or 3-pin plug (309) for easy installation.
- -PKD versions are terminated with Packard-style hardshell connector.
- Replacement lens kits include replacement gasket and screws.
- See matching 309AA double-sided amber turn signal/warning light on page 52. See 318 & 319 series LED version on page 17.

Order No.	Description	Pack	Std Carton
308L	dual, roadside	mfg. pa	ick 16
308L-PKD	dual, roadside w/ hardshell connector	mfg. pa	ick 16
308R	dual, curbside	mfg. pa	ick 16
308R-PKD	dual, curbside w/ hardshell connector	mfg. pa	ick 16
309R	red, single	mfg. pa	ck 24
308-15A	amber replacement lens kit	poly pa	ck 50
308-15R	red replacement lens kit	poly pa	ck 50
308-15BLK	black block-off cover	poly pa	ck 50






413 Flush-Mount 4" Stop/Turn/Tail Light




- Double-wire, flush-mount 4" round light functions as S/T/T light.
- Black polycarbonate housing.
- 413-3 has reflector optics, eliminating need for separate reflector.
- · Grounds through mounting screws.
- NOTE: Less than 75 sq. cm of effective, projected luminous lens area. For use on vehicles under 80" wide unless used in pairs per side.

Order No.	Description	Pack Sto	l Carton
V413	red	Viz Pack	6
413	red	poly pack	12
M413	red	mfg. pack	48
M413-3	red w/ reflector	mfg. pack	48
V410-15R	red lens	Viz Pack	12
410-15R	red lens	poly pack	10
411-24	mounting gasket	poly pack	1
415-15R	red reflector lens	poly pack	10
410-21	galvanized retainer ring	poly pack	25
425S-21	SS retainer ring	poly pack	25
413-07	replacement pigtail	poly pack	25
1157	replacement bulb	refere	nce only



INCANDESCENT STOP TURN & TAIL





STOP TURN & TAIL LIGHTS


413S Stainless Flush-Mount 4" Stop/Turn/Tail Light



- Double-wire, flush-mount 4" round light functions as S/T/T light.
- Stainless-steel housing and retainer ring.
- · Grounds through mounting screws.
- Refer to replacement and installation parts listed for 413 series on facing page.


Order No.	Description	Pack	Std Carton
M413S	stainless-steel, red	mfg. pac	k 48
425S-21	SS retainer ring	poly pac	k 25







421-491



421 Sealed Oval Stop/Turn/Tail Light








- Sealed, oval stop, turn, and tail light may be used on both curbside and roadside of vehicle or trailer.
- Legal in either horizontal or vertical position.
- Polycarbonate lens is welded to housing to form single unit.
- Requires mounting grommet and 3-wire plug to complete installation.
- 421H surface mount light available for easy mounting.
- See 421A turn signal, and 416 back-up light for companion models.
- Kits include light, grommet, and right-angle plug.
- 12-volt lamps designed with dual-filament, 2.1/.59 amp, 32/3 cp bulb.
- Grommet versions may be mounted using accessory 421-09 metal bracket shown

Order No.		Description	Pack	Std Carton
V421R		red	Viz Pack	6
V421KR	KIT	red kit	Viz Pack	3
421R		red	poly pac	k 12
421KR	KIT	red kit	poly pac	k 12
M421R		red	mfg, pac	k 48
M421KR	KIT	red kit	mfg. pac	k 48
M421HR		red, surface-mount	mfg. pac	k 48
421-18		grommet	poly pac	k 12
B421-18		grommet	mfg. pac	k 100
421-491		right angle plug	poly pac	k 12
B421-491		right angle plug	mfg. pac	k 100
431-491		plug	poly pac	k 12
B431-491		plug	mfg. pac	k 100
421-09		mounting bracket	box	6





INCANDESCENT STOP TURN & TAIL





424/431 Sealed 4" Round Stop/Turn/Tail Light





- Sealed, 4" round stop, turn, and tail light.
- Fully automated manufacturing process ensures consistent quality.
- Features extra wide, spin-welded, tongue-and-groove lens seal.
- 424R features one-piece integral gray housing and flange.
- High performance steel conductors reduce possibility of wire failure.
- Wedge-base socket prevents premature bulb failure.
- 431KR kit includes light, grommet and 431-491 straight plug.
- See page 11 for 824/826 LED version.


Order No.		Description	F	ack	Std (Carton
431R		red, grommet mount	р	oly pad	ck	12
M431R		red, grommet mount	n	nfg. pa	ck	50
M431KR	KIT	red, grommet mount kit	n	nfg. pa	ck	50
M424R		red, flange mount	n	nfg. pa	ck	48
426-18		grommet	р	oly pad	ck	12
B426-18		grommet	n	nfg. pa	ck	100
431-491		plug	р	oly pad	ck	12
B431-491		plug	n	nfg. pa	ck	100


425 Flush-Mount 4" Round Stop/Turn/Tail Light



- Double-wire, flush-mount 4" round S/T/T light.
- 425 series features heavy-gauge steel housing with black powder-coated finish
- 425S light features stainless-steel housing and retainer ring.
- Fits in 4 1/2" hole and secures with three screws or rivets.

Order No.	Description	Pack Std	Carton
425	red	poly pack	12
425S	stainless-steel, red	poly pack	12
M425	red	mfg. pack	48
M425S	stainless-steel, red	mfg. pack	48
410-15R	red lens	poly pack	10
411-24	mounting gasket	mfg. pack	10
410-21	galvanized retainer ring	poly bag	25
425S-21	SS retaining ring	poly bag	25
413-07	replacement pigtail	poly pack	25
1157	replacement bulb	referen	ce only







426 Sealed Long-Life Round 4" Stop/Turn/Tail Light










- · Fully automated manufacturing process ensures consistent quality.
- Features extra wide, spin-welded, tongue-and-groove lens seal.
- 12-volt lamps feature dual-filament, long-life 2.1/.59 amp, 32/3 cp heavy-duty, long-life bulb.
- Long life, wedge-base socket prevents premature bulb failure.
- 426 lights require mounting grommet and 3-wire plug.
- · Kits include 426R light, grommet, and 431-491 straight plug.
- · Viz-Pack versions have gray housing.
- See 426A turn signal, and 415 back-up light for companion models.
- Can be flange-mounted with use of 424-09 black snap-on flange. See page 185 for details.
- See page 11 for 826R & 826R-MV single-diode LED equivalent.

Order No.		Description	Pack S	Std Carton
V426R		red	Viz Pack	6
V426KR	KIT	red kit	Viz Pack	3
426R		red	poly pack	12
426KR	KIT	red kit	poly pack	12
M426R		red	mfg. pack	48
M426KR	KIT	red kit	mfg. pack	48
424-09		snap-on mounting flange	poly pack	24
426-18		grommet	poly pack	12
B426-18		grommet	mfg. pack	100
431-491		plug	poly pack	12
B431-491		plug	mfg. pack	100



See pages 184-185 for additional mounting options.






429 Sealed

4" Round Stop/Turn/Tail Light w/ Clear Rear Housing



- Sealed, 4" round stop, turn, and tail light.
- Clear back is ideal to illuminate service body compartments.
- Fully automated manufacturing process ensures consistent quality.
- Features extra wide, spin-welded, tongue-and-groove lens seal.
- High performance steel conductors reduce possibility of wire failure.
- Wedge-base socket prevents premature bulb failure.
- · Requires mounting grommet and 3-wire plug.


Order No.	Description	Pack Std	Carton
429R	clear back	poly pack	12
M429R	clear back	mfg. pack	48
424-09	snap-on mounting flange	poly pack	24
426-18	grommet	poly pack	12
B426-18	grommet	mfg. pack	100
431-491	plug	poly pack	12
B431-491	plug	mfg. pack	100





428 Universal Stud-Mount Stop/Turn/Tail Light





- Stud-mount, combination tail light that functions as stop, turn, tail, and license light (428 only).
- Features 3-3/4" diameter wrap-over lens retained by two screws, black plastic housing, and two 10" lead wires.
- Mounts with two 1/4" studs on 2" centers.
- Grounds through mounting hardware.
- NOTE: Less than 75 sq. cm of effective, projected luminous lens area. For use on vehicles under 80" wide unless used in pairs per side.

Order No.	Description	Pack Std (Carton
V428	with license light	Viz Pack	3
V428S	without license light	Viz Pack	6
428	with license light	box	24
428S	without license light	box	24
M428	with license light	mfg. pack	60
M428S	without license light	mfg. pack	60
V420-15	red replacement lens 2-pack	Viz Pack	12
420-15	red replacement lens	poly pack	10
413-07	replacement pigtail	poly pack	25
1157	replacement bulb	reference only	

INCANDESCENT STOP TURN & TAIL



419 **Rectangular Combination Rear Light**








- · Red lens provides stop and tail functions, while amber lens serves as turn signal or flashing warning light.
- Popular OEM lamp for use on construction and agricultural equipment.
- Designed for use on vehicles under or over 80" wide.
- Two screws securely hold each lens and allow for easy bulb replacement.
- Lens gasket seals out moisture and extends bulb life.
- Mounts easily with two 5mm studs on 2 7/8" centers.
- · Meets ECE requirements.

Order No.	Description	Pack	Std Carton
M419	red/amber	mfg. pacl	k 36
419-25A	amber lens	poly pack	(10
419-25R	red lens	poly pack	(10
P21/5W 12V	replacement bulb stop & tail	re	ference only
12498	replacement bulb turn signal	re	ference only




450R Sealed Rectangular Stop/Turn/Tail Light



- Sealed, 3"x 5" red stop, turn and tail light.
- Popular on commercial vehicles; replaces competitive rectangular lights.
- Kit includes light, grommet, and plug.
- Can be matched with 450A amber turn signal on page 49.


Order No.		Description	F	Pack	Std Carton
450KR	KIT	red kit	p	oly pac	k 20
M450R		red	r	nfg. pac	k 50
450-18		grommet	þ	oly pac	k 12
B450-18		grommet	r	nfg. pac	k 100
421-491		3-wire plug	p	oly pac	k 12
B421-491		3-wire plug	r	nfg. pac	k 100





INCANDESCENT COMBINATION REAR





Universal Three-Stud Combination Rear Light



- Universal, OEM-style replacement tail light for Chevrolet, GMC, Ford, and International.
- Features three 1/4" diameter mounting studs with 2" triangular pattern.
- Junction box has universal terminals.
- Interchangeable with competitive models as follows:
- Chevrolet/GMC 715104, 795059 (right side); Ford D9HA13405B; IH 467708 C91, 424539 C91, 590158 C91
- 442L: Chevrolet/GMC 715103, 795058 (left side);

Ford D8HZ13404A; IH 467707 C91, 424538 C91, 590157 C91

Order No.	Description	Pack	Std Carton
442	curbside	box	12
442L	roadside	box	12
445-25	replacement lens	poly pack	10
1157	replacement bulb (stop & tail)	reference only	
1156	replacement bulb (back-up)	reference only	



Universal Three-Stud Combination Rear Light






- Universal stud-mount combination tail light.
- Includes stop, turn, tail, back-up and license light functions.
- Features three 1/4" diameter mounting studs with 2" triangular pattern.
- Connects through 3 wire loom, grounds through mounting studs.
- OEM replacement for Peterbilt, Mack, White, and Jeep trucks.
- Services GM P/N 15613944 & 15565732, Navistar P/N 166282C91. Similar to Grote P/N 53702 and 5312.

Order No.	Description	Pack S	Std Carton
V445	with license light	Viz Pack	6
445	with license light	box	12
445-25	replacement lens	poly pack	10
1157	replacement bulb (stop & tail)	refe	erence only
1156	replacement bulb (back-up)	refe	erence only





454

Mack Replacement Combination Rear Light






- Features two 1/4" studs mounted on 2" centers and built-in license light.
- Connects through 39", 3 wire loom, grounds through mounting studs.
- · Design permits both left-and right-side installation.
- Replaces Mack numbers 14M0444RP1 and 14M0444RP4.

Order No.	Description	Pack	Std Carton
454	with license light	box	12
445-25	replacement lens	poly pac	k 10
1157	replacement bulb (stop & rail)	re	eference only
1156	replacement bulb (back-up)	re	eference only





INCANDESCENT COMBINATION REAR













- Combination rear light for vehicles and trailers under 80" wide.
- Includes the following functions: stop, turn, tail, rear reflex, side marker, side reflex, and license light ("L" suffix only).
- Viz Pack and poly pack units include lead wire.
- Manufacturers pack features push-in connections with two extra ports for additional lights.
- Mounts on 2" centers and includes mounting hardware.
- Grounds through 1/4" mounting studs.
- V440-15 lens kit contains two lenses: 440-15 & 55-15R.

Order No.	Description	Pack Std C	arton
V440	without license light	Viz Pack	6
V440L	with license light	Viz Pack	6
440	without license light	box	12
440L	with license light	box	12
M440	without license light	mfg. pack	48
M440L	with license light	mfg. pack	48
V440-15	lens kit	Viz Pack	12
440-15	stop & tail lens	poly pack	10
55-15R	side marker lens	poly pack	10
1157	replacement bulb (stop & tail)	reference only	
168	replacement bulb (side)	reference only	



441 **Under 80" Submersible Combination Rear Light**











- Combination rear light for vehicles and trailers under 80" wide.
- Includes the following functions: stop, turn, tail, rear reflex, side marker, side reflex, and license light ("L" suffix only).
- · Features gaskets on both rear and side lenses with brown and yellow or green lead wires.
- Mounts on 2" centers and includes mounting hardware.
- Grounds through 1/4" mounting studs.
- V440-15 lens kit contains two lenses: 440-15 & 55-15R.

Order No.	Description	Pack Std C	arton
M441	without license light	mfg. pack	48
M441L	with license light	mfg. pack	48
V440-15	lens kit	Viz Pack	12
440-15	stop & tail lens	poly pack	10
55-15R	side marker lens	poly pack	10
1157	replacement bulb (stop & tail)	reference only	
1895	replacement bulb (side)	referenc	e only

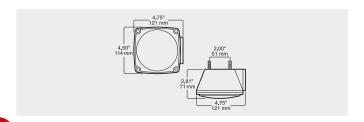







444 Over 80" Wide Combination Rear Light







- Combination rear light for vehicles and trailers 80" or more in width.
- Includes the following functions; stop, turn, tail, rear clearance, rear reflex, side marker, side reflex, and license light ("L" suffix).
- Features push-in connections with two extra ports for additional lights.
- Grounds through mounting studs.
- Mounts on 2" centers and includes mounting hardware.
- Units manufactured prior to April 2012 have the side marker lens attached with screws. Newer units use a snap-on lens. When ordering replacement side marker lenses, be sure to specify the appropriate style lens.

Order No.	Description	Pack	Std Carton
M444	without license light	mfg. pac	k 48
M444L	with license light	mfg. pac	k 48
440-15	stop & tail lens	poly pac	k 10
56-15R	side marker lens (screw type)	poly pac	k 10
444-151R	side marker lens (snap-on type)	poly pac	k 10
1157	replacement bulb (stop & tail)	re	ference only
194/193	replacement bulb (side)	re	ference only

452 Over 80" Wide Submersible Combo Rear Light











- Combination rear light for vehicles and trailers 80" or more in width.
- Includes the following functions: stop, turn, tail, rear clearance, rear reflex, side marker, side reflex, and license light ("L" suffix).
- Features gaskets on both rear and side lenses.
- Grounds through mounting studs.
- Mounts on 2" centers.
- Includes mounting hardware.

Order No.	Description	Pack Std	Carton
V452	without license light	Viz Pack	3
V452L	with license light	Viz Pack	3
M452	without license light	mfg. pack	48
M452L	with license light	mfg. pack	48
440-15	stop & tail lens	poly pack	10
56-15R	side marker lens	poly pack	10
1157	replacement bulb (stop & tail)	refere	nce only
194/193	replacement bulb (side)	refere	nce only

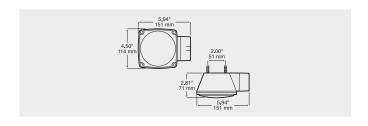



INCANDESCENT COMBINATION REAR







456 Over 80" Wide Submersible Combination Tail Light









- Low-profile, over 80" submersible combination tail light.
- Includes the following functions: stop, turn, tail, rear clearance, rear reflex, side marker, side reflex, and license light ("L" suffix).
- Housing slides out for easy maintenance and bulb replacement while maintaining gasket seal.
- Grounds through separate lead wire.
- "-3P" versions are terminated with an industry-standard PL3 plug.
- Mounts on slide-on 2" centers and includes mounting hardware.
- Available in manufacturer's pack or visual pack.

Order No.	Description	Pack Std (Carton
V456	curbside light	Viz Pack	6
V456L	roadside light	Viz Pack	6
M456	curbside light	mfg. pack	30
M456-3P	curbside light, PL3 plug	mfg. pack	30
M456L	roadside light	mfg. pack	30
M456L-3P	roadside light, PL3 plug	mfg. pack	30
1157	replacement bulb (stop & tail)	referenc	ce only
194/193	replacement bulb (side)	reference only	

457 Combination Rear Light










- · Combination tail light with polar white base.
- · Attractive rounded shape.
- Rugged, corrosion-resistant bulb socket.
- Includes the following functions: stop, turn, tail, rear reflex, and license light ("I" suffix).
- M457L includes license illuminator and license plate mounting bracket.
- · Grounds through mounting hardware.
- Designed for horizontal mounting.
- Popular for use on enclosed trailers or recreational vehicles.
- Available in manufacturer's pack or visual pack.

Order No.	Description	Pack St	d Carton
V457	without license light	Viz Pack	6
V457L	with license light	Viz Pack	6
M457	without license light	mfg. pack	48
M457L	with license light	mfg. pack	48
B457-15	replacement lens	poly pack	40
B457L-15	replacement lens	poly pack	40
1157	replacement bulb (stop & tail)	refer	ence only

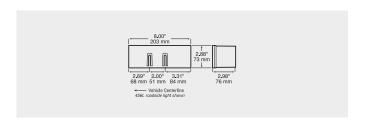







25911/25912 / 25913/25914 RV Combination Rear Light with Reflex



- Surface mount rear combination tail light.
- Available with or without integral back-up light.
- Available with or without integral license light & plate mounting bracket.
- Popular for RV applications.
- Self-service Viz Pack packaging.


Order No.	Description	Pack	Std Carton
V25911	red	Viz Pack	10
V25912	red w/ back-up light	Viz Pack	10
V25913	red w/ license light and bracket	Viz Pack	10
V25914	red w/ license light, brkt, back-up	Viz Pack	10
V25911-25	replacement lens	Viz Pack	10
V25912-25	repl. lens w/ back-up light	Viz Pack	10
V25913-25	repl. lens w/ license light	Viz Pack	10
V25914-25	repl. lens w/ license & back-up	Viz Pack	10
1157	replacement S/T/T bulb	re	ference only
1156	replacement backup bulb	re	ference only


25921/25922 / 25923/25924 RV Combination Rear Light with Reflex



- Surface mount rear combination tail light.
- Available with or without integral back-up light.
- Available with or without integral license light & plate mounting bracket.
- Popular for RV applications.
- Self-service Viz Pack packaging.

Order No.	Description	Pack	Std Carton
V25921	red	Viz Pack	10
V25922	red w/ back-up light	Viz Pack	10
V25923	red w/ license light and bracket	Viz Pack	10
V25924	red w/ license light, brkt, back-up	Viz Pack	10
V25921-25	replacement lens	Viz Pack	10
V25922-25	repl. lens w/ back-up light	Viz Pack	10
V25923-25	repl. lens w/ license light	Viz Pack	10
V25924-25	repl. lens w/ license & back-up	Viz Pack	10
1157	replacement S/T/T bulb	re	ference only
1156	replacement backup bulb	re	ference only
	-		

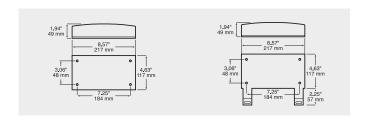



INCANDESCENT TRAILER LIGHT KITS





540 Under 80" Wide Trailer Light Kit









- Complete light kit for small trailers provides all legal lighting and reflectors for trailers under 80" wide.
- 540 kit include one each of 440/440L tail light, two 114A side marker lights, 20' trailer harness, license bracket, mounting hardware, and installation instructions
- V440-15 lens kit contains two lenses: one 440-15 and one 55-15R.

Description	Pack Std Carton	
w/ 20 ft. harness & side markers	Viz Pack 2	
w/ 20 ft. harness & side markers	box 12	
lens kit	Viz Pack 12	
stop & tail replacement lens	poly pack 10	
side marker replacement lens	poly pack 10	
amber replacement lens	poly pack 10	
replacement bulb (stop & tail)	reference only	
replacement bulb (rear marker)	reference only	
replacement bulb (front marker)	reference only	
	w/ 20 ft. harness & side markers w/ 20 ft. harness & side markers lens kit stop & tail replacement lens side marker replacement lens amber replacement lens replacement bulb (stop & tail) replacement bulb (rear marker)	

541 Under 80" Wide Trailer Rear Light Kit







- Rear light kit provides legal rear lighting and reflectors for trailers under 80" wide
- Includes one each of 440/440L tail light, 20' trailer harness, license bracket, mounting hardware, and installation instructions.
- V440-15 lens kit contains three lenses: 440-15, 55-15R & 55-15A.
- Front side marker/clearance lights and front side reflectors are necessary to meet all DOT requirements.

Order No.		Description	Pack	Std Carton
541	KIT	20 ft. harness	box	4
V440-15		lens kit	Viz Pack	12
440-15		stop & tail replacement lens	poly pac	k 10
55-15R		side marker replacement lens	poly pac	k 10
1157		replacement bulb (stop & tail)	re	ference only
168		replacement bulb (rear marker)	re	ference only

STT





544 Over 80" Wide Submersible Rear Light Kit





- Over 80" submersible rear lighting kit for all trailers.
- Kit provides rear lighting and reflectors for trailers over 80" wide.
- Includes one each of our 452/452L tail light, 25' trailer harness, license bracket, mounting hardware, and installation instructions.
- Front side marker/clearance lights, front side reflectors and rear identification lights are necessary to meet all DOT requirements.

Order No.		Description	Pack	Std Carton
V544	KIT	kit	Viz Pack	2
440-15		stop & tail replacement lens	poly pack	10
56-15R		side marker replacement lens	poly pack	10
1157		replacement bulb (stop & tail)	rei	ference only
194/193		replacement bulb (side marker)	rei	ference only

547 Over 80" Wide Submersible Rear Light Kit







- Over 80" submersible rear lighting kit for all trailers.
- Provides rear lighting and reflectors for trailers 80" wide and over.
- Includes one each of our low profile 456/456L tail light, 25' trailer harness, license bracket, mounting hardware, and installation instructions.
- Front side marker/clearance lights, side reflectors and rear identification lights are necessary to meet all DOT requirements.

Order No.		Description	Pack	Std Carton
V547	KIT	kit	Viz Pack	2
1157		replacement bulb (stop & tail)	re	eference only
194/193		replacement bulb (side marker)	re	eference only

LED TURN SIGNALS



817-7/818-7 LumenX[®] LED 4" Round Front & Rear Turn Signal












- Meets DOT standards for both FRONT and REAR turn signal use.
- White diodes and advanced optics fully illuminate amber lens.
- 817/818 series have both turn signal and low intensity marker light.
- 4731 lacks low light function.
- Meets DOT side marker requirements.
- AMP-compatible connector integrated into housing.
- 818-7 has flange integrated into the housing.
- 817-7 has skirted weld joint for added protection against moisture.
- 9–16 volt operating range.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- 817 kit includes light, grommet and 817-49 plug.
- 818 kit includes light and 817-49 plug.

Order No.		Description	Pack	Std Carton
817A-7		grommet mount	poly pac	k 6
818A-7		flange mount	poly pac	k 6
817KA-7	KIT	grommet mount kit	poly pac	k 6
818KA-7	KIT	flange mount kit	poly pac	k 6
M817A-7		grommet mount	mfg. pac	k 50
M818A-7		flange mount	mfg. pac	k 50
4731		grommet, w/o low-light function	mfg. pac	k 50
426-18		grommet	poly pac	k 12
B426-18		grommet	mfg. pac	k 100
417-49		hardshell plug	poly pac	k 6
B417-49		hardshell plug	mfg. pac	k 100
817-49		molded plug	poly pac	k 12
B817-49		molded plug	mfg. pac	k 100





824-7/826-7 *LumenX*[®] LED 4" Round Front & Rear Turn Signal













- Meets DOT standards for both **FRONT** and **REAR** turn signal use.
- White diodes and advanced optics fully illuminate amber lens.
- Includes both turn signal and low intensity marker light circuits.
- Meets DOT side marker requirements.
- · Industry-standard PL3 socket integrated into housing.
- 824-7 has flange integrated into the housing.
- 826-7 has skirted weld joint for added protection against moisture.
- 9-16 volt operating range.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- 826 kit includes light, grommet and 431-491 plug.
- 824 kit includes light and 431-491 plug.

Order No.		Description	Pack	Std Carton
V826KA-7	KIT	grommet mount kit	Viz Pack	6
V824KA-7	KIT	flange mount kit	Viz Pack	6
826A-7		grommet mount	poly pac	k 6
824A-7		flange mount	poly pac	k 6
826KA-7	KIT	grommet mount kit	poly pac	k 6
824KA-7	KIT	flange mount kit	poly pac	k 6
M826A-7		grommet mount	mfg. pac	k 50
M824A-7		flange mount	mfg. pac	k 50
426-18		grommet	poly pac	k 12
B426-18		grommet	mfg. pac	k 100
431-491		plug	poly pac	k 12
B431-491		plug	mfg. pac	k 100
		·	·	·







817-9/818-9 LumenX® LED 4" Round Front & Rear Turn Signal













- Meets DOT standards for both FRONT and REAR turn signal use.
- · White diodes and advanced optics fully illuminate amber lens.
- Includes both turn signal and low intensity marker light circuits.
- · Meets DOT side marker requirements.
- · AMP-compatible connector integrated into housing.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- 818-9 has flange integrated into the housing.
- 817-9 has skirted weld joint for added protection against moisture.
- 9-32 volt operating range is compatible with 12V and 24V vehicles.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- 817 kit includes light, grommet and 817-49 plug.
- 818 kit includes light and 817-49 plug.

Order No.		Description	Pack	Std Carton
817A-9		grommet mount	poly pa	ck 6
818A-9		flange mount	poly pa	ck 6
817KA-9	KIT	grommet mount kit	poly pa	ck 6
818KA-9	KIT	flange mount kit	poly pa	ck 6
M817A-9		grommet mount	mfg. pa	ck 50
M818A-9		flange mount	mfg. pa	ck 50
426-18		grommet	poly pa	ck 12
B426-18		grommet	mfg. pa	ck 100
417-49		hardshell plug	poly pa	ck 6
B417-49		hardshell plug	mfg. pa	ck 100
817-49		molded plug	poly pa	ck 12
B817-49		molded plug	mfg. pa	ck 100
·		·		



824-9/826-9 LumenX® LED 4" Round Front & Rear Turn Signal















- Meets DOT standards for both FRONT and REAR turn signal use.
- White diodes and advanced optics fully illuminate amber lens.
- Includes both turn signal and low intensity marker light circuits.
- Meets DOT side marker requirements.
- Industry-standard PL3 socket integrated into housing.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- 824-9 has flange integrated into the housing.
- 826-9 has skirted weld joint for added protection against moisture.
- 9-32 volt operating range is compatible with 12V and 24V vehicles.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- 826 kit includes light, grommet and 431-491 plug.
- 824 kit includes light and 431-491 plug.

Description	Pack St	d Carton
grommet mount	poly pack	6
flange mount	poly pack	6
grommet mount kit	poly pack	6
flange mount kit	poly pack	6
grommet mount	mfg. pack	50
flange mount	mfg. pack	50
grommet	poly pack	12
grommet	mfg. pack	100
plug	poly pack	12
plug	mfg. pack	100
	grommet mount flange mount kit grommet mount kit flange mount kit grommet mount flange mount grommet grommet grommet plug	grommet mount poly pack flange mount poly pack grommet mount kit poly pack flange mount kit poly pack grommet mount mfg. pack grommet mount mfg. pack grommet poly pack grommet poly pack grommet poly pack grommet poly pack









LED TURN SIGNALS









820-7/823-7 *LumenX*® LED Oval Front & Rear Turn Signal











- Meets DOT standards for both FRONT and REAR turn signal use.
- · White diodes behind amber lens.
- · Advanced optics fully illuminate lens.
- AMP-compatible connector integrated into housing.
- 823-7 has flange welded to light, forming a single unit.
- 820 kit includes light, grommet and 817-49 plug.
- 823 kit includes light and 817-49 plug.
- 9-16 volt operating range.
- Includes both turn signal and low intensity marker light circuits.
- Meets DOT side marker requirements.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Meets FMVSS 108 requirements in horizontal, vertical or any 360° position.

Order No.		Description	Pack	Std Carton
820A-7		grommet mount	poly pac	k 6
823A-7		flange mount	poly pac	k 6
820KA-7	KIT	grommet mount kit	poly pac	k 6
823KA-7	KIT	flange mount kit	poly pac	k 6
M820A-7		grommet mount	mfg. pac	ck 50
M823A-7		flange mount	mfg. pac	ck 50
421-18		grommet	poly pac	k 12
B421-18		grommet	mfg. pac	k 100
417-49		hardshell plug	poly pac	k 6
B417-49		hardshell plug	mfg. pad	k 100
817-49		molded plug	poly pac	k 12
B817-49		molded plug	mfg. pac	k 100

821-7/822-7 *LumenX*[®] LED Oval Front & Rear Turn Signal














- Meets DOT standards for both FRONT and REAR turn signal use.
- · White diodes behind amber lens.
- · Advanced optics fully illuminate lens.
- Includes both turn signal and low intensity marker light circuits.
- Meets DOT side marker requirements.
- Industry-standard PL3 socket integrated into housing.
- 822-7 has flange welded to light, forming a single unit.
- 9-16 volt operating range.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Meets FMVSS 108 requirements in horizontal, vertical or any 360° position.
- 821 kit includes light, grommet and 421-491 plug.
- 822 kit includes light and 421-491 plug.

Order No.		Description	Pack	Std Carton
V821KA-7	KIT	grommet mount kit	Viz Pack	6
V822KA-7	KIT	flange mount kit	Viz Pack	6
821A-7		grommet mount	poly pac	k 6
822A-7		flange mount	poly pac	k 6
821KA-7	KIT	grommet mount kit	poly pac	k 6
822KA-7	KIT	flange mount kit	poly pac	k 6
M821A-7		grommet mount	mfg. pac	k 50
M822A-7		flange mount	mfg. pac	k 50
421-18		grommet	poly pac	k 12
B421-18		grommet	mfg. pac	k 100
421-491		plug	poly pac	k 12
B421-491		plug	mfg. pac	k 100













820-10/823-10 LumenX[®] LED **Oval Front & Rear Turn Signal**
















- Meets DOT standards for both FRONT and REAR turn signal use.
- White diodes behind amber lens.
- · Advanced optics fully illuminate lens.
- Includes both turn signal and low intensity marker light circuits.
- · Meets DOT side marker requirements.
- · AMP-compatible connector integrated into housing.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- 823-10 has flange welded to light, forming a single unit.
- 9-32 volt operating range compatible with both 12V and 24V vehicles.
- Meets FMVSS 108 req. in horizontal, vertical or any 360° position.
- 820 kit includes light, grommet and 817-49 plug.
- 823 kit includes light and 817-49 plug.

Order No.		Description	Pack	Std Carton
820A-10		grommet mount	poly pac	k 6
823A-10		flange mount	poly pac	k 6
820KA-10	KIT	grommet mount kit	poly pac	k 6
823KA-10	KIT	flange mount kit	poly pac	k 6
M820A-10		grommet mount	mfg. pac	k 50
M823A-10		flange mount	mfg. pac	k 50
M823ATL-10		narrow, 2-screw flange	mfg. pac	k 50
421-18		grommet	poly pac	k 12
B421-18		grommet	mfg. pac	k 100
417-49		hardshell plug	poly pac	k 6
B417-49		hardshell plug	mfg. pac	k 100
817-49		molded plug	poly pac	k 12
B817-49		molded plug	mfg. pac	k 100

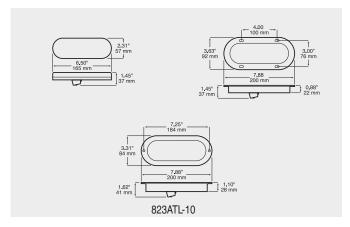





821-10/822-10 LumenX® LED **Oval Front & Rear Turn Signal**










- White diodes behind red lens.
- · Advanced optics fully illuminate lens.
- Industry-standard PL3 socket integrated into housing.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- 822-10 has flange welded to light, forming a single unit.
- 9-32 volt operating range is compatible with 12V and 24V vehicles.
- Meets FMVSS 108 requirements in horizontal, vertical or any 360° position.
- 821 kit includes light, grommet and 421-491 plug.
- 822 kit includes light and 421-491 plug.

Description	Pack Std Ca	arton
grommet mount	poly pack	6
flange mount	poly pack	6
grommet mount kit	poly pack	6
flange mount kit	poly pack	6
grommet mount	mfg. pack	50
flange mount	mfg. pack	50
grommet	poly pack	12
grommet	mfg. pack	100
plug	poly pack	12
plug	mfg. pack	100
	grommet mount flange mount flange mount kit flange mount kit grommet mount flange mount flange mount grommet grommet grommet plug	grommet mount poly pack flange mount poly pack T grommet mount kit poly pack T flange mount kit poly pack grommet mount mfg. pack flange mount mfg. pack grommet poly pack grommet poly pack grommet mfg. pack



LED TURN SIGNALS



TRADITIONAL 36 DIODE PIRANHA®





TRADITIONAL 38 DIODE PIRANHA®



417TA/418TA Piranha® LED 4" Round Amber Rear Turn Signal Light



- 418TA has flange welded to light, forming a single unit.
- Does not require "Top" positioning to meet FMVSS 108.
- Hardwired leads are terminated with built-in 3-wire PL3 adapter.
- See matching stop/turn/tail light on page 8.
- $\bullet\,$ For grommet-mount Viz Pack version with PL3 plug, see V417KTA at right.

Order No.	Description	Pack St	td Carton
V418KTA	amber w/ flange & adapter plug	Viz Pack	6
M417TA-P	amber w/ adapter plug	mfg. pack	50
M418TA-P	amber w/ flange & adapter plug	mfg. pack	50
426-18	grommet	poly pack	12
B426-18	grommet	mfg. pack	100

417KTA/817-36/818-36 Piranha® LED 4" Round Amber Rear Turn Signal Light

















- Original 36-diode Piranha multi-diode lens look.
- AMP-compatible connector integrated into housing.
- Advanced white diodes behind red lens.
- 818-36 has flange welded to light, forming a single unit.
- 817-36 has skirted weld joint for added protection against moisture.
- 9–16 volt operating range.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- · Does not require "Top" positioning to meet FMVSS 108 standard.
- V417KTA Viz-Pack kit includes light, grommet and 417-491 adapter plug.
- See page 8 for matching red stop/turn/tail light.

Order No.		Description	Pack	Std Carton
V417KTA	KIT	red w/ grommet & adapter plug	Viz Pack	6
817A-36		red, grommet mount	poly pack	ς 6
818A-36		red, flange mount	poly pack	6
M817A-36		red, grommet mount	mfg. pac	k 50
M818A-36		red, flange mount	mfg. pac	k 50
426-18		grommet	poly pack	κ 12
B426-18		grommet	mfg. pac	k 100
417-49		hardshell plug	poly pacl	۶ 6
B417-49		hardshell plug	mfg. pac	k 100
817-49		molded plug	poly pack	κ 12
B817-49		molded plug	mfg. pac	k 100

















TRADITIONAL 22 DIODE PIRANIHA®



TRADITIONAL 22 DIODE PIRANTIA



821-22/822-22 Piranha® LED **Oval Amber Rear Turn Signal Light**












- Original 22-diode Piranha multi-diode lens look.
- PL3-compatible connector integrated into housing.
- Advanced white diodes behind amber lens.
- 822-22 has flange welded to light, forming a single unit.
- 821KA Viz Pack kit includes light, grommet, and 421-491 plug.
- 9-16 volt operating range.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Meets FMVSS 108 req. in horizontal, vertical or any 360° position.
- See page 9 for matching red stop/turn/tail light.

Order No.		Description	Pack Std (Carton
V821A-22		amber	Viz Pack	6
V821KA-22	KIT	amber kit w/ grommet & plug	Viz Pack	6
821A-22		amber, grommet mount	poly pack	6
822A-22		amber, flange mount	poly pack	6
M821A-22		amber, grommet mount	mfg. pack	50
M822A-22		amber, flange mount	mfg. pack	50
421-18		grommet	poly pack	12
B421-18		grommet	mfg. pack	100
421-491		plug	poly pack	12
B421-491		plug	mfg. pack	100



820-22/823-22 Piranha® LED **Oval Amber Rear Turn Signal Light**













- Original 22-diode Piranha multi-diode lens look.
- AMP-compatible connector integrated into housing.
- · Advanced white diodes behind amber lens.
- 823-22 has flange welded to light, forming a single unit.
- 9-16 volt operating range.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Meets FMVSS 108 req. in horizontal, vertical or any 360° position.
- See page 9 for matching red stop/turn/tail light.

Order No.	Description	Pack Std	Carton
820A-22	amber, grommet mount	poly pack	6
823A-22	amber, flange mount	poly pack	6
M820A-22	amber, grommet mount	mfg. pack	50
M823A-22	amber, flange mount	mfg. pack	50
421-18	grommet	poly pack	12
B421-18	grommet	mfg. pack	100
417-49	hardshell plug	poly pack	6
B417-49	hardshell plug	mfg. pack	100
817-49	molded plug	poly pack	12
B817-49	molded plug	mfg. pack	100





LED TURN SIGNALS





817TA-2C/818TA-2C LED 4" Round Amber Rear Turn Signal Light













• Features amber diodes behind clear lens.

- · AMP-compatible connector integrated into housing.
- 9-32 volt operating range is compatible with 12V and 24V vehicles.
- 818TA-2C has flange welded to light, forming a single unit.
- Does not require "Top" positioning to meet FMVSS 108 standards.
- Compatible with connecting plugs shown on pages 204–207.
- New design 817CA-9 & 818CA-9 coming soon.

Order No.	Description	Pack St	d Carton
817TA-2C	10 diodes w/clear lens	poly pack	6
818TA-2C	10 diodes w/clear lens, flange	poly pack	6
M817TA-2C	10 diodes w/clear lens	mfg. pack	50
M818TA-2C	10 diodes w/clear lens, flange	mfg. pack	50
426-18	grommet	poly pack	12
B426-18	grommet	mfg. pack	100
417-49	hardshell plug	poly pack	6
B417-49	hardshell plug	mfg. pack	100
817-49	molded plug	poly pack	12
B817-49	molded plug	mfg. pack	100

824/826 Single Diode LED 4" Round Amber Rear Turn Signal Light









- Single diode LED light with traditional incandescent lens look.
- . Industry-standard PL3 socket integrated into housing with locking tabs for added plug retention.
- 9-32 operating range.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- 826A requires 426-18 grommet.
- 824A features gray housing with integral mounting flange.
- 824A flange has recessed lens.
- 431-491 plug required for installation.

Order No.	Description	Pack Std	Carton
826A-MV	grommet mount, multi-volt	poly pack	6
824A-MV	flange mount, multi-volt	poly pack	6
M826A-MV	grommet mount, multi-volt	mfg. pack	50
M824A-MV	flange mount, multi-volt	mfg. pack	50
426-18	grommet	poly pack	12
B426-18	grommet	mfg. pack	100
431-491	plug	poly pack	12
B431-491	plug	mfg. pack	100

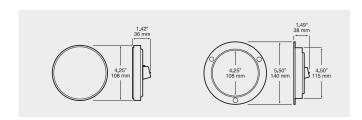







418WTA LED Mid-Trailer, Wide-Turn Signal







- · Designed to improve visibility on tractor/trailer applications.
- Features 4" amber turn signal mounted in L-bracket with bright "Caution Wide Turn" graphics.
- · Commonly used in mid-turn applications.
- Can be configured for either right- or left-side application.
- Kit includes sign, light, and instruction sheet.
- Choice of 36-diode Piranha® or 7-diode LumenX® light.
- 418WTA includes 417-49 hardshell plug.
- 818WTA requires AMP-compatible plug to complete installation.

Order No.		Description	Pack	Std Carton
418WTA	KIT	36-diode Piranha®	box	6
818WTA	KIT	7-diode LumenX®	box	6
417-49		hardshell plug	poly pack	6
B417-49		hardshell plug	mfg. pack	100
817-49		molded plug	poly pack	12
B817-49		molded plug	mfg. pack	100

817Y/818Y LED Bulls-Eye Sequential Auxiliary / Marker Light









- For use as auxiliary turn signal or warning/flasher. Not certified to meet FMVSS 108 rear turn requirements.
- Cycles through sequential flash pattern without external flasher unit.
- Includes low light function.
- Over-voltage and reverse voltage protection.
- AMP-compatible connector integrated into housing.
- Requires AMP-compatible plug to complete installation.
- Operates from 9-16 volts.
- Lens and housing welded to create watertight seal.
- 818 series has flange welded to housing to form a single unit.


Order No.	Description	Pack Std	Carton
817YA	grommet mount	poly pack	6
818YA	flange mount	poly pack	6
426-18	grommet	poly pack	12
B426-18	grommet	mfg. pack	100
417-49	hardshell plug	poly pack	6
B417-49	hardshell plug	mfg. pack	100
817-49	molded plug	poly pack	12
B817-49	molded plug	mfg. pack	100



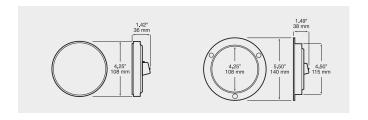

LED TURN SIGNALS





327 LED

Double-Face Park & Turn Light w/ Side Marker









- · Available with two amber lenses or with amber lens facing front of vehicle and red lens facing to rear.
- 327L for roadside use, 327R for curbside.
- Includes side marker function and reflex.
- 2-stud pedestal mount.
- 3-wire electrical connection.
- Two 4.5" square acrylic lenses.
- · Chrome plated plastic housing.

Order No.	Description	Pack Std Carto	on
V327AA	amber/amber	Viz Pack	6
V327L	amber/red, roadside	Viz Pack	6
V327R	amber/red, curbside	Viz Pack	6





Double-Face Round Park & Turn Light








- · Has amber lens facing front of vehicle, red lens facing to rear.
- · Reversible for use on either side of vehicle.
- Single stud pedestal mount.
- 3-wire electrical connection.
- Two 4" round acrylic lenses.
- · Chrome die-cast housing.

Order No.	Description	Pack Std Carton
V338-2	amber/red	Viz Pack 6





339 LED

Single-Face Round Park & Turn or S/T/T Light









- Single stud pedestal mount.
- 3-wire electrical connection.
- Single 4" round acrylic lens.
- · Chrome die-cast housing.
- V339R shown here is also listed with stop/turn/tail lights on page 17.

Order No.	Description	Pack Std Carton
V339A	amber	Viz Pack 6
V339R	red	Viz Pack 6
339A-BT2	amber	mfg. pack 24













319AA LED Double-Sided Agricultural Park/Turn/Warning Light



- ASAE S279.17 compliant.
- Perfect for all agricultural applications.
- Double-sided amber light.
- Works with all 12-volt vehicles.
- Can be mounted to vertical or horizontal surfaces.
- Stripped leads for easy installation.
- See matching stop/turn/tail light and combination light on page 17.

Order No.	Description	Pack Std (arton
319AA	amber, stripped leads	mfg. pack	24

320A/321A LumenX® LED Agricultural Turn/Marker/Warning Light









- Provides a minimum of 4 CP illumination at 90 degrees to lens face in every direction, regarless of installation orientation.
- Meets agricultural standard ASAE S279.17.
- Meets NHTSA's agricultural lamp requirement U.S. Title 49 Part 562.
- Also meets FMVSS 108 standards for FRONT and REAR turn signal, parking lamp, clearance, and side marker.
- Fits standard oval mounting grommet.
- Includes both high intensity ag warning/turn, and low intensity park/marker light circuits
- Three advanced white diodes behind precision-designed fresnel lens.
- PL3 or AMP compatible connector integrated into housing.
- 9–16 volt operating range w/ voltage regulation and over-voltage protection.
- Meets all applicable requirements in horizontal, vertical or any 360° position.


Order No.	Description	Pack Std	Carton
M320A	amber, AMP receptacle	mfg. pack	50
M321A	amber, PL3 receptacle	mfg. pack	50
B421-18	grommet	mfg. pack	100
B817-49	molded AMP-compatible plug	mfg. pack	100
B421-491	PL3 plug	mfg. pack	100

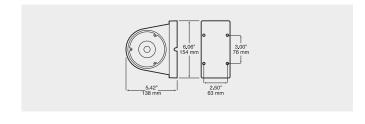



LED TURN SIGNALS





717 LED

7" Transit Front & Rear Turn Signal










- Round, 7-inch size popular for bus and transit applications.
- · Sealed potted design.
- 9-32 volt operating range.
- Surface mount with standard 4-hole mounting pattern.
- · Comes standard with mounting gasket providing additional protection between lamp and mounting surface.
- · Hardwired leads terminated with .180 male bullet and ring terminal for
- Matching red stop/turn/tail light available on page 16.
- · Matching white back-up light available on page 99.

Order No.	Description	Pack Std Carto	n
717A	surface mount	poly pack 2	20







850-1 LED

Rectangular Rear Turn Signal












- Certified to meet both FMVSS 108 (USA) & ECE (European) requirements for rear turn signal in horizontal or vertical position.
- Sealed lens and housing meets IP67 ingress protection level.
- 9-32 volt operating range.
- Hardwired design eliminates the need for separate plug and reduces connection points.
- 850A has 6.5' leads, others have 300mm (11.8") leads.
- 850A-1P has hardwired PL3 plug. Others have stripped leads.
- Matching red stop/turn/tail light on page 16.
- · Matching white back-up light on page 99.

Order No.	Description	Pack	Std Carton
P850A-1	amber, 12" leads	poly pack	6
850A	amber, 6.5' sheathed leads	mfg. pacl	(10
850A-1	amber, 12" leads	mfg. pacl	(10
850A-1P	amber, 12" leads w/ PL3 plug	mfg. pacl	(10
850-18	grommet	poly pack	12
B850-18	grommet	mfg. pacl	K 50



Shown with accessory bezel installed





423A-4 LED

Surface Mount Oval Auxiliary Turn Signal







- 9-32 volt operating range.
- Surface mounting for quick and versatile installation.
- · Decorative snap-on chrome bezel available as accessory.
- Matching stop/turn/tail version available. See page 15.

Order No.	Description	Pack Std C	arton
423A-4	amber	poly pack	6
M423A-4	amber	mfg. pack	50
423-11	accessory chrome bezel	poly pack	12
B423-11	accessory chrome bezel	mfg. pack	50









420Q/423Q LED **Amber Sequential Auxiliary / Marker Light**



- Sealed, oval 35 LED sequential-arrow light for auxiliary applications such as mid-turn signal or warning light.
- Cycles through multiple sequential arrows until fully illuminated.
- · Hardwired design includes 3-wire molded adapter plug.
- 9-32 volt operating range.
- Over-voltage and reverse voltage protection.
- · Available in grommet or flange mount models.
- · Low light function meets DOT side marker light requirement.

Order No.	Description	Pack Std Carton
420QA-P	amber	poly pack 6
423QA-P	amber w/ flange	poly pack 6
421-18	grommet	poly pack 12
B421-18	grommet	mfg. pack 100

820Q/823Q LED

Amber Sequential Auxiliary / Marker Light











- Sealed, oval 35 LED sequential-arrow light for auxiliary applications such as
- mid-turn signal or warning light. • Cycles through multiple sequential arrows until fully illuminated.
- · AMP-compatible connector integrated into housing.
- 9-32 volt operating range.
- Over-voltage and reverse voltage protection.
- Available in grommet or flange mount models.
- Low light function meets DOT side marker light requirement.
- 820QA requires grommet for installation.
- Plug required to complete installation.

Order No.	Description	Pack Std	Carton
820QA	amber	poly pack	6
823QA	amber w/ flange	poly pack	6
823QCA	amber, clear lens w/ flange	poly pack	6
421-18	grommet	poly pack	12
B421-18	grommet	mfg. pack	100
417-49	hardshell plug	poly pack	6
B417-49	hardshell plug	mfg. pack	100
817-49	molded plug	poly pack	12
B817-49	molded plug	mfg. pack	100





LED MID-TURN LIGHTS









350 LED Oval Amber Auxiliary/Mid-Turn Light w/ Reflex











- Two-function, 6-diode LED light that may be used as auxiliary mid-turn, while providing intermediate side marker light and side reflector.
- Hardwired design eliminates plug, reduces connection points.
- Features sealed lens and housing.
- Operates from 9-32 volts.
- Equipped with hardwired AMP hardshell connector; "-P" version terminated with standard PL3 plug.
- 350A-PKD2 has only two leads, features high intensity turn function only (no side marker function).

Order No.	Description	Pack Std	Carton
350A-P	amber w/ plug	poly pack	6
350AF	amber w/ flange	poly pack	6
M350A	amber	mfg. pack	50
M350AF	amber w/ flange	mfg. pack	50
M350A-P	amber w/ plug	mfg. pack	50
M350A-PKD2	amber, high intensity light only	mfg. pack	4
421-18	grommet	poly pack	12
B421-18	grommet	mfg. pack	100

351 LumenX® LED Oval Amber Auxiliary/Mid-Turn Light w/ Reflex














- Two-function, 6-diode LED light that may be used as auxiliary mid-turn, while providing intermediate side marker light and side reflector.
- · Integrated industry-standard PL3 socket.
- · Sealed lens and housing.
- Operates from 9-16 volts.
- Compatible with connecting plugs shown on pages 207-209.

Order No.	Description	Pack Std	Carton
V351A	amber	Viz Pack	6
351A	amber	poly pack	6
351AF	amber w/flange	poly pack	6
M351A	amber	mfg. pack	50
M351AF	amber w/flange	mfg. pack	50
421-18	grommet	poly pack	12
B421-18	grommet	mfg. pack	100
421-491	plug	poly pack	12
B421-491	plug	mfg. pack	100


















355 *LumenX*® LED Oval Amber Auxiliary/Mid-Turn Light w/ Reflex











- AMP-compatible connector integrated into housing.
- · Sealed lens and housing.
- Operates from 9-16 volts.
- Compatible with connecting plugs shown on pages 204–207.

Order No.	Description	Pack Std (Carton
355A	amber	poly pack	6
M355A	amber	mfg. pack	50
M355AF	amber w/flange	mfg. pack	50
421-18	grommet	poly pack	12
B421-18	grommet	mfg. pack	100
417-49	hardshell plug	poly pack	6
B417-49	hardshell plug	mfg. pack	100
817-49	molded plug	poly pack	12
B817-49	molded plug	mfg. pack	100

356 *LumenX*[®] LED Oval Amber Auxiliary/Mid-Turn Light w/ Reflex

















- Two-function light may be used as mid-turn, while providing intermediate side marker light and side reflector.
- AMP-compatible connector integrated into housing.
- Meets SAE J914B, SAE J2039 specifications.
- Meets CA Title 13 requirements.
- 9-16 volt operating range.
- Regulated design provides voltage protection and consistent output.
- Available in grommet and flange mount versions.
- Compatible with connecting plugs shown on pages 204-207.

Order No.	Description	Pack Std (Carton
356A	amber	poly pack	6
356AF	amber w/flange	poly pack	6
M356A	amber	mfg. pack	50
M356AF	amber w/flange	mfg. pack	50
421-18	grommet	poly pack	12
B421-18	grommet	mfg. pack	100
417-49	hardshell plug	poly pack	6
B417-49	hardshell plug	mfg. pack	100
817-49	molded plug	poly pack	12
B817-49	molded plug	mfg. pack	100









INCANDESCENT TURN SIGNALS





426 Sealed 4" Round Amber Turn Signal







- Meets DOT requirements for rear turn signal and/or front park & turn.
- Kits include light, grommet and 431-491 straight plug.
- See 426R stop and tail, and 415 back-up light for companion models.
- 12-volt lamps have long life, dual-filament, 2.1/.59 amp, 32/3 cp bulb.
- See 826A-MV LED version on page 40.

Order No.		Description	Pack	Std Carton
426A		amber	poly pac	k 12
426KA	KIT	amber kit	poly pac	k 12
M426A		amber	mfg. pad	ck 48
426-18		grommet	poly pac	ck 12
B426-18		grommet	mfg. pad	ck 100
431-491		3-wire plug	poly pac	k 12
B431-491		3-wire plug	mfg, pad	ck 100


431A Sealed 4" Round Amber Turn Signal






- Meets DOT requirements for rear turn signal and/or front park & turn
- Features extra wide, spin-welded, tongue-and-groove lens lip.
- High performance, copper alloy conductors.
- Heavy duty bulb and socket prevents premature bulb failure.
- Kit includes light, grommet, and plug.
- See 826A-MV LED version on page 40.

Order No.		Description	Pack	Std Carton
M431KA	KIT	amber kit	mfg. pad	ck 50
426-18		grommet	poly pac	k 12
B426-18		grommet	mfg. pad	ck 100
431-49		2-wire plug	poly pac	ck 12
B431-49		2-wire plug	mfg. pad	ck 100
431-491		3-wire plug	poly pac	ck 12
B431-491		3-wire plug	mfg. pad	ck 100





5.31" 135 mr








421 Sealed Oval Amber Turn Signal







- Meets DOT requirements for rear turn signal and/or front park & turn signal in either horizontal or vertical position.
- · Kits include light, grommet, and right-angle plug.
- See 421R stop and tail, and 416 back-up light for companion models.
- Equipped with dual-filament, 2.1/.59 amp, 32/3 cp bulb.
- See LED versions on page 36-37.

Order No.		Description	Pack Std	Carton
421A		amber	poly pack	12
421KA	KIT	amber kit	poly pack	12
M421A		amber	mfg. pack	48
M421KA	KIT	amber kit	mfg. pack	48
421-18		grommet	poly pack	12
B421-18		grommet	mfg. pack	100
421-491		3-wire plug	poly pack	12
B421-491		3-wire plug	mfg. pack	100




450A Sealed Recangular Amber Turn Signal



- Sealed, 3" x 5" amber parking & turn signal light.
- Popular on commercial market vehicles; fits competitive rectangular lights.
- Kit includes light, grommet, and plug.
- Can be matched with 450R red S/T/T light on page 26.
- See 850A-1 LED version on page 44.

Order No.		Description	Pack	Std Carton
450KA	KIT	amber kit	poly pacl	< 20
450-18		grommet	poly pack	κ 12
B450-18		grommet	mfg. pac	k 100
421-491		3-wire plug	poly pacl	κ 12
B421-491		3-wire plug	mfg. pac	k 100





306 Surface-Mount Rectangular Turn Signal Light



- 306A functions as turn signal and parking light.
- Features polycarbonate lens, durable galvanized steel base plate, and tough nylon bushing to protect lead wires.
- Grounds through mounting screw.
- Less than 75 sq. cm of effective, projected luminous lens area. For use on vehicles under 80" wide.
- See matching 306R stop/turn/tail light on page 21.
- See matching 393C back-up light on page 100.

Order No.	Description	Pack Std Car	ton
V306A	amber	Viz Pack	6
306A	amber	poly pack	24
306-25A	amber lens	poly pack	10
2057	replacement bulb	reference o	nly

INCANDESCENT MID-TURN LIGHTS




343 **Combination Side Turn Signal & Side Marker**



- Surface-mount unit meets SAE recommended practice for side turn signal, while providing marker light functions.
- Popular model commonly referred to as a mid-turn light.
- Bulb-replaceable unit 343 has 3/8" base and three lead wires: two blunt cut and one ground wire with ring terminal.
- 2757 has lens welded to 9/16" tall base and three lead wires with .180 molded bullets.

Order No.	Description	Pack Std C	arton
343A	amber, bulb replaceable	poly pack	12
M343A	amber, bulb replaceable	mfg. pack	48
2757	amber, welded lens	mfg. pack	48
343-25A	amber lens	poly pack	10
343-241	mounting gasket	mfg. pack	10
3157	replacement bulb	referenc	e only





352 Sealed **Combination Side Turn Signal & Side Marker**











- Amber unit meets SAE recommended practice for side turn signal, while providing side marker light and side reflector functions.
- Popular model commonly referred to as a mid-turn light.
- 421-18 grommet and 3-wire plug are required for installation.
- Kit includes light, 421-18 grommet, and 431-491 plug.
- See part number 421-09 for angle mounting bracket option.
- Meets SAE J2039 requirements for mid-turn lights on large trailers.
- See 356 LED version on page 47.

Order No.		Description	Pack	Std Carton
V352A		amber	Viz Pack	6
352A		amber	poly pac	k 12
M352A		amber	mfg. pac	ck 48
M352KA	KIT	amber kit	mfg. pad	k 48
421-18		grommet	poly pac	k 12
B421-18		grommet	mfg. pac	k 100
421-491		rt. angle plug	poly pac	k 12
B421-491		rt. angle plug	mfg. pac	k 100
431-491		plug	poly pac	k 12
B431-491		plug	mfg. pac	k 100







426WTA Mid-Trailer, Wide-Turn Signal








- Designed to improve visibility on tractor/trailer applications.
- Features 4" amber turn signal mounted in L-bracket with bright "Caution Wide Turn" graphics.
- Commonly used in mid-turn applications.
- Can be configured for either right- or left-side application.
- Kit includes sign, light, grommet, plug, mounting bracket, and instruction
- See LED versions on page 41.

Order No.	Description	Pack	Std Carton
426WTA	amber, wide turn	box	6





Single-Face Round Rear Turn Signal

PACK

- Pedestal-mount, red single-face turn signal or warning light.
- Durable, black plastic housing will not rust or corrode.
- Snap-on acrylic lens is interchangeable with competitive models.
- Single lead wire exits through 1/2" diameter stud.
- Grounds through mounting stud.


Order No.	Description	Pack Std Ca	rton
V313R	red	Viz Pack	6
313R	red	poly pack	12
313-15BLK	black back	poly pack	10
313-15R	red lens	poly pack	10
411-07	replacement pigtail	poly pack	25
1156	replacement bulb	reference only	

313AA Double-Face **Round Amber Park & Turn Light**



- Pedestal-mount, double face amber light functions as combination turn signal, parking light or warning light.
- Durable, black plastic housing with two snap-on amber lenses.
- Two lead wires exit through 1/2" diameter mounting stud.
- · Grounds through mounting stud.
- Converts to single-face amber light by snapping on black back.

Order No.	Description	Pack Std Carton
V313AA	amber/amber	Viz Pack 6
313AA	amber/amber	poly pack 12
313-15BLK	black back	poly pack 10
313-15A	amber lens	poly pack 10
413-07	replacement pigtail	poly pack 25
2057	replacement bulb	reference only




313-2 Double-Face **Red/Amber Park and Turn Signal**



- Pedestal-mount, double-face red/amber light functions as combination turn signal, parking light or warning light.
- Durable, black plastic housing with snap-on red and amber lenses.
- Two lead wires exit through 1/2" diameter mounting stud.
- Grounds through mounting stud.
- Popular style lamp is interchangeable with competitive units.
- Can be converted to single-face by snapping on black back.

04	ou to omigio race by emapping on	Diddit Daditi	
Order No.	Description	Pack Std Ca	arton
V313-2RA	red/amber	Viz Pack	6
313-2RA	red/amber	poly pack	12
313-15BLK	black back	poly pack	10
313-15A	amber lens	poly pack	10
313-15R	red lens	poly pack	10
413-07	replacement pigtail	poly pack	25
2057	replacement bulb	reference	only





INCANDESCENT PEDESTAL LIGHTS





Note: Less than 75 sq. cm of effective, projected luminous lens area. For use on vehicles under 80" wide.

308/309 Agricultural Stop/Turn/Tail & Warning Light





- ASAE S279.17 compliant.
- Perfect for all agricultural applications.
- 308 combination lights function as both red stop and tail light and amber turn signal and flashing warning light.
- 309AA functions as turn signal and/or flashing warning light.
- Works with all 12-volt vehicles.
- Can be mounted to vertical or horizontal surfaces.
- Rubber protective gasket seals unit from moisture and dust
- · Replaceable bulb and lens.
- Standard version has 4-pin plug (308) or 3-pin plug (309) for easy installation
- -PKD versions are terminated with Packard-style hardshell connector.
- · Replacement lens kits include replacement gasket and screws.
- 309R single red stop/turn/tail light available on page 22.
- See LED versions on pages 17 and 43.


Description	Pack	Std Carton
dual, roadside	mfg. pa	ck 16
dual, roadside w/ hardshell connector	mfg. pa	ck 16
dual, curbside	mfg. pa	ck 16
dual, curbside w/ hardshell connector	mfg. pa	ck 16
amber/amber, single	mfg. pa	ck 24
amber replacement lens kit	poly pa	ck 50
red replacement lens kit	poly pa	ck 50
black block-off cover	poly pa	ck 50
	dual, roadside dual, roadside w/ hardshell connector dual, curbside dual, curbside w/ hardshell connector amber/amber, single amber replacement lens kit red replacement lens kit	dual, roadside mfg. par dual, roadside w/ hardshell connector mfg. par dual, curbside mfg. par dual, curbside w/ hardshell connector mfg. par amber/amber, single mfg. par amber replacement lens kit poly par red replacement lens kit poly par


335-2 Double-Faced Turn Signal or Park/Turn Signal




- Features zinc diecast housing with black, powder-coated finish.
- · Acrylic lenses are interchangeable with competitive models.
- Grounds through mounting stud.
- 335-2 combination park and turn signal has two lead wires that exit through 1/2" mounting stud.

Order No.	Description	Pack Std	Carton
V335-2	amber/red w/ parking light	Viz Pack	6
M335-2-BT2	amber/red w/ parking light	mfg. pack	12
334-15A	amber lens	poly pack	10
334-15R	red lens	poly pack	10
413-07	pigtail for 335-2	poly pack	25
2057	replacement bulb for 335-2	referen	ce only









Note: Less than 75 sq. cm of effective, projected luminous lens area. For use on vehicles under 80" wide.



337-2 Double-Face Round Park & Turn Light



- Features zinc diecast housing with chrome-plated finish.
- Acrylic lenses are interchangeable with competitive models.
- Grounds through mounting stud.
- Park and turn signal leads exit through 1/2" mounting stud.
- See 338-2 LED version on page 42.


Order No.	Description	Pack Std C	arton
337-2	amber/red w/ parking light	poly pack	12
334-15A	amber lens	poly pack	10
334-15R	red lens	poly pack	10
413-07	pigtail	poly pack	25
2057	replacement bulb	referenc	e only


344 Double-Face Park & Turn Light w/ Side Marker



- Vertical, two-stud turn signal includes side marker light with reflector.
- Unique weather proof, plug-in harness provides for universal mount, or may be discarded for exact OEM replacement of Navistar 1661280C91.

Order No.	Description	Pack Std Carton
344A	amber	poly pack 12
344-24	mounting pad	mfg. pack 100
344-49	replacement plug	mfg. pack 12
3157	replacement bulb	reference only

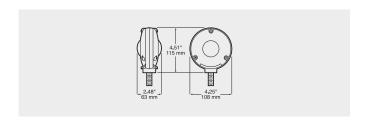



LED CLEARANCE & SIDE MARKER









35 LED Clearance/Side Marker Light













- LED version of Peterson 135 oval surface-mount clearance/marker light.
- · Mounts on industry standard 3" centers.
- 9-32 volt operating range.
- Hardwired power and ground leads.
- PC-rated light functions as both clearance and side marker when mounted at a 45° angle.

Order No.	Description	Pack Std (Carton
V35A-BT2	amber, .180 bullets	Viz Pack	6
V35R-BT2	red, .180 bullets	Viz Pack	6
35A-MV	amber, stripped	poly pack	6
35R-MV	red, stripped	poly pack	6
35A-MV-BT2	amber, .180 bullets	poly pack	6
35R-MV-BT2	red, .180 bullets	poly pack	6
M35A-MV	amber, stripped	mfg. pack	100
M35R-MV	red, stripped	mfg. pack	100
M35A-MV-BT2	amber, .180 bullets	mfg. pack	100
M35R-MV-BT2	red, .180 bullets	mfg. pack	100
V134-15A	amber lens	Viz Pack	6
V134-15R	red lens	Viz Pack	6
134-15A	amber lens	poly pack	10
134-15R	red lens	poly pack	10
B134-15A	amber lens	bulk pack	100
B134-15R	red lens	bulk pack	100

38 LED

Clearance/Side Marker Light















- LED version of Peterson 138 oval surface-mount clearance/marker light.
- Mounts on industry standard 3" centers.
- 9-32 volt operating range.
- Hardwired power and ground leads.
- PC-rated light functions as both clearance and side marker when mounted at a 45° angle.
- Compatible with 106-09 chrome accessory guard. See page 171.

Order No.	Description	Pack	Std Carton
V38A	amber, stripped	Viz Pack	6
V38R	red, stripped	Viz Pack	6
38A-MV	amber, stripped	poly pacl	6
38R-MV	red, stripped	poly pacl	6
38A-MV-BT2	amber, .180 bullets	poly pacl	6
38R-MV-BT2	red, .180 bullets	poly pacl	6
M38A-MV	amber, stripped	mfg. pac	k 100
M38R-MV	red, stripped	mfg. pac	k 100
M38A-MV-BT2	amber, .180 bullets	mfg. pac	k 100
M38R-MV-BT2	red, .180 bullets	mfg. pac	k 100
V138-15A	amber lens	Viz Pack	6
V138-15R	red lens	Viz Pack	6
138-15A	amber lens	poly pacl	< 10
138-15R	red lens	poly pacl	< 10
B138-15A	amber lens	bulk pacl	(100
B138-15B	blue lens	bulk pacl	(100
B138-15C	clear lens	bulk pacl	(100
B138-15G	green lens	bulk pacl	(100
B138-15R	red lens	bulk pacl	(100
V106-09	chrome guard	Viz Pack	6
B106-09	chrome guard	mfg. pac	k 60









60 LED Clearance/Side Marker Light









- Mounts on industry-standard 3" centers.
- 9-32 volt operating range.
- Hardwired power and ground leads.
- Thin-line design that fits most narrow rail applications.
- DOT legal when mounted horizontally with up to 20° tilt back.
- Foam mounting gasket available
- Compatible with 160-09 aluminum brush guard. See page 178.

Order No.	Description	Pack Std Car	rton
60A-MV	amber	poly pack	12
60R-MV	red	poly pack	12
M60A-MV	amber	mfg. pack	50
M60R-MV	red	mfg. pack	50
160-09	brush guard	poly pack	6
B160-09	brush guard	mfg. pack	120
160-242	gasket	mfg. pack	100

153 LED **Clearance/Side Marker Light**





- Lens is welded to housing to form single rugged unit.
- Kits include 153 LED light, 150-095 mounting bracket and plug.
- See mounting accessories section for additional mounting options.
- Meets DOT requirements in any 360° orientation, tilted back to a maximum of 32° .


Order No.		Description	Pack	Std Carton
V153KA	KIT	amber kit	Viz Pack	6
V153KR	KIT	red kit	Viz Pack	6
153A		amber	poly pack	12
153R		red	poly pack	12
M153A		amber	mfg. pack	50
M153R		red	mfg. pack	50
150-095		black bracket	poly pack	12
B150-18		grommet, 11/64" max thickness	mfg. pack	100
B150-181		grommet, 1/4" max thickness	mfg. pack	100
B153-181		grommet, water sealing	mfg. pack	100
153-49		plug	poly pack	12
B153-49		plug	mfg. pack	100



150-095







LED CLEARANCE & SIDE MARKER




121 LED Cab Marker Light



- Mounts with two screws on 1 7/16" centers.
- Hardwired design features .180 bullet terminal on hot lead and #10 ring terminal on ground wire.
- Includes neoprene mounting pad for secure, mar-free installation.
- · Available in amber only.

Order No.	Description	Pack Std Ca	rton
121A	amber	poly pack	6
M121A	amber	mfg. pack	50

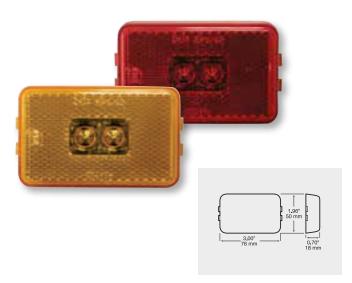

129 LED

Clearance/Side Marker Light w/ Reflex








- OE replacement light for Knapheide truck bodies.
- Kits include white grommet with lights. Black grommet available separately.
- · Sealed lens and housing.
- Flush mounts to vehicle.
- Requires grommet to complete installation.

Order No.		Description	Pack S	td Carton
129KA	KIT	amber kit w/ white grommet	poly pack	12
129KR	KIT	red kit w/ white grommet	poly pack	12
M129A		amber	mfg. pack	100
M129R		red	mfg. pack	100
127-18		black grommet	poly pack	24
B127-18		black grommet	mfg. pack	100





133 LED

Clearance/Side Marker Light







- Mounts on 3" centers.
- Hardwired design features two .180 bullet-terminals.
- Viz-Pack kits include attractive chrome bezel.
- Meets DOT requirements when mounted perpendicular to the road or tilted back to a maximum of 32°
- Chrome accessory bezel available separately. See page 171.

Order No.		Description	Pack	Std Carton
V133XA	KIT	amber kit	Viz Pack	6
V133XR	KIT	red kit	Viz Pack	6
133A		amber	poly pac	k 12
133R		red	poly pac	k 12
M133A		amber	mfg. pac	ck 50
M133R		red	mfg. pac	ck 50
B133-10		chrome bezel	mfg. pac	ck 50



161 LED Clearance/Side Marker Light





- LED alternative to traditional 154-series incandescent lights.
- 9-16 volt operating range.
- Requires bracket and 2-wire plug, or 154-11K bracket for grounding through mounting screw.
- Kits include light and 154-11K bracket with terminal pad.
- Dual-color M161A-R meets DOT regulations as amber front and red rear clearance light when properly mounted top or side of fender at widest point of trailer of boat, cargo and horse trailers.
- See accessories section for additional plug & mounting options.

Order No.		Description	Pack	Std Carton
V161KA	KIT	amber kit	Viz Pack	6
V161KR	KIT	red kit	Viz Pack	6
161A		amber	poly pac	k 12
161R		red	poly pac	k 12
161KA	KIT	amber kit	poly pac	k 12
161KR	KIT	red kit	poly pac	k 12
M161A		amber	mfg. pac	k 50
M161R		red	mfg. pac	k 50
M161A-R		dual-color amber & red	mfg. pac	k 50
154-09K		gray bracket kit	poly pac	k 12
154-10K		chrome bracket kit	poly pac	k 12
154-11K		black bracket kit	poly pac	k 12
B154-11K		black bracket kit w/terminal pad	mfg. pac	k 100
B154-11K-BT1		blk kit w/terminal pad, .180 bullet	mfg. pac	k 100
B154-11		black bracket for use with plug	mfg. pac	k 100
B153-49		2-wire molded plug w/6" leads	mfg. pac	k 100



154-09K








72/166 LED


21/2" & 2" Beehive Clearance/Side Marker Light



- Available in 2" (166A & 166R) and 2-1/2" (72R) diameters
- Features sealed lens and housing.
- Operates from 9-16 volts.
- Requires mounting grommet and 2-wire plug to complete installation.

Order No.	Description	Pack	Std Carton
V72R	2-1/2" red	Viz Pack	3
V166A	2" amber	Viz Pack	6
V166R	2" red	Viz Pack	6
166A	2" amber	poly pac	k 12
166R	2" red	poly pac	k 12
M166A	2" amber	mfg. pac	k 50
M166R	2" red	mfg. pac	k 50
146-18	2" grommet	poly pac	k 24
B146-18	2" grommet	mfg. pac	k 100
143-18	2-1/2" grommet	poly pac	k 24
B143-18	2-1/2" grommet	mfg. pac	k 100
162-49	plug	poly pac	k 12
B162-49	plug	mfg. pac	k 100





LED CLEARANCE & SIDE MARKER



168A & 168R





168XA-MV & 168XR-MV



M168CA-BT2 & M168CR-BT2

168 LED Mini Clearance/Side Marker Light











- 9-16 volt operating range, 9-32 volts for "-MV" multi-volt units.
 Hardwired with separate lead and ground wires.
- XA/XR versions include B168-10 chrome bezel, also available separately.
- Mounts on 1-15/16" centers; optional B168-09 bracket allows for mounting on either 1-15/16" or 1-1/8" centers.
- 168 series features 5.75" long lead wires.
- 4484 series features 9.5" long lead wires.

Order No.		Description	Dook -C	tel Courton
Order No.		Description		td Carton
V168A		amber	Viz Pack	3
V168R		red	Viz Pack	3
V168XA	KIT	amber kit w/ chrome bezel	Viz Pack	6
V168XR	KIT	red kit w/ chrome bezel	Viz Pack	6
168A		amber	poly pack	12
168R		red	poly pack	12
168A-MV		amber multivolt	poly pack	12
168R-MV		red multivolt	poly pack	12
168XA-MV	KIT	amber mv kit w/ chrome bezel	poly pack	12
168XR-MV	KIT	red mv kit w/ chrome bezel	poly pack	12
M168A		amber	mfg. pack	50
M168R		red	mfg. pack	50
M168CA-BT2		amber clear lens w/ .180 bullets	mfg. pack	50
M168CR-BT2		red clear lens w/ .180 bullets	mfg. pack	50
M168A-MV		amber multivolt	mfg. pack	50
M168R-MV		red multivolt	mfg. pack	50
4484A-1		amber w/ two .180 bullets	mfg. pack	50
4484R-1		red w/ two .180 bullets	mfg. pack	50
168-09		black bracket	poly pack	12
B168-09		black bracket	mfg. pack	100
168-092K	KIT	alum. brush guard & gasket kit	poly pack	12
B168-092		aluminum brush guard bracket	mfg. pack	100
168-10K	KIT	chrome bezel & gasket kit	poly pack	12
B168-10		chrome bezel	mfg. pack	100
168-18		mounting gasket	poly pack	12
B168-18		mounting gasket	mfg. pack	100
B168-181		thinline gasket – use w/ 168-092	mfg. pack	100









169 LED Clearance/Side Marker Light



- Operates from 9-16 volts.
- Features 2-wire, hardwired design.
- Ground wire includes #10 ring terminal.
- Mounts on 3" centers.
- B169-18 mounting gasket included in Viz Pack kits, or available separately.
- One-piece housing sealed with epoxy eliminates weld joints.
- Low cost LED alternative to traditional incandescent 154-series lights.

Order No.		Description	Pack S	td Carton
V169KA	KIT	amber kit	Viz Pack	3
V169KR	KIT	red kit	Viz Pack	3
169A		amber	poly pack	12
169R		red	poly pack	12
M169A		amber, stripped lead/ring term	mfg. pack	100
M169R		red, stripped lead/ring term	mfg. pack	100
B169-18		gasket	mfg. pack	100

170 LED Clearance/Side Marker Light w/ Reflex





- Operates from 9-16 volts.
- Features 2-wire, hardwired design.
- Ground wire terminated with #10 ring terminal
- Stripped hot wire, except -BT1 suffix which is terminated with .180 bullet
- LED alternative to traditional incandescent 114-series lights.
- Two mounting options: use center stud or two mounting screws.
- · Center stud provided; screws not included.

Order No.		Description	Pack	Std Carton
V170A	KIT	amber kit	Viz Pack	3
V170R	KIT	red kit	Viz Pack	3
M170A		amber, stripped lead + ring term.	mfg. pacl	< 50
M170R		red, stripped lead + ring term.	mfg. pacl	ς 50
M170A-BT1		amber, .180 bullet + ring term.	mfg. pacl	ς 50
M170R-BT1		red, .180 bullet + ring term.	mfg. pacl	ς 50



B169-18





LED CLEARANCE & SIDE MARKER

178 LED

Clearance/Side Marker Light











- Meets DOT requirements for clearance/side marker lights up to 20 degree tilt-back.
- 9-16 volt operating range, 9-32 volts for "-MV" and "-MVC" units.
- Hardwired design available with stripped leads, or with two .180 bullets (-BT2).
- Optional chrome bezel available. See page 182 for dimensions.
- Available with red or amber diodes behind stylish clear lens.
- · New hardwired design eliminates the need for plug.
- Mounts on 4" centers.
- Eye-catching Class 8 look makes it a great retrofit choice.
- Kits include light and decorative chrome bezel.


Order No.		Description	Pack	Std Carton
V178A		amber	Viz Pack	6
V178R		red	Viz Pack	6
V178XA	KIT	amber kit w/ chrome bezel	Viz Pack	6
V178XR	KIT	red kit w/ chrome bezel	Viz Pack	6
178A-MV		amber	poly pack	12
178R-MV		red	poly pack	12
178XA-MV	KIT	amber mv kit w/ chrome bezel	poly pack	12
178XR-MV	KIT	red mv kit w/ chrome bezel	poly pack	12
M178A		amber	mfg. pack	50
M178R		red	mfg. pack	50
M178A-MV		amber, multi-volt	mfg. pack	50
M178R-MV		red, multi-volt	mfg. pack	50
M178CA-BT2		amber 12V w/clear lens	mfg. pack	50
M178CR-BT2		red 12V w/clear lens	mfg. pack	50
M178A-MVC		amber multi-volt w/clear lens	mfg. pack	50
4354A		amber w/ two .180 bullet term.	mfg. pack	50
4354R		red w/ two .180 bullet terminals	mfg. pack	50
178-10		chrome bezel	poly pack	12
B178-10		chrome bezel	mfg. pack	100











180 LED

Clearance/Side Marker Light w/ Reflex












- Built-in reflector optics eliminate the need for separate reflector.
- Meets DOT lighting requirements.
- · Hardwired leads eliminate plug-to-lamp corrosion.
- Mounts with screws on 3" centers.
- Includes both lead and ground wire for mounting to all surfaces.
- Available in amber or red.

Description	Pack S	td Carton
amber	Viz Pack	3
red	Viz Pack	3
replacement lens, amber	Viz Pack	10
replacement lens, red	Viz Pack	10
	amber red replacement lens, amber	amber Viz Pack red Viz Pack replacement lens, amber Viz Pack







187 LED

Clearance/Side Marker Light w/ Reflex












- PC-rated, 6 diode LED combination light that functions as both clearance and side marker light when mounted at a 45° angle.
- · Hardwired design eliminates the need for plug.
- · Lens and housing linear welded for durable seal.
- · Skirted weld joint provides added protection against moisture.
- 9-16 volt operating range, 9-32 volts for "-MV" multi-volt units.

Order No.	Description	Pack Std	Carton
187A	amber	poly pack	10
187R	red	poly pack	10
187A-MV	amber, multi-volt	poly pack	12
187R-MV	red, multi-volt	poly pack	12
M187A	amber	mfg. pack	50
M187R	red	mfg. pack	50
M187A-MV	amber, multi-volt	mfg. pack	50
M187R-MV	red, multi-volt	mfg. pack	50
M187A-BT2	amber w/ two .180 bullet term.	mfg. pack	50
M187R-BT2	red w/ two .180 bullet terminals	mfg. pack	50





188 LED

Clearance/Side Marker Light w/ Reflex











- Sealed, 4-diode LED that offers clearance, side marker or ID light versatility.
- · Hardwired design eliminates the need for plug.
- · Lens and housing linear welded for durable seal.
- Skirted weld joint provides added protection against moisture.
- · Operates from 9-16 volts.

Order No.	Description	Pack Std Cartor
V188A	amber	Viz Pack 6
V188R	red	Viz Pack
188A	amber	poly pack 10
188R	red	poly pack 10
M188A	amber	mfg. pack 50
M188R	red	mfg. pack 50







353 LED

Clearance/Side Marker Light w/ Reflex









- PC-rated, 6-diode LED combination light that provides both clearance and side marker functions when mounted at a 45° angle.
- Third wire provides auxiliary turn function for enhanced safety.
- Can also be used as a mid marker light.
- · Hardwired design eliminates the need for plug.
- · Lens and housing linear welded for durable seal.
- Skirted weld joint provides added protection against moisture.
- 9-16 volt operating range.

Order No.	Description	Pack Std Ca	arton
M353A	amber	mfg. pack	50
M353R	red	mfg. pack	50

LED CLEARANCE & SIDE MARKER







"-AMP" rear





173 LED

21/2" Clearance/Side Marker w/ Reflex








- Round, 2-1/2" diameter.
- Accepts industry standard PL10 2-wire plug or AMP plug ("-AMP")
- DOT-legal integral reflex function.
- "-AMP" versions have 5 diodes and integrated receptacle for AMP-style sealed connector
- 142-18 grommet & appropriate plug required for installation.

Order No.	Description	Pack Sto	Carton
173A	amber	poly pack	12
173R	red	poly pack	12
M173A	amber	mfg. pack	50
M173R	red	mfg. pack	50
M173A-AMP	amber, AMP-style receptacle	mfg. pack	50
M173R-AMP	red, AMP-style receptacle	mfg. pack	50
142-18	grommet	poly pack	24
B142-18	grommet	mfg. pack	100
142-49	right angle plug	poly pack	12
B142-49	right angle plug	mfg. pack	100
162-49	PL10 plug	poly pack	12
B162-49	PL10 plug	mfg. pack	100
192-492	AMP-style plug	poly pack	6
B192-492	AMP-style plug	mfg. pack	50



175 LED Single Diode 21/2" Clearance/Side Marker w/ Reflex








- Round, 2-1/2" diameter in grommet or flange mount versions.
- Single diode design.
- Accepts industry standard 2-wire plug.
- DOT-legal integral reflex function.
- 142-18 grommet & appropriate plug required for installation.

Order No.	Description	Pack	Std Carton
175A	amber	poly pac	k 12
175R	red	poly pac	k 12
M175A	amber	mfg. pac	ck 50
M175R	red	mfg. pac	ck 50
M175FA	amber, flange mount	mfg. pac	ck 50
M175FR	red, flange mount	mfg. pac	ck 50
142-18	grommet	poly pac	k 24
B142-18	grommet	mfg. pac	k 100
142-49	right angle plug	poly pac	k 12
B142-49	right angle plug	mfg. pac	k 100
162-49	plug	poly pac	k 12
B162-49	plug	mfg. pac	k 100





189 LED Single Diode 2½" Clearance/Side Marker w/ Reflex







- 2-1/2" diameter LED light with traditional incandescent lens look.
- Popular for chassis applications.
- Accepts industry standard PL10 2-wire plug or AMP plug ("-AMP")
- DOT-legal integral reflex function.
- Fits metric size mounting holes.
- 9-16 voltage operating range.
- · Protective gasket included.

Description	Pack	Std Carton
amber, PL10 connector	poly pack	12
red, PL10 connector	poly pack	12
amber, PL10 connector	mfg. pack	50
red, PL10 connector	mfg. pack	50
amber, AMP-style receptacle	mfg. pack	50
red, AMP-style receptacle	mfg. pack	50
amber, PL10 w/ integrated clip	mfg. pack	50
red, PL10 w/ integrated clip	mfg. pack	50
replacement gasket	mfg. pack	1
stainless plug retention clip	mfg. pack	100
PL10 plug	poly pack	12
PL10 plug	mfg. pack	100
AMP plug w/ .180 bullets	mfg. pack	50
AMP plug w/ blunt cut leads	mfg. pack	50
	amber, PL10 connector red, PL10 connector amber, PL10 connector red, PL10 connector red, PL10 connector amber, AMP-style receptacle red, AMP-style receptacle amber, PL10 w/ integrated clip red, PL10 w/ integrated clip replacement gasket stainless plug retention clip PL10 plug PL10 plug AMP plug w/ .180 bullets	amber, PL10 connector poly pack red, PL10 connector poly pack amber, PL10 connector mfg. pack red, PL10 connector mfg. pack amber, AMP-style receptacle mfg. pack red, AMP-style receptacle mfg. pack red, AMP-style receptacle mfg. pack amber, PL10 w/ integrated clip mfg. pack red, PL10 w/ integrated clip mfg. pack red, PL10 w/ integrated clip mfg. pack replacement gasket mfg. pack stainless plug retention clip mfg. pack PL10 plug poly pack PL10 plug mfg. pack AMP plug w/ .180 bullets mfg. pack




B162-093 retention clip (Not for use with '-AMP" or "-CLP" versions)



"-CLP" rear



"-AMP" rear





190 LED Single Diode 2" Clearance/Side Marker w/ Reflex







- 2" diameter LED light with traditional incandescent lens look.
- Popular for chassis applications.
- Accepts industry standard PL10 2-wire plug or AMP plug ("-AMP")
- DOT-legal integral reflex function.
- Fits metric size mounting holes.
- 9-16 voltage operating range.
- · Protective gasket included.

Order No.	Description	Pack	Std Carton
190FA	amber, PL10 connector	poly pack	12
190FR	red, PL10 connector	poly pack	12
M190FA	amber, PL10 connector	mfg. pack	50
M190FR	red, PL10 connector	mfg. pack	50
M190FA-AMP	amber, AMP-style receptacle	mfg. pack	50
M190FR-AMP	red, AMP-style receptacle	mfg. pack	50
M190FA-CLP	amber, PL10 w/ integrated clip	mfg. pack	50
M190FR-CLP	red, PL10 w/ integrated clip	mfg. pack	50
140 24	replacement gasket	mfg. pack	1
B162-093	stainless plug retention clip	mfg. pack	100
162-49	PL10 plug	poly pack	12
B162-49	PL10 plug	mfg. pack	100
B192-492	AMP plug w/ .180 bullets	mfg. pack	50
B192-493	AMP plug w/ blunt cut leads	mfg. pack	50




B162-093 retention clip (Not for use with '-AMP" or "-CLP" versions)



"-CLP" rear



"-AMP" rear




Integrated receptacle accepts AMP-style sealed connector

192 LED 2½" Clearance/Side Marker Light



- 2-1/2" diameter.
- Integrated receptacle accepts AMP-style sealed connector.
- 9-16 volt operating range.
- Requires plug for installation.
- Non-flanged units require 142-18 grommet required for installation.
- See mounting accessories section for additional mounting options.

Order No.	Description	Pack Std	Carton
192A	amber	poly pack	12
192R	red	poly pack	12
192FA	amber, flange mount	poly pack	12
192FR	red, flange mount	poly pack	12
192ABS	amber w/ ABS decal	poly pack	12
M192A	amber	mfg. pack	50
M192R	red	mfg. pack	50
M192FA	amber, flange mount	mfg. pack	50
M192FR	red, flange mount	mfg. pack	50
M192SA	amber, surface mount	mfg. pack	50
M192SR	red, surface mount	mfg. pack	50
142-18	grommet	poly pack	24
B142-18	grommet	mfg. pack	100
192-492	plug w/ .180 bullets	poly pack	6
B192-492	plug w/ .180 bullets	mfg. pack	50
B192-493	AMP plug w/ blunt cut leads	mfg. pack	50

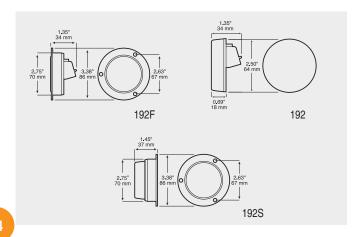

LED CLEARANCE & SIDE MARKER




162 LED 2½" Clearance/Side Marker Light



- Accepts industry standard 2-prong plug.
- 9-16 volt operating range.
- Available in grommet, flange and surface-mount versions.
- Visual pack kits include LED light, 142-18 grommet and 162-49 plug.
- · See mounting accessories section for additional mounting options.

Order No.	Description	Pack S	Std Carton
V162KA KIT	amber kit	Viz Pack	6
V162KR KIT	red kit	Viz Pack	6
162A	amber	poly pack	12
162R	red	poly pack	12
M162A	amber	mfg. pack	50
M162R	red	mfg. pack	50
M162FA	amber, flange mount	mfg. pack	50
M162FR	red, flange mount	mfg. pack	50
M162SA	amber, surface mount	mfg. pack	50
M162SR	red, surface mount	mfg. pack	50
142-18	grommet	poly pack	24
B142-18	grommet	mfg. pack	100
V162-49	plug	Viz Pack	6
162-49	plug	poly pack	12
B162-49	plug	mfg. pack	100









193 LED 21/2" PC-Rated Clearance & Side Marker Light










- Functions as clearance & side marker light when mounted at 45° angle.
- Integrated receptacle accepts AMP-style sealed connector.
- 9-16 volt operating range, 9-32 volts for "-MV" multi-volt units.
- Does not require "top" mounting.
- 143-18 grommet and compatible plug required for installation.
- · See mounting accessories section for additional mounting options.

Order No.	Description	Pack Std	Carton
193A	amber	poly pack	12
193R	red	poly pack	12
193FA	amber, flange mount	poly pack	12
193FR	red, flange mount	poly pack	12
M193A	amber	mfg. pack	50
M193R	red	mfg. pack	50
M193A-MV	amber multi-volt	mfg. pack	50
M193R-MV	red, multi-volt	mfg. pack	50
M193FA	amber, flange mount	mfg. pack	50
M193FR	red, flange mount	mfg. pack	50
M193FCA	amber w/ clear lens, flange	mfg. pack	50
M193FCR	red w/ clear lens, flange	mfg. pack	50
M193SA	amber, surface mount	mfg. pack	50
M193SR	red, surface mount	mfg. pack	50
M193SCR	red w/ clear lens, surface mnt.	mfg. pack	50
143-18	grommet	poly pack	24
B143-18	grommet	mfg. pack	100
192-492	AMP plug w/ .180 bullets	poly pack	6
B192-492	AMP plug w/ .180 bullets	mfg. pack	50
B192-493	AMP plug w/ blunt cut leads	mfg. pack	50

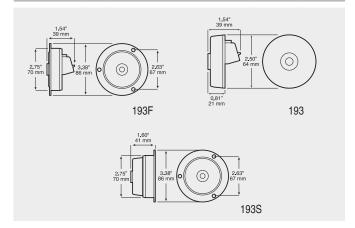



163 LED

21/2" PC-Rated Clearance & Side Marker Light










- $\bullet\,$ Functions as both clearance and side marker light when mounted at a 45° angle. Use 143-18 grommet for PC-rated installation.
- Accepts industry standard 2-prong plug.
- 9-16 volt operating range, 9-32 volts for "-MV" multi-volt units.
- Does not require "top" mounting.
- Kits include LED light, 143-18 grommet and 162-49 plug.

Order No.	_	Description	Pack	Std Carton
163A		amber	poly pack	12
163R		red	poly pack	12
163A-MV		amber multi-volt	poly pack	(12
163R-MV		red, multi-volt	poly pack	12
163FA-MV		amber, flange mount, multi-volt	poly pack	(12
163FR-MV		red, flange mount, multi-volt	poly pack	12
163KA-MV	KIT	amber kit, multi-volt	poly pack	12
163KR-MV	KIT	red kit, multi-volt	poly pack	12
M163A		amber	mfg. pacl	ς 50
M163R		red	mfg. pacl	ς 50
M163A-MV		amber multi-volt	mfg. pacl	ς 50
M163R-MV		red, multi-volt	mfg. pacl	ς 50
M163FA		amber, flange mount	mfg. pacl	ς 50
M163FR		red, flange mount	mfg. pacl	ς 50
M163FA-MV		amber, flange mount, multi-volt	mfg. pacl	< 50
M163FR-MV		red, flange mount, multi-volt	mfg. pacl	ς 50
M163SA		amber, surface mount	mfg. pacl	ς 50
M163SR		red, surface mount	mfg. pacl	ς 50
143-18		grommet	poly pack	24
B143-18		grommet	mfg. pacl	< 100
162-49		plug	poly pack	12
B162-49		plug	mfg. pacl	τ 100



LS

ACCY

LED CLEARANCE & SIDE MARKER



Integrated receptacle accepts AMP-style sealed connector





194 LED

2" Clearance/Side Marker Light



- 2" diameter.
- Integrated receptacle accepts AMP-style sealed connector.
- 9-16 volt operating range.
- Non-flanged units require 146-18 grommet for installation.
- See mounting accessories section for additional mounting options.

Order No.	Description	Pack Std	Carton
194A	amber	poly pack	12
194R	red	poly pack	12
194FA	amber, flange mount	poly pack	12
194FR	red, flange mount	poly pack	12
M194A	amber	mfg. pack	50
M194R	red	mfg. pack	50
M194FA	amber, flange mount	mfg. pack	50
M194FR	red, flange mount	mfg. pack	50
146-18	grommet	poly pack	24
B146-18	grommet	mfg. pack	100
192-492	AMP plug w/ .180 bullets	poly pack	6
B192-492	AMP plug w/ .180 bullets	mfg. pack	50
B192-493	AMP plug w/ blunt cut leads	mfg. pack	50



164 LED

2" Clearance/Side Marker Light









- Accepts industry standard 2-prong plug.
- 9-16 volt operating range.
- · Available in grommet, flange and surface-mount versions.
- Visual pack kits include LED light, 146-18 grommet and 162-49 plug.
- See mounting accessories section for additional mounting options.

Order No.		Description	Pack	Std Carton
V164KA	KIT	amber kit	Viz Pack	6
V164KR	KIT	red kit	Viz Pack	6
164A		amber	poly pac	k 12
164R		red	poly pac	k 12
M164A		amber	mfg. pac	k 50
M164R		red	mfg. pac	k 50
M164FA		amber, flange mount	mfg. pac	k 50
M164FR		red, flange mount	mfg. pac	k 50
M164SA		amber, surface mount	mfg. pac	k 50
M164SR		red, surface mount	mfg. pac	k 50
146-18		grommet	poly pac	k 24
B146-18		grommet	mfg. pac	k 100
162-49		plug	poly pac	k 12
B162-49		plug	mfg. pac	k 100

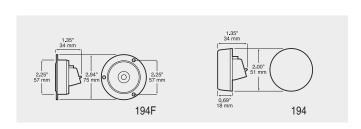









195 LED

2" PC-Rated Clearance & Side Marker Light










- Functions as clearance & side marker light when mounted at 45° angle.
- Integrated receptacle accepts AMP-style sealed connector.
- Does not require "top" mounting.
- 9-16 volt operating range, 9-32 volts for "-MV" multi-volt units.
- Non-flanged units require 146-18 grommet for installation.
- See mounting accessories section for additional mounting options.

Order No.	Description	Pack	Std Carton
195A	amber	poly pac	k 12
195R	red	poly pac	k 12
195FA	amber, flange mount	poly pac	k 12
195FR	red, flange mount	poly pac	k 12
M195A	amber	mfg. pac	k 50
M195R	red	mfg. pac	k 50
M195A-MV	amber, multi-volt	mfg. pac	k 50
M195R-MV	red, multi-volt	mfg. pac	k 50
M195FA	amber, flange mount	mfg. pac	k 50
M195FR	red, flange mount	mfg. pac	k 50
146-18	grommet	poly pac	k 24
B146-18	grommet	mfg. pac	k 100
192-492	AMP plug w/ .180 bullets	poly pac	k 6
B192-492	AMP plug w/ .180 bullets	mfg. pac	k 50
B192-493	AMP plug w/ blunt cut leads	mfg. pac	k 50

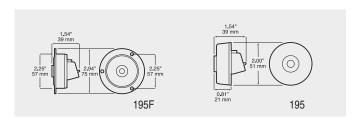



165 LED

2" PC-Rated Clearance & Side Marker Light










- Functions as both clearance and side marker light when mounted at a 45° angle. Use 146-18 grommet for PC-rated installation.
- Does not require "top" mounting.
- Accepts industry standard 2-prong plug.
- 9-16 volt operating range, 9-32 volts for "-MV" multi-volt units.
- Available in grommet, flange and surface-mount versions.
- Kits include LED light, 146-18 grommet and 162-49 plug.

Order No.		Description	Pack	Std Carton
165A		amber	poly pac	k 12
165R		red	poly pac	k 12
165A-MV		amber, multi-volt	poly pac	k 12
165R-MV		red, multi-volt	poly pac	k 12
165KA-MV	KIT	amber kit, multi-volt	poly pac	k 12
165KR-MV	KIT	red kit, multi-volt	poly pac	k 12
165FA-MV		amber, flange mount, multi-volt	poly pac	k 12
165FR-MV		red, flange mount, multi-volt	poly pac	k 12
M165A		amber	mfg. pac	k 50
M165R		red	mfg. pac	k 50
M165A-MV		amber, multi-volt	mfg. pac	k 50
M165R-MV		red, multi-volt	mfg. pac	k 50
M165FA		amber, flange mount	mfg. pac	k 50
M165FR		red, flange mount	mfg. pac	k 50
M165FA-MV		amber, flange mount, multi-volt	mfg. pac	k 50
M165FR-MV		red, flange mount, multi-volt	mfg. pac	k 50
M165SA		amber, surface mount	mfg. pac	k 50
M165SR		red, surface mount	mfg. pac	k 50
M165SA-MV		amber, surface mount, multi-volt	mfg. pac	k 50
M165SR-MV		red, surface mount, multi-volt	mfg. pac	k 50
B146-18		grommet	mfg. pac	k 100
B162-49		plug	mfg. pac	k 100



LED CLEARANCE & SIDE MARKER

196 Single Diode LED 21/2" Clearance/Side Marker Light










- Single white diode behind colored lens for traditional incandescent lens look.
- Accepts industry standard 2-wire plug.
- 9-16 volt operating range.
- Visual pack kits include 142-18 grommet & 162-49 plug.

Order No.		Description	Pac	ς ς	td Carton
V196KA	KIT	amber kit	Viz F	Pack	6
V196KR	KIT	red kit	Viz F	Pack	6
196A		amber	poly	pack	12
196R		red	poly	pack	12
M196A		amber	mfg.	pack	50
M196R		red	mfg.	pack	50
M196ABS	KIT	amber w/ ABS decal	mfg.	pack	50
142-18		grommet	poly	pack	24
B142-18		grommet	mfg.	pack	100
162-49		plug	poly	pack	12
B162-49		plug	mfg.	pack	100








197 Single Diode LumenX® LED 21/2" PC-Rated Clearance & Side Marker Light












- Functions as both clearance & side marker light when mounted at 45° angle.
- Accepts industry standard PL10 2-wire plug or AMP plug ("-AMP")
- 9-16 volt operating range.

Order No.		Description	Pack St	d Carton
197A		amber, grommet	poly pack	12
197R		red, grommet	poly pack	12
197KA	KIT	amber, grommet	poly pack	12
197KR	KIT	red, grommet	poly pack	12
197KFA	KIT	amber, flange	poly pack	12
197KFR	KIT	red, flange	poly pack	12
M197A		amber, grommet	mfg. pack	50
M197A-AMP		amber, grommet, AMP receptacle	mfg. pack	50
M197FA		amber, flange	mfg. pack	50
M197FA-AMP		amber, flange, AMP receptacle	mfg. pack	50
M197R		red, grommet	mfg. pack	50
M197R-AMP		red, grommet, AMP receptacle	mfg. pack	50
M197FR		red, flange	mfg. pack	50
M197FR-AMP		red, flange, AMP receptacle	mfg. pack	50
M197G-AMP		green, AMP receptacle	mfg. pack	50
143-18		grommet	poly pack	24
B143-18		grommet	mfg. pack	100
162-49		plug	poly pack	12
B162-49		plug	mfg. pack	100
192-492		AMP plug w/ .180 bullets	poly pack	6
B192-492		AMP plug w/ .180 bullets	mfg. pack	50
B192-493		AMP plug w/ blunt cut leads	mfg. pack	50







198 Single Diode LED 2" Clearance/Side Marker Light










- Single white diode behind colored lens for traditional incandescent lens look.
- · Round, 2" dia.
- Accepts industry standard 2-wire plug.
- 9-16 volt operating range.
- Visual pack kits include LED light, 146-18 grommet and 162-49 plug.

Order No.		Description	Pack	Std Carton
V198KA	KIT	amber kit	Viz Pacl	6
V198KR	KIT	red kit	Viz Pacl	6
198A		amber	poly pac	k 12
198R		red	poly pac	k 12
M198A		amber	mfg. pad	ck 50
M198R		red	mfg. pad	ck 50
M198ABS	KIT	amber w/ ABS decal	mfg. pad	ck 50
146-18		grommet	poly pac	k 24
B146-18		grommet	mfg. pad	k 100
162-49		plug	poly pac	k 12
B162-49		plug	mfg. pad	k 100







199 Single Diode LumenX[®] LED 2" PC-Rated Clearance & Side Marker Light










- Single white diode behind colored lens for traditional incandescent lens look.
- · Round, 2" diameter.
- Functions as both clearance & side marker light when mounted at 45° angle.
- Single-diode design with white diode behind colored lens.
- Accepts industry standard PL10 2-wire plug or AMP plug ("-AMP")
- 9-16 volt operating range.


• 9-10 voit operating range.				
Order No.		Description	Pack	Std Carton
199KA	KIT	amber, grommet	poly pack	(12
199KR	KIT	red, grommet	poly pack	(12
199KFA	KIT	amber, flange	poly pack	(12
199KFR	KIT	red, flange	poly pack	(12
M199A		amber, grommet	mfg. pacl	k 50
M199A-AMP		amber, grommet, AMP receptacle	mfg. pacl	k 50
M199FA		amber, flange	mfg. pacl	k 50
M199FA-AMP		amber, flange, AMP receptacle	mfg. pacl	k 50
M199R		red, grommet	mfg. pacl	k 50
M199R-AMP		red, grommet, AMP receptacle	mfg. pacl	k 50
M199FR		red, flange	mfg. pacl	k 50
M199FR-AMP		red, flange, AMP receptacle	mfg. pacl	k 50
146-18		grommet	poly pack	c 24
B146-18		grommet	mfg. pacl	k 100
162-49		plug	poly pack	(12
B162-49		plug	mfg. pacl	k 100
192-492		AMP plug w/ .180 bullets	poly pack	6
B192-492		AMP plug w/ .180 bullets	mfg. pacl	k 50
B192-493		AMP plug w/ blunt cut leads	mfg. pacl	k 50







LED CLEARANCE & SIDE MARKER




191 LED **Clearance/Side Marker Light**



- Equipped with 2 diodes behind colored transparent lens.
- Lens is welded to housing to form single unit.
- Equipped with single hardwired lead wire.
- Mounting stud serves as ground when mounted to metallic surface.

Order No.	Description	Pack Std Carton
M191A	amber	mfg. pack 50
M191R	red	mfg. pack 50





203 LED PC-Rated Clearance & Side Marker Light



- Polycarbonate lens and base are welded together to form a single rugged
- LED version of our popular 150 series light.
- See mounting accessories section for additional mounting options.

Order No.	Description	Pack	Std Carton
203A	amber	poly pac	k 12
203R	red	poly pac	k 12
M203A	amber	mfg. pad	k 50
M203R	red	mfg. pag	k 50
150-09	black bracket	poly pac	k 12
142-49	plug	poly pac	k 12
B142-49	plug	mfg. pac	k 100



215 Single Diode LED Clearance/Side Marker Light w/ Reflex










- Low profile design.
- Single-diode, surface-mount LED clearance/side marker light with integral reflex, eliminating the need for separate reflector.
- New patented conductive plastic design, U.S. Patent No. 8,057,067
- · Single lead wire for electrical connection.
- · Grounds through the mounting screw.
- 9-16 volt operating range.
- · 3-year warranty.

Order No.	Description	Pack Std (Carton
V215A	amber	Viz Pack	6
V215R	red	Viz Pack	6
M215A	amber	mfg. pack	100
M215R	red	mfg. pack	100
215-15A	amber replacement lens	mfg. pack	10
215-15R	red replacement lens	mfg. pack	10





bracket



388 LED

Clearance/Side Marker Light









- · Includes black bracket for surface mounting.
- Can be recess-mounted without bracket.
- · Wires exit in center of light.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Optional chrome bracket available separately.
- See page 118 for matching white and blue utility lights.

Order No.	Description	Pack Std Carto
388A	amber	poly pack 1
388R	red	poly pack 1.
M388A	amber	mfg. pack 1
M388R	red	mfg. pack 1
388-09X	chrome bracket	poly pack 1
B388-09X	chrome bracket	mfg, pack 5

277K LED


Fender-Mount Combo Clearance/Side Marker






- Dual single-diode 3/4" LED lights in low-profile combination bracket.
- Forward-facing amber and rear-facing red lights in a single unit.
- Surface-mount design mounts easily with three screws (not included).
- Rugged, corrosion-resistant bracket made of thick, rigid black plastic.
- Low profile shape with smooth, rounded corners resists snagging.
- Wire junctions completely sealed in thick urethane potting material.
- 9-16 voltage operating range.
- Max current draw 0.2A@12V.

Order No.	Description	Pack Std C	arton
M277K	curbside	mfg. pack	100
M277KL	roadside	mfg. pack	100
M277K-BT2	curbside w/.180 bullets	mfg. pack	100
M277KL-BT2	roadside w/.180 bullets	mfg. pack	100

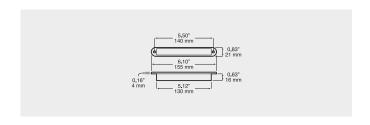





171/271 LED 3/4" Clearance/Side Marker Light












- Compact single diode design fits 3/4" hole.
- Meets DOT requirements for clearance, side marker and ID lights.
- . Compatible with all 12 volt systems.
- Hardwired 8" leads available stripped, or with .180 bullets.
- 271 versions have 3-wire design feature standard clearance/marker plus high-intensity function useful for use as auxiliary CHMSL.
- Includes rubber mounting grommet.

Order No.		Description	Pack S	td Carton
V171A	KIT	amber w/ grommet	Viz Pack	3
V171R	KIT	red w/ grommet	Viz Pack	3
171KA	KIT	amber w/ grommet	poly pack	12
171KR	KIT	red w/ grommet	poly pack	12
271KA	KIT	amber 3-wire w/ grommet	poly pack	6
271KR	KIT	red 3-wire w/ grommet	poly pack	6
271KA-BT3	KIT	amber w/.180 bullets & grommet	poly pack	6
271KR-BT3	KIT	red w/.180 bullets & grommet	poly pack	6
M171A	KIT	amber w/ grommet	mfg. pack	50
M171R	KIT	red w/ grommet	mfg. pack	50
M171A-P	KIT	amber w/ plug & grommet	mfg. pack	50
M171R-P	KIT	red w/ plug & grommet	mfg. pack	50
M171A-BT2	KIT	amber w/.180 bullets & grommet	mfg. pack	50
M171R-BT2	KIT	red w/.180 bullets & grommet	mfg. pack	50
M271A	KIT	amber 3-wire w/ grommet	mfg. pack	50
M271R	KIT	red 3-wire w/ grommet	mfg. pack	50
M271A-BT3	KIT	amber 3-wire w/.180 bullets, grmt	mfg. pack	50
M271R-BT3	KIT	red 3-wire w/.180 bullets, grmt	mfg. pack	50
M271A-AMP	KIT	amber 3-wire w/ AMP plug, grmt.	mfg. pack	50
M271R-AMP	KIT	red 3-wire w/ AMP plug, grmt.	mfg. pack	50

See pages 180-183 for additional mounting options.



LED CLEARANCE & SIDE MARKER



176 LED 3/4" PC-Rated Clearance & Side Marker Light











- Compact single diode design fits 3/4" hole.
- Has theft-deterrent security feature when properly mounted.
- Functions as clearance and side marker light when properly installed.
- Compatible with all 12 volt systems.
- Hardwired 8" leads available stripped, with .180 bullets, or AMP-style
- Compatible grommet or bracket required for installation.
- Includes rubber mounting grommet.
- · Does not require top mounting.
- 176BKA & 176BKR kits include light, grommet and 176-10 surface-mount bracket.
- 176KA-ABS kit includes light w/ bullets, grommet, and ABS decal.

Order No.		Description	Pack	Std Carton
176KA	KIT	amber, .180 bullets & grommet	poly pack	6
176KR	KIT	red, .180 bullets & grommet	poly pack	6
176BKA	KIT	amber w/ bracket & grommet	poly pack	6
176BKR	KIT	red w/ bracket & grommet	poly pack	6
176KA-AMP	KIT	amber, AMP-style & grommet	poly pack	(12
176KR-AMP	KIT	red, AMP-style & grommet	poly pack	(12
176KA-ABS	KIT	amber abs light w/ grommet	poly pack	6
M176A	KIT	amber, stripped leads & grommet	mfg. pac	k 50
M176R	KIT	red, stripped leads & grommet	mfg. pac	k 50
M176A-AMP	KIT	amber, AMP-style & grommet	mfg. pac	k 50
M176R-AMP	KIT	red, AMP-style & grommet	mfg. pac	k 50
M176A-BT2	KIT	amber w/.180 bullets & grommet	mfg. pac	k 50
M176R-BT2	KIT	red w/.180 bullets & grommet	mfg. pac	k 50
B177-18		grommet	mfg. pac	k 100

See pages 180-183 for additional mounting options.









- Functions as clearance and side marker light when properly installed.
- Compatible with all 12 volt systems.
- 8" (200 mm) hardwired leads available stripped, with .180 bullets, or AMP-style connector.
- Does not require top mounting.
- Includes rubber mounting grommet.

Order No.	Description	Pack	Std Carton
M177A	amber	mfg. pacl	K 50
M177R	red	mfg. pacl	K 50
M177A-AMP	amber, AMP-style & grommet	mfg. pacl	K 50
M177R-AMP	red, AMP-style & grommet	mfg. pacl	K 50
M177A-BT2	amber w/.180 bullets	mfg. pacl	K 50
M177R-BT2	red w/.180 bullets	mfg. pacl	K 50
M177CA-BT2	amber w/ clear lens &.180 bullets	mfg. pacl	k 50
M177CR-BT2	red w/ clear lens &.180 bullets	mfg. pacl	K 50
B177-18	grommet	mfg. pacl	k 100

See pages 180-183 for additional mounting options.




181 LED 3/4" PC-Rated Clearance & Side Marker Light




- Compact single diode design fits ¾" hole.
- PC rated as both clearance and side marker light when mounted at a 45° angle with optical facets in lens running vertically.
- Hardwired 8" leads available either stripped, or with .180 bullets.
- 12 volt and multi-volt (9-32V) versions.
- Includes rubber mounting grommet.

		0.0		
Order No.		Description	Pack	Std Carton
V181A-BT2	KIT	amber, .180 bullets & grommet	Viz Pack	6
V181R-BT2	KIT	red, .180 bullets & grommet	Viz Pack	6
181KA	KIT	amber, stripped leads & grommet	poly pack	6
181KR	KIT	red, stripped leads & grommet	poly pack	6
181KA-BT2	KIT	amber, .180 bullets & grommet	poly pack	6
181KR-BT2	KIT	red, .180 bullets & grommet	poly pack	6
181KA-MV	KIT	amber kit, stripped, multi-volt	poly pack	6
181KR-MV	KIT	red kit, stripped, multi-volt	poly pack	6
M181A	KIT	amber, stripped leads & grommet	mfg. pacl	k 50
M181R	KIT	red, stripped leads & grommet	mfg. pacl	k 50
M181A-BT2	KIT	amber, .180 bullets & grommet	mfg. pacl	k 50
M181R-BT2	KIT	red, .180 bullets & grommet	mfg. pacl	k 50
M181A-MV	KIT	amber, stripped leads, multi-volt	mfg. pacl	k 50
M181R-MV	KIT	red, stripped leads, mult-volt	mfg. pacl	k 50
M181A-MV-BT2	KIT	amber, .180 bullets, multi-volt	mfg. pacl	k 50
M181R-MV-BT2	KIT	red, .180 bullets, mult-volt	mfg. pacl	k 50
B177-18		grommet	mfg. pacl	k 100

See pages 180-183 for additional mounting options.





LED CLEARANCE/MARKER W/ AUX





186 LumenX[®] Dot XL™LED 13/8" PC-Rated Clearance & Side Marker Light














- Round 1 3/8" diameter model fits popular 3/4" mounting holes.
- Single-diode LED design with white diode behind colored lens.
- PC-rated, functions as both clearance and side marker light when mounted at a 45° angle.
- Hardwired 8" leads available either stripped, or with .180 bullets.
- 9-16 volt operating range.
- Includes specially designed mounting grommet for installation.

Order No.		Description	Pack S	Std Carton
186KA	KIT	amber, stripped leads	poly pack	12
186KR	KIT	red, stripped leads	poly pack	12
M186A	KIT	amber, stripped leads	mfg. pack	50
M186R	KIT	red, stripped leads	mfg. pack	50
M186A-BT2	KIT	amber, .180 bullets	mfg. pack	50
M186R-BT2	KIT	red, .180 bullets	mfg. pack	50
B186-10		surface-mount bracket - flat	mfg. pack	100
B186-13		surface-mount bracket - curved	mfg. pack	100



B186-10 bracket (bracket and light sold separately)



286 LumenX® Dot XL™LED PC-Rated Clearance & Side Marker w/ Aux Function












- Round 1 3/8" diameter model fits popular 3/4" mounting holes.
- Single-diode LED design with white diode behind colored lens.
- PC-rated, functions as both clearance and side marker light when mounted at a 45° angle.
- Hardwired 8" leads available either stripped, or with .180 bullets.
- Features a third wire for auxiliary brake or turn functions.
- 9-16 volt operating range.
- Includes specially designed mounting grommet for installation.

Order No.		Description	Pack	Std Carton
286KA	KIT	amber w/ aux function, stripped	poly pac	k 6
286KR	KIT	red w/ aux function, stripped	poly pac	k 6
286KA-BT3	KIT	amber w/ aux func, .180 bullets	poly pac	k 6
286KR-BT3	KIT	red w/ aux function, .180 bullets	poly pac	k 6
M286A	KIT	amber w/ aux function, stripped	mfg. pac	k 50
M286R	KIT	red w/ aux function, stripped	mfg. pac	k 50
M286A-BT3	KIT	amber w/ aux func, .180 bullets	mfg. pac	k 50
M286R-BT3	KIT	red w/ aux function, .180 bullets	mfg. pac	k 50
B186-10		surface-mount bracket - flat	mfg. pac	k 100
B186-13		surface-mount bracket - curved	mfg. pac	k 100









233 LED 21/2" PC-Rated Clearance & Side Marker Light w/ Aux Function









- Functions as clearance & side marker light mounted at 45° angle.
- Amber light equipped with 1 diode, red light has 5 diodes.
- Does not require top-mount positioning to meet DOT requirements.
- Features a third wire for auxiliary brake or turn function.
- Integrated receptacle accepts AMP-style sealed connector.
- 9-16 volt operating range.
- 143-18 grommet and compatible plug required for installation.
- · Available with amber or red diodes behind clear lens.

Order No.	Description	Pack Std	Carton
M233A	amber, grommet mount	mfg. pack	50
M233R	red, grommet mount	mfg. pack	50
M233FA	amber, flange mount	mfg. pack	50
M233FR	red, flange mount	mfg. pack	50
M233CA	amber w/clear lens, grommet	mfg. pack	50
M233CR	red w/clear lens, grommet	mfg. pack	50
M233FCA	amber w/ clear lens, flange	mfg. pack	50
M233FCR	red w/ clear lens, flange	mfg. pack	50
143-18	grommet	poly pack	24
B143-18	grommet	mfg. pack	100
417-49	plug	poly pack	6
B417-49	plug	mfg. pack	100


253 LED Clearance/Side Marker Light w/ Aux Function






- Rectangular LED clearance, side marker and ID light.
- Features a third wire for auxiliary brake or turn functions.
- DOT legal when mounted horizontally with up to a 32° tilt back.
- Hardwired design has stripped leads with ring terminal on ground.
- 9-16 voltage operating range.
- See mounting accessories on pages 175-176 for additional mounting options.

Order No.	Description	Pack Std C	arton
M253A	amber	mfg. pack	50
M253R	red	mfg. pack	50
150-095	surface-mount bracket	poly pack	12
B150-095	surface-mount bracket	mfg. pack	100





LED ACCESSORY LIGHTS








Mirrored "stealth" look when unlit





- Chrome stealth look when off, stunning 3D tunnel effect when on!
- Illuminate and beautify stainless steel air cleaners, headache racks, bumpers, door panels, & running boards.
- For off-road or accessory use; not to replace legally required lighting.
- Mounts on 4" centers using #10 screws
- Reversible leads w/ .180 bullets. Terminals can be removed for hard-wiring connection to vehicle harness.
- · Compatible with all 12 volt systems.
- 3-year warranty.

Order No.	Description	Pack Std Carton
179A	amber	poly pack 12
179R	red	poly pack 12
M179A	amber	mfg. pack 50
M179R	red	mfg. pack 50









Mirrored "stealth" look when unlit


272/274 LED 21/2 or 2" Round **Auxiliary Tunnel Lights™**







- · Chrome stealth look when off, stunning 3D tunnel effect when on!
- Perfect for air cleaners, stainless skirts, headache racks, side rails, etc.
- For off-road or accessory use; not to replace legally required lighting.
- Mounting grommet required for installation, included in kits.
- Compatible with 2" and 2.5" chrome bezels. See page 192.
- Reversible leads w/ .180 bullets color-coded to indicate lamp color.
- · Compatible with all 12 volt systems.
- · 3-year warranty.

Order No.		Description	Pack	Std Carton
272KA	KIT	amber 2.5" w/ grommet	poly pac	k 12
274KA	KIT	amber 2" w/ grommet	poly pac	k 12
274KR	KIT	red 2" w/ grommet	poly pac	k 12
M272A		amber 2.5"	mfg. pad	ck 50
M274A		amber 2"	mfg. pad	ck 50
M274R		red 2"	mfg. pad	ck 50
B143-18		2.5" mounting grommet	mfg. pad	ck 100
B146-18		2" mounting grommet	mfg. pad	ck 100









176RGB LED 3/4" Multi-Color Accessory Light











- Compact light fits 3/4" hole.
- Common power wire plus 3 separate ground wires permit illumination in seven colors: red, blue, green, cyan, violet, yellow and white.
- · Hardwired with four 8" wires.
- Compatible grommet or bracket required for installation. See pages 180–182.
- · Check local laws before mounting on exterior of road-legal vehicles.

Order No.	Description	Pack	Std	Carton
M176RGB	seven selectable colors	mfg. pac	k	50
4741B	blue only, 2-wire	mfg. pac	k	50
B177-18	rubber grommet	mfg. pac	k	100







102 **Surface Mount Clearance & Side Marker Light**



- Surface-mount light functions as clearance and side marker.
- Durable base and acrylic lens provides high quality at economical price.
- Grounds through mounting screw with single lead wire.
- · Available in amber or red.

Order No.	Description	Pack Std	Carton
V102A	amber	Viz Pack	6
V102R	red	Viz Pack	6
M102A	amber	mfg. pack	100
M102R	red	mfg. pack	100
102-15A	amber lens	poly pack	10
102-15R	red lens	poly pack	10
193 or 194	12 volt replacement bulb	reference only	

106 Combination 2-Bulb Light w/ Reflex






- Two bulbs for increased reliability.
- Molded base and socket absorb shock and vibration.
- Grounds through mounting screw with single lead wire.
- V108-15 contains two lenses per pack.

Order No.	Description	Pack Std C	Carton
M106A	amber	mfg. pack	100
M106R	red	mfg. pack	100
V108-15A	amber lens 2-pack	Viz Pack	6
V108-15R	red lens 2-pack	Viz Pack	6
108-15A	amber lens	poly pack	10
108-15R	red lens	poly pack	10
B108-15A	amber lens	bulk pack	100
B108-15R	red lens	bulk pack	100
193 or 194	12 volt replacement bulb	referenc	ce only





109 **Cab Marker Light**



- Rugged, diecast housing with chrome-plated finish.
- Special base design and neoprene mounting pad allow light to be mounted on both flat or curved surfaces.
- Single-screw convenience for bulb or lens service.
- Includes single lead wire and grounds through mounting screw.
- · Available in amber only.

Order No.	Description	Pack Std Carton
V109A	amber	Viz Pack 6
67	replacement bulb	reference only

INCANDESCENT CLEARANCE/MARKER




107 Mini-Lite Clearance/Side Marker



- Amber or red lights functions as clearance, side marker or identification light.
- Blue and green lights are for accessory use only, not for use as legallyrequired clearance or marker lights.
- Features durable base with external mounting holes.
- Lens snap-locks onto base.
- Running-board light kit contains six lights, mounting hardware, connectors, and easy-to-follow instructions.
- · Includes single lead wire and grounds through mounting screw.

Order No.	Description	Pack Std	Carton
V107WA	amber	Viz Pack	3
V107WB	blue	Viz Pack	6
V107WR	red	Viz Pack	3
107WA	amber	poly pack	48
107WR	red	poly pack	48
M107WA	amber	mfg. pack	100
M107WR	red	mfg. pack	100
V107-15A	amber lens	Viz Pack	6
V107-15R	red lens	Viz Pack	6
107-15A	amber lens	poly pack	10
107-15R	red lens	poly pack	10
107-15B	blue lens	poly pack	10
107-15G	green lens	poly pack	10
B107-15A	amber lens	bulk pack	100
B107-15R	red lens	bulk pack	100
193 or 194	12 volt replacement bulb	reference only	
464	24 volt replacement bulb	reference only	






108 Combination 1-Bulb Light w/ Reflex



- Molded base with single-bulb socket
- Single lead wire; grounds through mounting screw.
- See pages 251 & 255 for replacement lens photos.
- V108-15A and V108-15R Viz Packs contain two lenses per package.
- Replacement lens compatibility depends on date of manufacture:

MANUFACTURE DATE	AMBER	RED
Through 2011	108-15A	108-15R
2012-2018	108-151A	108-151R
2019-On	V2549-15A	V2549-15R

Order No.	Description	Pack	Std Carton
V108WA	amber	Viz Pack	3
V108WR	red	Viz Pack	3
108WA	amber	poly pack	24
108WR	red	poly pack	24
M108WA	amber	mfg. pac	k 100
M108WR	red	mfg. pac	k 100
V2549-15A	amber repl. lens, 2019-on	Viz Pack	10
V2549-15R	red repl. lens, 2019-on	Viz Pack	10
108-151A	amber repl. lens, 2012-2018	poly pack	(10
108-151R	red repl. lens, 2012-2018	poly pack	(10
B108-151A	amber repl. lens, 2012-2018	bulk pack	100
B108-151R	red repl. lens, 2012-2018	bulk pack	100
V108-15A	amber lens 2-pack, 2011-prior	Viz Pack	6
V108-15R	red lens 2-pack, 2011-prior	Viz Pack	6
108-15A	amber repl. lens, 2011-prior	poly pack	(10
108-15R	red repl. lens, 2011-prior	poly pack	(10
B108-15A	amber repl. lens, 2011-prior	bulk pack	100
B108-15R	red repl. lens, 2011-prior	bulk pack	100
193 or 194	12 volt replacement bulb	re	ference only



110


PC-Rated Clearance/Side Marker Light



- Has corrosion-resistant molded housing and plated metal bracket.
- · Acrylic lens snaps onto housing.
- Includes single lead wire and grounds through mounting screw.
- V110-15 contains two lenses per pack.

Order No.	Description	Pack Std Ca	rton
V110A	amber	Viz Pack	6
V110R	red	Viz Pack	6
M110A	amber	mfg. pack	100
M110R	red	mfg. pack	100
V110-15A	amber lens 2-pack	Viz Pack	6
V110-15R	red lens 2-pack	Viz Pack	6
110-15A	amber lens	poly pack	10
110-15R	red lens	poly pack	10
193 or 194	12 volt replacement bulb	reference	only







Clearance/Side Marker Light w/ Reflex



- Surface mounts on 3.25" centers.
- Single bulb.
- Single lead wire for electrical connection.
- Grounds through mounting hardware.
- 15,000-hour-rated long-life bulb.

Order No.	Description	Pack Std C	arton
V112A	amber	Viz Pack	3
114-15A	amber lens	poly pack	10
193 or 194	12 volt replacement bulb	referenc	e only





114

PC-Rated Clearance/Side Marker w/ Reflex












- "Quick Lock" port; just push stripped power wire in to connect.
- Grounds through stud, or through additional ground wire port.
- Use as both side marker and clearance light when properly mounted.
- Features 15,000-hour-rated long life bulb.
- See 170 series LED version on page 59.



Order No.	Description	Pack Std	Carton
V114A	amber	Viz Pack	3
V114R	red	Viz Pack	6
M114A	amber	mfg. pack	100
M114R	red	mfg. pack	100
114-15A	amber lens	poly pack	10
114-15R	red lens	poly pack	10
193 or 194	12 volt replacement bulb	referen	ce only

REFLECT

INCANDESCENT CLEARANCE/MARKER








- Surface mount, wedge design popular for use on recreational trailers.
- Single electrical lead; grounds through mounting hardware.
- Mounts on 3 1/8" centers.
- Lens and housing sonic-welded to form a sealed single unit.

Order No.	Description	Pack	Std Carton
M116A	amber	mfg. pad	ck 100




118 Cab Marker Light ()17



- Popular style, amber cab marker light interchanges with competitive models.
- Base constructed of molded, corrosion-resistant ABS.
- · Grounds through mounting hardware.
- · Kit pack includes five lights, wire harness and mounting hardware.

Order No.		Description	Pack	Std Carton
V118A		amber	Viz Pacl	6
V118KA	KIT	5 light amber kit	Viz Pacl	6
M118A		amber	mfg. pad	ck 200
118-15A		amber lens	poly pac	k 10
67		replacement bulb	re	eference only






119 PC-Rated Clearance/Side Marker Light



- Functions as combination side marker and clearance light when properly mounted.
- Acrylic lens guarded by 14-gauge, bright-plated steel housing.
- Can be spot-welded to side rails, truck bed rails, etc.
- Flat-back design mounts without disassembly.
- · Includes single lead wire and grounds through mounting screw.
- Blue and green for accessory use only.

Order No.	Description	Pack Std C	arton
119A	amber	poly pack	24
119R	red	poly pack	24
M119A	amber	mfg. pack	48
M119R	red	mfg. pack	48
119-15A	amber lens	poly pack	10
119-15R	red lens	poly pack	10
168	replacement bulb	reference	only





122 Vanguard II Armored **PC-Rated Clearance & Side Marker Light**








- Surface-mount design functions as side marker or clearance light.
- Can also be used as combination marker and clearance light when properly mounted.
- Impact-resistant, molded housing resists rust and corrosion
- · Includes mounting gasket.
- · Includes single lead wire; grounds through mounting screws.

Order No.	Description	Pack Std Ca	rton
M122A	amber	mfg. pack	48
M122R	red	mfg. pack	48
124-15A	amber lens	poly pack	10
124-15R	red lens	poly pack	10
193 or 194	12 volt replacement bulb		




122X Vanguard II Armored Chrome **PC-Rated Clearance & Side Marker Light**



- Deluxe, chrome-plated version of 122 series clearance and side marker light; same function and features as 122 series.
- · Includes single lead wire; grounds through mounting screws.
- Brilliant, durable, copper-nickle, chrome-plated finish.

Order No.	Description	Pack Std (Carton
V122XA	amber	Viz Pack	6
V122XR	red	Viz Pack	6
M122XA	amber	mfg. pack	48
M122XR	red	mfg. pack	48
124-15A	amber lens	poly pack	10
124-15R	red lens	poly pack	10
193 or 194	12 volt replacement bulb	referenc	ce only





123 Cast Aluminum PC-Rated Clearance & Side Marker Light






- Flat back light functions as clearance or side marker light.
- When properly mounted, can also be used as combination side marker and clearance light.
- Flat back design eliminates need for socket hole.
- Features 15,000-hour-rated long life bulb and single lead wire.
- · Grounds through mounting screw.

Order No.	Description	Pack Std C	arton
123A	amber	poly pack	24
123R	red	poly pack	24
124-15A	amber lens	poly pack	10
124-15R	red lens	poly pack	10
193 or 194	12 volt replacement bulb	referenc	e only
	-		





INCANDESCENT CLEARANCE/MARKER

124 Vanguard

PC-Rated Clearance & Side Marker Light








- Features durable diecast housing, zinc screws and snap-in bushing.
- Pass-through mounting holes for installation without disassembly.
- Flat-back design eliminates need for socket hole.
- Equipped with 15,000-hour-rated long-life bulb.
- Includes single lead wire.
- · Grounds through mounting screws.

Order No.	Description	Pack Std C	arton
124A	amber	poly pack	24
124R	red	poly pack	24
M124A	amber	mfg. pack	48
M124R	red	mfg. pack	48
124-15A	amber lens	poly pack	10
124-15R	red lens	poly pack	10
193 or 194	12 volt replacement bulb	reference	e only





125 Clearance/Side Marker Light w/ Reflex








- Lightweight, chrome plated ABS housing
 Mounts on 2-11/16" centers; uses lens screws as mounting screws.
- Twist-in socket assembly contains both lead wire and ground wire for mounting on all surfaces.
- Requires 1-1/4" socket mounting hole for installation.

Order No.	Description	Pack	Std Carton
M125A	amber	mfg. pack	96
M125R	red	mfg. pack	96
125-15A	amber lens	poly pack	10
125-15R	red lens	poly pack	10
193 or 194	12 volt replacement bulb	ref	erence only





126 Clearance/Side Marker Light








- · Lightweight, chrome plated ABS housing
- Mounts on 2-11/16" centers; uses lens screws as mounting screws.
- · Twist-in socket assembly contains both lead wire and ground wire for mounting on all surfaces.
- Requires 1-1/4" socket mounting hole for installation.

Order No.	Description	Pack Std C	arton
V126A	amber	Viz Pack	6
V126R	red	Viz Pack	6
M126A	amber	mfg. pack	96
M126R	red	mfg. pack	96
126-25A	amber lens	poly pack	10
126-25R	red lens	poly pack	10
193 or 194	12 volt replacement bulb	referenc	e only





127

Clearance/Side Marker Light










- OE replacement light for Knapheide truck bodies.
- Features sealed lens and housing and 15,000-hour-rated, 12-volt bulb.
- Mounts flush to vehicle with rubber grommet.
- Grommet and 2-wire plug required to complete installation.
- Viz-Pack kits include light, plug and white grommet.

Order No.		Description	Pack	Std Carton
V127KA	KIT	amber kit	Viz Pacl	κ 6
V127KR	KIT	red kit	Viz Pacl	κ 6
127A		amber	poly pac	ck 24
127R		red	poly pac	ck 24
M127A		amber	mfg. pad	ck 100
M127R		red	mfg. pad	ck 100
127-18		grommet, black	poly pac	k 24
B127-18		grommet, black	mfg. pad	ck 100
142-49		plug	poly pac	k 12
B142-49		plug	mfg. pad	ck 100



128

Clearance/Side Marker Light w/ Reflex








- Mounts on 3" centers.
- · Features twist-in socket assembly with both lead and ground wires for mounting to all surfaces.
- V108-15 contains two lenses per pack.

Order No.	Description	Pack Std C	arton
V128A	amber	Viz Pack	6
V128R	red	Viz Pack	6
V108-15A	amber lens	Viz Pack	6
V108-15R	red lens	Viz Pack	6
108-15A	amber lens	poly pack	10
108-15R	red lens	poly pack	10
193 or 194	12 volt replacement bulb	reference	e only





132

Clearance/Side Marker Light w/ Reflex








- Rectangular, one-bulb design.
- Surface mounts on 3-3/8" centers with mounting gasket included.
- · Twist-in socket assembly contains both lead wire and ground wire for mounting on all surfaces.

Order No.	Description	Pack	Std Carton
V132A	amber	Viz Pack	6
V132R	red	Viz Pack	6
M132A	amber	mfg. pac	k 100
M132R	red	mfg. pac	k 100
193 or 194	12 volt replacement bulb	re	eference only





INCANDESCENT CLEARANCE/MARKER



130 Hard-Hat Clearance/Side Marker Light w/ Reflex










- Original, hard-hat style clearance or side marker light with built-in reflector optics; eliminates need for separate reflector.
- Contains two bulbs for maximum light output.
- Utilizes one lead wire and grounds through mounting screws.
- Compatible with 106-09 chrome accessory guard. See page 171.

Order No.	Description	Pack Std (Carton
130A	amber	poly pack	24
130R	red	poly pack	24
M130A	amber	mfg. pack	100
M130R	red	mfg. pack	100
130-25A	amber lens	poly pack	10
130-25R	red lens	poly pack	10
V106-09	chrome guard	Viz Pack	6
B106-09	chrome guard	mfg. pack	60
193 or 194	12 volt replacement bulb	reference only	






136 Thin-Line Clearance/Side Marker Light






- · Surface mounting.
- High-impact base and scratch-resistant acrylic lens.
- · May be mounted horizontally or vertically.
- · Includes single lead wire and grounds through mounting screw.

Order No.	Description	Pack Std	Carton
V136A	amber	Viz Pack	6
V136R	red	Viz Pack	6
136A	amber	poly pack	24
136R	red	poly pack	24
M136A	amber	mfg. pack	100
M136R	red	mfg. pack	100
136-15A	amber lens	poly pack	10
136-15R	red lens	poly pack	10
193 or 194	12 volt replacement bulb	referen	ce only







Clearance/Side Marker Light





- Direct replacement for OE lights on older Peterbilt trucks.
- Two-wire design includes .180 bullet and #10 ring terminal.
- Includes stainless-steel, self-tapping mounting screws.
- Mounts on 3 15/16" centers.

Order No.	Description	Pack	Std C	arton
M137A	amber	mfg. pac	k	50
M137R	red	mfg. pac	k	50
193 or 194	12 volt replacement bulb	re	eference	e only



135 **PC-Rated Clearance & Side Marker Light**












- Two bulb design.
- · Acrylic lens snaps onto housing.
- Surface mounts on 3" centers.
- Single wire connection, grounds through mounting hardware.
- 15,000-hour-rated long-life bulb.
- V134-15 contains two lenses per pack.
- See 35 LED version on page 54.

Order No.	Description	Pack	Std Carton
V135A	amber	Viz Pack	3
V135R	red	Viz Pack	3
135A	amber	poly pac	k 24
135R	red	poly pac	k 24
M135A	amber	mfg. pac	k 100
M135R	red	mfg. pac	k 100
V134-15A	amber lens	Viz Pack	6
V134-15R	red lens	Viz Pack	6
134-15A	amber lens	poly pac	k 10
134-15R	red lens	poly pac	k 10
B134-15A	amber lens	bulk pac	k 100
B134-15R	red lens	bulk pac	k 100
193 or 194	12 volt replacement bulb	re	ference only





138 **PC-Rated Clearance & Side Marker Light**












- "Double bulls-eye" twin bulb design.
- · Acrylic lens snaps onto housing.
- Surface mounts on 3" centers
- Single 4.5" wire connection, grounds through mounting hardware.
- Features two 15,000-hour-rated long-life bulbs.
- Compatible with 106-09 chrome accessory guard. See page 171.
- Blue, clear and green lenses available for accessory use only.
- V138-15 contains two lenses per pack.
- See 38 LED version on page 54.

Order No.	Description	Pack Std	Carton
V138A	amber	Viz Pack	3
V138R	red	Viz Pack	3
138A	amber	poly pack	24
138R	red	poly pack	24
M138A	amber	mfg. pack	100
M138C	clear	mfg. pack	100
M138G	green	mfg. pack	100
M138R	red	mfg. pack	100
V138-15A	amber lens	Viz Pack	6
V138-15R	red lens	Viz Pack	6
138-15A	amber lens	poly pack	10
138-15R	red lens	poly pack	10
B138-15A	amber lens	bulk pack	100
B138-15B	blue lens	bulk pack	100
B138-15C	clear lens	bulk pack	100
B138-15G	green lens	bulk pack	100
B138-15R	red lens	bulk pack	100
V106-09	chrome guard	Viz Pack	6
B106-09	chrome guard	mfg. pack	60
193 or 194	12 volt replacement bulb	referen	ice only
464	24 volt replacement bulb	referen	ce only



INCANDESCENT CLEARANCE/MARKER



B162-093 retention clip

140 Incandescent 2" Clearance/Side Marker Light w/ Reflex









- 2" round light with 15,000-hour long-life incandescent bulb.
- Built-in reflex, eliminating need for separate reflector.
- Fits metric size mounting holes.
- Welded terminals, no solder.
- · Accepts industry standard 2-wire plug.
- 9-16 voltage operating range.
- Protective gasket included.
- See 190 series LED version lights on page 63.

Order No.	Description	Pack Std	Carton
M140FA	amber	mfg. pack	100
M140FR	red	mfg. pack	100
140 24	replacement gasket	mfg. pack	1
142-49	plug	poly pack	12
B142-49	plug	mfg. pack	100
B162-093	stainless steel retaining clip	mfg. pack	100



142 21/2" PC-Rated Clearance/Side Marker Light















- · Lens is welded to housing to form single unit.
- Requires mounting grommet and 2-wire plug for installation.
- Features 15,000-hour-rated long-life bulb.
- Kits include 142 light, 142-18 grommet and 142-49 plug.
- ABS warning version avail., or see 2954 accessory ABS label on page 194.
- See pages 64-65 for LED versions.
- · See mounting accessory section for additional mounting options.

Order No.		Description	F	Pack	Std Carton
V142A		amber	\	/iz Pack	6
V142R		red	\	/iz Pack	6
V142KA	KIT	amber kit	\	/iz Pack	6
V142KR	KIT	red kit	\	/iz Pack	6
142A		amber	ŗ	oly pack	c 24
142R		red	ŗ	oly pack	c 24
142KA	KIT	amber kit	ŗ	oly pack	(12
142KR	KIT	red kit	ŗ	oly pack	(12
M142A		amber	r	nfg. pacl	k 100
M142R		red	r	nfg. pacl	k 100
M142ABS		amber w/ ABS label	r	nfg. pacl	k 100
142-18		grommet	ŗ	oly pack	24
B142-18		grommet	r	nfg. pacl	k 100
142-49		plug	ŗ	oly pack	(12
B142-49		plug	r	nfg. pacl	k 100

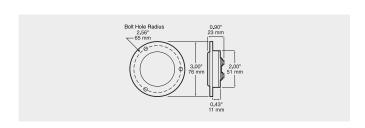





143

21/2" Clearance/Side Marker Light w/ Reflex















- 143 series features built-in reflex optics, eliminating the need for a separate
- 143F has reflex-enabled flange integral with lens.
- 143 light comes without flange for use with rubber grommet.
- · Accepts industry standard 2-wire plug.
- Features 15,000-hour-rated long life bulb.
- See pages 62-63 for LED versions.
- See mounting accessory section for additional mounting options.

Order No.	Description	Pack Std	Carton
V143A	amber	Viz Pack	6
V143R	red	Viz Pack	6
143A	amber	poly pack	24
143R	red	poly pack	24
M143A	amber	mfg. pack	100
M143R	red	mfg. pack	100
M143FA	amber, flange mount	mfg. pack	100
M143FR	red, flange mount	mfg. pack	100
142-18	grommet	poly pack	24
B142-18	grommet	mfg. pack	100
142-49	plug	poly pack	12
B142-49	plug	mfg. pack	100







146 2" PC-Rated Clearance/Side Marker Light













- · Functions as side marker or clearance light.
- May be used as combination side marker and clearance light when mounted at a 45° angle.
- Features sealed lens and housing; 146F and 146S lights are sonic welded to flange to form single unit.
- 146 light comes without flange for use with rubber grommet.
- Requires 2-wire plug to complete installation.
- Features 15,000-hour-rated long-life bulb.
- Kit includes 146 light, 146-18 grommet and 142-49 plug.
- ABS warning version avail., or see 2954 accessory ABS label on page 194.
- See page 69 for LED versions.
- · See mounting accessory section for additional mounting options.

Order No.	Description	Pack Std Carton
V146A	amber	Viz Pack 6
V146R	red	Viz Pack 6
V146KA KI	T amber kit	Viz Pack 6
V146KR KI	red kit	Viz Pack 6
146A	amber	poly pack 24
146R	red	poly pack 24
M146A	amber	mfg. pack 100
M146R	red	mfg. pack 100
M146KA KI	amber kit	mfg. pack 100
M146KR KI	red kit	mfg. pack 100
M146SA	amber, surface mount	mfg. pack 100
M146SR	red, surface mount	mfg. pack 100
M146ABS	amber w/ ABS mark	mfg. pack 100
146-18	grommet	poly pack 24
B146-18	grommet	mfg. pack 100
142-49	plug	poly pack 12
B142-49	plug	mfg. pack 100





INCANDESCENT CLEARANCE/MARKER

150

PC-Rated Clearance/Side Marker Light















- · Lens is welded to housing to form single unit.
- Features 15,000-hour-rated, long-life bulb and female terminals.
- Mounting bracket and electrical connector required to complete installation; see mounting and electrical accessories for details.
- · Viz Pack kits include light, 150-102 bracket, lead wire and screws.
- 2636 kit includes light, 150-18 grommet, and 142-49 plug.
- See 203 series LED version on page 70.




















150-18



150-102





151 Clearance/Side Marker Light





- · Functions as side marker or clearance light.
- · Lens is welded to housing to form single unit.
- · Mounting stud serves as ground when mounted to metallic surface.
- Comes with a single 24" lead wire.
- · Available in amber or red.
- See 191 Series LED version on page 70.

Order No.	Description	Pack Std Carton
151A	amber	poly pack 24
151R	red	poly pack 24
M151A	amber	mfg. pack 100
M151R	red	mfg. pack 100





152 PC-Rated Clearance/Side Marker Light









- · Functions as side marker or clearance light.
- When mounted at a 45° angle, light may be used as combination clearance and side marker light.
- · Lens is welded to housing to form single unit.
- Mounting grommet and electrical connector required.
- Kits include 152 light, single 17" lead wire, and mounting bracket with stud that serves as ground when mounted to metallic surface.
- 152 series has male pins.
- Features 15,000-hour-rated, long-life bulb.
- · See mounting accessories for additional mounting options.
- · Available in amber or red.

Order No.		Description	Pack St	d Carton
152A		amber	poly pack	24
152R		red	poly pack	24
M152A		amber	mfg. pack	100
M152R		red	mfg. pack	100
M152BKA	KIT	amber/black kit	mfg. pack	100
M152BKR	KIT	red/black kit	mfg. pack	100
B150-18		black grommet	mfg. pack	100
152-49		replacement lead wire	poly pack	12
B153-49		2-way plug	mfg. pack	100

154A-R Clearance/Side Marker Light









- Functions as both amber front clearance light and red rear clearance light for over 80" applications.
- Mounts on top or side of most fenders to mark widest point on trailer; ideal for boat, cargo or horse trailers.
- · Mounting bracket and electrical connector are required to complete installation; 154 series has male pins.
- · Mounting screw serves as ground when mounted to metallic surface with single lead wire for electrical connection.
- Features two 15,000-hour-rated, long-life bulbs.
- See 161 LED version on page 57.
- Utilizes same mounting hardware as standard 154 series; see mounting accessories section for additional mounting options.

Order No.		Description	Pack	Std Carton
154A-R		amber/red	poly pack	< 24
M154A-R		amber/red	mfg. pacl	k 100
154-09K	KIT	gray bracket kit	poly pack	(12
B154-09		gray bracket	mfg. pacl	k 100
154-10K	KIT	chrome bracket kit	poly pack	(12
B154-10		chrome bracket	mfg. pacl	k 100
B154-11		black bracket	mfg. pacl	k 100
154-11K	KIT	black bracket kit	poly pack	(12
B154-11K	KIT	black bracket kit	mfg. pacl	k 100
B154-11K-BT1	KIT	black bracket kit, .180 bullet term	mfg. pacl	k 100
153-49		plug	poly pack	(12
B153-49		plug	mfg. pacl	k 100

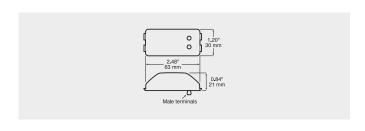



INCANDESCENT CLEARANCE/MARKER









154 PC-Rated Clearance/Side Marker Light













- Functions as side marker or clearance light.
- When mounted at a 45° angle, light may be used as combination clearance and side marker light.
- Lens is welded to housing to form single unit.
- Mounting bracket and electrical connector required.
- Mounting screw serves as ground when mounted to metallic surface with single lead wire for electrical connection.
- Features two 15,000-hour-rated, long-life bulbs.
- Kits includes 154 light and gray mounting bracket with lead wire molded into terminal pad and mounting screws.
- 154KA & 154KR kits include light and black mounting bracket with lead wire molded into terminal pad.
- See mounting accessories section for additional mounting options.
- See 161 LED versions on page 57.

Order No.		Description	Pack	Std Carton
V154A		amber	Viz Pack	6
V154R		red	Viz Pack	6
154A		amber	poly pack	< 24
154R		red	poly pack	< 24
154KA	KIT	amber/gray kit	poly pack	< 24
154KR	KIT	red/gray kit	poly pack	< 24
M154A		amber	mfg. pac	k 100
M154R		red	mfg. pac	k 100
M154KA	KIT	amber kit	mfg. pac	k 100
M154KR	KIT	red kit	mfg. pac	k 100
154-09K	KIT	gray bracket kit	poly pack	12
B154-09		gray bracket	mfg. pac	k 100
154-10K	KIT	chrome bracket kit	poly pack	λ 12
B154-10		chrome bracket	mfg. pac	k 100
B154-11		black bracket	mfg. pac	k 100
154-11K	KIT	black bracket kit	poly pack	(12
B154-11K	KIT	black bracket kit	mfg. pac	k 100
B154-11K-BT1	KIT	black bracket kit, .180 bullet term	mfg. pac	k 100
153-49		plug	poly pack	λ 12
B153-49		plug	mfg. pac	k 100

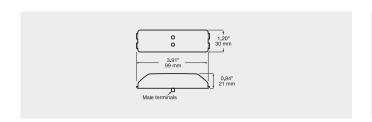



155 Sealed PC-Rated Hard Hat II Clearance/Side Marker Light










- May be used as combination side marker and clearance light when properly mounted at a 45° angle.
- Features internal brass contacts for extended service.
- Fitted with two 15,000-hour-rated, long-life bulbs.
- High impact lens is welded to housing to form a single unit.
- 160-49 or 160-491 plug required for installation.
- 155A/R poly pack contains a 160-49 style plug.


Order No.	Description	Pack Std Carto	on
155A	amber, sealed	poly pack 2	24
155R	red, sealed	poly pack 2	24
M155A	amber, sealed	mfg. pack	50
M155R	red, sealed	mfg. pack	50
160-49	plug	poly pack	12
B160-49	plug	mfg. pack 10	00



160-49

Clearance/Side Marker Light






- Lens and base welded to form single sealed unit.
- Includes .175"-thick closed cell cushion for mounting.
- Twist-out bulb socket for easy bulb replacement.
- Two-wire electrical connection.

Order No.	Description	Pack	Std Carton
V2548A	amber	Viz Pack	10
V2548R	red	Viz Pack	10
M2548A	amber	mfg. pac	k 100
M2548R	red	mfg. pac	k 100
193 or 194	12 volt replacement bulb	re	ference only





2549

Clearance/Side Marker Light






- · Popular for RV applications.
- Snap-off lens and twist-out bulb socket provide easy bulb access from outside vehicle or from behind mounting panel.
- Two-wire electrical connection.

Order No.	Description	Pack	Std Carton
V2549A	amber	Viz Pack	10
V2549R	red	Viz Pack	10
V2549-15A	amber replacement lens	Viz Pack	10
V2549-15R	red replacement lens	Viz Pack	10
193 or 194	12 volt replacement bulb	re	ference only





LED ID BARS







177 / 186 LED **Identification Light Bar**









- Three individual single diode LED lights pre-mounted in one-piece housing.
- 177-3R features 3/4" diameter Dot Lights™.
- 186-3R has three, 1-3/8" diameter, single diode LumenX® Dot XL™ lights.
- Housing made of rugged, corrosion-resistant polymer.
- 9-16 volt operating range.
- Individual lights have hardwired leads terminated with .180 bullets.
- · All leads are plugged into pre-installed gang harness for ease of installation.

Order No.	Description	Pack Std Cart	ton
177-3R	red, 0.75" dia. lights	poly pack	6
186-3R	red, 1 3/8" dia. lights	poly pack	6
M177-3R	red, 0.75" dia. lights	mfg. pack	50
M186-3R	red, 1 3/8" dia. lights	mfg. pack	50

169 LED

Identification Light Bar










- · One-piece housing sealed with epoxy eliminates weld joints.
- · Operates from 9-16 volts.
- · Features 2-wire, hardwired design.
- · Includes mounting gasket.
- Standard version includes blunt-cut hot wires and #10 ring terminal on ground.
- · Also available with .180 bullets on hot wires.

Order No.	Description	Pack	Std Carton
V169-3R	red	Viz Pack	3
169-3R	red	poly pacl	k 24
M169-3A	amber	mfg. pac	k 100
M169-3R	red	mfg. pac	k 100
M169-3ABT1	amber w/ .180 bullet & ring term	mfg. pac	k 100
M169-3RBT1	red w/ .180 bullet & ring term	mfg. pac	k 100
M169-3RBT2	red w/ two .180 bullets	mfg. pac	k 100





Identification Light Bar



191-3 LED





- Sealed LED Identification bar for over-80" applications
- Stainless steel bar is corrosion-resistant with three sealed LED lights
- Pre-wired with single 60" hardwired lead wire
- Mounts on 8.5" centers.


8.50" 216 mm	
1.19" 30 mm 14.25" 362 mm	
1.06" 27 mm \$	

0	rder No.	Description	Pack	Std Carton
٧	191-3RL	red	Viz Pack	6
М	191-3RL	red	mfg. pac	k 50



107-3 Mini Light Bar





- 107-3 corrosion-resistant bar is powder-coated white with three 107 lights attached.
- Mounts on 16-1/8" centers and grounds through mounting hardware.

Order No.	Description	Pack Std (Carton
V107-3R	red	Viz Pack	3
107-3R	red	poly pack	24
M107-3A	amber	mfg. pack	48
M107-3R	red	mfg. pack	48
107-15A	amber lens	poly pack	10
107-15R	red lens	poly pack	10
B107-15A	amber lens	mfg. pack	100
B107-15R	red lens	mfg. pack	100
193 or 194	12 volt replacement bulb	referenc	ce only


150-3 Sealed Submersible Light Bar



- Submersible identification bar light for over 80" applications.
- Black polycarbonate bar is corrosion-proof with three 150 sealed lights attached.
- 150 lights snap on/off for easy service.
- · Mounts on 16" centers.
- 0.20 " mounting holes accept #10 screws.
- Includes three-plug harness with two lead wires.
- All versions have 6" ground wire w/ ring terminal and 50" hot wire.
- Field upgradable to LEDs bar also accepts 203 series on page 70.

Order No.	Description	Pack	Std Carton
150-3R	red	poly pacl	k 6
M150-3R	red	mfg. pac	k 48
150R	replacement light	poly pac	k 24
150-49	replac. harness w/ 8" hot lead	poly pacl	k 10





136-3 Thin-Line Light Bar

- Identification bar light for over 80" applications.
- Corrosion resistant bar is 24-gauge steel with black enamel finish and three 136 oval lights attached.
- Mounts on 6-15/16" centers.
- Includes single lead wire and grounds through mounting hardware.

Order No.	Description	Pack Std (Carton
136-3R	red	poly pack	24
136-15A	amber lens	poly pack	10
136-15R	red lens	poly pack	10
193 or 194	12 volt replacement bulb	referen	ce only



151-3 Sealed Submersible Light Bar







- Submersible identification bar light for over 80" applications.
- Stainless steel bar is corrosion-resistant with three sealed lights.
- Pre-wired with 60" lead wire.
- Grounds through mounting hardware.
- Mounts on 8 1/2" centers.
- See 191-3R LED version at left.

Order No.	Description	Pack Std	Carton
V151-3RL	red	Viz Pack	6
M151-3RL	red	mfg. pack	48

LED BACK-UP LIGHTS





817-7/818-7 LumenX[®] LED 4" Round Back-Up Light












- · Advanced optics fully illuminate lens.
- A single light meets FMVSS 108 requirements when properly mounted.
- AMP-compatible connector integrated into housing.
- 818-7 has flange integrated into the housing.
- 817-7 has skirted weld joint for added protection against moisture.
- 9-16 volt operating range.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- 817 kit includes light, grommet and 817-48 plug.
- 818 kit includes light and 817-48 plug.

Order No.		Description	P	ack	Std Cart	on
817C-7		grommet mount	р	oly pac	k	6
818C-7		flange mount	р	oly pac	k	6
817KC-7	KIT	grommet mount kit	p	oly pac	k	6
818KC-7	KIT	flange mount kit	p	oly pac	k	6
M817C-7		grommet mount	m	nfg. pac	ck	50
M818C-7		flange mount	m	nfg. pac	ck	50
426-18		grommet	р	oly pac	k	12
B426-18		grommet	m	ıfg. pac	k 1	00
417-48		hardshell plug	р	oly pac	k	6
B417-48		hardshell plug	m	ıfg. pac	k 1	00
817-48		molded plug	p	oly pac	k	12
B817-48		molded plug	m	ıfg. pac	k 1	00



824-7/826-7 LumenX® LED 4" Round Back-Up Light












- · Advanced optics fully illuminate lens.
- A single light meets FMVSS 108 requirements when properly mounted.
- Industry-standard PL3 socket integrated into housing.
- 824-7 has flange integrated into the housing.
- 826-7 has skirted weld joint for added protection against moisture.
- 9-16 volt operating range.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- 826 kit includes light, grommet and 431-49 plug.
- 824 kit includes light and 431-49 plug.

Order No.		Description	Pack	Std Carton
V826KC-7	KIT	grommet mount kit	Viz Pack	6
V824KC-7	KIT	flange mount kit	Viz Pack	6
826C-7		grommet mount	poly pac	k 6
824C-7		flange mount	poly pac	k 6
826KC-7	KIT	grommet mount	poly pac	k 6
824KC-7	KIT	flange mount	poly pac	k 6
M826C-7		grommet mount	mfg. pac	k 50
M824C-7		flange mount	mfg. pac	k 50
426-18		grommet	poly pac	k 12
B426-18		grommet	mfg. pac	k 100
431-49		plug	poly pac	k 12
B431-49		plug	mfg. pac	k 100







817-9/818-9 LumenX[®] LED 4" Round Back-Up Light












- · Advanced optics fully illuminate lens.
- A single light meets FMVSS 108 requirements when properly mounted.
- · AMP-compatible connector integrated into housing.
- · 818-9 has flange integrated into the housing.
- 817-9 has skirted weld joint for added protection against moisture
- 9-32 volt operating range is compatible with 12V and 24V vehicles.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- · Does not require "Top" positioning to meet FMVSS 108 standard.
- 817 kit includes light, grommet and 817-48 plug.
- 818 kit includes light and 817-48 plug.

Order No.		Description	Pack	Std C	arton
817C-9		grommet mount	poly pac	k	6
818C-9		flange mount	poly pac	k	6
817KC-9	KIT	grommet mount kit	poly pac	k	6
818KC-9	KIT	flange mount kit	poly pac	k	6
M817C-9		grommet mount	mfg. pad	ck	50
M818C-9		flange mount	mfg. pad	ck	50
426-18		grommet	poly pac	k	12
B426-18		grommet	mfg. pad	ck	100
417-48		hardshell plug	poly pac	k	6
B417-48		hardshell plug	mfg. pad	ck	100
817-48		molded plug	poly pac	k	12
B817-48		molded plug	mfg. pad	ck	100



824-9/826-9 LumenX[®] LED 4" Round Back-Up Light










- · Advanced optics fully illuminate lens.
- A single light meets FMVSS 108 requirements when properly mounted.
- Industry-standard PL3 socket integrated into housing.
- 824-9 has flange integrated into the housing.
- 826-9 has skirted weld joint for added protection against moisture.
- 9-32 volt operating range is compatible with 12V and 24V vehicles.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- 826 kit includes light, grommet and 431-49 plug.
- 824 kit includes light and 431-49 plug.

Order No.		Description	Pa	ck	Std Carton
826C-9		grommet mount	pol	у рас	k 6
824C-9		flange mount	pol	у рас	k 6
826KC-9	KIT	grommet mount	pol	у рас	k 6
824KC-9	KIT	flange mount	pol	у рас	k 6
M826C-9		grommet mount	mfç	g. pac	k 50
M824C-9		flange mount	mfg	g. pac	k 50
426-18		grommet	pol	у рас	k 12
B426-18		grommet	mfg	g. pac	k 100
431-49		plug	pol	у рас	k 12
B431-49		plug	mfg	g. pac	k 100



LED BACK-UP LIGHTS







820-7/823-7 LumenX® LED **Oval Back-Up Light**













- A single light meets FMVSS 108 requirements when properly mounted.
- · AMP-compatible connector integrated into housing.
- 823-7 has flange welded to light, forming a single unit.
- 9-16 volt operating range.
- 823CTL-7 version has integral narrower flange with recessed lens and two mounting holes positioned at ends for narrower rail applications.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Meets FMVSS 108 requirements in horizontal, vertical or any 360° position.
- 820 kit includes light, grommet and 817-48 plug.
- 823 kit includes light and 817-48 plug.

Order No.		Description	Pack	Std Carton
820C-7		grommet mount	poly pac	k 6
823C-7		flange mount	poly pac	k 6
820KC-7	KIT	grommet mount kit	poly pac	k 6
823KC-7	KIT	flange mount kit	poly pac	k 6
M820C-7		grommet mount	mfg. pad	ck 50
M823C-7		flange mount	mfg. pad	ck 50
M823CTL-7		narrow, 2-screw flange	mfg. pad	ck 50
421-18		grommet	poly pac	k 12
B421-18		grommet	mfg. pad	ck 100
417-48		hardshell plug	poly pac	k 6
B417-48		hardshell plug	mfg. pad	k 100
817-48		molded plug	poly pac	k 12
B817-48		molded plug	mfg. pad	k 100


















- A single light meets FMVSS 108 requirements when properly mounted.
- · Industry-standard PL3 socket integrated into housing.
- 822-7 has flange welded to light, forming a single unit.
- 9-16 volt operating range.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Meets FMVSS 108 requirements in horizontal, vertical or any 360° position.
- 821 kit includes light, grommet and 421-49 plug.
- 822 kit includes light and 421-49 plug.

Order No.		Description	Pack	Std Carton
V821KC-7	KIT	grommet mount kit	Viz Pack	6
V822KC-7	KIT	flange mount kit	Viz Pack	6
821C-7		grommet mount	poly pac	k 6
822C-7		flange mount	poly pac	k 6
821KC-7	KIT	grommet mount	poly pac	k 6
822KC-7	KIT	flange mount	poly pac	k 6
M821C-7		grommet mount	mfg. pac	k 50
M822C-7		flange mount	mfg. pac	k 50
421-18		grommet	poly pac	k 12
B421-18		grommet	mfg. pac	k 100
421-49		plug	poly pac	k 12
B421-49		plug	mfg. pac	k 100
		·		









820-10/823-10 LumenX[®] LED Oval Back-Up Light











- · Advanced optics fully illuminate lens.
- A single light meets FMVSS 108 requirements when properly mounted.
- · AMP-compatible connector integrated into housing.
- 823-10 has flange welded to light, forming a single unit.
- 9-32 volt operating range is compatible with 12V and 24V vehicles.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Meets FMVSS 108 requirements in horizontal, vertical or any 360° position.
- 820 kit includes light, grommet and 817-48 plug.
- 823 kit includes light and 817-48 plug.

Order No.		Description	Pack	Std	Carton
820C-10		grommet mount	poly pad	ck	6
823C-10		flange mount	poly pad	ck	6
820KC-10	KIT	grommet mount kit	poly pad	ck	6
823KC-10	KIT	flange mount kit	poly pad	ck	6
M820C-10		grommet mount	mfg. pa	ck	50
M823C-10		flange mount	mfg. pa	ck	50
421-18		grommet	poly pac	ck	12
B421-18		grommet	mfg. pa	ck	100
417-48		hardshell plug	poly pac	ck	6
B417-48		hardshell plug	mfg. pa	ck	100
817-48		molded plug	poly pad	ck	12
B817-48		molded plug	mfg. pa	ck	100

821-10/822-10 *LumenX*® LED Oval Back-Up Light












- Advanced optics fully illuminate lens.
- A single light meets FMVSS 108 requirements when properly mounted.
- Industry-standard PL3 socket integrated into housing.
- 822-10 has flange welded to light, forming a single unit.
- 9-32 volt operating range is compatible with 12V and 24V vehicles.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Meets FMVSS 108 requirements in horizontal, vertical or any 360° position.
- 821 kit includes light, grommet and 421-49 plug.
- 822 kit includes light and 421-49 plug.

Order No.		Description	Pack	Std Carton
821C-10		grommet mount	poly pack	6
822C-10		flange mount	poly pack	6
821KC-10	KIT	grommet mount	poly pack	6
822KC-10	KIT	flange mount	poly pack	6
M821C-10		grommet mount	mfg. pack	50
M822C-10		flange mount	mfg. pack	50
421-18		grommet	poly pack	12
B421-18		grommet	mfg. pack	100
421-49		plug	poly pack	6
B421-49		plug	mfg. pack	100







LED BACK-UP LIGHTS







829-7 *LumenX*® LED 4" Round Back-Up Light w/ Reflex











- Optically advanced design fully illuminates lens.
- · Industry-standard PL3 socket integrated into housing.
- Single light meets FMVSS 108 requirements when properly mounted.
- Flange with reflector optics integrated into housing, provides auxiliary reflex function.
- See M829R-7 for stop & tail companion model.
- 9-16 volt operating range.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- Includes protective gasket.

Order No.	Description	Pack Std	Carton
M829C-7	flange mount with reflex	mfg. pack	50
431-49	plug	poly pack	12
B431-49	plug	mfg. pack	100

824/826 Single Diode LED 4" Round Back-Up Light









- Single diode LED light with traditional incandescent lens look.
- Industry-standard PL3 socket integrated into housing with locking tabs for added plug retention.
- · 9-32 operating range.
- Does not require "Top" positioning to meet FMVSS 108 standard.
- 826C requires 426-18 grommet.
- 824C features gray housing with integral mounting flange.
- 824C flange has recessed lens.
- 431-49 plug required for installation.

Order No.	Description	Pack Std	Carton
826C-MV	grommet mount, multi-volt	poly pack	6
824C-MV	flange mount, multi-volt	poly pack	6
M826C-MV	grommet mount, multi-volt	mfg. pack	50
M824C-MV	flange mount, multi-volt	mfg. pack	50
426-18	grommet	poly pack	12
B426-18	grommet	mfg. pack	100
431-49	plug	poly pack	12
B431-49	plug	mfg. pack	100

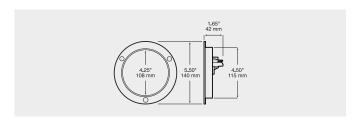









717 Great White® LED 7" Back-Up/Dome Light







- Round, 7-inch size popular for bus and transit applications.
- · Sealed potted design.
- 9-32 volt operating range.
- Surface mount with standard 4-hole mounting pattern.
- Comes standard with mounting gasket providing additional protection between lamp and mounting surface.
- Hardwired leads terminated with .180 male bullet and ring terminal for ground.
- Matching red stop/turn/tail light available on page 16.
- Matching amber turn signal available on page 44.

Order No.	Description	Pack Std Ca	rton
717C	surface mount	poly pack	20

850C *Great White*® LED Rectangular Back-Up Light













- Two versions available for mounting in either horizontal or vertical orientation.
- Meets DOT & ECE requirements when mounted as specified.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- 12-inch or 61/2-foot hardwired stripped leads
- 850C-1P has hardwired PL3 plug
- Matching red stop/turn/tail light available on page 16.
- Matching amber turn signal available on page 44.

Order No.	Description	Pack Std	Carton
P850C-1	vertical, 12" leads	poly pack	6
850C	vertical, 61/21 leads	mfg. pack	10
850C-AMP	vertical, 12' leads w/ AMP plug	mfg. pack	10
850C-1P	vertical, 12" leads, with plug	mfg. pack	10
850C-1	vertical, 12" leads	mfg. pack	10
850HC-1	horizontal, 12" leads	mfg. pack	10
850-18	rubber grommet	poly pack	12
B850-18	rubber grommet	mfg. pack	100






INCANDESCENT BACK-UP LIGHTS







393 **Back-Up Light**



- Rectangular, bulb-replaceable back-up light.
- Features tough polycarbonate lens and unique pillow optics that allow maximum light output.
- · Grounds through mounting screws with single lead wire for electrical connection.
- See matching 306R stop/turn/tail light on page 21.
- See matching 306A turn signal on page 49.

Order No.	Description	Pack	Std Carton
M393C	clear	poly pac	k 48
306-25C	replacement lens	poly pac	k 10
411-07	replacement pigtail	poly pac	k 25
1141	replacement bulb	re	ference only



411C

4" Round Flanged Back-Up Light



- Single-wire, flush-mount 4" round back-up light
- Black polycarbonate housing with galvanized steel retainer ring
- Fits in 4 1/2" hole and secures with three screws or rivets

Order No.	Description	Pack	Std Carton
M411C	clear	mfg. pac	k 48
410-21	galvanized retainer ring	poly bag	25
411-24	mounting gasket	poly pac	k 10
411-07	replacement pigtail	poly pac	k 25
414-15C	replacement lens	poly pac	k 10
1156	replacement bulb	re	ference only



411SC

4" Round Flanged Stainless Steel Back-Up Light



- Single-wire, flush-mount 4" round back-up light
- Stainless steel housing and retainer ring
- Fits in 4 1/2" hole and secures with three screws or rivets

Order No.	Description	Pack Std	Carton
M411SC	clear, stainless steel housing	mfg. pack	48
425S-21	SS retainer ring	poly bag	25
411-24	mounting gasket	poly pack	10
411-07	replacement pigtail	poly pack	25
414-15C	replacement lens	poly pack	10
1156	replacement bulb	referei	nce only





415/431 Sealed 4" Round Back-Up Light







- Available with standard bulb (431) or long life krypton bulb (415).
- Requires mounting grommet and 2-wire plug for installation.
- Kits include light, grommet, and plug.
- See 426A turn signal, and 426R stop/turn/tail companion models.
- Equipped with dual filament, 2.10 amp, 32 cp bulb.
- 415 series features long-life krypton bulb.
- Can be used with 3-wire plug to provide accessory low-light function.
- See LED version on page 98.

Order No.		Description	Pack Std	Carton
415		clear, long-life bulb	poly pack	12
415K		clear kit, long-life bulb	poly pack	12
M415		clear, long-life bulb	mfg. pack	48
M431C		clear	mfg. pack	50
M431KC	KIT	clear kit	mfg. pack	50
426-18		grommet	poly pack	12
B426-18		grommet	mfg. pack	100
431-49		plug	poly pack	12
B431-49		plug	mfg. pack	100

416 Sealed Oval Back-Up Light









- Meets DOT requirement in either horizontal or vertical position.
- Polycarbonate lens welded to housing to form single unit.
- Requires mounting grommet and 2-wire plug for installation.
- 416K kit include light, grommet, and right-angle plug.
- 12-volt lamps designed with dual filament, 2.1 amp, 32 cp bulb.
- Can be used with 3-wire plug to provide accessory low-light function.
- See LED versions on page 96–97.

Order No.		Description	Pack Std	Carton
416		clear	poly pack	12
416K	KIT	clear kit	poly pack	12
M416		clear	mfg. pack	48
421-18		grommet	poly pack	12
B421-18		grommet	mfg. pack	100
421-49		right angle plug	poly pack	12
B421-49		right angle plug	mfg. pack	100





LED SYSTEM MONITORING LIGHTS





153CTP LED Vehicle System Monitoring Light







- Three-wire connection for test and indicator functions.
- Lights only when activated by monitored circuit. Perfect for tire pressure monitoring systems.
- Power-on self-test function lights lamp for approximately 30 seconds when power is initially applied.
- 9-16 volt operating range.
- Leads terminated with .180 bullets.
- Fits 150-091 and 150-095 brackets (See pages 175-176).

Order No.	Description	Pack Std (Carton
153CTP-BT3	white w/ .180 bullets	poly pack	6
M153CTP-BT3	white w/ .180 bullets	mfg. pack	50
150-095	mounting bracket	poly pack	12
B150-095	mounting bracket	mfg. pack	100

See pages 175–176 for additional mounting options.

186CTP *LumenX*[®] Dot XL[™] LED Vehicle System Monitoring Light















- White diode with SAE J575e compliant quad-flash strobe function.
- Three-wire connection for test and indicator functions.
- Power-on self test function lights for approx. 10 seconds when power is first applied.
- Strobe light function is activated by monitored circuit. Perfect for tire pressure monitoring systems.
- 9-32 volt operating range.
- Leads terminated with .180 bullets.
- 1 3/8" dia., mounts in 3/4" mounting hole with included grommet.
- · Optional brackets for surface mounting available separately.

Order No.	Description	Pack Std C	arton
186CTP-BT3	white w/ .180 bullets	poly pack	6
M186CTP-BT3	white w/ .180 bullets	mfg. pack	50
B186-10	flat bracket	mfg. pack	100
B186-13	curved bracket	mfg. pack	100







153C LED Utility & License Light












- · Meets FMVSS 108 and ECE requirements.
- · Also suitable for use as compartment or utility light.
- 9-32 volt operating range.
- Fits 150-095, 150-091, 150-14, 150-141, 150-142 and 150-143 brackets (See pages 175-177).
- 153C-P terminated with 2-wire female plug for easy installation.
- 153C-BT2 terminated with .180 bullets.
- M153C-MV-PKD terminated with Packard-style hardshell connector.
- V153KC-MV Viz Pack kit includes light and 150-095 bracket.
- 153C-142 kit includes M153C-MV and B150-142 bracket.
- 153C-JAMP includes an AMP-compatible connector and 12" jacketed lead.

Order No.		Description	Pack	Std Carton
V153KC-MV	KIT	white kit w/ bracket	Viz Pack	6
153C-MV		white	poly pack	6
153C-P		white w/ PL10 plug	poly pack	6
153C-BT2		white w/ .180 bullets	poly pack	6
153C-142	KIT	white kit w/ hooded bracket	poly pack	6
M153C-MV		white	mfg. pacl	κ 50
M153C-P		white w/ plug	mfg. pacl	K 50
M153C-BT2		white w/ .180 bullets	mfg. pacl	ς 50
M153C-JAMP		w/ jacketed AMP connector	mfg. pacl	ς 50
M153C-MV-P		white w/ plug	mfg. pacl	< 50
M153C-MV-PKD		white w/ hardshell connector	mfg. pacl	ς 50
150-095		mounting bracket	poly pack	12
B150-095		mounting bracket	mfg. pacl	< 100
B150-142		hooded bracket, black	mfg. pacl	ς 50


See pages 175–177 for additional mounting options.







V153KC-MV kit includes light plus 150-095 bracket






168C Great White® LED Mini Utility Light





- LED utility, interior, compartment, courtesy or auxiliary light.
- Not for use as legally-required marker or license light.
- Two Great White® LEDs provide brilliant white light.
- 9-16 volt operating range.
- Mounts on 1-15/16" centers
- 168-10K kit includes 168-10 chrome bezel and 168-182 gasket.
- 168-092K kit includes 168-092 chrome bezel and 168-181 gasket.
- Optional bracket allows for mounting on 1-15/16" or 1-1/8" centers.
- Mounting gasket, bracket, or chrome bezel available separately.

Order No.	Description	Pack S	td Carton
168C	white	poly pack	12
M168C	white	mfg. pack	50
168-09	black bracket	poly pack	12
B168-09	black bracket	mfg. pack	100
168-10K KIT	chrome bezel w/ gasket	poly pack	12
B168-10	chrome bezel	mfg. pack	100
168-18	mounting gasket	poly pack	12
B168-18	mounting gasket	mfg. pack	100
168-092K KIT	aluminum bracket w/ gasket	poly pack	12
B168-092	aluminum bracket	mfg. pack	50







168-09



168-18





TURN

MARKE

B-U/UTIL

MERG

×

(EFLECT

ACCY

ERCH

ECH ECH

LED LICENSE & UTILITY

171 LED Great White® LED Dot Light™ 1-Diode Utility Light














- Fits 3/4" hole.
- Black rubber grommet Included.
- 9-16 volt operating range.
- Stripped, 8" hardwired leads.
- M171C-BT2 terminated with .180 bullets
- M171W-MV-BT2 multi-volt version available.

Order No.		Description	Pack	Std Carton
V171C	KIT	white, stripped leads	Viz Pack	3
171KC	KIT	white, stripped leads	poly pacl	6
171KC-BT2	KIT	white w/ .180 bullets	poly pacl	6
M171C	KIT	white, stripped leads	mfg. pac	k 50
M171C-BT2	KIT	white w/ .180 bullets	mfg. pac	k 50
M171W-MV-BT2	KIT	white w/ .180 bullets, multi-volt	mfg. pac	k 50



Actual Size




178W Great White® LED **Oval Dome & Utility Light**










- Multi-volt design is compatible with both 12 and 24 volt systems.
- Hardwired with separate lead and ground wires.
- · Mounts on 4" centers.
- Optional chrome bezel available.

Order No.	Description	Pack Std Cart	on
178W-MV	clear	poly pack	12
M178W-MV	clear	mfg. pack	50
178-10	chrome bezel	poly pack	12
B178-10	chrome bezel	mfg. pack 1	00







186W LumenX® Dot XL™LED **Utility Light**












- Mounts in 3/4" diameter hole.
- · Lens is welded to housing to form single rugged unit.
- · Hardwired design with two .180 bullet-terminals.
- 9-16 voltage operating range.
- · Rubber grommet included.

Order No.	Description	Pack	Std Carton
M186W-BT2	white	mfg. pac	k 50





290 Single Diode LED **License & Utility Light**







BACK-UP, LICENSE, UTILITY & DOME

- Surface-mounts on 2" centers.
- Single license light is DOT-compliant when used properly with spacer.
- Available in either 12 volt, or multi-volt ("-MV") for 12V & 24V systems.
- 290C versions have 0.95" spacer for use as top mount license light.
- 290B-P consists of a 290C permanently attached to a polymer license plate
- 290C-SM versions have 1.60" spacer for use as side mount license light.
- 290 comes without spacer for use as low-profile utility light.

Order No.	Description	Pack Std	Carton
V290	utility light	Viz Pack	6
V290C	license light, top mount	Viz Pack	6
290	utility light	poly pack	12
290B-P	license light w/ poly license plate brkt	poly pack	6
290-BT2	utility light, .180 bullets	poly pack	12
290C	license light, top mount	poly pack	12
290C-AMP	license light, top, AMP plug	poly pack	12
290C-BT2	license light, top, .180 bullets	poly pack	12
290-MV	utility light, multi-volt	poly pack	12
290C-MV	license light, top mount, multi-volt	poly pack	12
290C-SM	license light, side mount	poly pack	12
290C-SM-BT2	license light, side mount, .180 bullets	poly pack	12
M290	utility light	mfg. pack	50
M290-MV	utility light, multi-volt	mfg. pack	50
M290B-P	license light with poly bracket	mfg. pack	24
M290-BT2	utility light, .180 bullets	mfg. pack	50
M290C	license light, top mount	mfg. pack	50
M290C-AMP	license light, top, AMP plug	mfg. pack	50
M290C-BT2	license light, top, .180 bullets	mfg. pack	50
M290C-MFP	license light, top, male/female bullets	mfg. pack	50
M290C-MV	license light, top mount, multi-volt	mfg. pack	50
M290C-SM	license light, side mount	mfg. pack	50
M290C-SM-BT2	license light, side mount, .180 bullets	mfg. pack	50
M290C-SM-PKD	license light, side mount, Packard plug	mfg. pack	50
290-09	spacer bracket, top mount	poly pack	12
290-091	spacer bracket, side mount	poly pack	12

UTILITY & AUX 290













290B-P









LS

TURN

MARKER

B-U/UTIL

REFLECT

LED LICENSE & UTILITY



203 LED License Plate/Utility Light



- Polycarbonate lens and base are welded together to form a single rugged unit.
- LED version of our popular 150 series light.
- Side of 203C lens painted to meet license illuminator requirements.
- 203W has clear lens for utility use only.
- V203W includes 150-09 mounting bracket, gasket, and two screws.
- Interchangeable with competitive units.
- Requires mounting bracket and plug to complete installation.
- See pages 175–177 for additional mounting options.


Order No.		Description	Pack	Std Carton
V203C		clear/painted license light	Viz Pack	6
V203W	KIT	utility light kit with bracket	Viz Pack	6
203C		clear/painted license light	poly pac	k 12
203W		utility light	poly pac	k 12
M203C		clear/painted license light	mfg. pac	k 50
M203W		utility light	mfg. pac	k 50
150-09		gray bracket	poly pac	k 12
150-14		gray license light bracket	poly pac	k 24
B150-14		gray license light bracket	mfg. pac	k 100
150-141		black license light bracket	poly pac	k 24
B150-141		black license light bracket	mfg. pac	k 100
142-49		plug	poly pac	k 12
B142-49		plug	mfg. pac	k 100







150-09 mounting bracket





250W Single Diode LED Utility Light








- Single-diode LED utility light.
- Lens is welded to housing to form single rugged unit.
- Hardwired design with two .180 bullet-terminals.
- 9-16 voltage operating range.

Order No.	Description	Pack Std C	arton
M250W-BT2	white	mfg. pack	50
150-095	surface mount bracket	poly pack	12
B150-095	surface mount bracket	mfg. pack	100
B150-18	rubber grommet	mfg. pack	100



291C Single Diode LED 3/4" License Light










- Compact single diode design fits 3/4" hole.
- A single light meets DOT requirements when mounted properly above the center of the license plate.
- · Features theft deterrent locking ring.
- 9-16 voltage operating range.
- Available with AMP plug or 8" or 36" leads with double .180 bullets.
- · Includes mounting grommet.

Order No.		Description	Pac	k :	Std Carton
291KC-BT2	KIT	8" leads w/ .180 bullets	poly	pack	6
M291C-AMP	KIT	AMP plug	mfg	. pack	100
M291C-BT2	KIT	8" leads w/ .180 bullets	mfg	. pack	100
M291C-BT236	KIT	36" leads w/ .180 bullets	mfg	. pack	100



296 LED License Light





- Specially-designed optics for optimal light dispersal.
- A single unit meets DOT requirements when mounted above license plate.
- Requires two lights to meet DOT requirements when mounted to side of license plate.
- "XC" version features attractive chrome finish.

Order No.	Description	Pack	Std Carton
V296XC	chrome	Viz Pack	6
M296C	black	mfg. pac	k 50
M296XC	chrome	mfg. pac	k 50
M296C-PKD	black with Packard plug	mfg. pac	k 50

296XC 296XC 296XC

298 LED License & Utility Light





- Requires two lights to meet DOT requirements.
- Also suitable for utility courtesy light applications.
- Hardwired leads.
- Durable, attractive chrome finish.

Order No.	Description	Pack Std C	arton
V298C	chrome	Viz Pack	6
298C	chrome	poly pack	12
M298C	chrome	mfg. pack	20
M298C-BT2	chrome w/ .180 bullets	mfg. pack	20



INCANDESCENT LICENSE & UTILITY



Compact Courtesy Light






- Rectangular interior, compartment, courtesy, or general illumination utility light with chrome-plated ABS housing.
- Mounts on 2 11/16" centers using lens screws as mounting hardware.
- Twist-in socket assembly contains both lead wire and ground wire for mounting on all surfaces.
- Requires 1 1/4" socket mounting hole for installation.

Order No.	Description	Pack Std Cartor
M126C	clear, chrome	mfg. pack 96
126-25C	replacement lens	poly pack 10
193	replacement bulb	reference only





138

Double Bulls-Eye Utility Light








- · Popular two-bulb light designed for various utility uses.
- Acrylic lens snaps onto housing.
- Surface mounts on 3" centers.
- Unit has single lead wire for electrical connections and grounds through mounting screws.

Order No.	Description	Pack St	d Carton
M138C	clear	mfg. pack	100
B138-15C	replacement lens	bulk pack	100
193/194	replacement bulb	refer	ence only





146 Sealed 2" Utility Light







- Popular 2" clear light is perfect as general illumination utility light.
- High impact resistant lens welded to the housing to form single sealed unit.
- Features 15,000-hour-rated long-life bulb.
- Requires grommet and 2-wire plug to complete installation.
- See mounting accessories for additional mounting options.

Order No.	Description	Pack Std Carto
146C	clear	poly pack 2
M146C	clear	mfg. pack 10
146-18	grommet	poly pack
B146-18	grommet	mfg. pack 10
142-49	plug	poly pack
B142-49	plug	mfg. pack 10



150 Sealed License Plate/Utility Light









- Side of 150C lens painted to meet license illuminator requirements.
- 150W has clear lens for utility use only.
- 150KC includes 150C light and 150-14 gray bracket.
- Interchangeable with competitive units.
- · Requires mounting bracket and plug to complete installation.
- See pages 175-177 for additional mounting options.
- See 203C/203W LED version on page 106.

Order No.		Description	Pack	Std Carton
V150C		clear/painted	Viz Pack	6
V150W		clear	Viz Pack	6
150C		clear/painted	poly pack	24
150KC	KIT	clear/painted w/ gray bracket	poly pack	6
150W		clear	poly pack	6
M150C		clear/painted	mfg. pack	100
M150W		clear	mfg. pack	100
150-09		gray bracket	poly pack	12
150-14		gray license light bracket	poly pack	24
B150-14		gray license light bracket	mfg. pack	100
150-141		black license light bracket	poly pack	24
B150-141		black license light bracket	mfg. pack	100
142-49		plug	poly pack	12
B142-49		plug	mfg. pack	100






150-09 mounting bracket



150-141 mounting bracket



154 Sealed License Plate/Utility Light





- Polycarbonate lens & housing welded as single unit for maximum protection.
- Same quality features as 150C in two-bulb design.
- Requires mounting bracket and plug to complete installation.
- See page 177 for mounting options.

Order No.	Description	Pack Std Carton
154C	clear/painted	poly pack 24
M154C	clear/painted	mfg. pack 100














394C Step Well Utility Light



- Features chrome-plated brass housing and hood, with glass lens.
- Durable neoprene mounting pad.
- Perfect utility light for bus or RV applications.
- May be mounted vertically or horizontally.
- Includes single lead wire and grounds through mounting screws.

Order No.	Description	Pack Std	Carton
M394C	clear, with hood	mfg. pack	50
1141	21 cp replacement bulb	reference only	

B-U/UTIL

INCANDESCENT LICENSE & UTILITY



License Plate Light






- Features our patented Vibar® socket and single lens screw for easy bulb replacement.
- Meets DOT requirements when mounted above license plate.
- Polycarbonate lens and ABS housing provide protection against damage and all internal parts are corrosion-resistant.
- Surface mounts with two screws on 1 3/4" centers.
- Grounds through the mounting screws.

Order No.	Description	Pack Std Cartor
400	clear	poly pack 24
M400	clear	mfg. pack 48
168	replacement bulb	reference only





434


Mini Utility/Courtesy Light



- Features bright metal housing with hooded shield to prevent upward glare.
- Surface mounts with two stainless-steel screws on 2" centers.
- · Separate ground wire for non-metallic surfaces.

Order No.	Description	Pack Std Carton
V434	clear	Viz Pack 6
M434	clear	mfg. pack 100
193/194	replacement bulb	reference only





435

Chrome License Plate Light






• Traditional style, bulb-replaceable light surface mounts on 2" centers and grounds through mounting screws.

• Features chrome-plated steel housing and mounting bracket.

- Interchangeable with competitive models.
- Meets FMVSS108 requirements when used in pairs. Lights must be mounted 2"-3" above license plate, 6" apart.

Order No.	Description	Pack Std	Carton
V435	clear	Viz Pack	6
435	clear	poly pack	24
M435	clear	mfg. pack	48
67	replacement bulb	referer	nce only






License Plate Light






- Features patented Vibar® socket, tough polycarbonate lens, and ABS hood.
- All internal parts are durable stainless-steel or tinned-brass.
- Surface mounts on 3 1/4" centers.
- 436B includes black powder-coated, steel license plate bracket riveted to
- 436B-P includes black polypropylene bracket riveted to light; has separate
- 436 and 436B ground through mounting hardware.
- See 296 LED version on page 107.

Order No.	Description	Pack St	d Carton
436	clear	poly pack	24
M436	clear	mfg. pack	48
M436B	clear with steel bracket	mfg. pack	24
M436B-P	clear with poly bracket	mfg. pack	24
436-25	replacement lens	poly pack	10
436-01	gray housing	poly pack	24
168	replacement bulb	refere	ence only

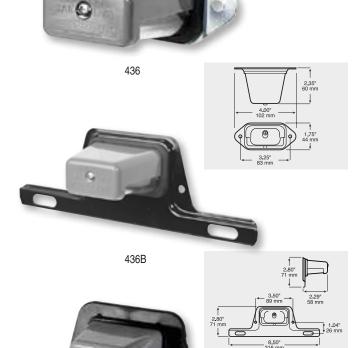








436X Chrome, Stud-Mount

- Features our patented Vibar® socket and single lens screw for easy bulb
- Chrome-plated version of 436 light with stud mount.
- · Ideal as replacement light for foreign car license illuminators or for customizing trucks, vans, and trailers.
- Single lead wire for electrical connection; grounds through mounting bolts.

Order No.	Description	Pack Std Carto
V436SX	clear	Viz Pack
436SX	clear	poly pack 2
436-25	replacement lens	poly pack 1
168	replacement bulb	reference onl





INCANDESCENT LICENSE & UTILITY




Chrome License Plate/Utility Light



- Features chrome-plated hood, steel housing, and polycarbonate lens.
- 437 includes single lead wire with molded .156 bullet terminal and grounds through mounting hardware.
- · Similar to styling on some GM vehicles.
- · Requires 2" mounting hole.
- Two units required for legal license illumination.

Order No.	Description	Pack Std Ca	arton
V437	clear	Viz Pack	6
M437	clear	mfg. pack	48
67	replacement bulb	reference	only



432 Chrome / 438 Sealed Chrome License Plate / Utility Light






- Chrome-plated steel light snaps into 1 1/4" diameter hole (overall diameter is 1 1/2")
- Commonly used to illuminate license plate on step bumpers.
- Two units required for legal license illumination.
- Also serves as perfect interior, compartment, courtesy, or general illumination utility light.
- 438 series is sealed with single 5.5" lead wire.
- 432 series is bulb replaceable with twist-in rubber socket and dual 14" lead wires.
- See 298 LED version on page 107.



Order No.	Description	Pack S	td Carton
V432	clear, bulb replaceable	Viz Pack	6
V438	clear, sealed	Viz Pack	6
438	clear, sealed	poly pack	20
M432	clear, bulb replaceable	mfg. pack	50
M438	clear, sealed	mfg. pack	100
168	replacement bulb	refei	rence only





439 Sealed License Plate Light





- Popular style sealed, surface mount license light.
- Polycarbonate lens and housing are sonic welded for water-tight seal.
- Mounts on 2 3/4" centers.
- Requires 142-49 plug for electrical connection.

Order No.	Description	Pack Std	Carton
M439	clear	mfg. pack	48
142-49	plug	poly pack	12
B142-49	plug	mfg. pack	100



362/363/364 Great White® LED **Interior Strip Light**



- Fully potted construction, yet very flexible.
- Installs easily with super-strong "press-in-place" adhesive backing.
- Available in 12", 24" & 47" lengths.
- "-2" versions have leads on both ends for daisy-chaining to 16' max.
- 9-16 voltage operating range.
- · Perfect for aisle lighting and use in service bodies.
- Each manufacturer pack contains ten (10) strips per inner bag except M362-1-BT2, M364-1, M364-1-BT2 and M364-1PKD.
- · Poly pack contains one strip per bag.

Order No.	Description	Pack	Std Carton
362-1	12" single lead wire	poly pack	(10
362-2	12" lead wires on both ends	poly pack	(10
363-1	24" single lead wire	poly pack	(10
363-2	24" lead wires on both ends	poly pack	(10
M362-1	12" single lead wire	mfg. pac	k 10
M362-1-BT2	12" single lead wire, .180 bullets	mfg. pac	k 100
M362-2	12" lead wires on both ends	mfg. pac	k 10
M362-2-BT2	12" leads both ends, .180 bullets	mfg. pac	k 100
M363-1	24" single lead wire	mfg. pac	k 10
M363-1-BT2	24" single lead, .180 bullets	mfg. pac	k 10
M363-1PKD	24" single lead, Packard plug	mfg. pac	k 10
M363-2	24" lead wires on both ends	mfg. pac	k 10
M363-2-BT2	24" leads both ends, .180 bullets	mfg. pac	k 100
M364-1	47" single lead wire	mfg. pac	k 6
M364-1-BT2	47" single lead, .180 bullets	mfg. pac	k 100
M364-1PKD	47" single lead, Packard plug	mfg. pac	k 100




360 Great White® LED **Rectangular Dome Light**









- LED dome and interior light is perfect for dry van trailer applications.
- Mounts flush; thin design extends only 0.86" below mounting surface.
- 9-32 volt operating range.
- Fully potted circuit board.
- Available with polycarbonate or aluminum housing.
- Hard-wired with dual 8" long, 14 ga. stripped leads.
- Operating temperature -40 to +122 F (-40 to +50 C).

Order No.	Description	Pack St	d Carton
M360-1	polycarbonate, stripped leads	mfg. pack	1
M360	aluminum housing, stripped	mfg. pack	10
M360-BT2	aluminum, .180 bullets	mfg. pack	10



365 Great White® LED **Motion Sensing Dome Light**







- LED dome and interior light.
- · Built-in motion sensor automatically activates light.
- Light stays illuminated for approx. 5 minutes unless new motion occurs.
- Mounts flush, thin design extends only 0.86" below mounting surface.
- 9-32 voltage operating range.
- · Rugged aluminum housing and potted circuit board.
- Hardwired with dual 8.5" long, 14 gauge stripped leads or .180 bullet terminals.

Order No.	Description	Pack Std Ca	rton
M365	white, stripped leads	mfg. pack	10
M365-BT2	white, .180 bullets	mfg. pack	10

LED DOME & INTERIOR LIGHTS





Optimized profile and flat mounting tabs on both ends easily screw-mount to flat surfaces.



358 Great White® LED **Dome/Interior Light**










- Available in 6", 12" and 18" lengths.
- Easy and versatile surface screw mounting; ideal for center ceiling mount in step vans and service bodies.
- Multi-volt design is compatible with both 12V and 24V systems.
- Available with either stripped leads or terminated with .180 bullets.
- Integral, IP68-rated molded seal resists dust, moisture and vapors.
- Optional timer switch available separately.
- The 18-inch version is available with wires at both ends for daisy-chaining multiple lights together.
- Optional timer switch available separately; see page 215.

Order No.	Description	Lumens	Pack	Std Carton
358-1	6" long, stripped leads	300	poly pack	12
358-2	12" long, stripped leads	500	poly pack	12
358-3	18" long, stripped leads	1000	poly pack	12
M358-1	6" long, stripped leads	300	mfg. pacl	50
M358-1-BT2	6" long, .180 bullets	300	mfg. pack	c 50
M358-2	12" long, stripped leads	500	mfg. pacl	50
M358-2-BT2	12" long, .180 bullets	500	mfg. pacl	50
M358-3	18" long, stripped leads	1000	mfg. pack	5 0
M358-3-BT2	18" long, .180 bullets	1000	mfg. pacl	c 50
M358-4	18" long, dual-end stripped lead	ds 1000	mfg. pacl	c 50
M358-4-BT2	18" long, dual-end .180 bullets	1000	mfg. pack	50

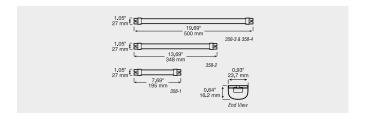

SEALED Suitable for exterior use



Mounts easily to horizontal or vertical surfaces, or fits in corners using either screws or available snap-in channel clip (sold separately).



BACK-UP, LICENSE, UTILITY & DOME

359 Great White® LED Dome/Interior Light








- RD FMV Multi-Volt 12V & 24V
- Available in 6", 12" and 18" lengths.
- More effective light distribution than recessed dome lights.
- No mounting pan needed, so the R-value of insulated cargo areas is not reduced.
- Easy and versatile surface screw mounting on any vertical or horizontal surface.
- Multi-volt design is compatible with both 12V and 24V systems.
- Available with either stripped leads or terminated with .180 bullets.
- Integral, IP68-rated molded seal resists dust, moisture and vapors.
- Accessory cove molding facilitates easy wiring for retrofits.
- Optional timer switch available separately; see page 215.

Order No.	Description	Lumens	Pack	Std Carton
359-1	6" long, stripped leads	300	poly pack	12
359-2	12" long, stripped leads	500	poly pack	12
359-3	18" long, stripped leads	1000	poly pack	12
M359-1	6" long, stripped leads	300	mfg. pacl	< 50
M359-1-BT2	6" long, .180 bullets	300	mfg. pacl	< 50
M359-2	12" long, stripped leads	500	mfg. pacl	< 50
M359-2-BT2	12" long, .180 bullets	500	mfg. pacl	< 50
M359-3	18" long, stripped leads	1000	mfg. pacl	ς 50
M359-3-BT2	18" long, .180 bullets	1000	mfg. pacl	< 50
M359-4	18" long, dual-end stripped lead	ds 1000	mfg. pacl	ς 50
M359-4-BT2	18" long, dual-end .180 bullets	1000	mfg. pacl	< 50
B359-10	snap-in channel clip		mfg. pacl	< 100

The 18-inch version is available with wires at both ends for daisy-chaining multiple lights together.










The same trailer with our new 359-3 lights installed is much more efficiently lit, despite lower costs up front and over the life of the trailer.



LS

JURN

RER _

B-U/UTIL

SPEC

EMERG

MOUNT

EFLECT


\CC\

ERCH

E E

LED DOME & INTERIOR LIGHTS





368 Great White® LED **Dome/Interior Light**









- 5.8" x 2.8" rectangular LED dome and interior light.
- White plastic housing and clear lens.
- Separate lead and ground wires included.
- Available with stripped leads.
- Mounts on 4-11/16" (119 mm) centers.
- For interior use only.
- 9-32 voltage operating range.
- · Replaces V366 series.

Order No.	Description	Pack Std Carto	n
V368	white, stripped leads	Viz Pack	6
368	white, stripped leads	poly pack 1	12
M368	white, stripped leads	mfg. pack 5	50



369 Great White® LED Rotating Interior Light w/ Switch










- 12" interior swivel rail light.
- Equipped with on-off switch.
- White plastic housing & clear lens.
- · Hardwired with separate lead and ground wire.
- For interior use only.
- 10-30 voltage operating range.

Order No.	Description	Pack Std Carton
V369S	white	Viz Pack 4





370 Great White® LED **Interior Swivel Light**







- Long-life LED design.
- · Swivels to direct beam where needed.
- · Low-glare reflector housing.
- · Polished metal base.
- 10-30 volt operating range.
- · Hardwired with Tyco Mate-N-Lok connector.

Order No.	Description	Pack	Std Carton
M370	round	mfg. pad	ck 50

371S

371 Great White® LED **Interior Swivel Light**





- Long-life LED design.
- · Swivels to direct beam where needed.
- Low-glare reflector housing.
- Brushed-finish metal base.
- 10-30 volt operating range.
- Available with or without on/off switch.
- Includes TE Mate-N-Lok connector, #1-480699-0.

Order No.	Description	Pack	Std Carton
M371	rectangular base	mfg. pa	ck 50
M371S	rectangular w/switch	mfg. pa	ck 50





379 Great White® LED Dome/Interior Light w/ Switch










- 5.5" diameter round dome light.
- Equipped with on-off switch.
- White plastic housing & clear lens.
- Lens removes for mounting.
- For interior use only.
- 10-30 volt operating range.

Order No.	Description	Pack	Std Carton
V379S	white	Viz Pack	4





381 Great White® LED **Dome/Interior Light**







- Round dome light with black or chrome bezel
- General illumination for interior applications
- 9-16 volt operating range
- Two hardwired leads

Order No.	Description	Pack Std Carton
V381X	chrome	Viz Pack 6
M381	black	mfg. pack 50
M381X	chrome	mfg. pack 50

LED DOME & INTERIOR LIGHTS

388C Great White® LED Int/Ext Aisle & Utility Light









- Includes bracket for surface mounting, or can be recess-mounted.
- 388C features Great White® diodes and black bracket.
- 388WB features blue diodes and white bracket; great for marine use!
- Optional chrome accessory bracket available.
- Recessed or surface mount LED strip light.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Low amp draw.
- · Perfect for aisle lighting.

Order No.	Description	Pack Std C	arton
V388C	white w/ black bracket	Viz Pack	6
V388WB	blue w/white bracket	Viz Pack	6
388C	white w/ black bracket	poly pack	12
388WB	blue w/white bracket	poly pack	12
M388C	white w/ black bracket	mfg. pack	10
M388WB	blue w/white bracket	mfg. pack	10
388-09X	chrome bracket	poly pack	12
B388-09X	chrome bracket	mfg. pack	50





Optional B388-09X chrome bracket

397 LED Step Well Courtesy Light












- · Low profile, hardwired design meets ADA requirements for step well lighting.
- · Perfect for transit, bus & RV use.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- · Sealed circuit board with two hardwired leads.
- Includes mounting gasket, 3 mounting screws and 3 matching screw covers.

Order No.	Description	Pack	Std Carton
397C	black, stripped leads	poly pac	k 12
M397C	black, stripped leads	mfg. pad	ck 50



398/399 Great White® LED 3" x 1.75" Rectangular Work Light







- · White diodes behind clear lens.
- · Cast alloy housing.
- Two mounting bases; flat/perpendicular (398) or angled (399)
- Wide even flood pattern with 500 lumen output.
- Two 20" jacketed lead wires terminated with .180 bullet connectors
- 10-30 volt operating range
- -22° F-120° F operating temperature range
- Includes rubber mounting base
- IP67/IP69K ingress protection rating
- Draws 0.39 amps @ 12V, 0.20 amps @ 24V


Order No.	Description	Pack Std	Carton
398-BT2	white flood pattern, flat base	poly pack	6
M398-BT2	white flood pattern, flat base	mfg. pack	60
M399-BT2	white flood, wedge base	mfg. pack	60

398-BT2 399-BT2 118

LED DOME & INTERIOR LIGHTS







BACK-UP, LICENSE, UTILITY & DOME

423W-4 Great White® LED Int/Ext Dome& Utility Light






- Features 10 bright Great White® diodes behind clear lens.
- · Sealed lens and housing.
- 9-32 volt operating range works with both 12V and 24V systems.
- · Hardwired design.
- · Easy surface mounting.
- Attractive accessory chrome bezel available.

Order No.	Description	Pack Std Carton
423W-4	white	poly pack 6
M423W-4	white	mfg. pack 50
423-11	chrome bezel	poly pack 12
B423-11	chrome bezel	mfg. pack 50





870W LumenX[®] LED Oval Touch-On, Touch-Off Interior/Dome Light













- · Turns on and off with a simple touch of the lens surface.
- 400 lumen max output.
- · Lens is welded to housing to form single unit.
- 9–32 volt operating range is compatible with 12V and 24V systems.
- Mounts in grommet or surface-mount bracket.
- Surface-mount bracket available in chrome or black finish.

Order No.	Description	Lumens	Pack	Std Carton
870W	oval, stripped leads	400	poly pack	6
M870W	oval, stripped leads	400	mfg. pacl	< 50
M870W-BT2	oval, .180 bullets	400	mfg. pacl	ς 50
820-09	black oval bracket		poly pack	12
820-10	chrome oval bracket		poly pack	12
421-18	oval grommet		poly pack	12





872W LumenX® LED Touch-On, Touch-Off Interior/Dome Light













- Turns on and off with a simple touch of the lens surface.
- 400 lumen max output.
- Lens is welded to housing to form single unit.
- 9-32 volt operating range is compatible with 12V and 24V systems.
- Mounts in grommet or surface-mount bracket.
- Surface-mount bracket available in chrome or black finish.

Order No.	Description	Lumens	Pack	Std Carton
872W	round, stripped leads	400	poly pack	6
M872W	round, stripped leads	400	mfg. pac	k 50
M872W-BT2	round, .180 bullets	400	mfg. pac	k 50
817-09	black round bracket		poly pack	λ 12
817-10	chrome round bracket		poly pack	λ 12
426-18	round grommet		poly pack	√ 12

INCANDESCENT DOME & INTERIOR


380

Interior Dome/Utility Light

- Surface-mount light perfect for dome or utility light applications.
- On/off rocker switch.
- White powder-coated metal housing.
- Polycarbonate lens is secured with three screws for easy bulb replacement.
- Includes two wires: .156 male bullet and .156 female plug.

Order No.	Description	Pack Std Ca	rton
M380S	white light w/ switch	mfg. pack	50
380-25C	clear repl. lens	poly pack	10
1141	replacement bulb	reference	only





382

Euro-Style Oval Porch/Utility Light With Switch




- · Includes rocker on/off switch.
- 382 features two 5.5" lead wires.
- Viz Pack includes both clear and amber lenses.
- · Polycarbonate lens is secured with three screws.
- · CSA approved.
- Plastic base for corrosion-free service.


Order No.	Description	Pack Std Ca	rton
V382S	amber/clear w/ switch	Viz Pack	6
M382C	clear w/ switch	mfg. pack	50
383-25C	clear repl. lens	poly pack	10
383-25A	amber repl. lens	poly pack	10
1141	replacement bulb	reference	only






Viz Pack includes extra amber lens.







384/385 Rectangular Porch/Utility Lights



- Surface mount porch or utility light available with or without switch.
- Snap-in lens allows for easy bulb replacement.
- · Contains separate ground wire.
- Viz Packs include both clear and amber lenses.
- 384 series has polar white base.
- 385 series has colonial white base.


Order No.	Description	Pack S	td Carton
V384	polar white kit w/o switch	Viz Pack	6
V384S	polar white kit w/ switch	Viz Pack	6
V385S	colonial white kit w/ switch	Viz Pack	6
M385S	colonial w/ switch, clear lens	mfg. pack	50
384-15A	amber repl. lens	poly pack	10
384-15C	clear repl. lens	poly pack	10
93	replacement bulb	refe	rence only

389

Dome Light

- Durable 12-volt interior dome light with switch.
- For bright general illumination.
- Plastic translucent lens snaps securely onto base.
- Aluminum base for corrosion-free service.
- Surface mounts with single lead wire for electrical connection.
- Grounds through mounting screw.

Order No.	Description	Pack Std Carton
389S	aluminum	poly pack 12
M389S	aluminum	mfg. pack 48
389-15C	replacement lens	poly pack 10
1141	replacement bulb	reference only



390


Dome Light



- Durable 12-volt interior dome light with switch.
- For bright general illumination.
- Plastic translucent lens snaps securely onto base.
- Plastic base for corrosion-free service.
- Surface mounts and grounds through base.
- Single lead wire supplied for electrical connection.

Order No.	Description	Pack Std Carton
V390S	plastic	Viz Pack 6
M390S	plastic	mfg. pack 48
1141	replacement bulb	reference only





391


Interior Light



- Polycarbonate 12-volt interior dome light with nylon switch.
- For bright general illumination.
- Metal base surface mounts with screws on 3 1/2" centers.
- Separate ground and lead wires supplied for electrical connection.

Order No.	Description	Pack Std Carto
V391C	clear	Viz Pack
M391	clear	mfg. pack
391-25	replacement lens	mfg. pack
1141	replacement bulb	reference or






395

Dome/Utility Light

- Interior or exterior, surface-mount, clear RV utility light.
- Stainless-steel housing and gasketed acrylic lens.
- · Weather-resistant mounting gasket.
- CSA Approved.
- Separate 5.75" lead and ground wires for electrical connection.

Order No.	Description	Pack Std Carton
M395C	clear	mfg. pack 25
700-15C	replacement lens	poly pack 10
1156	replacement bulb	reference only





MARK

B-U/UTIL

S =

FMFR

MOUNT


CELEC

ERCH

H

LED HEADLIGHTS







701C Great White® LED 7" PAR 56 Headlight










- 1100/1650 lumen output (low/high beam).
- · Wider, more even pattern than halogen bulbs.
- Designed to last many times longer than a traditional sealed beam.
- Multivolt design is compatible with both 12V and 24V systems.
- Low power consumption draws only 0.7-1.9 amps.
- DOT-legal; exceeds FMVSS-108 and CMVSS-108 requirements.
- Meets applicable SAE standards.
- Drop-in LED replacement for all PAR56 7-inch standard headlights, including popular H6014, H5024 and H6024 halogen sealed beams.
- 5400k~6400k color temperature closely matches natural daylight.
- UV- and impact-resistant, hard-coated polycarbonate lens
- · Standard H4 3-blade terminals integrated directly into the heavy-duty cast alloy rear housing.
- Requires 701-491 anti-flicker harness for use on CANBUS-equipped vehicles, including '07 and newer Jeep Wrangler.
- · Does not function as a daytime running light (DRL).
- V701KC-2 Kit includes two 701C headlights & two 701-491 anti-flicker
- See ECE version on page 158 for markets with left-hand traffic.
- · IP66 ingress rating.

Order No.		Description	Pack !	Std Carton	
V701C		LED 7" PAR56 repl.	Retail Box	(1
V701KC-2	KIT	LED 7" PAR56 Twin Pack	Viz Pack I	Зох	2*
701C		DOT-compliant	box		1
M701C		DOT-compliant	mfg. pack		4
701-491		anti-flicker harness	poly pack		1

*Two kits of two lights each per master carton







702C/703C Great White® LED **Rectangular Quad Headlights**












- 702C is an SAE Type 2A1 low beam w/ 4-diode, single-chip assembly.
- 703C is an SAE Type 1A1 high beam w/ 6 diodes.
- Greater vibration & shock resistance for longest available service life.
- Multivolt design is compatible with both 12V and 24V systems.
- · Heavy-duty polycarbonate/cast alloy housing.
- UV & impact resistant, hard-coated polycarbonate lens.
- · Vacuum metallized reflector.
- 800 (702C) & 1000 (703C) source lumens.
- Low power draw: 10.25 watts (702C) & 17 watts (703C).
- DOT-legal; exceeds FMVSS-108 and CMVSS-108 requirements.
- 5200k ~6000k (702C) & 5200k ~6300k (703C) color temperature.
- 3.5", 18 gauge, hardwired leads terminated w/ standard H4 terminals.
- · IP66 ingress rating.

Order No.	Description	Pack Std Carton	
V702C	4"x6" low beam	Retail Box	2
V703C	4"x6" high beam	Retail Box	2
702C	4"x6" low beam	box	1
703C	4"x6" high beam	box	1

*Physical configuration and electrical compatibility does not guarantee legal compliance in OE or retrofit applications. Refer to vehicle manufacturers' specifications and government and SAE documentation regarding headlight requirements and aiming standards. The 702C low-beam function headlight is designed only for use as part of a four-lamp integrated system of the type shown above. It is not designed or sold as a replacement for a dual function (high/low beam) headlight. Federal law requires that horizontal adjustment be disabled for the 702C










705C Great White® LED **Rectangular Headlight**










- 800/1600 lumen output (low/high beam).
- Wider, more even pattern than halogen bulbs.
- Designed to last many times longer than a traditional sealed beam.
- Multivolt design is compatible with both 12V and 24V systems.
- Low power consumption draws only 0.51–2.23 amps.
- DOT-legal; exceeds FMVSS-108 and CMVSS-108 requirements.
- Meets applicable SAE standards.
- 5200k~6000k color temperature.
- Heavy-duty black polycarbonate/cast alloy housing.
- UV- and impact-resistant, hard-coated polycarbonate lens.
- -30° C to 50° C (-22° F to 122° F) operating temperature range.
- Hardwired w/ standard H4 3-blade connector.
- · IP67 ingress rating.

Order No.	Description	Pack Std Carton
V705C	5"x7" high & low beam	Retail Box 2
705C	5"x7" high & low beam	box 1

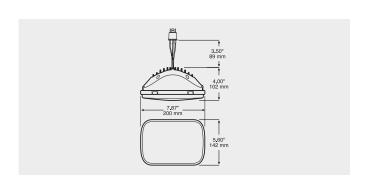



711 Great White® LED PAR 36 LED Replacement Beam








- High-output Great White® diodes for a bright general illumination.
- Fits all standard Par 36 incandescent sealed beam applications.
- Impact-resistant polycarbonate lens.
- Cast aluminum body with matte black finish.
- Compatible with both 12 and 24-volt systems.
- Self-service visual packaging.
- See pedestal-mount 908S version on page 127.

Order No.	Description	Pack Std C	arton
V711	round	Viz-Pack	6
711	round	mfg. pack	20



LED WORK LIGHTS



817-9 LumenX[®] LED 4" Round Work Light















- New white diodes behind clear lens.
- Available in 450 lumen & 800 lumen versions.
- · Advanced optics fully illuminate lens.
- Flood pattern for broad illumination.
- Also suitable for dome or utility light.
- Regulated design provides voltage protection and consistent light output over a wide voltage range.
- Skirted weld joint provides added protection against road and weather conditions.
- 817 series has 9–32 volt operating range. 800 series is compatible with 12 volt systems only.
- 800 series draws 0.65A @ 14V.
- 817/818 series draws 0.29A @ 12V, 0.22A @ 24V.
- M800W-9 & M817W-9 require grommet or surface-mount bracket.
- M800WF-9 M818W-9 are equipped with integral mounting flange.

Order No.	Description	Pack S	Std Carton
800W-9	grommet mnt, 800 lumen, 12V	poly pack	6
800WF-9	flange mnt, 800 lumen, 12V	poly pack	6
817W-9	grommet mnt, 450 lumen, MV	poly pack	6
818W-9	flange mount, 450 lumen, MV	poly pack	6
M800W-9	grommet mnt, 800 lumen, 12V	mfg. pack	50
M800WF-9	flange mnt, 800 lumen, 12V	mfg. pack	50
M817W-9	grommet mnt, 450 lumen, MV	mfg. pack	50
M818W-9	flange mount, 450 lumen, MV	mfg. pack	50
417-1	surface mount bracket	mfg. pack	40
426-18	grommet	poly pack	12
B426-18	grommet	mfg. pack	100
417-48	hardshell plug	poly pack	6
B417-48	hardshell plug	mfg. pack	100
817-48	molded plug	poly pack	12
B817-48	molded plua	mfg. pack	100







901 Great White® LED 2" Round Mini Work Light













- · High-output single white diode for a bright, narrow spot beam pattern.
- · Impact-resistant polycarbonate lens.
- Die-cast aluminum body with matte black finish.
- · Heat dissipating fins for durability and longevity.
- · High vibration resistance and low amp draw.
- Compatible with both 12 and 24-volt systems.
- 9-48 VDC operating range.
- · Reverse voltage protection.
- Draws 1.3A @ 12V, 0.65 @ 24V.
- 2-Conductor black PVC jacketed harness 20 GA GPT.
- IP68 rated.
- Stainless steel mounting hardware.
- · EMC certified.

Order No.	Description	Pack	Std Carton
V901-MV	round	Viz-Pack	4
901-MV	round	box	1







903 Great White® LED 3" x 5" Rectangular Work Light













- · Bright, even flood pattern.
- Extra-rugged, commercial-grade construction.
- · Impact-resistant polycarbonate lens.
- Die-cast aluminum body with black finish.
- · Heat dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- Compatible with both 12 and 24-volt systems.
- 9-32 VDC operating range.
- · Reverse voltage protection.
- Draws 2.65A @ 12V, 1.0A @ 24V.
- · 2-Conductor black PVC jacketed harness.
- IP67 rated.
- · Stainless steel mounting hardware.
- · Certified to ECE Reg 10.

Order No.	Description	Pack	Std Carton
903-MV	rectangular, stripped leads	box	1
903-MV-PKD	rectangular, hardshell connector	box	1



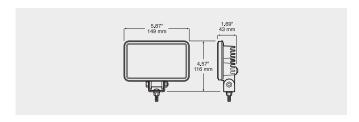



904 Great White® LED 3" x 3" Square Work Light













- · Bright, even flood pattern.
- Impact-resistant polycarbonate lens.
- Die-cast aluminum body with matte black finish.
- Heat dissipating fins for durability and longevity.
- · High vibration resistance and low amp draw.
- Compatible with both 12 and 24-volt systems.
- 9–36 VDC operating range.
- Reverse voltage protection.
- Draws 0.98A @ 12V, 0.43A @ 24V.
- 2-Conductor black PVC jacketed harness 20 GA GPT.
- Operating temperature: -40° +65° C.
- Color temperature: 6300k.
- · Certified to ECE Reg 10.
- IP67 rated.
- Stainless steel mounting hardware.

Order No.	Description	Pack Std Ca	rton
V904-MV	square	Viz-Pack	4
904-MV	square	box	1
904-MV-BT2	square, .180 bullets	box	1





LED WORK LIGHTS







Available with integrated AMP-compatible receptacle on rear

905 LED 3" x 3" Pedestal-Mount Work Light












- Low profile, light-weight design is just 1.39" thin.
- Optimized work light beam pattern for even general area illumination.
- Reinforced mounting insert and stainless steel mounting hardware.
- Rugged textured polymer housing and lens.
- · High vibration resistance and low amp draw.
- · Stainless steel mounting hardware.
- 9-32 volt operating range.
- IP67 ingress rating
- Draws 0.40 amps @12V, 0.21 amps @24V.
- 905-MV has two hardwired, stripped leads.
- M905-MV-AMP has integrated AMP-compatible receptacle built into rear
- M905-MV-BT2 has two hardwired leads with .180 bullet connectors.

Order No.	Description	Pack Std C	arton
V905-MV	stripped leads	Viz Pack	3
905-MV	stripped leads	poly pack	6
M905-MV	stripped leads	mfg. pack	60
M905-MV-AMP	AMP-compatible receptacle	mfg. pack	60
M905-MV-BT2	.180 bullets	mfg. pack	60







906 LED 3" x 5" Pedestal-Mount Work Light

Available with integrated AMP-compatible receptacle on rear











- Low profile, light-weight design is just 1.39" thin.
- Optimized work light beam pattern for even general area illumination.
- Reinforced mounting insert and stainless steel mounting hardware.
- Rugged textured polymer housing and lens.
- · High vibration resistance and low amp draw.
- · Stainless steel mounting hardware.
- 9-32 volt operating range.
- · IP67 ingress rating
- Draws 0.81 amps @12V, 0.41 amps @24V.
- 906-MV has two hardwired, stripped leads.
- M906-MV-AMP has integrated AMP-compatible receptacle built into rear
- M906-MV-BT2 has two hardwired leads with .180 bullet connectors.

Order No.	Description	Pack Std Ca	arton
V906-MV	stripped leads	Viz Pack	3
906-MV	stripped leads	poly pack	6
M906-MV	stripped leads	mfg. pack	50
M906-MV-AMP	AMP-compatible receptacle	mfg. pack	50
M906-MV-BT2	.180 bullets	mfg. pack	50





or 800









- Extremely even, flood pattern for broad illumination.
- Also suitable for use as a utility light.
- Sealed LED work light installed in rubber housing with lead wires.
- Available in multi-volt and 12 volt version.
- 908 draws 0.65A @ 14V.
- 907-MV draws 0.29A @ 12V, 0.22A @ 24V.


Order No.	Description	Pack Std Car	ton
V908	800 lumen, 12V	Viz Pack	6
907	450 lumen, multi-volt	poly pack	6
M907-MV	450 lumen, multi-volt	mfg. pack	24
M908	800 lumen, 12V	mfg. pack	24




908S Great White® LED 4" Round Work Light











- Two lead wires terminated with .180 bullets.
- Multi-volt design is compatible with both 12-volt and 24-volt systems.
- Draws 1.45A @ 12V, 0.72A @ 24V.

Order No.	Description	Pack	Std Carton
M908S-MV-BT2	900 lumen, multi-volt, with switch	mfg. pa	ck 24

lux ______1

911 Great White® LED **Pedestal-Mount Work Light**











- High-output Great White® diodes for a bright, even, round pattern.
- Extra-rugged, commercial-grade construction.
- · Cast aluminum body with heat-dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- 9–32 volt operating range.
- Draws 1.65A @ 12.8V, 0.78A @ 28V.
- · Comes complete with stainless steel mounting hardware.

Description	Pack	Std Carton
round	box	1
w/hardshell connector	box	1
w/.180 bullets	box	1
	round w/hardshell connector	round box w/hardshell connector box

Weatherproof, push-on/

push-off switch

LED WORK LIGHTS



910 Great White® LED **Pedestal-Mount Work Light**











- High-output Great White® diodes for a bright, even, flood pattern.
- Die-cast aluminum body with heat-dissipating fins for durability & longevity.
- · High vibration resistance.
- 10-30 volt operating range.
- Draws 1.2A @ 13.5V, 0.59A @ 28V.
- Operating temperature: -40° +65° C.
- · Comes complete with stainless steel mounting hardware.
- IP67/IP69K Rated.
- · RoHS compliant.
- · Certified to ECE Reg 10.

Order No.	Description	Pack St	d Carton
V910-MV	stripped leads	Viz-Pack	4
910-MV	stripped leads	box	1
910-MV-BT2	w/ .180 bullets	box	1
910-MV-PKD	w/hardshell connector	box	1



910M Great White® LED **Magnetic-Mount Work Light with Switch**












- Same great features as 910-MV, but in a magnetic, temporary-mount light.
- · Strong magnetic-mount base has no-scratch, rubberized face.
- · Rear-mounted on/off toggle switch.
- 8-foot, quick-disconnect coil cord with 12V accessory plug.
- · Handy grab handle makes carrying and repositioning light easy.

Order No.	Description	Pack	Std Carton
V910M-MV	stripped leads	Viz-Pack	3
910M-MV	stripped leads	box	1



921 Great White® LED **Pedestal-Mount Work Light**











- High-output Great White[®] diodes for a bright, even, flood pattern.
- · Die-cast aluminum body with heat-dissipating fins for durability & longevity.
- · High vibration resistance.
- 10-30 volt operating range.
- Draws 1.2A @ 13.5V, 0.59A @ 28V.
- Operating temperature: -40° +65° C.
- · Comes complete with stainless steel mounting hardware.
- IP67/IP69K Rated.
- · RoHS compliant.
- · Certified to ECE Reg 10.

Order No.	Description	Pack Std Carton
V921-MV	stripped leads	Viz-Pack 4
921-MV	stripped leads	box 1
921-MV-BT2	20" leads, .180 bullets	box 1



912 Great White® LED 3" Round Work Light





- High-output Great White® diodes for a bright, even flood pattern.
- Impact-resistant polycarbonate lens.
- Cast aluminum body with heat-dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- 9–32 VDC operating range is compatible with 12 and 24-volt systems.
- Reverse voltage protection.
- Draws 1.11A @ 12V, 0.61A @ 24V.
- · 2-Conductor black PVC jacketed harness 18 GA GPT.
- Operating temperature: -40° +65° C.
- Color temperature: 6500k.
- · IP67 rated.
- · Stainless steel mounting hardware.


Order No.	Description	Pack	Std Carton
V912-MV	round	Viz Pack	4
912-MV	round	box	1


913 Great White® LED 3" x 3" Compact Work Light




- High-output Great White® diodes for a bright, even flood pattern..
- Cast aluminum body and Impact-resistant polycarbonate lens are IP67 rated.
- · Heat-dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- 9-32 VDC operating range is compatible with 12 and 24-volt systems.
- Reverse voltage protection.
- Draws 1.3A @ 12V, 0.65A @ 24V.
- · 2-Conductor black PVC jacketed harness 18 GA GPT.
- Operating temperature: -40° +65° C.
- Color temperature: 6500k.
- Certified to ECE Reg 10.
- · Stainless steel mounting hardware.

Order No.	Description	Pack	Std Carton
V913-MV	square	Viz-Pack	4
913-MV	square	box	1
913MV-AMP	square w/ AMP connection	box	1
913MV-BT2	square w/ .180 bullets	box	1







LED WORK LIGHTS



915 Great White® LED 5" x 7" Rectangular Work Light









- High-output Great White® diodes for a bright, even flood pattern.
- Impact-resistant polycarbonate lens.
- Cast aluminum body with heat-dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- 9-32 VDC operating range is compatible with 12 & 24-volt systems.
- · Reverse voltage protection.
- Draws 3.2A @ 12V, 1.6A @ 24V.
- · 2-Conductor black PVC jacketed harness.
- Color temperature: 6000k.
- CE & EMC Certified.
- IP67 Rated.
- Stainless steel mounting hardware.

Order No.	Description	Pack	Std Carton
915-MV	rectangular	box	1



916/918 LumenX® LED Swiveling Work Light









- 916S features 817W-9 light, 918S features 800W-9 light
- Rugged, cast aluminum housing with durable gray powder-coat finish.
- Mounting arm with two 360° joints swivels to point light in any direction.
- · High vibration resistance.
- 918S draws 0.65A @ 14V.
- 916S draws 0.29A @ 12V, 0.22A @ 24V.
- Convenient push-button switch.
- · Two lead wires.

Order No.	Description	Pack	Std Carton
916S	450 lumen, multi-volt, stripped leads	box	1
916S-JAMP	450 lumen, multi-volt, jacketed AMP	box	1
918S	800 lumen, 12V, stripped leads	box	1



919 Great White® LED 3.25" x 4.75" Work Light











- High-output Great White® diodes for a bright, even, wide spot pattern.
- Die-cast aluminum body with matte black finish.
- Swiveling head can be mounted horizontally or vertically.
- 10-40 VDC operating range is compatible with 12 & 24-volt systems.
- Operating temperature: -30° +50° C.
- Operating current: 1.64A @ 12VDC, 0.83A @ 24VDC.
- Stainless steel mounting hardware.
- · RoHS compliant.
- IP67/IP69K rated.
- Certified to ECE Reg 10.

Order No.	Description	Pack	Std Carton
V919-MV	oval	Viz Pack	5
919-MV	oval	box	1

928 Great White® LED 3" x 3" Square Work Light









- High-output Great White® diodes for a bright, even flood pattern.
- 10-30 VDC operating range.
- Draws 2.15A @ 12V, 1.03A @ 24V.
- Impact-resistant polycarbonate lens.
- Die-cast aluminum body with matte black finish.
- Operating temperature: -30° +50° C.
- · Stainless steel mounting hardware.
- IP67 and IP69K Rated.
- · RoHS compliant.
- · Certified to ECE Reg 10.

Order No.	Description	Pack	Std Carton
928-MV	square	box	1



920B-MV Great White® LED **Blue Pedestrian Warning Light**







- Two 5 watt blue diodes for a bright spot pattern.
- Impact-resistant polycarbonate lens.
- Die-cast aluminum body with matte black finish.
- · Heat dissipating fins for durability and longevity.
- High vibration resistance and low amp draw.
- Operating voltage: 12-48V DC
- Operating current: 0.6A @ 12.8VDC, 0.3A @ 28VDC.
- PVC jacketed, partially stripped, 17.75 " (450mm) lead wires.
- Operating temperature range: -40°F +149°F (-40°C +65°C).
- IP67 rated.
- · Stainless steel mounting hardware.


Order No.	Description	Pack	Std Carton
920B-MV	blue, oval	box	1



LEDs light up both RED & GREEN







1217G-R LED Traffic Indicator / Loading Dock Light







- Dual-color diodes provide red and green indicators in a single lens.
- Ideal for loading bays, car parks, barriers and gates.
- Includes 4 meter co-extruded three-core cable.
- 18-28 volt operating range.
- · Individually boxed.
- IP67 ingress protection rating.
- Installation requires 426-18 grommet or 417-1 bracket, available separately.

Order No.	Description	Pack Std	Carton
1217G-R	red/green bi-color	box	30
417-1	surface mount bracket	mfg. pack	40
426-18	grommet	poly pack	12
B426-18	grommet	mfg. pack	100







930 Nightwatcher® LED 39" Rectangular Light Bar









- Rugged, extruded aluminum housing with die-cast end caps.
- Thick, scratch-resistant polycarbonate lens.
- Powder-coated black finish.
- Infinitely adjustable mounting pedestal locations.
- Flood beam pattern.
- 6000K-6500K daylight color temperature.
- 10-30 volt operating range.
- Draws 15A @ 13.5V, 6.6A @ 28V.
- IP66 ingress protection rating.
- Includes all mounting hardware.
- 18" sheathed leads.
- Includes fuse holder, 20 amp ATC fuse, and butt connectors for easy wiring.

Order No.	Description	Pack	Std Carton
930-MV	double row flood	box	1

931 Nightwatcher® LED 39" Rectangular Light Bar











- Rugged, extruded aluminum housing with die-cast end caps.
- Thick, scratch-resistant polycarbonate lens.
- · Powder-coated black finish.
- Infinitely adjustable mounting pedestal locations.
- 60° flood beam pattern.
- 6000K-6500K daylight color temperature.
- 10-30 volt operating range.
- Draws 11.6A @ 13.5V, 5.2A @ 28V.
- IP66 ingress protection rating.
- · Includes all mounting hardware.
- 18" sheathed leads with Deutsch style connector (DT04-2P).
- Remove connector plug for custom termination option.

Order No.	Description	Pack	Std Carton
931-MV	single row flood	box	1

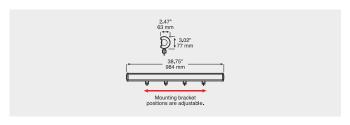



SPEC

SINGLE ROW mananana

932 Nightwatcher® LED 14" Rectangular Light Bar









- Combination beam with 60° flood beam and 30° spot beam patterns.
- 6000-6500K color temperature.
- 9-32 VDC operating range.
- Draws 3.54A @ 13.5V, 1.77A @ 28V.
- · Rugged extruded aluminum housing.
- · Powder-coated black finish.
- 18" sheathed leads with Deutsch-style connector.
- Female pigtail included for custom installation.
- · Includes side-mount brackets and hardware.
- · IP68 ingress rating.
- · Attractive, full-color retail box with window.

Order No.	Description	Pack	Std Carton
V932-MV	single row flood/spot	Viz Pack	1



933 Nightwatcher® LED 14" Rectangular Light Bar









- Combination beam with 60° flood beam and 30° spot beam patterns.
- 6000-6500K color temperature.
- 10-30 VDC operating range.
- Draws 3.36A @ 13.5V, 1.53A @ 28V.
- · Rugged extruded aluminum housing.
- · Powder-coated black finish.
- Thick, scratch-resistant polycarbonate lens.
- 18" sheathed leads with Deutsch-style connector.
- Female pigtail included for custom installation.
- Includes side-mount brackets and hardware.
- · IP68 ingress rating.
- · Attractive, full-color retail box with window.

Order No.	Description	Pack Std Carton
V933-MV	double row flood/spot	Viz Pack 1



934 Nightwatcher® LED 22" Rectangular Light Bar












- Combination beam with 60° flood beam and 30° spot beam patterns.
- 6000-6500K color temperature.
- 10-30 VDC operating range.
- Draws 7.98A @ 13.5V, 3.14A @ 28V.
- · Rugged extruded aluminum housing.
- · Powder-coated black finish.
- Thick, scratch-resistant polycarbonate lens.
- 18" sheathed leads with Deutsch-style connector.
- Female pigtail included for custom installation.
- · Includes side-mount brackets and hardware.
- · IP68 ingress rating.
- · Attractive, full-color retail box with window,

Order No.	Description	Pack	Std Carton
V934-MV	double row flood/spot	Viz Pacl	(1

INCANDESCENT WORK LIGHTS





408 Tractor/Utility Light



- Tractor or utility light with trapezoid beam pattern.
- Replaceable 55W H3 halogen bulb.
- Slim housing fits into tight areas.
- 2370 candelas, 880 lumens.
- Black plastic housing and hardened glass lens.
- Adjustable mounting hardware.
- Separate 8" lead and ground wires for electrical connection.

Order No.	Description	Pack Std Car	ton
V408	trapezoid	Viz Pack	6
M408	trapezoid	mfg. pack	36
VH550	replacement bulb	Viz Pack	12






3" x 5" Tractor/Utility Light



- Low-profile, rectangular lamp functions as tractor or utility light.
- Available in both trapezoid (HT) and flood (HF) beam patterns.
- Replaceable 55W H3 halogen bulb.
- Flood version outputs 2190 candelas, 949 lumens.
- Trapezoid version outputs 6190 candelas, 949 lumens.
- · Black plastic housing
- Adjustable black zinc plated steel mounting hardware.
- · Self-service Viz Pack packaging.

Order No.	Description	Pack Std Car	ton
V502HF	flood	Viz Pack	3
V502HT	trapezoid	Viz Pack	3
M502HF	flood	mfg. pack	12
VH550	replacement bulb	Viz Pack	12





503

3" x 5" Tractor & Work Light




- Heavy-duty lamp with 3" x 5" lens.
- Functions as tractor or general work light.
- Available in both trapezoid (HT) and flood (HF) beam patterns.
- Replaceable 55W H3 halogen bulb.
- 4060 candelas, 870 lumens (flood version 780 lumens).
- · Polycarbonate housing.
- Black-plated mounting bracket for corrosion-free service.
- Self-service Viz Pack packaging.

Order No.	Description	Pack	Std Carton
V503HF	flood	Viz Pack	3
V503HT	trapezoid	Viz Pack	3
M503HF	flood	mfg. pac	k 12
VH550	replacement bulb	Viz Pack	12

- Heavy-duty tractor or general work light with 4" x 6" lens.
- Available in both trapezoid (HT) and flood (HF) beam patterns.
- Replaceable 55W H3 halogen bulb.
- Flood version outputs 3800 candelas, 813 lumens.
- Trapezoid version outputs 3120 candelas, 860 lumens.
- Nylon housing and black-plated hardware for corrosion resistance.
- · Self-service Viz Pack packaging.

Order No.	Description	Pack Std Car	on
V504HF	flood	Viz Pack	3
V504HT	trapezoid	Viz Pack	3
VH550	replacement bulb	Viz Pack	12



507

PAR 36 Rubber Tractor Light






- PVC molded housing cushions lamp from shock and vibration.
- Replaceable, flush-mount, par 36 sealed beam.
- Available in both trapezoid and flood beam patterns.
- 10" lead wire exits through back of housing, grounds through mounting stud.
- 507S includes push-button on/off switch on back of housing and .180 bullet terminal on lead.
- Universal 5/16" mounting stud and adjustable zinc-plated bracket allow mounting in any position.
- Accepts standard 4411 (trap. 12V), 4511 (trap. 6V), H7610 (halogen trap.) or H7614 (halogen flood) bulb.
- See 907 LED version on page 127.

Order No.	Description	Pack	Std Carton
V507	trapezoid	Viz Pack	3
507	trapezoid	poly pack	(12
M507	trapezoid	mfg. pacl	k 24
M507S	trapezoid, with on/off switch	mfg. pacl	k 24
507LU	housing only	poly pack	(12
4411	replacement bulb (12v trapezoid)	re	ference only






508

PAR 36 Rubber Tractor Light






- Same quality design as the 507 series with recessed sealed beam.
 PVC hood reduces glare and provides added protection.
- Trapezoidal beam pattern.
- Accepts standard 4411 (trap. 12V), 4511 (trap. 6V), H7610 (halogen trap.) or H7614 (halogen flood) bulb.

Order No.	Description	Pack Std Car	ton
V508	trapezoid	Viz Pack	6
M508	trapezoid	mfg. pack	16
4411	replacement bulb	reference	only





INCANDESCENT WORK LIGHTS




516 Heavy-Duty Swiveling Trapezoidal Work Light



- PAR 36 sealed beam work lamp.
- · Trapezoidal pattern.
- Mounting arm with two 360° joints swivels to point light in any direction.
- Rugged cast aluminum housing with gray powder-coat finish.
- · Convenient rubber-covered on-off switch and integrated handle.
- Uses 4411 trapezoidal sealed beam.
- Also available in LED version. See 916S and 918S on page 130.

Order No.	Description	Pack	Std Carton
516S	swivel housing	box	1






530 Nightwatcher® LX 6" Round Off-Road Light



- 6" light produces over 250,000 candle power.
- Durable steel housing finished in black E-coat for long-lasting service.
- Aluminum-coated metal reflector.
- · Hardened-glass lens.
- H3 100-watt halogen bulb.
- Armored cables.
- Universal swiveling, rubber cushioned mounting bracket.
- · For off-road use only.

Order No.	Description	Pack Std Ca	rton
V530	black	Viz Pack	6
VH549	replacement bulb	Viz Pack	12

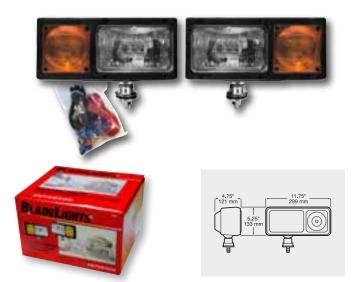

505 BladeLights® Snow Plow Light Kit

- Head light and turn signal kit for snow removal vehicles.
- Includes high and low beam function.
- · Low-profile housing.
- Easy-to-replace sealed halogen beam and turn signal bulb.
- 1/2" diameter, adjustable-ball mounting stud.
- Meets FMVSS 108 requirements.
- Kits include two lights, wiring, switch, mounting hardware, and easy-to-follow instructions.
- 24" lead wires.
- Packaged in bright, four-color display box.


Order No.		Description	Pack	Std Carton
505K	KIT	snow plow light kit	box	1
H6545		replacement sealed beam		reference only
2357		replacement bulb		reference only

517 Nightwatcher® LX Mini Halogen Driving/Docking Light

- Powerful 55-watt, halogen driving or docking light.
- Black housing.
- Precision-cast, hardened-glass lens.
- Steel reflector with bright chrome plating.
- Stainless steel mounting hardware and bezel screws.
- Wiring kit sold separately.

Order No.	Description	Pack Std Carto	n
M517S	black	mfg. pack 3	30
V520-10	wiring kit	Viz Pack 1	12
VH550	replacement bulb	Viz Pack 1	2





525 Nightwatcher® LX Halogen Docking Light




- Powerful 55-watt, halogen docking light.
- · Black housing.
- · Precision-cast, hardened-glass lens.
- Vaporized aluminum reflector.
- Viz Pack kit includes two lamps, wiring, connectors, fuse, rocker switch, and installation instructions.
- M525S and V525S-2 include stainless-steel mounting hardware and bezel screws
- Lens and reflector assembly may be reversed for optional inverted mounting.


Order No.		Description	Pack	Std Carton
V525S-2	KIT	kit w/ 1 1/2" SS bolt	Viz Pack	3
M525		1" bolt	mfg. pac	k 30
VH550		replacement bulb	Viz Pack	12












526 Nightwatcher® LX Chrome Clear Driving Light

- Powerful 55-watt, halogen driving light.
- · Chrome plated steel housing.
- Precision-cast, hardened-glass lens.
- Vaporized aluminum reflector.
- Universal mounting bracket.
- Wiring kit sold separately.

Order No.	Description	Pack Std C	arton
M526	clear driving	mfg. pack	30
V520-10	wiring kit	Viz Pack	12

HALOGEN FOG & DRIVING LIGHTS




557 Nightwatcher® LX Ultra-Slim Clear Fog Light

- Attractive, low-profile clear fog light provides maximum road clearance.
- 55-watt halogen bulb.
- · Black-finished aluminum diecast housing.
- · Hardened-glass lens.
- Mounts above or below bumper.
- · Screws or double-sided tape for installation on any surface.
- Kit contains two lights, rocker switch, wiring, and installation instructions.

Order No.		Description	Pack	Std Carton
557-2	KIT	clear fog light kit	box pac	k 20
VH550		replacement bulb	Viz Pacl	(12





566 Nightwatcher® LX Clear OE-Style Driving Light




- Popular original equipment style clear driving light kit.
- Designed to mount in most factory and aftermarket air dams.
- · Can be mounted on top or bottom of bumper.
- 55-watt halogen bulb behind replaceable, hardened-glass lens.
- Black plastic housing.
- · Kit contains two lights, rocker switch, wiring, and instructions.
- · Meets SAE specifications.

Order No.		Description	Pack	Std Carton
V566-1	KIT	clear driving light kit	Viz Pack	3
VH550		replacement bulb	Viz Pack	12







582 Nightwatcher® LX Slim Oval ION Fog/Docking Light



- Attractive, low-profile clear fog light provides maximum road clearance.
- 55-watt halogen bulb behind ion-coated lens.
- Black-finished aluminum diecast housing.
- Mounts above or below bumper.
- May be used as marine docking lights.
- Screws or double-sided tape for installation on any surface.
- Kits include two lights, wiring, illuminated rocker switch, instructions.

Order No.		Description	Pack	Std Carton
V582-2	KIT	black driving light kit	Viz Pack	3
VH550		replacement bulb	Viz Pack	12



586 Nightwatcher® LX Compact Square ION Driving Light



- · Compact, modern shape.
- 55-watt halogen bulb behind ion-coated lens.
- · Black metal powder-coated housing.
- May be used as marine docking lights.
- Kits include two lights, wiring, illuminated rocker switch, instructions.

Order No.		Description	Pack	Std Carton
V586-2	KIT	black driving light kit	Viz Pack	3











955 LED Magnetic-Mount Tow Light Kit









- Kit includes trunk harness, 20' wire harness, connectors, and instructions.
- Strong magnetic base meets 35–40 lb. pull force test.
- 8-16 volt operating range.
- Four conductor, bonded harness uses 18 gauge copper stranded wire.
- Plugs into standard flat four-way vehicle trailer light connector.
- Packaged in 2-lamp, self-service visual pack kit.

Order No.		Description	Pack	Std Carton
V955	KIT	complete kit	Viz Pack	2











- Two auxiliary warning lights with magnetic bases.
- Kit includes trunk harness, 20' four-wire harness, connectors, and instructions.
- Plugs into standard flat four-way vehicle trailer light connector.
- Packaged in attractive, self-service visual pack kit.

Order No.		Description	Pack	Std Carton
V555	KIT	complete kit	Viz Pack	2
313-15R		red replacement lens	poly pack	10
1157		replacement bulb	re	ference only





LED AUXILIARY STROBE



817S/818S LumenX® LED **Auxiliary Round Strobing Lights**















• Meets SAE J595 Class 1

- Strobing light functions as auxiliary strobe or warning light.
- Ideal for emergency, construction and refuse vehicles.
- · New white diodes behind white or colored lenses.
- · Advanced optics fully illuminate lens.
- AMP-compatible connector integrated into housing.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- 818-9 has flange integrated into the housing.
- 817-9 has skirted weld joint for added protection against moisture.
- 9-32 volt operating range is compatible with 12V and 24V vehicles.
- See pages 184-185 & 187 for mounting options.

Order No.	Description	Pack Std	Carton
817SA-9	amber, grommet mount	poly pack	6
818SA-9	amber, flange mount	poly pack	6
817SR-9	red, grommet mount	poly pack	6
818SR-9	red, flange mount	poly pack	6
817SW-9	white, grommet mount	poly pack	6
818SW-9	white, flange mount	poly pack	6
M817SA-9	amber, grommet mount	mfg. pack	50
M818SA-9	amber, flange mount	mfg. pack	50
426-18	grommet	poly pack	12
B426-18	grommet	mfg. pack	100
417-48	hardshell plug, 2-wire	poly pack	6
B417-48	hardshell plug, 2-wire	mfg. pack	100
817-48	molded plug, 2-wire	poly pack	12
B817-48	molded plug, 2-wire	mfg. pack	100







820S/823S LumenX[®] LED **Auxiliary Oval Strobing Lights**

















• Meets SAE J595 Class 1

- Strobing light functions as auxiliary strobe or warning light.
- Ideal for emergency, construction and refuse vehicles.
- New white diodes behind white or colored lenses.
- · Advanced optics fully illuminate lens.
- AMP-compatible connector integrated into housing.
- 821SA-10 has PL3 plug integrated into housing.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- 823-10 has flange integrated into the housing.
- 820KSA kit includes 421-18 grommet and 417-49 plug.
- 9-32 volt operating range is compatible with 12V and 24V vehicles.
- See pages 186-187 for mounting options.

Order No.		Description	Pack	Std Carton
820KSA	KIT	amber, grommet mount kit	poly pac	k 6
820SA-10		amber, grommet mount	poly pac	k 6
823SA-10		amber, flange mount	poly pac	k 6
820SR-10		red, grommet mount	poly pac	k 6
823SR-10		red, flange mount	poly pac	k 6
820SW-10		white, grommet mount	poly pac	k 6
823SW-10		white, flange mount	poly pac	k 6
M820SA-10		amber, grommet mount	mfg. pac	k 50
M820SR-10		red, grommet mount	mfg. pac	k 50
M821SA-10		amber, grommet, PL3 plug	mfg. pac	k 50
421-18		grommet	poly pac	k 12
B421-18		grommet	mfg. pac	k 100
417-48		hardshell plug, 2-wire	poly pac	k 6
B417-48		hardshell plug, 2-wire	mfg. pac	k 100
817-48		molded plug, 2-wire	poly pac	k 12
B817-48		molded plug, 2-wire	mfg. pac	k 100





Rectangular Auxiliary Strobing Light












- 3.5" x 5" LED light functions as auxiliary strobe or warning light.
- Two separate hot leads for selectable dual flash or quad flash strobe.
- Strobing function meets SAE J595 Class 2 specification.
- Operates from 9-32 volts.
- Ideal for emergency, construction and refuse vehicles.
- Potted, hardwired 12.25" sheathed leads. Available with AMP plug.
- Sealed lens and housing meets IP67 ingress protection level.
- · Grommet fits material up to 6 mm.

Order No.	Description	Pack Std Carton
850SA	amber	poly pack 6
850SA-AMP	amber, AMP plug	poly pack 6
B850-18	rubber grommet	mfg. pack 100





1197SA Single Diode *LumenX*® LED 2½" Round Auxiliary Strobing Light










- · Functions as amber auxiliary strobe or warning light.
- Round, 21/2" diameter.
- Operates from 9-16 volts.
- Integral receptacle accepts industry-standard AMP plug.
- Sealed lens and housing meets IP67 ingress protection level.
- · Grommet fits material up to 6 mm.

Description	Pack	Std Carton
amber	mfg pack	50
grommet	poly pack	24
grommet	mfg. pack	100
AMP plug w/ .180 bullets	poly pack	6
AMP plug w/ .180 bullets	mfg. pack	50
molded AMP plug, .180 bullets	mfg. pack	50
	amber grommet grommet AMP plug w/ .180 bullets AMP plug w/ .180 bullets	amber mfg pack grommet poly pack grommet mfg. pack AMP plug w/ .180 bullets poly pack AMP plug w/ .180 bullets mfg. pack





Black: power White: ground Red: sync Clear diodes flash bright amber or white! Shown in 150-095 surface mount bracket. Bracket or grommet required

for mounting, available separately.

253S LED Ultra-Mini Strobing Lights w/ Sync









- 60 triple-flashes per minute meet J595 Class 1 specs.
- "Sync wire" technology allows two lamps to communicate with each other without an external strobe controller. (See next page for more information.)
- 9-16 volt operating range.
- Ultra-compact size allows installation on nearly any vertical surface.


Description	Pack Std C	arton
amber, type 1	poly pack	6
amber, type 2	poly pack	6
white, type 1	poly pack	6
white, type 2	poly pack	6
mounting bracket	poly pack	12
grommet	poly pack	100
grommet	poly pack	100
	amber, type 1 amber, type 2 white, type 1 white, type 2 mounting bracket grommet	amber, type 1 poly pack amber, type 2 poly pack white, type 1 poly pack white, type 2 poly pack mounting bracket poly pack grommet poly pack

TIIRN

H

WARNING & EMERGENCY

ALTERNATING, SYNCHRONOUS, OR **RANDOM STROBE** PATTERNS— **NO EXTERNAL** CONTROLLER NEEDED! STROBE POWER ➤



- Synchronous Strobe Pattern: Use two "-1" lamps
- Alternating Strobe Pattern: Use one "-1" and one "-2"
- Random Strobing: Leave black wire unconnected



TRADITIONAL 36 DIODE PIRANTIA®



817SA Piranha® LED **Auxiliary Round Strobing Lights w/ Sync**













- Original 36-diode Piranha multi-diode lens look.
- · AMP-compatible connector integrated into housing.
- "Sync wire" technology allows two lamps to communicate with each other without an external strobe controller.
- Operates from 9-32 volts.
- · Regulated design provides voltage protection and consistent light output over a wide voltage range.
- · Ideal for emergency, construction and refuse vehicles.
- Meets SAE J595 Class 2 specifications.

Order No.	Description	Pack St	d Carton
817SA-1	amber, grommet mount, pos. 1	poly pack	6
817SA-2	amber, grommet mount, pos. 2	poly pack	6
818SA-1	amber, flange mount, pos. 1	poly pack	6
818SA-2	amber, flange mount, pos. 2	poly pack	6
B426-18	grommet	mfg. pack	100
B417-49	hardshell plug, 3-wire	mfg. pack	100





LED AUXILIARY STROBE W/ SYNC



820S & 823S LED Auxiliary Oval Strobing Lights w/ Sync

PIRANHA®














- Oval, LED triple-flash strobing auxiliary or emergency warning light.
- 9-32 volt operating range, no separate external controller required.
- "Sync wire" technology allows two lamps to communicate with each other without an external strobe controller.
- Meets SAE J595 Class 2 specifications rotated in any orientation.
- · 823HSA permits easy surface mounting.

Order No.	Description	Pack	Std Carton
820SA-1	amber, pos. 1	poly pack	6
820SA-2	amber, pos. 2	poly pack	6
820SR-1	red, pos. 1	poly pack	6
820SR-2	red, pos. 2	poly pack	6
823SA-1	amber w/ flange, pos. 1	poly pack	6
823SA-2	amber w/ flange, pos. 2	poly pack	6
823HSA-1	amber surface mount, pos. 1	poly pack	6
823HSA-2	amber surface mount, pos. 2	poly pack	6
421-18	grommet	poly pack	12
B421-18	grommet	mfg. pacl	(100
417-49	plug	poly pack	6
B417-49	hardshell plug, 3-wire	mfg. pacl	(100

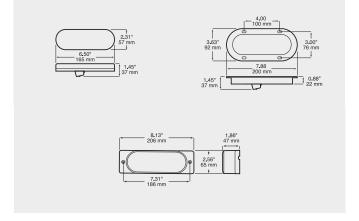











• Meets SAE J595 Class 1

- 6 super bright diodes.
- 12-24 volt operating range.
- 19 programmable flash patterns
- · Solid-state design.
- 4153SA features screw-on surface mounting and includes foam base gasket.
- 4154SA comes with adjustable, clamp-on/adhesive mounting bracket.
- · All mounting hardware included.

Order No.	Description	Pack Std Cartor
P4153SA	amber, surface mount	poly pack
P4154SA	amber, bracket mount	poly pack
4153SA	amber, surface mount	box 1
4154SA	amber, bracket mount	box 1



PROGRAMMABLE



4153SA Surface Mount

4154SA

Bracket Mount

4155SA LED

Programmable Low-Profile Surface-Mount Strobe














- Screw mounts on 3-inch centers.
- 12 programmable flash patterns.
- Meets SAE J595 Class 1.
- 3 super bright diodes.
- Compatible with 12VDC and 24VDC systems.
- Aluminum base for heat dissipation.
- Multiple units can synchronize for simultaneous or alternating flash.

Order No.	Description	Pack	Std Carton
P4155SA	surface mount	poly pa	ck 1
4155SA	surface mount	box	1
4155SA-BT3	surface mount w/ .180 bullets	box	1








PROGRAMMABLE!





4156SA LED

Programmable Surface-Mount Strobe Pad













- · Low-profile LED amber warning strobe with pad mount.
- · Mounts using screws and high-strength self-adhesive backing (both included).
- 23 programmable flash patterns.
- Meets SAE J595 Class 1 & ECE Reg 10.
- 6 super bright diodes.
- Compatible with 12VDC and 24VDC systems.
- · Aluminum base for heat dissipation.
- · Multiple units can synchronize for simultaneous or alternating flash.


Order No.	Description	Pack	Std Carton
P4156SA	surface mount	poly pacl	k 1
4156SA	surface mount	box	1
4156SA-BT3	surface mount w/ .180 bullets	box	1


ERG 즓


LED STROBE W/ TURN OVERRIDE

MULTI-FUNCTION STROBES FUNCTION AS TURN SIGNALS!

Each lamp has electronic strobe and turn signal functions built-in, with no external strobe controller. Activating turn signal automatically overrides strobe function. Two power wires allow strobes to be activated with cab switch and automatically when shifted into reverse.







* Center terminal provides power to −1 lamp only; the sync wire provides power to other lamps in the system. Two-wire AMP plugs are recommended for -2, -3, and -4 lamps. If three-wire AMP plug are used with these lamps, all unused wires must be properly sealed against mosture/corrosion.





867SA LumenX® LED Strobe & Rear Turn Signal w/ Sync

















- · Activating turn signal automatically overrides strobe function.
- Requires no external strobe controller. (Requires standard vehicle flasher for turn function.)
- Meets SAE J595 Class 2 specifications. Requires 426-18 grommet, 417-49 3-wire plug, and 880-49 or 866-486 single wire sync plug for installation.

Order No.	Description	Pack	Std Carton
867SA-1	amber, curbside high	poly pac	k 6
867SA-2	amber, roadside high	poly pac	k 6
867SA-3	amber, curbside low	poly pac	k 6
867SA-4	amber, roadside low	poly pac	k 6
M867SA-1	amber, curbside high	mfg. pac	k 50
M867SA-2	amber, roadside high	mfg. pac	k 50
B426-18	grommet	mfg. pac	k 100
B417-49	hardshell plug, 3-wire	mfg. pac	k 100
880-49	plug, sync wire, stripped lead	poly pac	k 6
B880-49	plug, sync wire, stripped lead	mfg. pac	k 100
866-486	plug, sync wire, Packard connector	poly pac	k 6
B866-486	plug, sync wire, Packard connector	mfg. pac	k 100





860SA LumenX® LED Strobe & Rear Turn Signal w/ Sync
















- Two- or four-lamp system functions as both alternating strobes and DOTcompliant rear turn signals.
- · Activating turn signal automatically overrides strobe function.
- Requires no external strobe controller. (Requires standard vehicle flasher for turn function.)
- Meets SAE J595 Class 2 specifications rotated in any orientation.
- Requires 421-18 grommet, 417-49 3-wire plug, and 880-49 single wire sync plug for installation.


Order No.	Description	Pack S	Std Carton
860SA-1	amber, curbside high	poly pack	6
860SA-2	amber, roadside high	poly pack	6
860SA-3	amber, curbside low	poly pack	6
860SA-4	amber, roadside low	poly pack	6
B421-18	grommet	mfg. pack	100
B417-49	hardshell plug, 3-wire	mfg. pack	100
880-49	plug, sync wire, stripped lead	poly pack	6
B880-49	plug, sync wire, stripped lead	mfg. pack	100
866-486	plug, sync wire, Packard connector	poly pack	6
B866-486	plug, sync wire, Packard connector	mfg. pack	100






Each lamp has electronic strobe and turn signal functions built-in, with no external strobe controller. Activating turn signal automatically overrides strobe function. Two power wires allow strobes to be activated with cab switch and automatically when shifted into reverse.







* Center terminal provides power to −1 lamp only; the sync wire provides power to other lamps in the system. Two-wire AMP plugs are recommended for -2, -3, and -4 lamps. If three-wire AMP plug are used with these lamps, all unused wires must be properly sealed against mosture/corrosion.



TRADITIONAL 36 DIODE PIRANTA®





866SA Piranha® LED Strobe & Rear Turn Signal w/ Sync
















- · Activating turn signal automatically overrides strobe function.
- · Requires no external strobe controller. (Requires standard vehicle flasher for turn function.)
- Meets SAE J595 Class 2 specifications rotated in any orientation.
- Requires 426-18 grommet, 417-49 3-wire plug, and 880-49 single wire sync plug for installation.

Order No.	Description	Pack	Std Carton
866SA-1	amber, grommet mnt. curbside high	poly pack	6
866SA-2	amber, grommet mnt. roadside high	poly pack	6
866SA-3	amber, grommet mnt. curbside low	poly pack	6
866SA-4	amber, grommet mnt. roadside low	poly pack	6
M866SA-1	amber, curbside high	mfg. pac	k 50
M866SA-2	amber, roadside high	mfg. pac	k 50
B426-18	grommet	mfg. pac	k 100
B417-49	hardshell plug, 3-wire	mfg. pacl	k 100
880-49	plug, sync wire, stripped lead	poly pack	6
B880-49	plug, sync wire, stripped lead	mfg. pacl	k 100
866-486	plug, sync wire, Packard connector	poly pack	6
B866-486	plug, sync wire, Packard connector	mfg. pacl	k 100

861SA Piranha® LED Strobe & Rear Turn Signal w/ Sync













- Two- or four-lamp system functions as both alternating strobes and DOTcompliant rear turn signals.
- · Activating turn signal automatically overrides strobe function.
- · Requires no external strobe controller. (Requires standard vehicle flasher for turn function.)
- Meets SAE J595 Class 2 specifications rotated in any orientation.
- Requires 421-18 grommet, 417-49 3-wire plug, and 880-49 single wire sync plug for installation.

Order No.	Description	Pack Std	Carton
861SA-1	amber, curbside high	poly pack	6
0010A-1		poly pack	0
861SA-2	amber, roadside high	poly pack	6
861SA-3	amber, curbside low	poly pack	6
861SA-4	amber, roadside low	poly pack	6
B421-18	grommet	mfg. pack	100
B417-49	hardshell plug, 3-wire	mfg. pack	100
880-49	plug, sync wire, stripped lead	poly pack	6
B880-49	plug, sync wire, stripped lead	mfg. pack	100
866-486	plug, sync wire, Packard connector	poly pack	6
B866-486	plug, sync wire, Packard connector	mfg. pack	100





LED FLASHING BEACON



316 LED

Battery-Operated Hazard Light w/Magnetic Mount







- 6" x 4" battery-powered, portable LED flashing light.
- Available in amber or red.
- Magnetic mount attaches securely to back of vehicle or trailer.
- 18 bright, highly visible diodes.
- 3-way switch for flashing or steady-on operation.
- 180 flashes per minute in flash mode.
- · Requires four AA batteries (not included).
- Can flash for 36 hours or more on one set of alkaline batteries.
- Can be optionally configured as self-standing easel.
- Sealed lens and base.

Order No.	Description	Pack	Std Carton
V316MA	amber	Viz Pack	4
V316MR	red	Viz Pack	4



740 LED

Battery-Operated Safety Beacon w/Magnetic Mount






- · General purpose, battery-powered, portable light.
- 300-400 hour run time on 2 D batteries (not included).
- · Carry strap included.
- Heavy-duty magnetic base.
- Optional mounting bracket available.
- 65 flashes per minute.
- · Photocell mode switch located inside battery compartment.

Order No.	Description	Pack	Std Carton
740A	amber	box	1
740R	red	box	1
740-09	bracket	box	1





772 LED

Alternating Beacon w/Magnetic Mount








- · 16 bright amber diodes.
- · Alternating upper and lower flashing compartments.
- · 90 flashes per minute.
- · Low amp draw.
- 9-16 volt operating range.
- Integral 12' coil cord and lighter socket plug.
- Mounts with three powerful magnets in base.

Order No.	Description	Pack	Std Carton
V772A	amber	Viz Pack	4

FLASHING/REVOLVING INCANDESCENT



Alternating Beacon w/Magnetic Mount








- Twin incandescent bulbs flash alternately.
- 12 volt.
- 90 flashes per minute.
- Solid-state design for reliable, silent operation.
- Mounts with three powerful magnets in base.
- 12' coil cord with lighter socket plug.
- See 772 LED version on previous page.

Order No.	Description	Pack	Std Carton
V773A	amber	Viz Pack	2
771-15A	amber replacement lens	box	1
R10W	replacement bulb	re	eference only






771 **Economy Revolving Beacon**



- 12 volt.
- Incandescent bulb.
- 60 flashes per minute.
- Low-noise drive motor.
- Mounts with three powerful magnets in base.
- · 12' coil cord with lighter socket plug.

Order No.	Description	Pack Std C	arton
V771A	amber	Viz Pack	2
V771B	blue	Viz Pack	4
771-15A	amber replacement lens	box	1
771-15B	blue replacement lens	box	1
771-15R	red replacement lens	box	1
R10W	replacement bulb	reference	e only





774

Teardrop Revolving Beacon





- 12 volt incandescent bulb.
- 90+ flashes per minute.
- Polished rotating reflector for maximum output.
- Low-noise drive motor.
- Magnetic mount.
- 12' coil cord with lighter socket plug.

Order No.	Description	Pack Std (Carton
V774A	amber	Viz Pack	4
V774R	red	Viz Pack	4
774-15A	amber replacement lens	box	1
774-15B	blue replacement lens	box	1
774-15R	red replacement lens	box	1
1141	replacement bulb	referenc	ce only

FLASHING/REVOLVING INCANDESCENT





TRIPLE LENS DESIGN

763 Revolving Beacon





- Low cost, magnetic-mount revolving light.
- For use with 12 volt vehicles.
- 6,600 candle power from incandescent bulb with reflector.
- Rotating reflector provides 135 flashes per minute.
- · Acrylic lens.
- Rubber-covered aluminum base with 60 lb. magnet.
- Equipped with 15' straight cord and lighter socket plug with built-in on/off switch and LED indicator.
- Red and blue lenses also available by special order only.

Order No.	Description	Pack	Std Carton
763A	amber	box	1
756-15A	amber replacement lens	box	1
BB-22	replacement motor and gear	box	1
1195	replacement bulb		reference only

756 Revolving Light









- Available in 12 volt or 24 volt versions.
- Center-mounted 50 candle power incandescent bulb.
- 110 flashes per minute.
- Three rotating 2 1/4" polycarbonate bulls-eye lenses.
- · Stainless steel base.
- 756MA includes magnetic base and lighter socket plug.


Order No.	Description	Pack	Std Carton
756A	amber, 12V	box	1
756MA	amber, 12V magnetic mount	box	1
756A24	amber, 24V	box	1
756R24	red, 24V	box	1
756-15A	amber replacement lens	box	1
756-15B	blue replacement lens	box	1
756-15R	red replacement lens	box	1
756-21	retainer	poly pac	k 1
756-23	gasket	poly pac	k 1
BB-22	replacement motor and gear	box	1
1195	replacement bulb	re	ference only





LED STROBING BEACONS







744 LED 360° Micro Strobing Beacon









- High-performance LED strobe with compact dimensions.
- Meets SAE J845, Class 3 specifications.
- 60 quad flashes per minute.
- Six super bright diodes.
- Rugged polycarbonate lens and base.
- Low 0.5 amp maximum current draw.
- 12-80 volt operating range.
- · Surface mounts with two screws or bolts.

Order No.	Description	Pack	Std Carton
744A	amber	box	1













- · Designed for vehicle applications where a small very bright warning light is
- Meets SAE J845, Class 2A specifications.
- 72 quad flashes per minute.
- Four (4) super bright diodes on sq. extrusion (1 per side).
- Polycarbonate lens and base are sonic welded.
- Low 1.2 amp maximum current draw.
- Compatible with 12V and 24V vehicles.
- · Standard 3-hole mounting.

Order No.	Description	Pack	Std Carton
745A	amber	box	1



762 LED 360° Strobing Beacon







- 65 "double-quad" flashes per minute.
- Meets SAE J845 Class 3A specifications.
- · Ideal for material handling equipment.
- · Polycarbonate lens and base.
- 11-110 volt operating range.
- 11" lead wires.
- Reverse voltage protected.
- Low amp draw: 0.15@12v, .13 @48v.
- Standard 3-hole mounting on 4.57 " bolt circle.

Order No.	Description	Pack	Std Carton
762A	amber	box	1

LED STROBING BEACONS





764 LED Micro-Strobe Light













- 16 super bright diodes.
- 9-36 volt operating range.
- 65 triple flashes per minute.
- Meets SAE J845, Class 2A specifications.
- · Solid-state design.
- · Screw-on fresnel lens design with weather-resistant O-ring seal.
- Permanent mount version mounts on 3-hole, 4.57 " bolt circle using #8 screws, or on pipe with 1/2-14 American National Pipe threads.
- Magnetic mount version includes 24" coil cord and lighter socket plug.
- Replaces 766A & 766MA

Order No.	Description	Pack Std C	arton
V764MA	amber, magnetic	Viz Pack	2
764A	amber	box	1
766-25A	amber replacement lens	box	1

791 LED Low Profile 360° Strobing Beacon













- Four super-high output 2.5W LEDs.
- 360° display and 4 User-selectable patterns.
- Multivolt configuration is compatible with 12 and 24 volt systems.
- Low 0.8 amp maximum current draw.
- Meets SAE J845 Class 2A specifications.
- Polycarbonate lens and flange base.
- Magnetic-mount version has 15' cord and plug with integral switch.

Order No.	Description	Pack	Std Carton
791A	flange mount	box	1
791MA	magnetic mount	box	1
791-25A	amber replacement lens	box	1

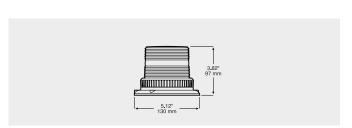





CLASS 1 SPEC



792 **LED Double Flash School Bus Beacon**







- White strobe for school bus applications
- Meets SAE J845 Class 1 specifications.
- 12-24 volt operating range.
- 70 dual flashes per minute.
- Exceeds the brightness of a typical 14-joule xenon strobe.
- · Polycarbonate lens and base.
- Includes durable foam mounting gasket.

Order No.	Description	Pack	Std Carton
792C	white	box	1
L3-77	replacement strobe tube	box	1

797 LED 360° Strobing Beacon









- Single amber quad flash function.
- Meets SAE J845 Class 2A specifications.
- Ideal for material handling equipment.
- 65 quad flashes per minute.
- Polycarbonate lens and base.
- 9-36 volt operating range.
- 18" wire lengths with strip wires.
- Reverse voltage protected.
- Low amp draw: 0.56@12v, 0.25 @28v.
- Standard 3-hole mounting.
- Replaces 767A-2 & 767A-3

Order No.	Description	Pack	Std Carton
7071	ombor	hov	4

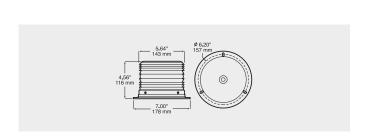



LED STROBING BEACONS





764-2 LED

Programmable Micro-Strobe Light














- 16 super bright diodes.
- 9-36 volt operating range.
- 3-wire, programmable design.
- Six flash patterns: steady burn, single flash, double, quad, quint, ultra.
- Meets SAE J845, Class 2A specifications.
- · Solid-state design.
- Screw-on fresnel lens design with weather-resistant O-ring seal.
- Mounts on 3-hole, 4.57 " bolt circle using #8 screws, or on pipe with 1/2-14 American National Pipe threads.

Order No.	Description	Pack	Std Carton
764A-2	amber	box	1
766-25A	amber replacement lens	box	1







798 LED

Programmable 360° Strobing Beacon








- 5.6" tall.
- Meets SAE J845 Class 1A specifications in modes 2,4 & 7.
- 360° display and 20 User-selectable patterns.
- 11–28 volt operating range.
- Multivolt configuration is compatible with 12 and 24 volt systems.
- 12" cable.
- · Black aluminum base.
- Permanent base mounts with pipe or 3 screws for easy, secure installation.

Order No.	Description	Pack	Std Carton
798A	amber	box	1

PROGRAMMABLE!





799 LED

Programmable 360° Strobing Beacon







- · Ruggedized design for construction/heavy-duty applications
- Five user-selectable flash patterns:
 - ① Quad flash (72 gfpm)
 - 2 Fast single flash (80 fpm)
 - 3 Slow single flash (50% on time)
 - 4 Random Flash
 - (5) Hex flash (60 hex bursts/min)
- Meets SAE J845 Class 1A specifications in modes 3 & 5.
- Multivolt configuration is compatible with 12 and 24 volt systems.
- · Comes with mounting bolts attached to base.

Order No.	Description	Pack	Std Carton
799A	amber, pipe mount	box	1







- 12 to 24 volt operating range.
- Double flash.
- 120 flashes per minute.
- Mounts with three powerful magnets in base.
- 12' coil cord with lighter socket plug.

Order No.	Description	Pack	Std Carton
V768A	amber	Viz Pack	4
771-15A	amber replacement lens	box	1






2 Joule Single Flash Strobe Beacon





- 12 volt
- 60 single flashes per minute
- 2 joule/150 candela-second brightness
- Shock-resistant rubber base, encapsulated circuitry
- Magnetic-mount model is equipped with 15' coil cord and lighter socket plug with built-in on/off switch and LED indicator.


Order No.	Description	Pack	Std Carton
769A	amber	box	1
769B	blue	box	1
769C	clear	box	1
769R	red	box	1
769MA	amber, magnetic	box	1
769-25A	amber replacement lens	box	1
769-25B	blue replacement lens	box	1
769-25C	clear replacement lens	box	1
769-25R	red replacement lens	box	1
L2-77	replacement strobe tube	box	1








769-1HA equipped with 6" tall lens





769-1

4 Joule Double Flash Strobe Beacon






- 12-48 volt operating range.
- 60 double flashes per minute.
- 4 joule/300 candela-second brightness.
- Shock-resistant rubber base, encapsulated circuitry.
- See 769 strobe for replacement 4 1/2" lenses and strobe tube.

Order No.	Description	Pack	Std Carton
769-1A	amber	box	1
769-1B	blue	box	1
769-1C	clear	box	1
769-1R	red	box	1
769-1HA	amber, 6" tall	box	1
769-25HA	amber repl. 6" lens	box	1

XENON STROBES





769-2

5 Joule Quad Flash Strobe Beacon








- 12-48 volt operating range.
- 65 quad flashes per minute.
- 5 joule/400 candela-second brightness.
- Shock-resistant rubber base, encapsulated circuitry.
- Magnetic-mount and equipped with 15' cord and lighter socket plug with built-in on/off switch and LED indicator.
- · See 769 strobe for replacement lenses.

Order No.	Description	Pack	Std Carton
769-2MA	amber, magnetic	box	1
L2X-77	replacement strobe tube	box	1



Heavy Duty Construction





787

6 Joule Extreme Duty Strobe Beacon





- · Heavy duty, U-shaped strobe tube withstands high vibration.
- 12-24 volt operating range.
- 65 double flashes per minute.
- 6 joule/150 candela-second brightness.
- Polycarbonate fresnel lens.
- Shock-resistant rubber base and encapsulated circuitry resist dust, high humidity, and salt spray.
- See 769 strobe for replacement lenses.
- Blue, clear, green and red also available by special order only.

Order No.	Description	Pack	Std Carton
787A	amber	box	1
STU15AM-77	replacement strobe tube	box	1



789

10 Joule Quad Flash Strobe Beacon








- 12-24 volt operating range.
- 75 quad flashes per minute.
- 10 joule/825 candela-second brightness.
- Meets SAE Class 2A specifications.
- Corrosion-free polycarbonate base and fresnel lens.
- Magnetic-mount model is equipped with 15' cord and lighter socket plug with built-in on/off switch and LED indicator.
- See 769 strobe for replacement lenses.


Order No.	Description	Pack	Std Carton
789A	amber	box	1
789R	red	box	1
789MA	amber, magnetic	box	1
L3-77	replacement strobe tube	box	1





Heavy Duty Construction





15 Joule Extreme-Duty Strobe Beacon



- Heavy duty, helical, xenon strobe tube withstands high vibration.
- Anti-shock suspended fixture to further isolate strobe tube.
- 12-24 volt operating range.
- 60 double flashes per minute.
- 15 joule/900 candela-second brightness.
- Low 1.6 amp current draw.
- Meets SAE Class 1A specifications.
- 6" tall polycarbonate fresnel lens.
- Shock-resistant rubber base and encapsulated circuitry resist dust, high humidity, and salt spray.
- Blue, clear, green and red also available by special order only.

Order No.	Description	Pack	Std Carton
788A	amber	box	1
769-25HA	amber replacement lens	box	1
585-77	replacement strobe tube	box	1

790

17 Joule Quad Flash Strobe Beacon






- 12-24 volt operating range.
- 70 quad flashes per minute.
- 17 joule/650 candela-second brightness.
- Meets SAE J845 Class 2A specifications.
- Powder-coated aluminum base and fresnel lens.
- See 769 strobe for replacement lenses.

Order No.	Description	Pack	Std Carton
790A	amber	box	1
790B	blue	box	1
790C	clear	box	1
790R	red	box	1
L7-77	replacement strobe tube	box	1





793

17 Joule Quad Flash Strobe Beacon








- 12-24 volt operating range.
- 70 quad flashes per minute.
- 17 joule/1200 candela-second brightness.
- Meets SAE J845 Class 2A specifications.
- Inner polycarbonate fresnel lens with outer acrylic lens cover.
- Corrosion-free polycarbonate base with stainless steel clamp ring.
- Blue, clear and red lenses also available by special order only.
- See 799A LED version on page 152.


Order No.	Description	Pack	Std Carton
793A	amber, 12-24V	box	1
755-15A	amber replacement lens	box	1
769-25C	clear inner repl. lens	box	1
L7-77	replacement strobe tube	box	1





LIGHT BARS





761

23" Revolving Halogen Mini Light Bar








- Dual 12 volt, 55-watt halogen bulbs with dual rotating reflectors.
- 270 FPM flash rate.
- Modular construction with field-replaceable lens, bulbs and motor.
- Magnetic mount model features four 75 lb. vertical pull magnets, 15' straight cord and lighter socket plug with integral on/off switch.

Order No.	Description	Pack	Std Carton
761A	amber, permanent	box	1
761MA	amber, magnetic	box	1
760-25A	amber replacement lens	box	1
VH550	halogen replacement bulb	Viz Pack	12

PROGRAMMABLE!





760

Programmable 23" Xenon Strobe Mini Light Bar







- Alternating quad-flash strobes produce 75 quad flashes per min.
- 12-24 volt operating range.
- Meets SAE J845 Class 2A specifications.
- · Amber outer lens and clear fresnel lenses.
- · Polycarbonate outer lens and powder-coated metal base.
- Magnetic mount model features four 45 lb. magnets, 15' straight cord and lighter socket plug with integral on/off switch.
- Permanent mount unit has 36" lead wires.

Order No.	Description	Pack	Std Carton
760A	amber, permanent	box	1
760MA	amber, magnetic	box	1
760-25A	amber repl. outer lens	box	1
760-25C	clear repl. outer lens	box	1
769-25A	amber repl. inner lens	box	1
769-25C	clear repl. inner lens	box	1
L3-77	replacement strobe tube	box	1

PROGRAMMABLE!




Quick-disconnect cord standard





Magnetic mount kit available



751Δ I FΓ

Programmable Low Profile Strobing Mini Light Bar













- 360° display with 23 user-selectable patterns.
- Output meets SAE J845 Class 1A & ECE R10-04 in flash modes 10,12,13, & 15.
- Multivolt configuration is compatible with 12 and 24 volt systems.
- Mounts permanently, or use optional magnetic mount kit that includes dualswitch standard accessory plug and twin suction/magnet mounting cups.
- Integral reverse polarity protection.
- Current draw is 3.8 amps @ 12V, 1.9 amps @ 24V.
- 6 amp fuse recommended.

Std Carton	Pack	Description	Order No.
1	box	amber, permanent mount	751A
1	box	magnetic mount kit	751-24K











- SAE J845 Class 2A light output
- Compatible with both 12 and 24 volt systems
- 2.75" low profile dome, 17.25" wide
- Low 1.4 amp maximum current draw
- Select from three different flash patterns.
- 752MA Magnetic mount version includes 15' straight cord and plug with on/off switch and flash mode selector button.
- 752 permanent mount version includes extra lead wire for flash pattern selection. Momentarily connecting this to the positive (+) lead advances the flash pattern. This can be done prior to installation or wired to a momentary switch (not included).

,	,		
Order No.	Description	Pack	Std Carton
752A	permanent mount	box	1
752ΜΔ	w/cord_plug & switch	hox	1






752MA magnetic version includes flash pattern selector switch on plug









778 LED

35" Sequencing Directional Light Bar








- · Eight lamp heads.
- 12-24 volt operating range.
- · Low 1.4 amp draw.
- 16 different flash modes.
- · Low profile, powder-coated aluminum housing.
- Includes 25' cable, touch pad controller and two L-shaped brackets.

Order No.	Description	Pack	Std Carton
778A	amber	box	1
778-48	replacement cable	poly pac	k 1



Includes threeswitch control box.



779-1 LED 55" Arrow Stick







- Ten bright, multi-volt LED lamps feature extra long life and low amp
- · Four traffic control flash modes—left arrow, right arrow, center lamps only, and all lamps flashing.
- · Aluminum housing with black powder coat finish and horizontal mounting flange.
- Includes 25' cable and power control box.

Order No.	Description	Pack S	td Carton
779-1A	amber	box	1
M817A-9	replacement light	mfg. pack	50
779-40	replacement control box	mfg. pack	1

ECE COMPLIANT LIGHTING: SERVING MARKETS ABROAD

The United Nations Economic Commission for Europe (UNECE), founded in 1947, works to promote pan-European economic integration. The European Union (EU) works closely with the UNECE in developing its uniform vehicle equipment code for member states, so EU vehicle lighting requirements mirror UNECE standards to a great degree. Peterson's ECE-compliant lighting products are certified to meet the applicable legal requirements for road vehicles in EU member countries and in other nations around the world that subscribe to ECE vehicle equipment standards.



Product listings featuring this icon meet both DOT and ECE vehicle equipment standards, and are legal for use both in North American and ECE markets. These are listed in the various other parts of this catalog.




Peterson manufactures the products listed in this ECE-compliant section for our customers who serve markets outside North America. Vehicle equipment regulations in the United States, Canada and Mexico differ from those in EU/ECE nations; use of these lights may violate national or local laws. US Federal regulations expressly forbid the sale of these lights domestically as replacements or substitutes for required DOT-compliant vehicle lighting equipment.









701C LED ECE-Compliant 7" (178 mm) PAR 56 Headlight









- LED PAR56 7-inch replacement is brighter and lasts many times longer than traditional sealed-beam headlights.
- Compliant with ECE Regs 112 & 7 for left-hand traffic.
- 1350/1700 lumen output (low/high beam).
- Built-in ECE front postion lamp function with dedicated LEDs.
- · H4 connection and position lamp blade terminal integrated into housing.
- Multivolt design is compatible with both 12V and 24V systems.
- Low power consumption 2.1A @ 12V, 1.0A @ 24V.
- 5400k~6300k color temperature closely matches natural daylight.
- UV- and impact-resistant, hard-coated polycarbonate lens.
- Includes two masking decals (required when driving in countries with righthand traffic), along with application template and instructions.
- Requires 701-491 anti-flicker harness for use on CANBUS-equipped vehicles, including '07 and newer Jeep Wrangler.
- Does not function as a daytime running light (DRL).


Order No.	Description	Pack	Std Carton
701C-ECE-LHT	ECE for Left Hand Traffic	box	1
701-491	anti-flicker harness	poly pac	k 1
701-83	replacement masking decal kit	mfg. pac	k 1













All component modules available separately for replacement of individual components.



1288 LED ECE-Compliant Stud-Mount Rear Cluster Light












- Combination side marker, Combination tail, stop, rear fog, turn signal and back-up light.
- Integral rear reflex.
- Certified to applicable ECE regulations.
- Surface mounts with four studs.
- Universal design mounts on left or right side of vehicle.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Hardwired design features 12" (300 mm) sheathed cable with a single 6-pole AMP plug for all wiring connections.
- Sealed components meet IP67 ingress protection level.
- Optional snap-in rear license plate light (not included with 1288 light).
- · Individual replacement light modules sold separately.
- Replacement modules come with adhesive-filled heat-sealable connectors for corrosion resistant butt-splices to existing wiring.


Order No.	Description	Pack	Std Carton
1288	cluster light assy, stud mount	mfg. pacl	k 10
1288C	optional white license plate module	mfg. pacl	k 10
1288A	replacement side marker	mfg. pacl	k 10
1288B	replacement back-up light	mfg. pacl	k 10
1288F	replacement rear fog light	mfg. pacl	k 10
1288R	replacement tail/stop light	mfg. pacl	k 10
1288TA	replacement turn signal	mfg. pacl	k 10



LED COMBINATION LIGHTS



1290-09



2290A-R LED ECE Compliant Combination Stop, Rear Turn & Tail Light












- · Updated lens design with new Fresnel-style optics.
- Direct replacements for Peterson 1290A-R light.
- · Amber diodes on top, red diodes below.
- Light appears clear when unlit.
- · Compliant to ECE/ADR requirements for all functions, mounted vertically or horizontally.
- · Convenient, low-profile surface mounting.
- · Sealed lens and housing meets IP67 ingress protection level.
- 100,000 hour rated life.
- 2 metre (78") sheathed wires.

Order No.	Description	Pack Std C	arton
2290A-R	amber & red, 40 diode	poly pack	6
M2290A-R	amber & red, 40 diode	mfg. pack	12
1290-09	black mounting bracket	mfg. pack	1
1290-24	optional mounting gasket	box	20





2291A-R LED ECE Compliant Combination Stop, Rear Turn & Tail Light












- Updated lens design with new Fresnel-style optics.
- Direct replacements for Peterson 1291A-R light.
- Amber diodes on top, red diodes below.
- Light appears clear when unlit.
- · Compliant to ECE/ADR requirements for all functions, mounted vertically or horizontally.
- · Convenient, low-profile surface mounting.
- Sealed lens and housing meets IP67 ingress protection level.
- 100,000 hour rated life.
- 2 metre (78") sheathed wires.

Order No.	Description	Pack Std Car	ton
2291A-R	amber & red, slimline	poly pack	6
M2291A-R	amber & red, slimline	mfg. pack	24





2291F-C LED ECE Compliant Combination Reverse & Rear Fog Light











- Advanced lens design with Fresnel-style optics.
- Designed to compliment 2290A-R / 2291A-R.
- · Light appears clear when unlit.
- . Compliant to ECE/ADR requirements for all functions, mounted vertically or horizontally.
- · Convenient, low-profile surface mounting.
- Sealed lens and housing meets IP67 ingress protection level.
- 100,000 hour rated life.
- 2 metre (78") sheathed wires.

Order No.	Description	Pack Std (Carton
2291F-C	white reverse & red fog	poly pack	6
M2291F-C	white reverse & red fog	mfg. pack	24







1217-9/1218-9 LumenX[®] LED ECE Compliant Round Stop/Turn/Tail Light















- · AMP-compatible connector integrated into housing.
- Regulated design provides voltage protection and consistent output.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Kits include light and plug. 1217KR-9 also includes grommet.
- Sealed lens and housing meets IP67 ingress level.
- Grommet version fits 114 mm hole in material up to 6 mm.
- See pages 184-185 & 187 for mounting options.

Order No.		Description	Pack	Std	Carton
1217KR-9	KIT	red kit, grommet mount	poly pac	k	6
1218KR-9	KIT	red kit, flange mount	poly pac	k	6
1217R-9		red, grommet mount	poly pac	k	6
1218R-9		red, flange mount	poly pac	k	6
426-18		rubber grommet	poly pac	k	12
B426-18		rubber grommet	mfg. pad	ck	100
417-49		hardshell plug	poly pac	k	6
B417-49		hardshell plug	mfg. pad	ck	100
817-49		molded plug	poly pac	k	12
B817-49		molded plug	mfg. pad	ck	100

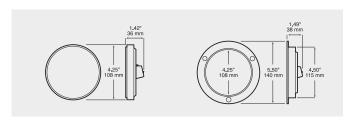

1217-9/1218-9 *LumenX*® LED ECE Compliant **Round Turn Signal Light**














- · White diodes and advanced optics fully illuminate red lens.
- · AMP-compatible connector integrated into housing.
- Regulated design provides voltage protection and consistent output.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Kits include light and plug. 1217KA-9 also includes grommet.
- Sealed lens and housing meets IP67 ingress level.
- Grommet version fits 114 mm hole in material up to 6 mm.
- See pages 184-185 & 187 for mounting options.

Description	Pack St	d Carton
T amber kit, grommet mount	poly pack	6
T amber kit, flange mount	poly pack	6
amber, grommet mount	poly pack	6
amber, flange mount	poly pack	6
rubber grommet	poly pack	12
rubber grommet	mfg. pack	100
hardshell plug	poly pack	6
hardshell plug	mfg. pack	100
molded plug	poly pack	12
molded plug	mfg. pack	100
	T amber kit, grommet mount T amber kit, flange mount amber, grommet mount amber, flange mount rubber grommet rubber grommet hardshell plug hardshell plug molded plug	T amber kit, grommet mount poly pack T amber kit, flange mount poly pack amber, grommet mount poly pack amber, flange mount poly pack rubber grommet poly pack rubber grommet mfg. pack hardshell plug poly pack molded plug poly pack




LED ROUND LIGHTS









1217-9/1218-9 LumenX® LED ECE Compliant **Round Reverse Light**















• White diodes fully illuminate advanced optics lens.

- · AMP-compatible connector integrated into housing.
- Regulated design provides voltage protection and consistent output.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Kits include light and plug. 1217KC-9 also includes grommet.
- Sealed lens and housing meets IP67 ingress level.
- Grommet version fits 114 mm hole in material up to 6 mm.
- See pages 184-185 & 187 for mounting options.

Order No.		Description	Pack	Std Carton
1217KC-9	KIT	white kit, grommet mount	poly pack	6
1218KC-9	KIT	white kit, flange mount	poly pack	6
1217C-9		white, grommet mount	poly pack	6
1218C-9		white, flange mount	poly pack	6
426-18		rubber grommet	poly pack	(12
B426-18		rubber grommet	mfg. pacl	k 100
417-48		hardshell plug	poly pack	6
B417-48		hardshell plug	mfg. pacl	k 100
817-48		molded plug	poly pack	(12
B817-48		molded plug	mfg. pacl	k 100

1217-9 / 1218-9 LED ECE Compliant **Round Rear Fog Light**













- Replaces part nos. 1217F & 1218F.
- 108 mm (4-1/4") round rear fog light.
- · Certified to meet ECE requirements.
- Does not require "top" positioning.
- Sealed lens and housing meets IP67 ingress level.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Grommet fits 114 mm hole in material up to 6 mm.
- See pages 184-185 & 187 for mounting options.

Order No.	Description	Pack	Std Carton
1217F-9	clear w/red diodes	poly pack	6
1218F-9	clear w/ red diodes, flange mnt.	poly pack	6
426-18	rubber grommet	poly pack	12
B426-18	rubber grommet	mfg. pack	100
417-48	hardshell plug	poly pack	6
B417-48	hardshell plug	mfg. pack	100
817-48	molded plug	poly pack	12
B817-48	molded plug	mfg. pack	100
817-48	molded plug	poly pack	12







Clear lens with clear diodes that light up red and amber.

1217A-R/1218A-R LED ECE Compliant 12 Combination Stop, Rear Turn & Tail Light Co













- 108 mm (4-1/4") round rear combination light.
- Turn function in upper half, tail and stop functions in lower half.
- Clear lens with clear diodes that light up amber and red.
- Certified to meet ECE requirements for all functions.
- Sealed lens and housing meets IP67 ingress level.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- · Available in grommet mount or flange mount version.
- Grommet version fits 114 mm hole in material up to 6 mm.
- See pages 184-185 & 187 for mounting options.

Order No.	Description	Pack S	td Carton
1217A-R	combo, grommet mt., 2m leads	mfg. pack	50
1217A-R-SW	combo, grommet mt., 12" leads	mfg. pack	50
1218A-R	combo, flange mount, 2m leads	mfg. pack	50
1218A-R-SW	combo, flange mount, 12" leads	mfg. pack	50
426-18	rubber grommet	poly pack	12
B426-18	rubber grommet	mfg. pack	100



Clear lens with clear diodes that light up red and white.

1217F-C LED ECE Compliant Combination Reverse & Rear Fog Light















- 108 mm (4-1/4") round rear combination light.
- Rear fog function in upper half, reverse function in lower half.
- Clear lens with clear diodes that light up red and white.
- Certified to meet ECE requirements for all functions.
- Sealed lens and housing meets IP67 ingress protection level.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Hardwired design features 12" (300 mm) leads.
- Grommet version fits 114 mm hole in material up to 6 mm.
- See pages 184-185 & 187 for mounting options.

Description	Pack	Std Carton
red/white combo	mfg. pacl	k 50
red/white combo, flange mount	mfg. pacl	k 50
rubber grommet	poly pack	(12
rubber grommet	mfg. pacl	k 100
	red/white combo red/white combo, flange mount rubber grommet	red/white combo mfg. pack red/white combo, flange mount mfg. pack rubber grommet poly pack





TURN

MARKER

LED ROUND LIGHTS



2217A-R/2218A-R/2219A-R LED ECE Compliant Combination Stop, Rear Turn & Tail Light










- 108 mm (4-1/4") round rear combination light.
- Turn function in center, tail and stop functions in outer ring.
- Certified to meet ECE requirements for all functions.
- Sealed lens and housing meets IP67 ingress protection level.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Hardwired design features 12" (300 mm) leads.
- Grommet version fits 114 mm hole in material up to 6 mm.

Order No.	Description	Pack S	Std Carton
2217A-R	red/amber combo, grommet mt.	mfg. pack	50
2218A-R	red/white combo, flange mount	mfg. pack	50
2219A-R	red/white combo, stud mount	mfg. pack	50
426-18	rubber grommet	poly pack	12
B426-18	rubber grommet	mfg. pack	100



2219A-R features two mounting studs on rear

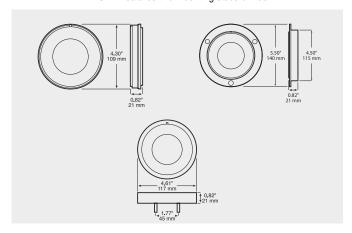



2217F-C/2218F-C/2219F-C LED ECE Compliant Combination Reverse & Rear Fog Light










- 108 mm (4-1/4") round rear combination light.
- Reverse function in center, rear fog function in outer ring.
- Certified to meet ECE requirements for all functions.
- Sealed lens and housing meets IP67 ingress protection level.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Hardwired design features 12" (300 mm) leads.
- Grommet version fits 114 mm hole in material up to 6 mm.

Order No.	Description	Pack	Std Carton
2217F-C	red/white combo, grommet mount	mfg. pac	k 50
2218F-C	red/white combo, flange mount	mfg. pac	k 50
2219F-C	red/white combo, stud mount	mfg. pac	k 50
426-18	rubber grommet	poly pacl	k 12
B426-18	rubber grommet	mfg. pac	k 100



2219F-C features two mounting studs on rear



1220/1223 LumenX® LED ECE Compliant **Oval Tail & Stop Light**













- Certified to meet ECE requirements in horizontal or vertical position.
- · AMP-compatible connector integrated into housing.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Kits include light and plug. 1220KR-10 also includes grommet.
- Sealed lens and housing meets IP67 ingress level.
- · Grommet version fits material up to 6 mm.

Order No.		Description	Pack	Std Carton
1220KR-10	KIT	red kit, grommet	poly pac	k 6
1223KR-10	KIT	red kit, flange mount	poly pac	k 6
1220R-10		red, grommet	poly pac	k 6
1223R-10		red, flange	poly pac	k 6
B421-18		rubber grommet	mfg. pac	k 100
B417-49		hardshell plug	mfg. pac	k 100









1220/1223 LumenX® LED ECE Compliant **Oval Front Turn Signal Light**













- Certified to meet ECE requirement for front & rear turn indicator when mounted in vertical or horizontal orientation.
- Integrated AMP-compatible receptacle, meets IP67 ingress level
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Kits include light and plug. 1220KA-10 also includes grommet.
- · Grommet version fits material up to 6 mm.

Order No.		Description	Pack	Std Carton
1220KA-10	KIT	amber kit, grommet	poly pack	6
1223KA-10	KIT	amber kit, flange	poly pack	6
1220A-10		amber, grommet	poly pack	6
1223A-10		amber, flange	poly pack	6
B421-18		rubber grommet	mfg. pacl	k 100
B417-48		hardshell plug, 2-wire	mfg. pacl	k 100







1220/1223 LumenX® LED ECE Compliant **Oval Reverse Light**













- Certified to meet ECE requirement for reverse light function when mounted in vertical or horizontal orientation.
- Integrated AMP-compatible receptacle, meets IP67 ingress level
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Kits include light and plug. 1220KC-10 also includes grommet.
- · Grommet version fits material up to 6 mm.


Order No.		Description	Pack S	td Carton
1220KC-10	KIT	white kit, grommet mount	poly pack	6
1223KC-10	KIT	white kit, flange mount	poly pack	6
1220C-10		white, grommet mount	poly pack	6
1223C-10		white, flange mount	poly pack	6
B421-18		rubber grommet	mfg. pack	100
B417-48		hardshell plug, 2-wire	mfg. pack	100

LED OVAL LIGHTS



Shown with B423-11 chrome bezel installed, available separately.





1223-4 LED ECE Compliant Surface Mount Rear Tail & Stop Light












- Oval design w/ black surface-mount housing & optional chrome bezel.
- Certified to meet ECE requirements in horizontal or vertical position.
- Sealed lens and housing meets IP67 ingress level.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Hardwired design with 8" lead wires.
- · Convenient surface mounting with four screws.
- See matching amber rear turn signal below.
- Attractive chrome bezel available separately.

Order No.	Description	Pack Std Carton
1223R-4	red tail & stop	mfg. pack 50
423-11	chrome bezel	poly pack 12
B423-11	chrome bezel	mfg. pack 50

Shown with B423-11 chrome bezel installed, available separately.





1223-4 LED ECE Compliant Surface Mount Rear Turn Signal Light












- Oval design w/ black surface-mount housing & optional chrome bezel.
- Certified to meet ECE requirements in horizontal or vertical position.
- · Sealed lens and housing meets IP67 ingress level.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Hardwired design with 8" lead wires.
- · Convenient surface mounting with four screws.
- · See matching red rear stop and tail light above.
- · Attractive chrome bezel available separately.

per rear turn signal	mfg. pack	50
ome bezel	poly pack	12
ome bezel	mfg. pack	50
	ome bezel	ome bezel poly pack



Shown with B423-11 chrome bezel installed, available separately.





1223 LED ECE Compliant Surface Mount Combination Stop, Rear Turn & Tail Light











- Oval design w/ black surface-mount housing & optional chrome bezel.
- Clear lens with clear diodes that light up red and amber.
- Certified to meet ECE requirements for all functions in horizontal or vertical position.
- · Sealed lens and housing meets IP67 ingress level.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- · Hardwired design with 8" lead wires.
- · Convenient surface mounting with four screws.
- See matching red rear stop and tail light above.

Order No.	Description	Pack Std C	arton
1223A-R-MV	red/amber combo, multi-volt	mfg. pack	50
423-11	chrome bezel	poly pack	12
B423-11	chrome bezel	mfg. pack	50

850R LED ECE Compliant **Rectangular Tail & Stop Light**












- Certified to meet both FMVSS 108 (USA) & ECE (European) requirements in horizontal or vertical position.
- Available with 12" or 2 meter (61/2-ft.) hardwired leads.
- Sealed lens and housing meets IP67 ingress protection level.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- 850R-1P has hardwired PL3 plug.
- · Grommet fits material up to 6 mm.
- Also fits surface-mount cluster pods. See page 189.

Order No.	Description	Pack Std C	arton
P850R-1	red, 12" leads	poly pack	6
850R	red, 2 meter leads	mfg. pack	10
850R-1	red, 12" leads	mfg. pack	10
850R-1P	red, 10" leads w/ plug	mfg. pack	10
850-18	rubber grommet	poly pack	12
B850-18	rubber grommet	mfg. pack	50





850A LED ECE Compliant **Rectangular Rear Turn Signal Light**














- Available with 12" or 2 meter (61/2-ft.) hardwired leads.
- Sealed lens and housing meets IP67 ingress protection level.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Potted, hardwired terminals for durability.
- 850A-1P has hardwired PL3 plug.
- · Grommet fits material up to 6 mm.
- · Also fits surface-mount cluster pods. See page 189.

Order No.	Description	Pack Std Car
P850A-1	amber, 12" leads	poly pack
850A	amber, 2 meter leads	mfg. pack
850A-1	amber, 12" leads	mfg. pack
850A-1P	amber, 10" leads w/ plug	mfg. pack
850-18	rubber grommet	poly pack
B850-18	rubber grommet	mfg. pack









850F LED ECE Compliant **Rectangular Rear Fog Light**









- Certified to meet ECE requirements in horizontal or vertical position.
- Sealed lens and housing meets IP67 ingress protection level.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Equipped with 12" (300 mm) sheathed leads.
- · Grommet fits material up to 6 mm.
- Also fits surface-mount cluster pods. See page 189.

Order No.	Description	Pack Std C	arton
850F-SW	clear lens with red diodes	mfg. pack	10
850-18	rubber grommet	poly pack	12
B850-18	rubber grommet	mfg. pack	50


TURN

띪

> 12 50

LED RECTANGULAR LIGHTS

Clear lens with diodes that light up red and amber.



851A-R LED ECE Compliant Combination Stop, Rear Turn & Tail Light














- Turn function in upper half, tail and stop functions in lower half.
- Clear lens with diodes that light up red and amber.
- Certified to meet ECE requirements for all functions.
- Sealed lens and housing meets IP67 ingress protection level.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Available with 12" or 2 meter (61/2-ft.) hardwired leads.
- · Also fits surface-mount cluster pods. See page 189.

Order No.	Description	Pack	Std Carton
P851A-R-SW	amber/red combo, 12" leads	poly pac	k 6
851A-R	amber/red combo, 2m leads	mfg. pac	k 10
851A-R-SW	amber/red combo, 12" leads	mfg. pac	k 10
850-18	rubber grommet	poly pac	k 12
B850-18	rubber grommet	mfg. pac	k 50



Clear lens with clear diodes that light up red and white.



851F-C LED ECE Compliant Combination Reverse & Rear Fog Light













- Rear fog function in upper half, reverse function in lower half.
- · Clear lens with diodes that light up red and white.
- Certified to meet ECE requirements in vertical position.
- Sealed lens and housing meets IP67 ingress protection level.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Equipped with 12" sheathed leads.
- · Also fits surface-mount cluster pods. See page 189.

Order No.	Description	Pack Std Cart	on
851F-C-SW	red, white combo	mfg. pack	10
850-18	rubber grommet	poly pack	12
B850-18	rubber grommet	mfg. pack	50

850C LED ECE+DOT Compliant Rectangular Reverse Light














- 2 versions available for either horizontal or vertical mounting.
- Meets DOT & ECE requirements when mounted as specified.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Available with 12" or 2 meter (61/2-ft.) hardwired leads.
- 850C-1P has hardwired PL3 plug.
- Also fits surface-mount cluster pods. See page 189.

Order No.	Description	Pack Std	Carton
P850C-1	vertical, 12" leads	poly pack	6
850C	vertical, 2m leads	mfg. pack	10
850C-1	vertical, 12" leads	mfg. pack	10
850C-1P	vertical, 12" leads, with plug	mfg. pack	10
850C-AMP	vertical, with AMP shroud	mfg. pack	10
850HC-1	horizontal, 12" leads	mfg. pack	10
850-18	rubber grommet	poly pack	12
B850-18	rubber grommet	mfg. pack	50







Optional mounting bracket and chrome bezel are shown with 1200A lights installed; sold separately.





1200 LED ECE Compliant Oval Side Marker/Outline Lights w/ Reflex











- Low-profile, sealed design with integral reflex function.
- 1200C has two diodes, 1200A and 1200R have three diodes.
- Certified to applicable ECE regulations.
- Side marker meets ECE regulations mounted horizontally or vertically.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Meets IP67 ingress protection level.
- Hardwired design has 12" (300mm) sheathed leads.
- · See page 190 for bracket and bezel dimensions.

Description	Pack	Std Carton
amber side marker	poly pac	k 12
white front outline marker	poly pac	k 12
red rear outline marker	poly pac	k 12
amber side marker	mfg. pac	k 50
amber w/ AMP shroud	mfg. pac	k 50
white front outline marker	mfg. pac	k 50
white w/ AMP shroud	mfg. pac	k 50
red rear outline marker	mfg. pac	k 50
red w/ AMP shroud	mfg. pac	k 50
horizontal mount bracket	mfg. pac	k 400
chrome bezel	poly pac	k 12
chrome bezel	mfg. pac	k 50
	amber side marker white front outline marker red rear outline marker amber side marker amber w/ AMP shroud white front outline marker white w/ AMP shroud red rear outline marker red w/ AMP shroud horizontal mount bracket chrome bezel	amber side marker poly pace white front outline marker poly pace red rear outline marker poly pace amber side marker mfg. pace amber w/ AMP shroud mfg. pace white front outline marker mfg. pace white w/ AMP shroud mfg. pace red rear outline marker mfg. pace red w/ AMP shroud mfg. pace red w/ AMP shroud mfg. pace red w/ AMP shroud mfg. pace chorizontal mount bracket mfg. pace chrome bezel poly pace

1203 LED ECE+DOT Compliant Marker & Outline Lights w/Integral Reflex










- LED marker lights feature 3 diodes and integral reflex.
- Red and amber lights meet both ECE and DOT requirements.
- White light certified to meet ECE front outline marker standard.
- Mounts on 4.5" centers to any flat, vertical surface.
- Hardwired design has 12" (300mm) sheathed leads.
- "-PKD" versions have Packard-compatible hardshell connector.
- 9-32 volt operating range.

Order No.	Description	Pack Std C	arton
P1203A	amber side marker	poly pack	12
P1203C	white front outline marker	poly pack	12
P1203R	red rear outline marker	poly pack	12
1203A	amber, stripped leads	mfg. pack	50
1203A-PKD	amber w/ hardshell connector	mfg. pack	50
1203C	white front outline marker	mfg. pack	50
1203C-PKD	white w/ hardshell connector	mfg. pack	50
1203R	red rear outline marker	mfg. pack	50
1203R-PKD	red w/ hardshell connector	mfg. pack	50





LED OUTLINE & MARKER LIGHTS



1268R-MV mounted in 168-10 bezel

1268 Series LED ECE Compliant Side Marker/Outline Lights












- Equipped with two diodes except 1268A-MTC, which has four.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- · Certified to applicable ECE and ADR regulations.
- 1268A-MTC meets ECE Reg 6, Cat 5 for supplementary side direction indicator and comes equipped with 2.5 meter leads.
- Hardwire design features sheathed, stripped leads.
- 168-09 bracket mounts 1268-series lights on 1.125" (29 mm) centers.
- See pages 178–179 for bracket and bezel dimensions.

Order No.		Description	Pack St	d Carton
P1268A-MV		amber, 2 m leads	poly pack	12
P1268A-MVC		amber w/clear lens, 2 m leads	poly pack	12
P1268R-MV		red, 2 m leads	poly pack	12
P1268R-MVC		red w/clear lens, 2 m leads	poly pack	12
P1268W-MV		white lens, 2 m leads	poly pack	12
1268A-MV		amber, 2 m leads	mfg. pack	50
1268A-MVC		amber w/clear lens, 2 m leads	mfg. pack	50
1268A-MVC-BT2		amber w/ clr lens, .180 bullets	mfg. pack	50
1268A-MTC		amber w/clear lens, 2.5 m	mfg. pack	50
1268R-MV		red, 2 m leads	mfg. pack	50
1268R-MVC		red w/clear lens, 2 m leads	mfg. pack	50
1268W-MV		white lens, 2 m leads	mfg. pack	50
168-09		bracket, black	poly pack	12
168-092K	KIT	alum. brush guard & gasket kit	poly pack	12
168-10K	KIT	chrome bezel & gasket kit	poly pack	12
168-18		mounting gasket	poly pack	12
B168-09		bracket, black	mfg. pack	100
B168-092	KIT	alum. brush guard & gasket kit	mfg. pack	100
B168-10		chrome bezel	mfg. pack	100
B168-18		gasket for use w/o bracket	mfg. pack	100
B168-181		gasket for use with B168-092	mfg. pack	100
B168-182		gasket for use with B168-10	mfg. pack	100







2268 LED ADR Compliant Combination Side Marker Light











- Certified to applicable ADR (Australian Design Rules) regulations.
 NOT ECE COMPLIANT
- Welded rear housing, advanced surface-mount diodes, and more precise separation between red and amber illumination.
- Amber and red diodes behind clear lens
- · Low profile, narrow surface-mount design suits narrow rails.
- · Meets IP67 ingress rating.
- Hardwired design features 18-gauge leads.
- 2268A-R-MV has 2.5 meter leads. 2268A-R-MV-BT2 has 200 mm leads.
- Flat-wire sheathed cable for simplified crimp connections, less bulk.
- Multiple mounting hardware options.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- · Recommended fastening: 4 mm screw.
- 168-09 bracket mounts 2268 lights on 1.125" (29 mm) centers.
- See pages 178-179 for bracket and bezel dimensions.

Order No.		Description	Pack	Std Carton
P2268A-R-MV		2.5 m / 98.5" stripped leads	poly pac	k 12
P2268A-R-MV-BT2		200 mm / 8", .180 bullets.	poly pac	k 12
2268A-R-MV		2.5 m / 98.5" stripped leads	mfg. pac	k 50
2268A-R-MV-BT2		200 mm / 8", .180 bullets.	mfg. pac	k 50
B168-09		bracket, black	mfg. pac	k 100
B168-092	KIT	alum. brush guard & gasket kit	mfg. pac	k 100
B168-10		chrome bezel	mfg. pac	k 100
B168-181		gasket for use with B168-092	mfg. pac	k 100
B168-182		gasket for use with B168-10	mfg. pac	k 100
B2268-18		gasket for use w/o bracket	mfg. pac	k 100



- · Accessorizes 38, 108, 130, and 138 series lights.
- Sturdy die-cast guard provides added protection for oblong lights.
- Chrome plated for beauty and durability.
- Fits most PM oblong lights as well as competitive models.

Order No.	Description	Pack	Std Carton
V106-09	chrome	Viz Pack	6
B106-09	chrome	mfg. pac	k 60




127

Flush Mount Grommet

- Flush mounts 127 and 129 clearance light to vehicle.
- Recommended hole size for 1/8" thick plate: 3.5" x 2.4" with 7/16" radius corners.
- Requires 142-49 or B142-49 plug for incandescent light installation.

Order No.	Description	Pack	Std Carton
127-18	black	poly pacl	k 24
B127-18	black	mfg. pac	k 100






133 Chrome Bezel

- Fits 133 clearance light to vehicle.
- Attractive chrome finish.
- · Mounts on 3" centers.

Order No.	Description	Pack	Std Carton
B133-10	chrome	mfg. pad	ck 50






142

Surface Mount Bracket for 2½" Round Lights





- Allows grommet-mount 2.5" clearance/marker lights to be surface mounted
 Branch deflector design protects light unit.
- Occasion deflector design protects light drift.
- Constructed of UV and corrosion resistant plastic
- · Available in gray or black.
- Requires 143-18 or 144-18 grommet to complete installation.

Order No.	Description	Pack Std Ca	rton
142-09	gray	poly pack	12
B142-091	black	mfg. pack	100



B-U/UTIL

SPEC

EMERG

REFLECT

\CC\

ERCH

E C E

MOUNTING ACCESSORIES

GROMMETS, BRACKETS & BEZELS


142

2 1/2" Edge Mount Grommet

- Provides edge mounting of 2 1/2" sealed lights.
- Ideal for mounting PC-rated lights.
- Fits 2 25/32" mounting hole.
- Requires 142-49 plug to complete installation.

Order No.	Description	Pack Std Ca	rton
B142-17	open back	mfg. pack	100
142-49	plug	poly pack	12
B142-49	plug	mfg. pack	100






142 2 1/2" Grommet



- Allows 2 1/2" diameter sealed units to be flush mounted.
- Fits 72, 142, 143, 162, 163, 192, 193, 196, and 197 series lights.
- Fits 3" mounting hole.
- Installation of lights with PL10 plug requires 142-49 or 162-49 plug.
- Kit contains 142-18 grommet, 142-49 plug and grounding screw.

Order No.		Description	Pack	Std Carton
142-18		open back	poly pac	k 24
142-18K	KIT	open back, kit	poly pac	k 12
B142-18		open back	mfg. pac	k 100
142-49		plug	poly pac	k 12
B142-49		plug	mfg. pac	k 100





143/144 2 1/2" Grommet



- Mounts 2 1/2" diameter sealed units.
- Fits 72, 142, 143, 162, 163, 173, 175, 192, 193, 196, and 197 series lights.
- Fits 2 25/32" mounting hole.
- Installation of lights with PL10 plug requires 142-49 or 162-49 plug.
- Kit contains 143-18 grommet, 142-49 plug and grounding screw.
- Closed back unit is recommended for open installations where splash plate is not used.


Order No.		Description	Pack	Std Carton
143-18		open back	poly pack	24
143-18K	KIT	open back, kit	poly pack	12
144-18		closed back	poly pack	24
B143-18		open back	mfg. pack	100
B144-18		closed back	mfg. pack	100
142-49		plug	poly pack	12
B142-49		plug	mfg. pack	100





- Closed back protects terminals from wheel splash.
- Fits 72, 142, 143, 162, 163, 173, 175, 192, 193, 196, and 197 series lights.
- Fits 3" mounting hole.
- Installation of lights with PL10 plug requires 142-49 or 162-49 plug.
- Easy access side entry for plug.

Order No.	Description	Pack Std Carton
B143-17	closed back	mfg. pack 100
142-49	plug	poly pack 12
B142-49	plug	mfg. pack 100









146-092


143/146 L-Mount Brackets




- Brackets mount either 2-inch diameter or 2.5-inch diameter grommet-mount lights perpendicular to any flat surface.
- Heavy-gauge steel construction.
- Rugged black power coated finish.
- 143-092 accepts 142-18, 143-18 & 144-18 grommets.
- 146-092 accepts 146-18, 146-182 & 146-184 grommets.

Order No.	Description	Pack Std Carton
143-092	accepts 2.5" lights	mfg. pack 6
146-092	accepts 2" lights	mfg. pack 6





146-18



146-182

146 2" Grommets



- Allows 2" diameter sealed units to be flush mounted.
- Fits 146, 166, 164, 165, 194, 195, 198, and 199 series lights.
- Fits 2 5/16" mounting hole in panels up to 0.25" thick.
- Installation of lights with PL10 plug requires 142-49 or 162-49 plug.
- Kit includes 146-18 grommet, 142-49 plug and grounding screw.
- Closed back unit is recommended for open installations where splash plate is not used.

Order No.		Description	Pack	Std Carton
146-18		open back	poly pack	24
146-18K	KIT	open back, kit	poly pack	12
146-182		closed back	poly pack	24
B146-18		open back	mfg. pack	(100
B146-182		closed back	mfg. pack	100
142-49		plug	poly pack	12
B142-49		plug	mfg. pack	(100

TIIRN

MARKER

B-U/UT

7

H

HOH

≅


REFLECT

ACCY

ERCH

MOUNTING ACCESSORIES


GROMMETS, BRACKETS & BEZELS





- Allows grommet-mount 2" clearance/marker lights to be surface mounted
- Branch deflector design protects light unit.
- Constructed of UV and corrosion resistant plastic.
- Fits 2" diameter round sealed lights.
- Requires 146-181 grommet and appropriate plug for installation.

Order No.	Description	Pack Std Cartor
146-09	gray	poly pack 12
B146-09	gray	mfg. pack 100
B146-093	black	mfg. pack 100
146-181	grommet	poly pack 48
B146-181	grommet	mfg. pack 100
142-49	plug	poly pack 12
B142-49	plug	mfg. pack 100




146 2" Grommet




• Mounts 2" diameter sealed units in 146-09 surface mount bracket.

Order No.	Description	Pack Std Ca	arton
146-181	open back	poly pack	48
B146-181	open back	mfg. pack	100















146/142 Cam-On Surface Mount Brackets

- Allows 2" or 2 1/2" lamps to be surface mounted.
- Stainless steel construction.
- · Easy cam-on, cam-off installation for incandescent or LED lights.
- Requires 142-49 or 162-49 plug to complete installation.
- · Mounts with two screws.

Order No.	Description	Pack	Std Carton
2593	2" LED & incandescent	mfg. pa	ck 100
2594	2 1/2" LED & incandescent	mfg. pa	ck 100

GROMMETS, BRACKETS & BEZELS



150 Mounting Brackets



- Allows 150, 152, and 203 series lights to be surface mounted.
- Gray, chrome or black finish.
- Mounts on 2" centers.
- Requires 142-49 2-wire plug for electrical connection.
- Pack includes bracket, gasket and mounting screws.

Order No.	Description	Pack Std Carton
150-09	gray	poly pack 12
150-10	chrome	poly pack 12
150-13	black	poly pack 12
142-49	plug w/ 6" leads	poly pack 12
B142-49	plug w/ 6" leads	mfg. pack 100






- · White ABS construction.
- Allows 150, 153, and 203 series lights to be surface mounted.
- Mounts on 3 5/8" centers.
- 150 and 203 series require 142-49 2-wire plug for electrical connection.
- 153 series require 153-49 plug, except 153C which is hardwired.

Order No.	Description	Pack	Std Carton
150-091	white	poly pacl	k 12
B150-091	white	mfg. pac	k 50
142-49	plug w/ 6" leads - 150, 203 series	poly pacl	k 12
B142-49	plug w/ 6" leads - 150, 203 series	mfg. pac	k 100
153-49	plug w/ 6" leads - 153 series	poly pacl	k 12
B153-49	plug w/ 6" leads – 153 series	mfg. pac	k 100






150

Chassis Mounting Kits

- Allows 150 series lights to be surface mounted.
- · Available in chrome and black.
- Mounts on 2" centers.
- Grounds through mounting hardware.
- Kit includes bracket, gasket, mounting screws and 17" lead wire with .156 bullet terminal.

Order No.	Description	Pack Std (Carton
150-092	black kit	poly pack	12
150-102	chrome kit	poly pack	12
B150-12	chassis/chrome bracket	mfg. pack	100

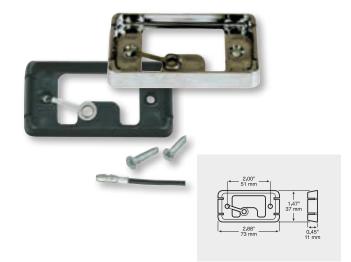

MOUNTING ACCESSORIES

GROMMETS, BRACKETS & BEZELS




Surface Mount Bracket



- Allows 153, 203, and 253 series lights to be surface mounted.
- 153 light requires 153-49 plug for installation.
- Also accepts 150 style light with 142-49 plug when vehicle surface is cut out to clear plug.

Order No.	Description	Pack	Std Carton
150-095	black	poly pac	k 12
B150-095	black	mfg. pad	k 100






150 Moi

Mounting Grommets


- Allows flush mounting of 150 or 153 series light on metallic or non-metallic surfaces.
- B150-18 also accepts 152 light.
- 150 and 203 series require 142-49 2-wire plug for electrical connection.
- 153 series require 153-49 plug, except 153C which is hardwired.
- Hole spec for 150-18: 2.88" x 1.53" x 11/64" max panel thickness.
- Hole spec for 150-181: 3.00" x 1.65" x 1/4" max panel thickness.
- 153-181 is identical to 150-18, but designed to provide better water sealing.


Order No.	Description	Pack	Std Ca	rton
B150-18	black	mfg. pac	k	100
B150-181	black	mfg. pag	:k	100





150-181






150

License/Utility Light Bracket

- High-impact polycarbonate.
- · Black or gray.
- 150C, 153C, or 203C light snaps into housing to form single unit.
- · Mounts to vertical surfaces.
- Visor hood shields direct light from following vehicles.
- Complies with applicable regulations without need for additional spacers.

Order No.	Description	Pack Std Car	ton
150-14	gray	poly pack	24
150-141	black	poly pack	24
B150-14	gray	mfg. pack	100
B150-141	black	mfg. pack	100
142-49	plug	poly pack	12
B142-49	plug	mfg. pack	100






License Plate Light Brackets

- All Peterson 150C & 153C series license lights snap in easily.
- Bracket features hidden mounting holes and stylish design.
- Available in gloss black or brilliant chrome finish.
- Mounts to vertical surfaces.
- Visor hood shields direct light from following vehicles.
- Complies with applicable regulations without need for additional spacers.

Order No.	Description	Pack Std Ca	rton
B150-142	black	mfg. pack	50
B150-143	chrome	mfg. pack	50




154-09K












154 **Surface Mount Brackets**

- Allows 154 and 161 series lights to be surface mounted.
- Gray, chrome or black finish.
- Mounts on 3" centers.
- · Poly pack kits mount to metal surfaces and includes bracket, terminal pad with molded lead wire and mounting screws; grounds through mounting
- B154-11K-BT1 kit consists of bracket and molded plug assembly terminated
- Bracket available without terminal pad and wire; mounts to nonmetallic surfaces with 153-49 two wire plug.

Order No.		Description	Pack	Std Carton
154-09K	KIT	gray kit	poly pac	k 12
154-10K	KIT	chrome kit	poly pac	k 12
154-11K	KIT	black kit	poly pac	k 12
B154-09		gray bracket only	mfg. pac	k 100
B154-10		chrome bracket only	mfg. pac	k 100
B154-11		black bracket only	mfg. pac	k 100
B154-11K	KIT	black kit w/o screws	mfg. pac	k 100
B154-11K-BT1	KIT	black kit w/o screws, .180 bullet	mfg. pac	k 100



154 Stainless Steel Brush Guard


- Corrosion-free stainless steel construction.
- Designed for 154 series.
- · Accepts all thinline marker lights that mount on 3" centers or less.

Order No.	Description	Pack	Std Carton
B154-092	guard	mfg. pad	ck 100

MOUNTING ACCESSORIES

GROMMETS, BRACKETS & BEZELS






160 Aluminum Brush Guard



- Thick, extruded aluminum construction for extra protection.
- Mounts on 3" centers.
- Fits 60 series lights.

Order No.	Description	Pack	Std Carton
160-09	aluminum	poly pack	6
B160-09	aluminum	mfg. pac	k 120
160-242	mounting gasket for 160-09	mfg. pac	k 1




162 Plug Retaining Clip



- · Stainless steel construction.
- · Clips over electrical plug to keep it firmly inserted into light
- Fits 2" or 2 1/2" diameter marker lamps with cam-on mounting.
- Perfect for heavy-vibration applications such as container chassis.

Order No.	Description	Pack	Std Carto	n
B162-093	aluminum	mfg. pac	k 10	00





165


2" or 2 1/2" Cam-On Mounting Bracket



- Allows 2" or 2 1/2" diameter marker lamps to be surface mounted.
- Plastic deflectors protect lamp from damage.
- Easy cam-on, cam-off lamp installation.
- Fits incandescent and LED lights.
- Allows PC-rated installation.
- · Mounts with two screws.

Order No.	Description	Pack Std Cart	on
165-10	gray	poly pack	12
B165-10	gray	mfg. pack 1	00





168

Surface Mount Bracket

- Enhances appearance of 168, 1268, and 2268 series lights.
- · Attractive black finish.
- May also be used to adapt mounting centers from 1.93" to 1.13".
- 168-093 version has the same overall dimensions and construction, but has two snap-on prongs for mounting light to bracket.


Order No.	Description	Pack Std	Carton
168-09	black	poly pack	12
B168-09	black	mfg. pack	100
B168-093	black, snap-in lamp mount	mfg. pack	50

Aluminum Brush Guard

- Enhances durability and longevity of 168 and 1268 series lights.
- Rugged, stamped aluminum construction for extra protection.
- Black powdercoat version available.
- Requires use of 168-181 thinline mounting gasket.
- 168-092K kit include 168-181 gasket.

Order No.		Description	Pack	Std	Carton
168-092K	KIT	aluminum w/ 168-181 gasket	poly pa	ack	12
B168-092		aluminum	mfg. p	ack	50
B168-092B		black powdercoat	mfg. p	ack	50
B168-181		mounting gasket for 168-092	mfg. p	ack	100






168-10

Decorative Chrome Bezel

- Enhances appearance of 168 and 1268 series lights.
- Attractive chrome finish.
- · ABS construction.

Order No.	Desc	ription	Pack	Std Carton
168-10K	KIT chror	ne w/ 168-182 gasket	poly pac	k 12
B168-10	chror	ne	mfg. pac	k 100
B168-182	mour	nting gasket for 168-10	mfg. pac	k 100





168

Mounting Gasket

- Fits 168 and 1268 LED lights.
- Flexible rubber protects mounting surfaces.
- Use 168-18 when mounting 168 and 1268 light without brush guard or bezel.
- 168-181 for use with 168-092 aluminum brush guard.
- 168-182 for use with 168-10 chrome bezel.
- Use 2268-18 when mounting 2268A-R without bracket

Order No.	Description	Pack	Std Carton
168-18	black rubber	poly pac	k 12
B168-18	black rubber	mfg. pac	k 100
B168-181	mounting gasket for 168-092	mfg. pac	k 100
B168-182	mounting gasket for 168-10	mfg. pac	k 100
B2268-18	mounting gasket for 2268A-R-MV	mfg. pac	k 100






168-18




168-181



168-182










REFLECT

GROMMETS, BRACKETS & BEZELS






169 Mounting Gasket

- Fits 169 series LED lights.
- Flexible rubber protects mounting surfaces.

Order No.	Description	Pack	Std Carto	n
B169-18	black rubber	mfg. pac	ck 10	0





176 Mounting Bracket

- Rigid plastic snap-in bracket.
- Designed to mount 171, 176, 177, 181 and 271 series in 0.75" (19 mm) hole.
- Anti-theft feature when used with 176 series lights.
- 176-09X features chrome plating for enhanced appearance.

Order No.	Description	Pack	Std Carton
B176-09	plastic anti-theft bracket, black	mfg. pac	k 100
B176-09X	plastic anti-theft bracket, chrome	mfg. pac	k 100




177-10 Mounting Bezel



- Designed to fit 171, 176, 177, 181 and 271 series in 0.75" (19 mm) hole.
- 177-10 satin finish steel bezel fits over rubber grommet for durability and enhanced appearance.
- Secured in position between light housing and grommet when installed.

Order No.	Description	Pack Std	Carton
B177-10	satin finish steel bezel	mfg. pack	100





177-18 Mounting Grommet



- Designed to mount 171, 176, 177, 181 and 271 series in 0.75" (19 mm) hole.
- 177-18 grommet made of UV-resistant polymer rubber; stays flexible and prevents cracking for extended service life.
- Standard grommet provided with all 3/4" series lights.
- Grommet designed to fit .0179" to .1875" thick panels.

Order No.	Description	Pack !	Std Carton
B177-18	rubber grommet, 0.75" dia.	mfg. pack	100



176-092 / 176-093

· Channel dimensions:

B176-093

Channel-Mount Bracket

• Rubber grommet required for installation.


- Designed to fit 171, 176, 177, 181 and 271 series in 1" (25 mm) hole.
- UV-resistant polymer rubber; stays flexible and prevents cracking for extended service life.
- Replaces standard grommet when larger diameter mounting hole is required.
- Grommet designed to fit 26 gauge steel to 1/4" thick panel (.0179" .25")

Order No.	Description	Pack Sto	d Carton
B177-182	rubber grommet, 1" dia.	mfg. pack	100

• Fits Peterson 171, 176, 177, 181, 186, 271 and 286 series LED lights.

· Corrosion-resistant aluminum alloy construction for extra durability. • Mounts on 3" centers with two screws or bolts. Hardware not included.








Shown with light installed; sold separately




1

Min. Width		Max. Depth
1.13"	@	1.30"
1.00"	@	1.15"
0.65"	@	0.83"

Order No.	Description	Pack Std Carton
176-092	for flat surfaces	poly pack 6
176-093	for curved surfaces	poly pack 6
B176-092	for flat surfaces	mfg. pack 100



176-092




176-093




176-10



176-13





176-10 / 176-13 Surface Mount Bracket & Brush Guard

for curved surfaces

- Surface mounts 171, 176, 177, 181 and 271 series lights.
- Use of 177-18 grommet (provided with all 3/4" series lights) is required for mounting light into bracket.
- · High-strength, corrosion-free, UV-resistant gray polymer.
- Available to fit both flat and curved surfaces. 176-13 has 4.6" radius curve for proper fit on curved surfaces.
- · Easily amounts with two screws (not included).

Order No.	Description	Pack Std (Carton
176-10	for flat surfaces	poly pack	6
176-13	for curved surfaces	poly pack	6
B176-10	for flat surfaces	mfg. pack	100
B176-13	for curved surfaces	mfg. pack	100

100

mfg. pack

REFLECT

GROMMETS, BRACKETS & BEZELS


176-11/176-12


2" & 21/2" Retrofit Adapter Flanges

- Retrofits 171, 176, 177, 181 and 271 series single-diode clearance/marker lights into existing 2" & 2.5" mounting holes.
- Raised lip on reverse fits into existing hole for easy, accurate centering.
- Requires three rivets (recommended) or screws for mounting.
- Made of corrosion-resistant, high-strength polymer.
- Available in gray or black.
- 176-19 has a smaller 2.625" bolt hole pattern and completely flat back to replace competitive lights.


Order No.	Description	Pack Std (Carton
176-11	2", gray	poly pack	6
176-12	2.5", gray	poly pack	6
B176-15	2", black	mfg. pack	50
B176-17	2.5", black	mfg. pack	50
B176-19	2", black, 2.625" bolt pattern	mfg. pack	50








176-12 176-11





176-14 176-16

176-14/176-16 2" & 21/2" Retrofit Adapter



- Retrofits 171, 176, 177, 181 and 271 series single-diode clearance/marker lights into existing 2" & 2.5" mounting holes.
- 176-14 use with 2" 146-18 grommet.
 176-16 use with 2½" 143-18 and 144-18 grommets.
- Corrosion resistant black ABS construction.

Order No.	Description	Pack Std Carte	on
176-14	2" retrofit adapter	poly pack	6
176-16	2 ½" retrofit adapter	poly pack	6




178 **Decorative Chrome Bezel**

- Enhances appearance of 178 LED lamp.
- · Attractive chrome finish.
- · Corrosion-resistant ABS construction.


Order No.	Description	Pack Std Carton
178-10	chrome	poly pack 12
B178-10	chrome	mfg. pack 100

290-09 290C light not included





290-091 290C light not included



290 License Light Spacer Bracket




- Surface-mounts on 2" centers.
- 290 series license light is DOT-compliant when used properly with spacer.
- 290-09 0.95" spacer for use with 290C light as center top mount license light.
- 290-091 1.60" spacer for use with 290C as a single side mount license light.

Order No.	Description	Pack Std Carton
290-09	0.95" spacer bracket	poly pack 12
290-091	1.60" spacer bracket	poly pack 12




B186-10





B186-13




186 Surface-Mount Brackets



- Allows 186/286 Dot Light XL™ to surface-mount on curved or flat surfaces.
- Made of corrosion-resistant, high-strength polycarbonate.
- · Easily mounts with two screws (not included).
- · Attractive gray finish.

Order No.	Description	Pack	Std Carton
B186-10	flat surfaces	mfg. pac	k 100
B186-13	curved surfaces	mfg. pac	k 100






359-10 Mounting Clip



- Allows 359 series LED lights to attach to corner mounting rails without screws
- Constructed of corrosion-resistant, high-strength polycarbonate.

Order No.	Description	Pack Sto	d Carton
B359-10	black	mfg. pack	100





388

Surface Mount Bracket

- Allows 388-series LED lights to be surface mounted.
- Attractive chrome finish.
- Corrosion-resistant ABS construction.

Order No.	Description	Pack	Std Carton
388-09X	chrome	poly pac	k 12
B388-09X	chrome	mfg. pac	k 50


GROMMETS, BRACKETS & BEZELS

417


Surface Mount Brackets

- Available in 1, 2, and 3 light versions.
- Compatible with all current Peterson grommet-mount 4" round LED lights except 816, 826, and 827 series lights.
- Lights snap in easily, with no grommet required.
- Brackets feature separate backing plate with 1" (25 mm) cable exit hole and integral mounting studs, plus attachment screws.


Order No.	Description	Pack Std Carton
P417-1	single light	poly pack 6
417-1	single light	mfg. pack 40
417-2	double light	mfg. pack 20
417-3	triple light	mfg. pack 10



417-1



417-2



417-3

CONVENIENT TWO-PIECE DESIGN 417-2





417-3





426-10 426-11





426 2 or 3 Light Metal Module


- For use with PM 4" round lights, as well as similar competitors' lights.
- Designed as replacement for many OE trailer light modules.
- Fits all grommet-mounted and most flange-mounted 4" dia. lamps.
- 426-10 has openings for two lights, 426-11 has three.

Order No.	Description	Pack	Std Carton
426-10	2 light	box	6
426-11	3 light	box	6

- Black, powder-coated steel.
- For use with PM 4" round lights, as well as similar competitors' lights.
- May be bolted or welded in place.
- Fits all grommet-mounted and most flange-mounted 4" dia. lamps.
- Use 426-18 to complete grommet installation.

Order No.	Description	Pack	Std Carton
426-09	black steel	box	6






426 4" Grommet



- Black PVC grommet flush mounts 4" diameter round lamps in 4 1/2" hole.
- For use with 4" round stop/turn/tail and accessory lights.
- Provides additional shock absorption to extend lamp life.

Order No.	Description	Pack Std Carton
426-18	black	poly pack 12
B426-18	black	mfg. pack 100




418 Decorative Chrome Bezel

- Bright chrome decorative bezel snaps on without tools.
- Covers black flange and mounting screws.
- 418-10 fits 418R-4 round LED light.

Order No.	Description	Pack	Std Carton
B418-10	chrome round	mfg. pac	k 50





424 Snap-In Bracket




- Snap-in bracket for use with PM 4" round lights, as well as similar competitors' lights.
- Corrosion-free, high-impact plastic construction.

Order No.	Description	Pack	Std Carton
424-09	black	poly pac	k 24

GROMMETS, BRACKETS & BEZELS







421 **Mounting Bracket**



- Black, powder-coated steel.
- Fits standard 6.5" oval grommet lights, with pre-drilled mounting holes for mounting flanged lights. (Not compatible with 823RTL-7.)
- May be bolted or welded in place.
- May be used horizontally or vertically.
- Grommet-mount lights require 421-18 grommet to for installation.

Order No.	Description	Pack	Std Carton
421-09	black oval	box	6






Oval Grommet




- Black PVC grommet flush mounts oval style lamps.
- For use with PM standard 6.5" oval grommet-mount oval lights, as well as similar competitors' lights.
- Provides additional shock absorption to extend lamp life.

Order No.	Description	Pack	Std Carton
421-18	black oval	poly pac	k 12
B421-18	black oval	mfg. pad	ck 100






Decorative Chrome Bezel



- Covers black flange and mounting screws.
- Fits surface-mount oval LED lights 423A-4, 423R-4, 423W-4, 1223A-4, 1223R-4, and 1223A-R-4.

Order No.	Description	Pack Std Ca	rton
423-11	chrome oval	poly pack	12
B423-11	chrome oval	mfg. pack	50






794 LED Weld-On Steel Mounting Box

- Heavy-gauge steel weld box provides incredibly durable mount for standard, grommet-mount oval lights.
- Ideal for construction, refuse and other rough duty vehicles.

Order No.	Description	Pack	Std Carton
794-09	weld box only	box	1



Shown with light installed, sold separately



817-09 817-10

817 Surface Mount Bracket for 4" Round Lights




- Allows grommet-style 4" round lights to be surface mounted.
- Constructed of UV and corrosion resistant plastic
- Available in black or chrome finish.
- Compatible with LumenX "-7" and "-9" series 4" round lights.

Order No.	Description	Pack Std Carto	on
817-09	black	poly pack	12
817-10	chrome	poly pack	12
B817-09	black	mfg. pack	50
B817-10	chrome	mfg. pack	50
		3	

820-09



820-10 (ight sold separately)



820 Surface Mount Bracket for Oval Lights




- Allows grommet-style oval lights to be surface mounted.
- Constructed of UV and corrosion resistant plastic
- Available in black or chrome finish.
- Compatible with LumenX "-7" and "-10" series oval lights.

Order No.	Description	Pack Std Carton
820-09	black	poly pack 12
820-10	chrome	poly pack 12
B820-09	black	mfg. pack 50
B820-10	chrome	mfg. pack 50

GROMMETS, BRACKETS & BEZELS





510 Universal Mounting Bracket



- Black powder-coat finish.
- 3" wide x 4 1/2" tall.
- · For use with most PM stud mount tail lights.

Order No.	Description	Pack	Std Carton
510-9	black steel	mfg. pac	ck 24






520-09 Nightwatcher® LX Clamp-On Mounting Bracket



- Universal clamp-on bumper brackets for all fog and driving lights.
- Rugged, chrome plated steel.
- · Self-service Viz Pack packaging.

Order No.	Description	Pack	Std Carton
V520-09	mounting bracket	Viz Pack	6






450

Rectangular Rubber Grommet

- Black PVC grommet flush mounts incandescent 3"x 5" rectangular lamps.
- For use with 450 series stop, turn, tail, turn signal and backup lights, as well as similar competitors' lights.
- Provides additional shock absorption to extend lamp life.

Order No.	Description	Pack	Std Carton
450-18	black	poly pac	k 12
B450-18	black	mfg. pac	ck 50







850 **Mounting Grommet**

- Black rubber grommet fits 850 series lights.
- UV-resistant PVC stays flexible and prevents cracking for extended service life.
- Requires mounting opening configured to match diagram shown.

Order No.	Description	Pack	Std Carton
850-18	black	poly pac	ck 12
B850-18	rubber grommet	mfg. pa	ck 50

850

Stud Mount Light Modules

- High-strength, corrosion-free, UV-resistant, black glass-filled nylon.
- All 850 series rectangular LED lights snap in easily.
- Not compatible with incandescent lights.
- No mounting grommets required.
- 850-09 has two 0.25" (6 mm) screw mounting holes, others have separate backing plate with 1" (25 mm) cable exit hole and integral mounting studs, plus 1.20" (30 mm) long, black stainless, self-cutting #10 pozi-drive screws.

Order No.	Description	Pack	Std Carton
850-1	single light w/ back plate	poly pac	k 50
850-09	2-screw mnt. w/o back plate	mfg. pac	k 10
850-092H	double light, horizontal	mfg. pac	k 30
850-092V	double light, vertical	mfg. pac	k 30
850-093H	triple light, horizontal	mfg. pac	k 20
850-093V	triple light, vertical	mfg. pac	k 20







850-092H







850-093H




850-093V Shown with light installed, sold separately






850-09


850-1




850-092H



850-092V



850-093H



850-093V

GROMMETS, BRACKETS & BEZELS


740 LED

Mounting Bracket for Magnetic Safety Beacon

- Heavy-duty galvanized metal.
- Provides sturdy mounting point for 740-series magnetic beacons.

Order No.	Description	Pack	Std Carton
740-09	bracket	box	1






1200

Mounting Bracket

- For mounting 1200 ECE-compliant LED lamps at a right angle to the mounting surface.
- · Attractive satin black finish.
- ABS construction.

Order No.	Description	Pack	Std Carton
1200-09H	horizontal	mfg. pac	k 50





1200

Decorative Chrome Bezel

- Enhances appearance of 1200 ECE-compliant LED lamp.
- Attractive chrome finish.
- · ABS construction.

Order No.	Description	Pack	Std Carton
1200-09X	chrome	poly pac	k 12
B1200-09X	chrome	mfg. pac	k 50





150

License/Utility Bracket

- Licence plate bracket and 150-141 license light bracket riveted together.
 Requires 150C or 153C light and 142-49 plug to complete installation.

Order No.	Description	Pack Std Ca	rton
B150-141B	black plastic	mfg. pack	24

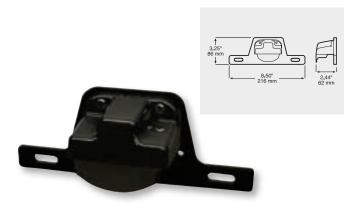




428 **Universal License Bracket**



- · For use with most PM stud-mounted tail lights.
- · Zinc-plated steel

Order No.	Description	Pack Std Cart	on
V428-09	steel	Viz Pack	12
428-09	steel	box	24
B428-09	steel	mfg. pack	50




440 **Universal License Bracket**



- For use with most PM stud-mounted tail lights.
- · Corrosion-free black plastic which flexes on impact.

Order No.	Description	Pack Std Car	ton
V440-09	black	Viz Pack	12
440-09	black	box	24
B440-09	black	mfg. pack	100
		9. р	



Universal RV License Plate Bracket




- Universal license plate bracket.
- Direct replacement for OE bracket on many popular RVs.
- Rugged steel construction.

Order No.	Description	Pack	Std Carton
V25900-09	steel	Viz Pack	(10

GROMMETS, BRACKETS & BEZELS

FOR GROMMET STYLE LIGHTS





7005


2" Round Decorative Bezels



- Chrome-plated plastic enhances appearance.
- Attaches to rubber grommet with two tapered screws.
- Fits grommet-mounted 2" round vehicle lights.
- Includes stainless steel mounting screws.
- · Attractive visual packaging.

Order No.	Description	Pack	Std Carton
V7005	2" round bezel	Viz Pacl	k 24





7007


2 1/2" Round Decorative Bezel



- Chrome-plated plastic enhances appearance.
- Attaches to rubber grommet with two tapered screws.
- Fits grommet-mounted 2 1/2" round vehicle lights.
- Includes stainless steel mounting screws.
- · Attractive visual packaging.

Order No.	Description	Pack	Std Carton
V7007	2 1/2" round bezel	Viz Pack	24





7009


4" Round Decorative Bezel



- Chrome-plated plastic enhances appearance.
- Attaches to rubber grommet with three tapered screws.
- Fits grommet-mounted 4" round vehicle lights.
- Includes stainless steel mounting screws.
- · Attractive visual packaging.

Order No.	Description	Pack	Std Carton
V7009	4" round bezel	Viz Pack	24





7011 Oval Decorative Bezels




- Chrome-plated plastic enhances appearance.
- Attaches to rubber grommet with four tapered screws.
- Fits grommet-mounted 6 1/2" x 2 1/4" oval vehicle lights.
- · Includes stainless steel mounting screws.
- Attractive visual packaging.

Order No.	Description	Pack	Std Carton
V7011	oval bezel	Viz Pack	24

7005S

Theft Deterrent Rings



- Designed to work with flange for added theft protection.
- Attractive stainless-steel finish resists corrosion.
- Embossed with PM logo.
- Not compatible with "S" suffix surface-mount lights.

Order No.	Description	Pack	Std Carto	n
7005S	2" round	poly pac	k 1	12
B7005S	2" round	mfg. pac	ck 2	25






7007S

Theft Deterrent Rings

- Fits 2.5" round flange-mounted lights.
- Designed to work with flange for added theft protection.
- Attractive stainless-steel finish resists corrosion.
- Embossed with PM logo.
- B7007S fits 162F and 163F lights.
- 7012 fits 192F and 193F lights.
- 7013 fits 192S, 193S and 233S surface-mount lights.

Order No.	Description	Pack	Std Carton
7007S	3.5" dia./2.5" opening/3.04" bolt cir.	poly pack	12
B7007S	3.5" dia./2.5" opening/3.04" bolt cir.	mfg. pacl	< 25
7012	3.75" dia./2.5" opening/3.20" bolt cir.	mfg. pacl	κ 25
7013	3.75" dia./2.75" opening/3.20" bolt cir.	mfg. pacl	< 25





7009S


Theft Deterrent Rings



- Fits 4" round flange-mounted lights.
- Designed for added theft protection of flange-mount lights.
- Attractive stainless-steel finish resists corrosion.
- Embossed with PM logo.

Order No.	Description	Pack	Std Carton
V7009S	4" round	Viz Pack	25
7009S	4" round	poly pac	k 12
B7009S	4" round	mfg. pac	k 25






7011S

Theft Deterrent Rings

- Fits 6 1/2" x 2 1/4" oval flange-mounted lights.
- Designed for added theft protection of flange-mount lights.
- Attractive stainless-steel finish resists corrosion.
- Embossed with PM logo.

Order No.	Description	Pack Std Carton
7011S	oval	poly pack 12
B7011S	oval	mfg. pack 25





MISC. MOUNTING ACCESSORIES



Certificate Holder and Pouch



- Keeps permit or license clean and dry in any weather.
- Dust-proof and weatherproof vinyl pouch with zipper seal.
- Heavy gauge aluminum frame.
- Frame measures 7 1/4" x 4 7/8".
- Pouch measures 7" x 4 5/8".
- Mounts on 6 3/8" centers.

Order No.	Description	Pack Std Ca	arton
45	holder & pouch	poly pack	24
B45	holder & pouch	mfg. pack	100
45-171	replacement pouch	poly pack	24






46

Round Certificate Holder

- Keeps permit or license clean and dry in any weather.
- Cam-on translucent cover has gasketed seal.
- · High-impact plastic.
- Tension spring holds documents in place with cover removed.

Order No.	Description	Pack Std Ca	arton
46	certificate holder	poly pack	12
B46	certificate holder	mfg. pack	30





2954 ABS Label



- Conforms to NHTSA requirements for labeling ABS malfunction lamps.
- · Heavy-duty material and industrial adhesive backing for durability.
- Flexible design adheres to curved surfaces.
- 4.00" x 1.25" with 1" letters.

Order No.	Description	Pack	Std Carto	n
2954	ABS label	mfg. pac	ck 10	00

- 10-lamp, 12-volt flasher.
- Available for medium-duty (2-prong) and heavy-duty (3-prong) applications.
- 21.0 amp rating.
- 60-120 FPM flash rate at 11 to 15 volts.
- 1 3/8" tall, fits easily into most applications.
- Meets FMVSS 108 and SAE J590 & J945 specifications.

Order No.	Description	Pack Std Carton
V554	2-prong	Viz Pack 3
554	2-prong	poly pack 6
557	3-prong	poly pack 6



570/571

12-Lamp Electro-Mechanical Flashers



- 12-lamp, 12-volt flasher.
- Available for medium-duty (2-prong) and heavy-duty (3-prong) applications.
- 25.2-amp rating.
- 70-120 FPM flash rate.
- 1 1/2" tall, fits into small areas with limited access.
- Meets FMVSS 108 and SAE J590 & J945 specifications.

Order No.	Description	Pack Std Cartor
V570	2-prong	Viz Pack 6
570	2-prong	poly pack 12
571	3-prong	poly pack 12
B570	2-prong	mfg. pack 100




572

Electronic Flasher for LED Lights

- 12-volt flasher.
- 2.5 amp rating.
- 76-96 FPM flash rate at 9-16 volt.
- Meets FMVSS 108 and SAE J590 & J945 specifications.

Order No.	Description	Pack	Std Carton
572	2-prong	box	6





5000

Multi-Volt Solid-State LED Flasher



- Resolves flash rate issues caused by reduced resistance LED lights.
- Surface-mount, fully encapsulated, solid-state flasher.
- For use with LED and/or incandescent lamps.
- Operates at .01 to 17 amps between 9–32 volts.
- Retrofit standard 2- and 3- prong flashers using included hardware.
- Complete kit includes 1 jumper wire, 1 tie-down, 2 mounting screws, 3 blade terminals, 1 #10 ring terminal, and instruction sheet.
- Meets FMVSS 108 and SAE J590, J945 & J2068 specifications.

Order No.	Description	Pack St	d Carton
5000	flasher kit	poly pack	12

E E



573/574

16-Lamp Electronic Flashers



- 16-lamp, 12-volt flasher.
- Available for medium-duty (2-prong) and heavy-duty (3-prong) applications.
- 35 amp rating.
- 60-120 FPM flash rate.
- Electronic chip improves switching operations and extends life.
- Internal components are designed for high temperature operation.
- 1 7/8" tall
- Meets FMVSS 108 and SAE J590 & J945 specifications.

Order No.	Description	Pack Std Carton
V573	2-prong	Viz Pack 3
573	2-prong	poly pack 12
574	3-prong	poly pack 12



576/577

20-Lamp Electronic Flashers



- 20-lamp, 12-volt flasher.
- Available for medium-duty (2-prong) and heavy-duty (3-prong) applications.
- 45-amp max rating.
- 60-120 FPM flash rate.
- Electronic chip improves switching operations and extends life.
- 1 7/8" tall.
- Meets FMVSS 108 and SAE J590 & J945 specifications.

Order No.	Description	Pack Std Carton
V576	2-prong	Viz Pack 3
576	2-prong	poly pack 12
577	3-prong	poly pack 12



579

Alternating, 10-Lamp Electronic Flasher

- 12-volt flasher.
- Alternating, three-prong flasher.
- 10 lamp capacity per side.
- Will flash four headlights or equivalent in emergency or warning lights.
- · 25-amp max rating.
- 60-120 FPM flash rate.
- Meets FMVSS 108 and SAE J590 & J945 specifications.

Order No.	Description	Pack	Std Carton
579	3-prong	poly pac	k 12

97 dB Back-Up Alarm



- 97-decibel volume.
- For all trucks and rubber-tire vehicles.
- 12-24 volt operating range.
- Less than 0.6 amp draw.
- -40° to +185° F temperature range.
- · ABS housing and epoxy-sealed internal components for vibration and moisture protection.
- Unit may be grounded through mounting screw.
- Meets SAE J994 Type C requirements.
- Meets IP65 ingress protection standard.
- · Self-service visual packaging.

Order No.	Description	Pack	Std Carton
V780	97 dB	Viz Pack	6
780	97 dB	box	6

UL APPROVED

UL APPROVED


102 dB Back-Up Alarm





- For medium-duty applications in higher noise areas.
- 12-24 volt operating range.
- Less than 0.6 amp draw.
- -40° to +185° F temperature range.
- · ABS housing and epoxy-sealed internal components for vibration and moisture protection.
- Unit may be grounded through mounting screw.
- Meets SAE J994 Type F requirements.
- Meets IP65 ingress protection standard.
- · Self-service visual packaging.

Order No.	Description	Pack Std Carton
V781	102 dB	Viz Pack 6
781	102 dB	box 6



782 107 dB Back-Up Alarm




- back-up alarms with louder alarm volume. • 12-24 volt operating range.
- Can be mounted to horizontal or vertical surfaces.
- Less than 0.8 amp draw.
- · ABS housing and epoxy-sealed internal components for vibration and moisture protection.
- · Unit may be grounded through mounting screw.
- Meets SAE J994 Type B specifications.
- Available with stripped leads or .180 bullet terminals.

Order No.	Description	Pack	Std Carton
782	107 dB, stripped leads	box	6
782-BT2	107 dB, .180 bullets	box	6

ELECT








BACK-UP ALARMS





783


87 dB Auxiliary Back-Up Alarm



- 87-decibel volume suitable for auxiliary warning applications.
- 12-24 volt operating range.
- Glass filled nylon housing and epoxy-sealed internal components for vibration and moisture protection.
- Unit may be grounded through mounting screw.
- Sealed lens and housing meets IP65 ingress protection level.
- · Meets IP65 ingress protection standard.
- · Self-service visual packaging.

Order No.	Description	Pack	Std Carton
V783	87 dB	Viz Pack	6






784/785 Back-Up Alarm



- Model 784 features 112 dB volume & meets SAE J994 Type A specifications.
- Model 785 features 97–112 dB variable volume that automatically senses and adjusts to ambient noise levels.
- 12-24 volt operating range.
- Less than 0.8 amp draw.
- Can be mounted to horizontal or vertical surfaces.

Order No.	Description	Pack	Std Carton
784	112 dB	box	1
785	97-112 dB variable	box	1






784-C Back-Up Alarm



- 112 dB volume
- 12-24V voltage range
- Less than 0.8 amp average current draw
- · Reverse polarity and spike protection
- · Rugged full-coverage housing
- · Epoxy-encapsulated circuit board

Order No.	Description	Pack	Std Carton
784-C	112 dB	box	10





786 Back-Up Alarm



- Fits circular opening used for standard 4-inch round, grommet-mount lights.
- Available in 97 dB and 102 dB versions.
- 786-97 has 12-48 volt operating range, meets SAE J994 Type C specs.
- 786-102 has 12-24 volt operating range, meets SAE J994 Type F specs.
- Comes complete with standard 426-18 mounting grommet.

Order No.	Description	Pack	Std Carton
786-97	97 dB	box	1
786-102	102 dB	box	1

135-951 Replacement Wire



 Replacement lead wire for 106, 130, 135, and 138 series incandescent marker lights.

Order No.	Description	Pack	Std Carton
135-951	lead wire, black	poly pac	k 100




142-49/50/51 Marker Lamp Plugs



- 2-wire molded plug for clearance and marker lights.
- Fits 140, 142, 143, 145, 146, 150, 189 & 190 series, plus competitive lights.
- Includes a #10 ring terminal on ground wire; hot wire is stripped.
- See page 178 for optional plug retaining clip.

Order No.	Description	Pack Std Carton
142-49	6" leads	poly pack 12
B142-49	6" leads	mfg. pack 100
B142-50	19" leads	mfg. pack 100
B142-51	12" leads	mfg. pack 100
B162-093	retaining clip	mfg. pack 100





146-49 Marker Lamp Harness





- Features two molded plugs with 2-wire termination.
- Included with M246K clearance light kit.
- Also fits 142, 143, 145, 146, and 150 series clearance and marker lights.
- Includes #10 ring terminal on ground wire; hot wire is blunt cut.
- May be used as harness for individual corner or ID lights.

Order No.	Description	Pack	Std Carton
B146-49	15" leads	mfg. pac	k 100

PLUGS, PIGTAILS & WIRES







150-49 ID Bar Lamp Harness



- Fits lights requiring PL10 style plug.
- Choice of 6.70" or 8.25" between receptacles.
- 150-49 replaces wire harness on 150-3 series identification light bar.
- Fits all competitive models.
- 5" ground wire w/ ring terminal and 8" hot wire.
- Includes #10 ring terminal on ground wire; hot wire is stripped.
- · May be used as harness for individual corner or ID lights.

Order No.	Description	Pack	Std Carton
150-49	6.7" centers	poly pac	k 10
B150-493	8.25" centers	mfg. pac	k 50



150-491 Lead Wire



- Single lead wire with male .156 termination and stripped end.
- Designed for use with 150 series lights and to provide additional connections on 154 series lights.

Order No.	Description	Pack Sto	d Carton
B150-491	.156 molded male, 18"	mfg. pack	100



152-49 Lead Wire



- Single lead wire with female .156 termination and stripped end.
- Designed for use with 152 series light.

Order No.	Description	Pack	Std Carton
152-49	.156 molded female, 17"	poly pac	k 10
B152-49	.156 molded female, 17"	mfg. pac	k 100



153-49/492 Marker Lamp Plugs



- 2-wire molded female plug for use with 152, 153, 154 and 161 series clearance and marker lights.
- 153-49 has ground wire with #10 ring terminal and stripped hot wire.
- B153-492 adapter plug mates male pin lamps to male pin harnesses.

Order No.	Description	Pack	Std Carton
153-49	6" leads	poly pac	k 12
B153-49	6" leads	mfg. pac	k 100
B153-492	8" adapter	mfg. pac	k 100

160-491

160-49/491/492 Marker Lamp Plugs



- Right-angle, two-wire plug for use with 155, 157 and 160 series LED clearance and marker lights.
- 8" leads
- 160-49 includes #10 ring terminal and stripped end.
- 160-491 includes #10 ring terminal and .180 bullet terminal.
- 160-492 includes two .180 bullet terminals.

Order No.	Description	Pack	Std Carton
160-49	ring term & stripped lead	poly pac	k 12
160-491	ring term & .180 bullet	poly pac	k 12
160-492	two .180 bullets	poly pac	k 12
B160-49	ring term & stripped lead	mfg. pac	k 100
B160-491	ring term & .180 bullet	mfg. pac	k 100
B160-492	two .180 bullets	mfg. pac	k 100

160-493 ID Bar Harness



- Identification light bar replacement wire harness for 160-3 series.
- Includes two .180 bullet terminals for easy installation.

Order No.	Description	Pack	Std Carton
160-493	6.25" centers, .180 bullets	poly pa	ck 12





160-49

160-492



- Right-angle TRIPLE SEAL, two-wire plug for use with 162, 163, 164, 165, and 166 series LED clearance/marker lights.
- 162-49 includes 8" stripped hot wire; ground wire provided with #10 ring terminal and heat shrink tubing for additional corrosion protection.
- 162-493 includes two .180 bullet terminals.
- See page 178 for optional plug retaining clip.

Order No.	Description	Pack Std C	arton
V162-49	stripped/ring	Viz Pack	6
162-49	stripped/ring	poly pack	12
162-493	.180 bullets	poly pack	12
B162-49	stripped/ring	mfg. pack	100
B162-493	.180 bullets	mfg. pack	100
B162-093	retaining clip	mfg. pack	100



EECT

PLUGS, PIGTAILS & WIRES




176-496 Lead Wire Adapter Kit



- Adapts hardwired leads to 0.180" bullet connectors.
- 7.5" overall length
- Special ridged design creates highly effective moisture barrier when mated to Maxi-Seal® advanced harness components.
- Kit contains 6 white wires with female receptacles, 6 black wires with female receptacles, and 12 heat-shrink butt splice connectors.

Order No.		Description	Pack	Std Carton
176-496	KIT	adapter kit	poly pa	ack 6
B176-491		white female leads	mfg. pa	ack 100
B176-492		black female leads	mfg. pa	ack 100
B176-493		white male leads	mfg. pa	ack 100
B176-494		black male leads	mfg. pa	ack 100



192-492/493 LED 2-Wire Plug



- · 2-wire hard-shell, weatherproof plug.
- For use with 173, 175, 189, 190, 192, 193, 194, 195, 197, 199, 905 and 906 series LED lights that are equipped with AMP-compatible receptacles.
- 192-492 terminated with two .180 bullet terminals.
- 192-493 has blunt-cut wires.
- Grease is not recommended on AMP-style connections.

Order No.	Description	Pack Std	Carton
192-492	hardshell, .180 bullets	poly pack	12
B192-492	hardshell, .180 bullets	mfg. pack	50
B192-493	hardshell, blunt-cut wires	mfg. pack	50



193-492 Molded LED 2-Wire Plug



- 2-wire weatherproof plug with molded plug housing.
- For use with 173, 175, 189, 190, 192, 193, 194, 195, 197, 199, 905 and 906 series LED lights that are equipped with AMP-compatible receptacles.
- Terminated with two .180 bullet terminals, can be removed for hardwiring into vehicle harness.
- Grease is not recommended on AMP-style connections.

Order No.	Description	Pack	Std Carton
193-492	molded, .180 bullets	poly pacl	k 12
B193-492	molded, .180 bullets	mfg. pac	k 100

344-49 Turn Signal Plug



- 3-wire hard shell, weather proof design.
- Replacement plug for 344 turn signal lights.
- Ground wire and two hot wires are blunt cut.

Order No.	Description	Pack Sto	d Carton
344-49	9" leads	poly pack	12



411-07 Pigtail



- Single wire with brass contact, nylon washer, and plug with stainless steel spring.
- Non-indexing type for all G-6, S-8, and S-11 single contact bulbs.

Order No.	Description	Pack Std Carton
411-07	10" lead	poly pack 25



413-07 Pigtail



- Two wires with brass contacts, nylon washer, and plug with stainless steel spring.
- Indexing type for all S-8 double contact bulbs.

Order No.	Description	Pack	Std Carton
413-07	10" leads	poly pac	k 25



PLUGS, PIGTAILS & WIRES



417-48/481/482 LED 2-Wire Plugs



- 2-wire hard-shell, weatherproof plug.
- For use with 817, 818, 820, 823, 1217, 1218, 1220, 1223 series LED lights.
- 417-48 includes stripped hot wire; ground wire provided w/ #10 ring terminal and heat-shrink tubing for additional corrosion protection.
- 417-481 adapter plug fits 421-49 and 431-49 plugs.
- 417-482 includes two .180 bullet terminals.
- Grease is not recommended on AMP-style connections.

Order No.	Description	Pack Std C	arton
417-48	stripped lead/ring terminal	poly pack	6
417-481	adapter plug	poly pack	6
417-482	.180 bullets	poly pack	6
B417-48	stripped lead/ring terminal	mfg. pack	100
B417-481	adapter plug	mfg. pack	100



817-48/481/482 Molded LED 2-Wire Plugs



- 2-wire weatherproof plug with molded plug housing.
- For use with 817, 818, 820, 823, 1217, 1218, 1220, 1223 series LED lights.
- 817-48 includes stripped hot wire; ground wire provided w/ #10 ring terminal and heat-shrink tubing for additional corrosion protection.
- 817-481 adapter plug fits 421-49 and 431-49 plugs.
- 817-482 includes two .180 bullet terminals.
- Grease is not recommended on AMP-style connections.

Order No.	Description	Pack Std C	Carton
817-48	stripped lead/ring terminal	poly pack	12
B817-48	stripped lead/ring terminal	mfg. pack	100
B817-481	adapter plug	mfg. pack	100
B817-482	.180 bullets	mfg. pack	100



417-49/491/492 LED 3-Wire Plugs



- 3-wire hard-shell, weatherproof plug.
- For use with 233, 817, 818, 820, 823, 1217, 1218, 1220, 1223 series LED lights.
- 417-49 includes stripped hot wires; ground wire provided w/ #10 ring terminal and heat shrink tubing for additional corrosion protection.
- 417-491 adapter plug fits 421-491 and 431-491 plugs.
- 417-492 includes three .180 bullet terminals.
- Grease is not recommended on AMP-style connections.

Order No.	Description	Pack Std (arton
417-49	stripped lead/ring terminal	poly pack	6
417-491	adapter plug	poly pack	6
B417-49	stripped lead/ring terminal	mfg. pack	100
B417-491	adapter plug	mfg. pack	100
B417-492	.180 bullets	mfg. pack	100

817-49/491/492 Molded LED 3-Wire Plugs



- 3-wire weatherproof plug with molded plug housing.
- For use with 233, 817, 818, 820, 823, 1217, 1218, 1220, 1223 series LED lights
- 817-49 includes stripped hot wires; ground wire provided w/ #10 ring terminal and heat-shrink tubing for additional corrosion protection.
- 817-491 adapter plug fits 421-491 and 431-491 plugs.
- 817-492 includes three .180 bullet terminals.
- 817-497 has one AMP-compatible plug and one Packard-style plug.
- Grease is not recommended on AMP-style connections.

Order No.	Description	Pack	Std Carton
817-49	stripped lead/ring terminal	poly pack	(12
817-497	AMP to Packard shroud adapter	poly pack	6
B817-49	stripped lead/ring terminal	mfg. pacl	k 100
B817-491	adapter plug	mfg. pacl	k 100
B817-492	.180 bullets	mfg. pacl	k 100



817-49

817-492



817-49L AMP-Compatible Lead Wire



- 3-wire, AMP-compatible harness with jacketed flat cable.
- Available in 12" and 98.5" lengths.
- For use with 817, 818, 820, 823, 1217, 1218, 1220, 1223 series LED lights.
- 817-49S and 817-49L have stripped hot wires and #10 ring terminal on ground wire.

Order No.	Description	Pack	Std Carton
B817-49S	12" overall, stripped lead/ring terminal	mfg. pa	ck 50
B817-49L	98.5" overall, stripped lead/ring term.	mfg. pa	ck 50



880-49/491/496 AMP-Compatible Plugs



- B880-49 & B880-491 adapter plugs connect back-up light function on 880/881/882/883 series lights to standard PL2/PL3 or AMP style harness connections.
- B880-49 can be used to connect sync wire on 860SA, 861SA, 866SA and 867SA series multi-function LED strobes.
- Grease is not recommended on AMP-style connections.

Order No.	Description	Pack Std C	arton
880-49	stripped wire	poly pack	6
B880-49	stripped wire	mfg. pack	100
B880-491	adapter plug	mfg. pack	100
B880-496	hardshell receptacle	mfg. pack	100

ELECT

PLUGS, PIGTAILS & WIRES





• Adapter plug connects single wire back-up light or strobe sync function to Packard-style harness connections.

Order No.	Description	Pack	Std Carton
866-486	AMP to Packard shroud adapter	poly pac	k 6
B866-486	AMP to Packard shroud adapter	mfg. pac	k 100



417-491Y LED Y-Adapter Plug



- Converts one PL3-style stop/turn/tail plug into two LED hard-shell, weatherproof stop/turn/tail plugs.
- For use with non-hardwired lights.
- Grease is not recommended on AMP-style connections.

Order No.	Description	Pack Std Carton
417-491Y	12" adapter plug	poly pack 6



417-491MP LED Adapter Plug



- Converts single male-pin lamp connection into LED hard-shell, weatherproof stop/turn/tail plug.
- For use with non-hardwired lights.
- Grease is not recommended on AMP-style connections.

Order No.	Description	Pack Std Carton
417-491MP	12" adapter plug	poly pack 6



417-493 Adapter Plug



- Adapts PL3 lamp to wiring terminated with LED-style plug.
- Grease is not recommended on AMP-style connections.

Order No.	Description	Pack Std Ca	rton
V417-493	adapter plug	Viz Pack	6
417-493	adapter plug	poly pack	10



417-496 Extension Harness



- Terminated with one male and one female hard-shell, weatherproof stop/ turn/tail plug.
- Provides an extra 10 inches of length between LED light and vehicle harness.
- Grease is not recommended on AMP-style connections.

Order No.	Description	Pack Std Carto	n
417-496	extension harness	poly pack	6
B417-496	extension harness	mfg. pack 10	00




421-49/491 Right-Angle PL3 Plugs



- 2-wire (-49) and 3-wire (-491) right angle plugs for single or double contact sealed stop/turn or backup lamps.
- Includes #10 ring terminal on ground wire; hot wire is stripped.

Order No.	Description	Pack Std C	arton
421-49	2-wire, rt. angle, 10.5"	poly pack	12
421-491	3-wire, rt. angle, 10.5"	poly pack	12
B421-49	2-wire, rt. angle, 10.5"	mfg. pack	100
B421-491	3-wire, rt. angle, 10.5"	mfg. pack	100



ELECT

PLUGS, PIGTAILS & WIRES



421-491RS Resistor Harness



- For use when upgrading existing vehicle turn signals from incandescent to LED.
- In-line 50 watt, 10 ohm resistor.
- 10.63" (270 mm) overall length.
- Provides adequate resistance for proper flasher module operation.
- Terminated with one male and one female PL3 plug.

Order No.	Description	Pack Std Ca	rton
421-491RS	resistor harness	poly pack	12




421-491Y PL3 "Y" Adapter Plug



• 3-wire molded plug converts one PL3 stop/turn/tail plug into two.


Order No.	Description	Pack Std Cart	on
421-491Y	Y-adapter plug, 12"	poly pack	6



Harness Extensions

- Connects to "Y" adapter to provide auxiliary strobe power.
- Choice of two lengths for simple, flexible, efficient installation.
- Hardshell connector on each end (one female plug, one shrouded male plug).

Order No.	Description	Pack	Std Carton
817-49288	extension harness, AMP style, 288"	poly pacl	k 6
817-4996	extension harness, AMP style, 96"	poly pacl	k 6



"Y" Adapter Harness

- Installs between brake light and existing trailer harness to provide brake circuit power to auxiliary strobe.
- Three AMP-compatible hardshell connectors (two female plugs, one shrouded male plug).
- 12.5" length.

Order No.	Description	Pack	Std Carton
817-49Y	STT Y-plug, AMP style, 12.5"	poly pad	ck 6

431-49/491

Straight PL3 Wire Plugs



- 2-wire (-49) and 3-wire (-491) molded plugs for single or double contact sealed stop/turn/tail lamps.
- Includes #10 ring terminal on ground wire; hot wire is stripped.

Order No.	Description	Pack Std C	arton
V431-49	2-wire, straight, 10.5"	Viz Pack	6
V431-491	3-wire, straight, 10.5"	Viz Pack	6
431-49	2-wire, straight, 10.5"	poly pack	12
431-491	3-wire, straight, 10.5"	poly pack	12
B431-49	2-wire, straight, 10.5"	mfg. pack	100
B431-491	3-wire, straight, 10.5"	mfg. pack	100





431-492

Extension Harness



- 3-wire harness terminated with one male and one female PL3 stop/turn/tail plug.
- Provides over 12 additional inches of length between light and vehicle harness.
- 12.75" (324 mm) overall length.

Order No.	Description	Pack Std C	arton
B431-492	extension harness	mfg. pack	100



701-491

LED Headlight Anti-Flicker Harness



- Anti-flicker harness plug for 701C series LED headlights.
- Used on specific CANBUS equipped vehicles, including Jeeps 2007 and newer.
- 11" (280 mm) length.
- Not compatible with daytime running lights (DRL) in Canada.

Order No.	Description	Pack Std C	arton
701-491	anti-flicker harness	poly pack	50



778-48

Replacement Cable



- Replacement for standard cable included with 778A Sequencing LED Light Bar
- 15 foot length

Order No.	Description	Pack Std Carto
778-48	replacement harness	poly pack


E E

TRAILER NOSE BOX









374 Defender® Trailer Nose Box





- Surface-mount nose box has reinforced nylon housing and aluminum faceplate.
- · Fits industry-standard mounting bolt pattern.
- #10 studs provide capacity for multiple terminals.
- Stainless steel terminal springs grip pins.
- · Conforms to SAE J560 specifications.

Order No.	Description	Pack	Std Carton
P374	J560 Nose box, solid pins	poly pac	ck 8





373 solid pin version



411 split pin version

373/411 Defender® J560 7-Way Insert





- Deep socket receptacle is 3/8" deeper than previous model for more secure, reliable hook-up.
- Receptacle available in solid pin and split pin versions.
- · Reinforced nylon housing.
- · Conforms to SAE J560 specifications.
- Spring-loaded hinge retainer pin to keep out contaminants when not in use.
- Direct wire ground.
- · Includes neoprene mounting gasket.

Order No.	Description	Pack Std	Carton
P373	J560 7-way insert, solid pins	poly pack	25
P411	J560 7-way insert, split pins	poly pack	25

Spec Your Trailer With the **DEFENDER** Harness and LED Lighting System.

Stay lit and stay on the road with the only harness and LED lighting system guaranteed* for **10 years** against corrosion. With heavy-duty terminals, integrated moisture barrier, advanced silicone seals, modular design, and a patented hardshell J560 connector — **DEFENDER** stops corrosion <u>before</u> it starts. When you need to deliver, drive with **DEFENDER**.



Maxi-Seal.
HARNESS SYSTEMS INC.

*See dealer for details.



- Polycarbonate plastic accessory plug and socket.
- Nickel-plated, phosphor-bronze metals for corrosion resistance.
- Socket fits all types of 12-volt accessories.
- Includes O-ring gasket and weather flap for protection.
- Plug features easy, no-solder, screw trap connection.

Order No.	Description	Pack	Std Carton
V2730	plug and socket set	Viz Pack	6
V2730S	socket	Viz Pack	6
V2730P	plug	Viz Pack	6
M2730S	socket	mfg. pac	k 48
M2730P	plug	mfg. pac	k 48



5404

Round 4-Way Connector

- Round, four-way trunk and trailer connector.
- Bright chrome-plated finish.
- Spring loaded cover on trunk connector.
- Brass contacts.

Order No.	Description	Pack	Std Carton
5404	complete kit	poly pac	k 10



5406

Round 6-Way Connector

- Round, 6-way male and female connectors.
- Molded interiors.
- Stainless steel spring on receptacle cover protects against corrosion and helps ensure dust and water-resistant seal.

Order No.	Description	Pack	Std Carton
5406P	plug	poly pac	k 10
5406S	socket	poly pad	k 10



5407

Round 7-Way Connector

- 7-way male and female connectors for heavy duty use.
- Diecast zinc construction.
- Accepts wide range of wire gauges.
- Built-in socket slant provides easy alignment and maximum contact.

Order No.	Description	Pack	Std Carton
5407P	plug	poly pac	k 10
5407S	socket	poly pac	k 10

CONNECTORS & ADAPTERS



5410 Tail Light Converter



- Use in place of our 5400B trunk connector when towing vehicle utilizes turn signal separate from stop/tail lamp.
- Converts 5-wire system down to 4-wire system.
- Heavy-duty, 10-amp transistors prevent premature failure.
- Includes all electrical connections and installations instructions.

Order No.	Description	Pack	Std Carton
V5410	complete kit	Viz Pack	6
B5410	complete kit	mfg. pac	k 24



5411

4-Way Flat Tester



- Tester plugs into connector of tow vehicle and illuminates when the electrical connections are correct.
- Tests to SAE standards on flat 4-way functions for tail light, stop/turn lights, and ground.
- · Self-service Viz Pack packaging.

Order No.	Description	Pack Std Carton
V5411	tester	Viz Pack 6







5413

6 to 4-Way Harness Adapter



- Converts 6-Way Round connector to 4-Way Flat connector.
- Easily adapts tow vehicle connector to trailer connector.
- Full length plug shell ensures positive latching.
- · Non-corrosive nylon shell.
- 7A max current through ground. Sum of all current through other terminals should not exceed 7 amps.
- · Self-service Viz Pack packaging.

Order No.	Description	Pack	Std Carton
V5413	3" length	Viz Pack	6







5414

7 to 4-Way Harness Adapter



- Converts 7-Way Round blade connector to 4-Way Flat pin connector.
- Easily adapts tow vehicle connector to trailer connector.
- Full-length plug shell ensures positive latching.
- Features non-corrosive nylon shell.
- 7A max current through ground. Sum of all current through other terminals should not exceed 7 amps.
- Self-service Viz Pack packaging.

Order No.	Description	Pack Std Carton
V5414	3 1/2" length	Viz Pack 6
5414	3 1/2" length	poly pack 12

EECT





5415

7 to 5-Way Harness Adapter

UIZ PACK

- Converts 7-Way Round blade connector to 5-Way Flat pin connector.
- Easily adapts tow vehicle connector to trailer connector.
- Simply plug adapter into tow vehicle connector and plug in trailer connector.
- · Full length plug shell ensures positive latching.
- Non-corrosive nylon shell.
- 7A max current through ground. Sum of all current through other terminals should not exceed 7 amps.
- Self-service Viz Pack packaging.

Order No.	Description	Pack Std Carton
V5415	4" length	Viz Pack 6
5415	4" length	poly pack 12







5416

7 to 4-Way Harness Adapter



- Converts 7-Way Round pin connector to 4-Way Flat pin connector
- Easily adapts tow vehicle connector to trailer connector.
- Full length plug shell ensures positive latching.
- Non-corrosive nylon shell.
- 7A max current through ground. Sum of all current through other terminals should not exceed 7 amps.
- Self-service Viz Pack packaging.

Order No.	Description	Pack Std Cartor
V5416	4" length	Viz Pack 6







5417

7 to 6-Way Harness Adapter



- Converts 7-Way Round blade connector to 6-Way Round pin connector.
- Easily adapts tow vehicle connector to trailer connector.
- Full length plug shell ensures positive latching.
- Non-corrosive nylon shell.
- 7A max current through ground. Sum of all current through other terminals should not exceed 7 amps.
- · Self-service Viz Pack packaging.

Order No.	Description	Pack Std Car	ton
V5417	4" length	Viz Pack	6

TRAILER WIRING & HARNESSES





5400A

Trailer Connector





- Flat four-way trailer connector.
- 5400A has 12" lead wires.
- 5400B has three 48" lead wires and 12" ground wire.
- Color coded wire meets SAE J1128 specifications.
- Plug meets SAE J1239 specifications.

Order No.	Description	Pack	Std Carton
V5400A	4-way trailer connector	Viz Pack	6
V5400B	4-way trunk connector	Viz Pack	6
B5400A	4-way trailer connector	mfg. pac	k 100
B5400B	4-way truck connector	mfg. pac	k 100



5401


Trailer/Trunk Extension Harnesses





- 30" harness extension.
- Available in both 4-way and 5-way flat configurations.
- Each configuration has trailer connector on one end and trunk connector on
- · Perfect for those times when an extension is needed between the tow vehicle and trailer.

Order No.	Description	Pack	Std Carton
V5401	4-way	Viz Pacl	k 6



5425

Split Trailer Harness Kit






- 25', split, four conductor harness.
- Designed to split at trailer tongue and run down each side of frame.
- Flat four-way plug meets SAE J1239 specifications, includes trunk connector.
- · Color-coded wire meets SAE J1128 specifications.

Clearance/Marker/ID Wire Harness

Order No.	Description	Pack Std Ca	arton
V5425Y	complete kit	Viz Pack	6
B5425Y	complete kit	mfg. pack	25



Not to scale. Some details enlarged for clarity

138.75"± 2.00" 3525-3600 mm 45.00" 45.00" 45.00 1143 mm 8.25 210 mm 8 25" 8.25" 12,75" 1143 mm 210 mm 324 mm

Not to scale. Some details enlarged for clarity.

2412

2712

2412/2712

- Front clearance and side marker harness features 16-gauge wire with four molded plugs.
- Rear clearance, rear side marker, and identification light harness features 18-gauge wire with seven molded plugs.

Order No.	Description	Pack	Std Car	ton
B2412	front, 10'	mfg. pac	k	50
B2712	rear, 11'	mfg. pac	k	50

2578

Breakaway Switch

- Required by law in some states.
- Ensures braking on towed vehicle during an accidental separation of trailer and towing vehicle.
- Emergency use only, not for braking when parked or stored.

Order No.	Description	Pack	Std Carton
2578	switch w/ lanyard	mfg. pac	k 120
2578-1	lanyard only	mfg. pac	k 250






Two Bullet Connector Styles




5600, 5601, 5602

5603



Surface Mount 5600, 5602, 5603



Recessed Mount 5600-1, 5601

5600 Timer Box Switch



- 10 amp maximum load.
- IP68 ingress rating. Suitable for installation inside or outside of vehicle.
- Pre-programmed for 30, 60, or 90 minutes of ON time per button push.
- 5600 and 5603 versions can be programmed for up to 2 hours of constant ON time by pressing the button up to 4 times (30 min added per push).
- Additional time can be added at any time, up to maximum.
- Lights flash per button push to indicate that command is received.
- Pushing and holding button turns off lights at any time.
- "2 minute warning" slowly dims and raises light level prior to shut-off.
- 9–32 volt operating range.
- Must be used in conjunction with 10 amp fuse for circuit protection.
- 5603 has 90" leads w/ individual bullet plugs rather than unified connector.

Order No.	Description	Leads	Interval	Max Time	Pack	Std Carton
P5600	surface	8"	30 min	120 min	poly pack	12
P5600-1	recessed	8"	30 min	120 min	poly pack	12
5600	surface	8"	30 min	120 min	mfg. pack	50
5600-1	recessed	8"	30 min	120 min	mfg. pack	50
5601	recessed, orange	8"	60 min	60 min	mfg. pack	50
5602	surface	8"	90 min	90 min	mfg. pack	50
5603	surface, 2 plugs	90"	30 min	120 min	mfg. pack	(2

520-40 Nightwatcher® LX 40 Amp Relay



- Universal relay for safety and protection.
- 40-amp heavy duty capacity.
- · Guards against overloads and arcing.
- 12-volt only.
- · Self-service Viz Pack packaging.

Order No.	Description	Pack Std Ca	irton
V520-40	relay	Viz Pack	12





520-41 Nightwatcher® LX Illuminated Rocker Switch



- Universal rocker switch for all quartz halogen lamps and other lighting applications.
- Illuminated.
- 15 amp capacity.
- · Self-service Viz Pack packaging.

Order No.	Description	Pack	Std Carton
V520-41	rocker switch	Viz Pack	12



19-41 Back-Up Mechanical Switch



- · For vehicles not originally equipped with back-up lights.
- · Heavy-duty, water and dust tight switch with 360 degree movement.
- Includes mounting bracket and cable grip connector.
- 12-36V DC, 5 amps max.
- Meets SAE J249 specifications.

Order No.	Description	Pack	Std Carton
19-41	heavy-duty	box	12



500

Turn Signal Switch



- 7-wire unit for vehicles with combination stop and turn signal lamps requiring brake light circuit.
- Includes built-in pilot lights to indicate left and right turn.
- Heavy diecast flat black enamel housing w/ chrome-plated lever.
- · Hazard warning switch with hazard pilot light.
- Supplied with universal steering column clamp and in-line fuse.
- Flasher not included.

Order No.	Description	Pack	Std Carton
V500	7-wire	Viz Pack	6
500	7-wire	box	6



5501

Switch Panel



- Durable black plastic mounts easily for convenient switch mounting.
- 1/2" diameter hole accommodates most standard toggle switches.
- · Also accepts PMV5525PT indicator light.

Order No.	Description	Pack	Std Carton
PMV5501PT	black	Viz Pack	(1

VIZ PACK



Order No.	Description	Std Carton
PMV5503PT	ignition switch – 4 stud .75" dia. hole 30A	1

UIZ PACK



Order No.	Description Std	Carton
PMV5504PT	flush mount horn button black plastic with nickel	1
	plated housing 5A 12V	

UIZ PACK



Order No.	Description	Std Carton
PMV5509PT	HD momentary on push-button w/boot 60A	12V 1





Order No.	Description Std Ca	rton
PMV5512PT	push-button momentary on switch 5/8" mount hole	1
	15A 12V 25A 6V	

UIZ PACK



Order No.	Description	Std Carton
PMV5522PT	heavy duty push/pull on-off switch 3/8" mour with chrome plated metal knob and 2 screws 6-28V	





Order No.	Description	Std Carto	n
PMV5579PT	euro switch push/pull on-off 5/16 mount hole screws 12V 16A	with	1





Order No.	Description Std C	arton
PMV5510PT	on-off metal bat handle toggle SPST switch with 2 screws 15A 12V	1





Order No.	Description	Std Carto	on
PMV5511PT	metal ball handle SPST toggle 3A/250V 5A/1	25V	1





Order No.	Description Std C	arton
PMV5513PT	weather resistant on-off toggle SPST switch with	1
	toggle boot 20A 12V	





Order No.	Description	Std Carton
PMV5536PT	illuminated red on-off SPST toggle switch 1/2	2" 1
	mount hole with 1/4" blades 16A 12V	





Order No.	Description Std C	arton
PMV5537PT	illuminated blue on-off SPST toggle switch 1/2"	1
	mount hole with 1/4" blades 16A 12V	





Order No.	Description	Std Carton	1
PMV5540PT	black on-off SPST toggle switch 1/2" mount h	nole 1	
	with 1/4" blades 16A 12V		





Order No.	Description	Std Carton
PMV5543PT	heavy duty on-off-on SPDT toggle switch die copper screw tabs and 3 brass screws 1/2" r hole with indicator plate 50A 6-12V	





Order No.	Description	Std Carton
PMV5544PT	heavy duty on-off-on momentary SPDT togg switch die cast 3 copper screw tabs and 3 br screws 1/2" mount hole with indicator plate 5 6-12V	ass





Order No.	Description	Std Carton
PMV5545PT	heavy duty SPST die cast 2 copper screw tal 2 brass screws 1/2" mount hole with indicator 50A 6-12V	





Order No.	Description Std Car	ton
PMV5546PT	on-off-on metal bat handle SPDT toggle switch 1/2" mount hole with indicator plate 15A 12V	1





Order No.	Description	Std Carto	n
PMV5560PT	illuminated red led on-off SPST toggle switch	1/2"	1
	mount hole with 1/4" blades 12V 10A		





Order No.	Description	Std Carto	n
PMV5561PT	illuminated blue led on-off SPST toggle switch	h 1/2"	1
	mount hole with 1/4" blades 12V 10A		





Order No.	Description Std	Carton
PMV5562PT	illuminated amber led on-off SPST toggle switch	1
	1/2" mount hole with 1/4" blades 12V 10A	





Order No.	Description Std (Carton
PMV5563PT	illuminated green led on-off SPST toggle switch	1
	1/2" mount hole with 1/4" blades 12V 10A	





Order No.	Description	Std Carton
PMV5571PT	On-Off SPST Toggle Switch with Red LED Indicator Light in Brushed Aluminum Bat Hat Volt 15 Amp	1 ndle 12





Order No.	Description Std C	arton
PMV5572PT	heavy duty on-off SPST toggle switch die cast red handle 2 copper screw tabs and 2 brass screws 1/2" mount hole with indicator plate 50A 6-12V	1





Order No.	Description	Std Carton
PMV5576PT	on-off metal bat handle toggle SPST switch	with 1
	indicator plate 3A 240 vac 6A 120 vac	





Order No.	Description	Std Cart	on
PMV5577PT	on-off metal bat handle toggle SPST switch vindicator plate 20A 12V	vith	1
	indicator plate 20A 12V		

SWITCHES & INDICATOR LIGHTS





Order No.	Description Std Ca	rton
PMV5570PT	weather resistant boot with threaded mounting nut	1
	for toggle switches fits 3/8" to 5/8" by 1/2" toggle	





Order No.	Description Std Ca	rton
PMV5530PT	illuminated red on-off SPST rocker switch with 1/4"	1
	blades 16A 12V	





Order No.	Description Sto	d Carton
PMV5580PT	illuminated red on-off oblong rocker switch 1/2"	1
	mount hole and 1/4" blades 25A 12V	





Order No.	Description	Std Carto	n
PMV5583PT	illuminated green on-off oblong rocker switch	1/2"	1
	mount hole and 1/4" blades 12V 25A		





Order No.	Description	Std Carto	n
PMV5584PT	illuminated red led on-off oblong rocker switch	h 1/2"	1
	mount hole and 1/4" blades 12V 25A		





Order No. Description	Std Carton
S S	en led on-off oblong rocker switch 1 e and 1/4" blades 12V 25A





Order No.	Description Std Ca	rton
PMV5525PT	indicator light - illuminated red 1/2" mount hole with	1
	1/4" blades 16A 12V	





Order No.	Description	Pack	Std Carton
PMV5564PT	indicator light - illum. red, 7/16" mtg hole, 1/4" blades 12V 15A	Viz Pack	1
PM5564PT	indicator light - illum. red, 7/16" mtg hole, 1/4" blades 12V 15A	poly pac	k 50

0002

Solderless Terminal Assortment



- 175 pieces.
- Comes complete in sturdy, closeable plastic container.

Order No.	Description	Pack	Std Carton
PMV0002-T	terminal kit	Viz Pack	: 1



1585 Alligator Clip Assortment



- 6 pieces.
- Assorted sizes and styles.

Order No.	Description	Pack	Std Carton
PMV1585KT	alligator clip assortment	Viz Pack	. 1



6110 Grommet Assortment



- 15 pieces.
- Assorted sizes and styles.

Order No.	Description	Pack	Std Carton
PMV6110PT	grommet assortment	Viz Pacl	(1



7029 Carburetor Cap Assortment



- Durable, flexible vinyl construction
- 40 pieces.
- Assorted sizes and styles.

Order No.	Description	Pack Std Cart	on
PMV7029PT	carburetor cap assortment	Viz Pack	1



510/511 Frame Clips



- Securely and safely attaches harness to trailer frame.
- Available in medium- or heavy-duty strength.

Order No.	Description	Pack	Std Carton
B510-72	medium-duty	mfg. pad	ck 100
B511-72	heavy-duty	mfg. pad	ck 100

TURN

RKER

B-U/UTIL

SPEC

EMERG

ĮĮ.

TNOO

ELECT

ACCY

ERCH

H

WIRING & TERMINALS





Order No.	Description	Std Carton
PMV0905PT	15 AMP fuse holder 16 AWG Qty 1	1
PMV0906PT	30 AMP fuse holder 12 AWG Qty 1	1





Order No.	Description	Std Carton
PMV0950PT	30 AMP ATC/ATO fuse holder 12 AWG Qty 1	1





Order No.	Description	Std Carton
PMV0961PT	10 AMP fuse holder 16 AWG Qty 1	1
PMV0963PT	20 AMP ATC/ATO fuse holder 12 AWG Qty 1	1





Description	Std Carton
30 AMP fuse holder 12 AWG Qty 1	1
	<u>'</u>











Order No.	Description	Std Carton
PMV0840PT	red & black insul. 30 AMP te	st Clips Qty 1 set 1







Order No.	Description	Std Carton
PMV1544KT	wire nut blue 22-16 AWG Qty 15	1
PMV1545KT	wire nut orange 18-16 AWG Qty 20	1
PMV1546KT	wire nut yellow 18-12 AWG Qty 8	1





Order No.	Description	Std Carton
PMV1560KT	18-14 AWG quick splice (blue) Qty 5	1
PMV1560PT	18-14 AWG quick splice (blue) Qty 15	1
PMV1560QT	18-14 AWG quick splice (blue) Qty 2	1





Order No.	Description	Std Carton
PMV1100KT	22-16 AWG nylon butt connector Qty 11	1
PMV1100PT	22-16 AWG nylon butt connector Qty 50	1





Order No.	Description	Std Carton
PMV1200KT	16-14 AWG nylon butt connector Qty 11	1
PMV1200PT	16-14 AWG nylon butt connector Qty 50	1





Order No.	Description	Std Carton
PMV1268KT	16-14 AWG .157" single bullet recept. Qty 7	1





Order No.	Description	Std Carton
PMV1300KT	12-10 AWG nylon butt connector Qty 6	1
PMV1300PT	12-10 AWG nylon butt connector Qty 25	1





Order No.	Description	Std Carton
PMV1700KT	22-16 AWG vinyl butt connector Qty 20	1
PMV1700PT	22-16 AWG vinyl butt connector Qty 50	1
PMV1700QT	22-16 AWG vinyl butt connector Qty 5	1





Order No.	Description	Std Carton
PMV1705KT	22-16 AWG vinyl #10 ring Qty 20	1





Order No.	Description	Std Carton
PMV1725KT	22-16 AWG vinyl #10 spade Qty 18	1





Order No.	Description	Std Carton
PMV1749KT	22-16 AWG vinyl .110" female Qty 18	1
PMV1755KT	22-16 AWG vinyl .250" female Qty 18	1
PMV1755QT	22-16 AWG vinyl .250" female Qty 3	1





Order No.	Description	Std Carton
PMV1800KT	16-14 AWG vinyl butt connector Qty 20	1
PMV1800PT	16-14 AWG vinyl butt connector Qty 50	1
PMV1800QT	16-14 AWG vinyl butt connector Qty 5	1





Order No.	Description	Std Carton
PMV1804KT	16-14 AWG vinyl #8 ring Qty 20	1
PMV1805KT	16-14 AWG vinyl #10 ring Qty 20	1
PMV1805QT	16-14 AWG vinyl #10 ring Qty 5	1





Order No.	Description	Std Carton
PMV1806KT	16-14 AWG vinyl 1/4" ring Qty 14	1
PMV1806QT	16-14 AWG vinyl 1/4" ring Qty 3	1





Order No.	Description	Std Carton
PMV1808KT	16-14 AWG vinyl 5/16" ring Qty 12	1
PMV1808QT	16-14 AWG vinyl 5/16" ring Qty 3	1
PMV1809KT	16-14 AWG vinyl 3/8" ring Qty 10	1

MERCH

TECH

WIRING & TERMINALS





Order No.	Description	Std Carton
PMV1825KT	16-14 AWG vinyl #10 spade Qty 18	1





Order No.	Description	Std Carton
PMV1855KT	16-14 AWG vinyl .250" female Qty 20	1
PMV1855PT	16-14 AWG vinyl .250" female Qty 100	1
PMV1855QT	16-14 AWG vinyl .250" female Qty 5	1





Order No.	Description	Std Carton
PMV1856KT	16-14 AWG vinyl .250" male Qty 19	1
PMV1856QT	16-14 AWG vinyl .250" male Qtv 5	1





Order No.	Description	Std Carton
PMV1858KT	16-14 AWG vinyl .157" bullet Qty 19	1
PMV1858QT	16-14 AWG vinyl .157" bullet Qty 5	1











Order No.	Description Std C	arton
PMV1865KT	16-14 AWG nylon .250" fully insul. female Qty 10	1
PMV1865PT	16-14 AWG nylon .250" fully insul. female Qty 50	1
PMV1865QT	16-14 AWG nylon .250" fully insul. female Qty 2	1





Order No.	Description	Std Carton
PMV1900KT	12-10 AWG vinyl butt connector Qty 14	1
PMV1900PT	12-10 AWG vinyl butt connector Qty 25	1
PMV1900QT	12-10 AWG vinvl butt connector Qtv 4	1





Order No.	Description	Std Carton
PMV1905KT	12-10 AWG vinyl #10 ring Qty 14	1
PMV1905QT	12-10 AWG vinyl #10 ring Qty 3	1





Order No.	Description	Std Carton
PMV1906KT	12-10 AWG vinyl 1/4" ring Qty 12	1
PMV1906PT	12-10 AWG vinyl 1/4" ring Qty 25	1
PMV1908KT	12-10 AWG vinyl 5/16" ring Qty 11	1
PMV1908PT	12-10 AWG vinyl 5/16" ring Qty 25	1





Order No.	Description	Std Carton
PMV1909KT	12-10 AWG vinyl 3/8" ring Qty 10	1
PMV1909PT	12-10 AWG vinyl 3/8" ring Qty 25	1
PMV1909QT	12-10 AWG vinyl 3/8" ring Qty 2	1
PMV1913QT	12-10 AWG vinyl 1/2" ring Qty 1	1





Order No.	Description	Std Carton
PMV1955KT	12-10 AWG vinyl .250" female Qty 15	1
PMV1955QT	12-10 AWG vinyl .250" female Qty 3	1





Order No.	Description	Std Carton
PMV1956QT	12-10 AWG vinyl .250" male Qty 3	1

UIZ PACK



Order No.	Description Std Ca	arton
PMV2250GT	22-16 AWG adhesive-filled heat shrink butt conn. Qty 25	1
PMV2250PT	22-16 AWG adhesive-filled heat shrink butt conn. Qty 5	1





Order No.	Description Std C	arton
PMV2260GT	16-14 AWG adhesive-filled heat shrink butt conn. Qty 25	1
PMV2260PT	16-14 AWG adhesive-filled heat shrink butt conn. Qty 5	1





Orde	r No.	Description Std C	arton
PMV:	2270GT	12-10 AWG adhesive-filled heat shrink butt conn. Qty 25	1
PMV	2270PT	12-10 AWG adhesive-filled heat shrink butt conn. Qty 5	1





Order No.	Description	Std Carton
PMV3157QT	12-10 AWG nylon w/grip .375" female Qty 2	1

UIZ PACK



Order No.	Description	Std Carton
PMV4008KT	8 AWG 5/16" brazed ring Qty 5	1





Order No.	Description	Std Carton
PMV4050KT	8 AWG insul, lug connector Qtv 3	1





Order No.	Description	Std Carton
PMV4138KT	6 AWG 5/16" tubular ring Qty 2	1
PMV4238KT	4 AWG 5/16" tubular ring Qty 2	1





Order No.	Description	Std Carton
PMV4239KT	4 AWG 3/8" tubular ring Qty 2	1
PMV4339KT	2 AWG 3/8" tubular ring Qty 1	1
PMV4439KT	1/0 AWG 3/8" tubular ring Qty 1	1
PMV4539KT	2/0 AWG 3/8" tubular ring Qty 1	1

WIRING & TERMINALS





Order No.	Description	Std Carton
PMV5140PT	black 1/4" convoluted tubing 14'	1
PMV5141PT	black 3/8" convoluted tubing 10'	1
PMV5142PT	black 1/2" convoluted tubing 7'	1
PMV5143PT	black 3/4" convoluted tubing 5'	1





Order No.	Description Std C	Carton
PMV7064PT	wht 4" nylon tie wrap 18lb tensile strength Qty 25	1
PMV7066PT	wht 6" nylon tie wrap 50lb tensile strength Qty 25	1
PMV7067PT	wht 11" nylon tie wrap 50lb tensile strength Qty 25	1





Order No.	Description Std C	arton
PMV7074PT	blk 4" nylon tie wrap 18lb tensile strength Qty 25	1
PMV7076PT	blk 6" nylon tie wrap 50lb tensile strength Qty 25	1
PMV7077PT	blk 11" nylon tie wrap 50lb tensile strength Qty 25	1





Order No.	Description	Std Carton
PMV7120QT	1/4" nylon clamp Qty 7	1





Order No.	Description	Std Carton
PMV81101PT	10 AWG red primary wire 10'	1
PMV81121PT	12 AWG red primary wire 12'	1
PMV81141PT	14 AWG red primary wire 20'	1
PMV81161PT	16 AWG red primary wire 25'	1
PMV81181PT	18 AWG red primary wire 35'	1






Order No.	Description	Std Carton
PMV81103PT	10 AWG black primary wire 10'	1
PMV81123PT	12 AWG black primary wire 12'	1
PMV81143PT	14 AWG black primary wire 20'	1
PMV81163PT	16 AWG black primary wire 25'	1
PMV81183PT	18 AWG black primary wire 35'	1





Order No.	Description	Std Carton
PMV81142PT	14 AWG yellow primary wire 20'	1
PMV81162PT	16 AWG yellow primary wire 25'	1









Order No.	Description	Std Carton
PMV81164PT	16 AWG green primary wire 25'	1
PMV81145PT	14 AWG blue primary wire 20'	1
PMV81165PT	16 AWG blue primary wire 25'	1
PMV81166PT	16 AWG brown primary wire 25'	1





Order No.	Description	Std Carton
PMV8221PT	1/4" single Wall black Shrink Tubing Qty 4	1
PMV8226PT	assorted Shrink Tubing Qty 4	1

- Protects aluminum and stainless steel against electrolytic reaction.
- Isolates dissimilar metals.
- Dielectric, suitable for use on electrical components.
- Contains anti-seize lubricant.
- 3.75 oz. tube.

Order No.	Description	Pack	Std Carton
PM-ECK-T	3.75 oz.	tube	24



0099/103T

Dielectric Grease



- Keeps battery terminals corrosion free.
- Seals High Energy ignition systems.
- Prevents voltage leakage.
- Available in 0.25 ounce and 3 ounce tubes.

Order No.	Description	Pack Std Carton
PMV0099PT	0.25 oz. tube	Viz Pack 1
PM-103T	3 oz. tube	mfg. pack 60



0300

Crimping Tool



- Cuts, strips and crimps 10 ga. to 22 ga. wire.
- · Cushioned grips.

Order No.	Description	Pack	Std Carton
PMV0300T	crimping tool	Viz Pack	(1



0690

Circuit Tester



- Equipped with aliigator clip and metal probe.
- Test bulb illuminates inside non-conductive handle.
- Compatible with 6-12 volt circuits.

Order No.	Description	Pack	Std Carton
PMV0690PT	circuit tester	Viz Pack	1



1575

Test Lead Set



- Set of two 30" leads.
- Alligator clips on both ends.
- Red and black insulation.

Order No.	Description	Pack	Std Cartor
PMV1575PT	test lead set	Viz Pack	: 1

CHOOSING SUPERIOR QUALITY CONSPICUITY PRODUCTS IS A CRITICAL SAFETY ENHANCEMENT

Every trip, every road, whether day or night.


NOT ALL REFLECTIVE MATERIALS ARE THE SAME

Road vehicles need more than lighting. Conspicuity tape and retro-reflectors are designed to reflect light back towards the source, no matter what angle it comes from. Unlike the glass beads found in less advanced reflective materials, Peterson conspicuity tapes use **precision-shaped microprisms** that reflect up to 250% more efficiently than bargin tapes. That higher performance is vital over longer distances and when visibility is reduced.

QUALITY THAT LASTS FOR THE LONG HAUL

There is more to tape performance than just the microprisms we use. The performance of your conspicuity equipment shouldn't degrade over time. Peterson specifies state-of-the-art backing materials and industrial-grade adhesives to maintain the highest visibility to other motorists long after installation.



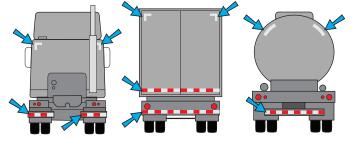

Trailer sides must have one horizontal 2" wide strip or two 1" wide strips of red/ white reflective tape running the entire length of the trailer, 15" to 60" above the ground. Either one continuous strip or intermittent strips evenly spaced to cover at least half the length of the trailer is permitted.

At the rear, 2" wide red/white reflective tape must run the width of the trailer. Additionally, 2" wide red/white reflective tape must be placed on the horizontal bar of the underride bumper, as well as 2" x 11.8" (300mm) white strips horizontally and vertically in the upper corners.

CURRENT FEDERAL REGULATIONS REQUIRE ALL TRAILERS OVER 80" WIDE AND OVER 10,000 POUNDS GVWR TO BE EQUIPPED WITH CONSPICUITY TREATMENT.

HEAVY DUTY TRUCK & TRAILER FEDERAL CONSPICUITY REQUIREMENTS

Per FMVSS 108 (49CFR 571.108) - "DOT-C2 compliant"

Required for heavy-duty trucks, trailers, tankers, dump trucks, tow trucks, etc.

Recommended for light-duty service bodies, vans and pick-ups.

Alternating RED/WHITE conspicuity tape is required on all new heavy-duty trailers manufactured after Dec. 1, 1993.

APPLICATION LOCATIONS

Rear Upper Body

• 12" WHITE strips placed in the upper rear corners

Rear Lower Body

- 2" wide RED/WHITE tape placed on rear full width of vehicle
- 2" wide RED/WHITE tape minimum 24" length on fender, mudflap brackets or within 12" below the top of mud flaps


Side Marking

• 2" wide RED/WHITE tape placed on each side of trailer continuous or evenly spaced over 50% of the vehicle

1000 Candlepower, 10 Year Warranty

Single-layer polyester film that is extremely flexible. Cannot delaminate like two-layer tape, so it maintains reflectivity after impact and can be riveted through.


Maximum nighttime reflectivity.



V59 High Intensity Prismatic (HIP)

10 Year Warranty

Air-backed, two-layer High Intensity Prismatic Tape is whiter in daylight than traditional polyester tape. Tape is sealed at edges and must not be punctured, or delamination may occur. Maximum daytime visibility.



V92 DAYBRIGHT

600 Candlepower, 5 Year Warranty

Single-layer polyester film that is extremely flexible. Cannot delaminate like two-layer tape, so it maintains reflectivity after impact and can be riveted through.

DAYBRIGHT white lines in pattern for increased daytime visibility.



V42

600 Candlepower, 3 Year Warranty

Single-layer polyester film that's a cost effective solution for retrofitting existing trucks and trailers.



V98

Conformable graphic sheeting meets NFPA 1901 standard, 5 Year Warranty Thin, weather-resistant prismatic tape. Vinyl construction to conform to vehicle shapes and curves. Maintains reflectivity after impact.

PM Conspicuity Tape Selection Guide

		STYLE		32 ndlepower	V59 H.I.P.	V92 – 600 CP <i>DAYBRIGHT</i>	V42 600 CP
	WARRANTY		10 Y	ears ears	10 Years	5 Years	3 Years
		WIDTH	1" / 1.45"	2"	2"	2"	2"
	464	6" White x 6" Red		464-2		464-1	
ROLLS*	463 465	7" White x 11" Red	465-5 (1")	465-2	NEW 465-3	463-1 (30' roll) 465-1 (150' roll)	NEW 465-4
TAPE	467	ALL WHITE				467-1	
	469	YELLOW	469 (1.45")	469-1	NEW 469-3		
IPS	465	7" White x 11" Red				465K (8 pack) 465-4K (4 pack)	
PE STRIPS	467 486	ALL WHITE		B486W (24" Curved)		467-4K (4 pack)	
TAPE	468	ALL RED				468-1C [†]	

CONSPICUITY TAPE ROLLS

10-Year, 1000 Candlepower Polyester Film Tape Rolls



- Ten year warranty.
- UV-stabilized and weather resistant high performance polyester film.
- No edge sealing requirement and can be riveted through.
- · Single layer prismatic construction maintains reflectivity after impact.
- · Industrial-strength adhesive to mount on flat or curved surfaces.

Order No.	СР	Wdth	Lgth	Style	Pattern	Pack	Std Carton
464-2	1000	2"	150'	V82	6" white x 6" red	box	1
465-2	1000	2"	150'	V82	7" white x 11" red	box	1
465-5	1000	1"	150'	V82	7" white x 11" red	box	1
469	1000	1.45"	150'	V82	yellow	box	1
469-1	1000	2"	150'	V82	yellow	box	1



10-Year, High Intensity Prismatic (HIP) Tape Rolls



- High Intensity Prismatic Tape is whiter in daylight than traditional polyester.
- · Air-backed, two-layer tape is sealed at edges.
- Industrial-strength adhesive to mount on flat or curved surfaces.

Order No.	СР	Wdth	Lgth	Style	Pattern	Pack	Std Carton
465-3	HIP	2"	150'	V59	7" white x 11" red	box	1
469-3	HIP	2"	150'	V59	yellow	box	1




5-Year, 600 Candlepower DAYBRIGHT Tape Rolls



- · White lines in pattern for maximum DAYTIME visibility.
- Five year warranty.
- UV-stabilized and weather resistant high performance polyester film.
- No edge sealing requirement and can be riveted through.
- Single layer prismatic construction maintains reflectivity after impact.
- Industrial-strength adhesive to mount on flat or curved surfaces.
- Each roll contains 150 feet of tape, except 463-1 (which has 30').
- 468-1C is for auxiliary use only in USA.

Order No.	СР	Wdth	Lgth	Style	Pattern	Pack	Std Carton
463-1	600	2"	30'	V92	7" white x 11" red	box	1
464-1	600	2"	150'	V92	6" white x 6" red	box	1
465-1	600	2"	150'	V92	7" white x 11" red	box	1
467-1	600	2"	150'	V92	all white	box	1
468-1C	600	2"	150'	V92	all red	box	1

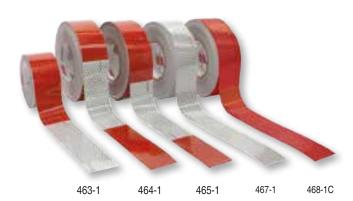

3-Year, 600 Candlepower Reflective Tape Roll



- Three year warranty.
- UV-stabilized and weather resistant high performance polyester film.
- No edge sealing requirement and can be riveted through.
- Single layer prismatic construction maintains reflectivity after impact.
- Industrial-strength adhesive to mount on flat or curved surfaces.

Order No.	. CP	Wdth	Lgth	Style	Pattern	Pack	Std Carton
465-4	600	2"	150'	V42	7" white x 11" red	box	1




470-1

Conformable Reflective Graphic Roll



- Five year warranty.
- Weather resistant, high performance, prismatic vinyl.
- Thin, flexible construction conforms to vehicle shapes and curves.
- Compliant to NFPA 1901 standard

Order No. CP	Wdth	Lgth	Style	Pattern	Pack	Std Carton
470-1	2"	150'	V98	lime	box	1



465K

5-Year, 600 Candlepower DAYBRIGHT Marking Strips



- High-brightness reflective material rated at 600 candle power.
- UV-stabilized and weather resistant high performance polyester film.
- No edge sealing requirement and can be riveted through.
- Single layer prismatic construction maintains reflectivity after impact.
- Industrial-strength adhesive to mount on flat or curved surfaces.
- Kits contain four or eight strips.

Order No.	СР	Wdth	Lgth	Style	Pattern	Pack	Std Carton
465K KIT	600	2"	18"	V92	red/white 8-strip kit	Viz Pack	12
465-4K KIT	600	2"	18"	V92	red/white 4-strip kit	Viz Pack	12
467-4K KIT	600	2"	11.8"	V92	all white 4-strip kit	Viz Pack	12





486W

10-Year, 1000 Candlepower Tanker Marking Strips




- Reflective material rated at 1000 candle power.
- Tank style white reflector tape.
- Industrial-strength adhesive to mount on flat or curved surfaces.
- 2" wide curved strip.
- Ten year warranty
- Approximately 23.5" long.

Order No.	СР	Wdth	Lgth	Style	Pattern	Pack	Std Carton
B486W	1000	2"	23.5"	V82	all white	box	100

What makes Spitfire® wide angle reflectors so superior?

- 50% wider reflectivity angle than conventional reflectors
- 47,000 microprisms per square inch for superior candle power
- Ultra-thin design—just .012" thick
- Hermetically sealed and unbreakable
- Industrial strength adhesive
- Easy to install on flat or curved surfaces
- Exceed DOT specifications
- Available in amber or red





493 Spitfire® Pressure-Sensitive Reflector Kit



- · Contains two each: 489, 490, 491 reflectors.
- Available in amber or red.
- · High-strength, pressure-sensitive backing adhesive.
- · Attractive, self-service visual packaging.

Order No.		Description	Pack	Std Carton
V493KA	KIT	amber kit	Viz Pack	12
V493KR	KIT	red kit	Viz Pack	12



Red and amber Viz Pack kits contain all the reflectors shown at left in attractive, sealed, hangable blister packs.

Pressure-Sensitive Rectangular Reflector



- Rectangular reflector measures 2.75" x 1.75" (70 mm x 45 mm).
- High-strength, pressure-sensitive backing adhesive.
- Meets FMVSS 108 requirements.

Order No.	Description	Pack Std	Carton
489A	amber (6 reflectors per bag)	poly pack	12
489R	red (6 reflectors per bag)	poly pack	12
B489A	amber	mfg. pack	100
B489R	red	mfg. pack	100



490 Spitfire®

Pressure-Sensitive Round Reflector



- Round reflector measures 2.88" (73 mm) diameter.
- High-strength, pressure-sensitive backing adhesive.
- Meets FMVSS 108 requirements.

Order No.	Description	Pack Std	Carton
490A	amber (6 reflectors per bag)	poly pack	12
490R	red (6 reflectors per bag)	poly pack	12
B490A	amber	mfg. pack	100
B490R	red	mfg. pack	100



491 Spitfire®

Pressure-Sensitive Rectangular Reflector



- Rectangular reflector measures 4.31" x 1.69" (110 mm x 43 mm).
- High-strength, pressure-sensitive backing adhesive.
- Meets FMVSS 108 requirements.

Order No.	Description	Pack	Std Carton
491A	amber (6 reflectors per bag)	poly pacl	k 12
491R	red (6 reflectors per bag)	poly pack	k 12
B491A	amber	mfg. pac	k 100
B491R	red	mfg. pac	k 100



492 Spitfire®

Pressure-Sensitive Rectangular Reflector



MARG

• Rectangular reflector measures 4.31" x 13/16" (110 mm x 21 mm).

- High-strength, pressure-sensitive backing adhesive.
- Ideal for applications where space is minimal.
- For auxiliary use only. Does not feature labeling required to meet FMVSS 108 requirements.

Order No.	Description	Pack Std Cartor
B492A	amber	mfg. pack 100
B492R	red	mfg. pack 100

TURN

ARKER

B-U/UTIL

SPEC

II C

MOOM

REFLECT

\CC\

FCE

H

DRIVEWAY MARKERS & REFLECTORS

461 **Driveway Marker**



- 3" diameter, double-sided, acrylic reflector.
- 3/16" galvanized steel post.
- Available with 36" or 48" post lengths.
- · Available in red or blue.

Order No.	Description	Pack	Std Carton
461B	36" blue	box	6
461R	36" red	box	6
461B-48	48" blue	box	12
461R-48	48" red	box	12




460 Steel Oval Reflector



- 3 1/4" diameter acrylic lens.
- Bright-plated, heavy-gauge steel housing.
- Two-piece construction features double strength lens guard.
- Available in amber or red.

Order No.	Description	Pack	Std Carton
B460A	amber	mfg. pac	k 100
B460R	red	mfg. pac	k 100





472


Aluminum Oval Reflector



- 3" diameter acrylic lens.
- · Low-profile, oval housing constructed of rustproof aluminum.
- V472 series contains one reflector per Viz Pack.
- Meets FMVSS 108 standards.
- Available in amber or red.

Order No.	Description	Pack	Std Carton
V472A	amber	Viz Pack	12
V472R	red	Viz Pack	12
B472A	amber	mfg. pac	k 100
B472R	red	mfg. pac	k 100





2" Accessory Reflector


- 2" diameter.
- Stick-on reflector with adhesive back.
- · Attractive chrome bezel.
- Ideal for dressing up cars, boats, bicycles and motorcycles.
- For accessory use only; does not meet FMVSS 108 requirements.
- · Available in amber or red.

Order No.	Description	Pack	Std Carton
B474A	amber	mfg. pac	k 100
B474R	red	mfg. pac	k 100

- 3 3/16" diameter acrylic lens.
- Adhesive backing permanently mounts to any clean, flat surface.
- V475 series contains one reflector per Viz Pack.
- Meets FMVSS 108 standards.
- Available in amber or red.

Order No.	Description	Pack St	d Carton
V475A	amber	Viz Pack	12
V475R	red	Viz Pack	12
B475A	amber	mfg. pack	100
B475R	red	mfg. pack	100





476

Round Center-Mount Reflector

- 3 3/16" diameter.
- · Hermetically sealed.
- · Center screw mounting.
- 3/16" diameter mounting hole.
- Meets FMVSS 108 standards.
- Available in amber or red.
- Poly bags contain two reflectors per pack.

476A amber, qty. 2 poly pack 476R red, qty. 2 poly pack B476A amber mfg. pack 1				
476R red, qty. 2 poly pack B476A amber mfg. pack 1	Order No.	Description	Pack	Std Carton
B476A amber mfg. pack 1	476A	amber, qty. 2	poly pac	k 12
3 1	476R	red, qty. 2	poly pac	k 12
B476R red mfg. pack 1	B476A	amber	mfg. pac	k 100
	B476R	red	mfg. pac	k 100





477

Round Center-Mount Reflector

- 2 3/8" diameter.
- · Hermetically sealed.
- · Center screw mounting.
- 1/4" diameter mounting hole.
- Perfect for any surface area where space is limited.
- Meets FMVSS 108 standards.
- Available in amber or red.
- Poly bags contain two reflectors per pack.

Order No.	Description	Pack Std Carton
477A	amber, qty. 2	poly pack 12
477R	red, qty. 2	poly pack 12
B477A	amber	mfg. pack 100
B477R	red	mfg. pack 100
		· · · · · · · · · · · · · · · · · · ·






REFLECTORS








479 **Oblong Reflector**

- 4 3/8" x 1 7/8" reflector.
- Hermetically sealed acrylic lens.
- Mounts on 3 15/16" centers.
- Meets FMVSS 108 standards.
- · Available in amber or red.

Order No.	Description	Pack	Std Carton
B479A	amber	mfg. pad	ck 100
B479R	red	mfg. pad	ck 100






480 **Oblong Quick-Mount Reflector**



- 4 3/8" x 1 7/8" acrylic lens.
- Adhesive backing permanently mounts to any clean, flat surface.
- V480 series contains two reflectors per Viz Pack.
- May also be mounted on 3 15/16" centers.
- Meets FMVSS 108 standards.
- Available in amber or red.

Order No.	Description	Pack Std Carto
V480A	amber	Viz Pack
V480R	red	Viz Pack
B480A	amber	mfg. pack 10
B480R	red	mfg. pack 10





481 **Round Quick-Mount Reflector**

- 2 3/8" acrylic reflector.
- · Permanent adhesive backing.
- Ideal for applications where space is minimal.
- Meets FMVSS 108 standards.
- Available in amber or red.
- Poly bags contain two reflectors per pack.

Order No.	Description	Pack Std Carton
481A	amber, qty. 2	poly pack 12
481R	red, qty. 2	poly pack 12
B481A	amber	mfg. pack 100
B481R	red	mfg. pack 100


483

Rectangular Quick-Mount Reflector



- 3 1/8" x 1 3/8" stick-on reflector.
- Adhesive back for quick and permanent mounting.
- V483 series contains two reflectors per Viz Pack.
- Meets FMVSS 108 standards.
- · Available in amber or red.

Order No.	Description	Pack Std Cartor
V483A	amber	Viz Pack 12
V483R	red	Viz Pack 12
B483A	amber	mfg. pack 100
B483R	red	mfg. pack 100




484

Rectangular Quick-Mount Reflector

- 3 7/16" x 1 11/16" stick-on reflector.
- Encased in attractive chrome bezel.
- Adhesive back allows quick and permanent mounting.
- Meets FMVSS 108 standards.
- Available in amber or red.

Order No.	Description	Pack Std C	arton
B484A	amber, chrome	mfg. pack	100
B484R	red, chrome	mfg. pack	100





487


Compact Rectangular Reflector



- 4 3/8" x 1 1/8" acrylic reflector.
- Features both adhesive backing and mounting holes.
- Perfect for many narrow mounting locations.
- V487 series contains two reflectors per Viz Pack.
- Meets FMVSS 108 standards.
- Available in amber or red.


Order No.	Description	Pack	Std Carton
V487A	amber	Viz Pack	12
V487R	red	Viz Pack	12
B487A	amber	mfg. pack	(100
B487R	red	mfg. pack	(100





ECE COMPLIANT REFLECTORS





1274 ECE-Compliant Triangular Rear Reflector




- Meets applicable ECE requirements for trailer use.
- High-strength foam adhesive backing, or equipped with holes for screw mounting.

Order No.	Description	Pack Std C	arton
1274R	triangular reflector	poly pack	25







1284 ECE-Compliant Reflector



- 81 mm x 37 mm (3.2" x 1.45").
- Meets applicable ECE requirements.
- Available in amber, red, and white.

Order No.	Description	Pack Std (Carton
1284A	amber	mfg. pack	250
1284R	red	mfg. pack	250
1284W	white	mfg. pack	250





2753 ECE-Compliant Reflector



- 56 mm (2.19").
- Meets applicable ECE requirements.

Order No.	Description	Pack	Std Carton
2753A	amber	mfg. pac	k 100
2753R	red	mfg. pac	k 100

ECE-approved products are made available for use in export markets that require Economic Commission for Europe (ECE) compliant equipment.

- Kit contains three folding warning triangles and 20" x 5" x 5" corrosion-free plastic storage box.
- One-piece triangles feature "living hinges" with foldout tabs that lock together.
- Heavy base and non-skid tabs withstand 40 MPH winds.
- Bright fluorescent orange color and high-efficiency reflectors for maximum visibility day or night.
- Meets FMVSS 125.

Order No.	Description	Pack	Std Carton
449	complete kit	box	1
449-1	kit, drop ship	box	72



459 SMV Emblems




- Standard type warning emblems for slow moving vehicles.
- Bright reflective edge strips and fluorescent orange center.
- Meets ASAE standard S276.5.
- 459 features corrosion-proof backing plate and hardware for either spade or bracket mounting.
- 459-1 features industrial-strength mounting adhesive for flush, no-drill mounting and mounting on slightly curved surfaces.

Order No.	Description	Pack	Std Carton
459	emblem w/ back plate	box	1
459-1	adhesive emblem	box	12

CONVEX MIRRORS





600


2" Round Blind-Spot Mirror



- 2" diameter convex glass mirror.
- · Aluminum housing.
- Adhesive backing mounts to any smooth, flat surface.
- Packaged one per display card.

Order No.	Description	Pack	Std Carton
V600	aluminum	Viz Pack	12





602


Rectangular Blind-Spot Mirror



- 4" x 5 1/2" convex glass mirror.
- · Aluminum housing.
- Adhesive backing mounts to any smooth, flat surface.
- Packaged one per display card.

Order No.	Description	Pack	Std Carton
V602	aluminum	Viz Pack	12





603

Round Blind-Spot Mirrors



- 3" diameter convex glass mirror.
- · Aluminum housing.
- · Adhesive backing mounts to any smooth, flat surface.
- Packaged one per display card.

Order No.	Description	Pack	Std Carton
V603	aluminum 3" dia.	Viz Pack	12



608

8" Convex Mirror

- 8" diameter convex glass mirror.
- Adjustable ball stud with 5/16" internal thread.
- Includes bright plated right angle bracket.
- Bright stainless or durable black enamel finish.
- Packaged in see-through display box.

Order No.	Description	Pack Std Carton
608	black	display box 6
608X	bright stainless	display box 6

RELATED ACCESSORIES


608

Offset Mount 8" Convex Mirror


- 8" diameter convex glass mirror.
- Offset stud allows positioning below West Coast-style mirrors.
- Includes bright plated right angle bracket.
- Bright stainless steel finish.
- Packaged in see-through display box.


Order No.	Description	Pack	Std Carte	on
608XO	bright stainless	display l	box	6












654/655 Steel Clamp-On Convex Mirrors

- Convex glass mirror available in 5" and 6" diameters.
- Durable black enamel or stainless steel finish.
- Includes clamp-on, right-angle mounting arm and angle bracket.
- Mounts below West Coast mirror, or clamps to any tubular bracket.
- Packaged in see-through display box.

Order No.	Description	Pack Std Carton
654	5" dia. black	display box 12
654X	5" dia. stainless	display box 12
655	6" dia. black	display box 12
655X	6" dia. stainless	display box 12






658 8" Fisheye Convex Mirror

- Highly convex mirror provides wide-angle fisheye view.
- Extra-large 8" diameter.
- Durable stainless steel finish.
- Includes angle bracket.
- Packaged in see-through display box.

Order No.	Description	Pack	Std Carton	i
658X	bright stainless	display	box 6	3



668 Pod-Mount Truck Mirror

- 8" convex glass mirror.
- Single arm adjustment is quick, easy and secure.
- Durable stainless steel finish.
- Pod base mounts easily to any flat surface.
- Packaged in see-through display box.
- Accepts 658X as replacement mirror head.

Order No.	Description	Pack	Std Carton
668X	bright stainless	display b	box 6

TURN

MARKER

B-U/UTIL

SPEC

MOUNT

FECT

_ ပ္ပ

ERCE


H

RELATED ACCESSORIES

UNIVERSAL MIRRORS








650


Quick-Fit Towing Mirror

- Provides increased viewing area.
- Does not obstruct stock mirror.
- Fits driver or passenger side mirror.
- Double-pivoting adjustable arms attach to nearly all mirrors.
- No-mar flexible rubber straps protect vehicle finish and ensure snug, vibration-free fit.
- · Attaches and removes in seconds without tools.

Order No.	Description	Pack	Std Carton
650	black	display b	oox 6







598/805

Universal Day/Night Rearview Mirrors



- OEM-styled, universal interior rearview mirror for cars and trucks.
- Available in 8" or 10" widths.
- Non-glare/nighttime adjustment switch.
- · Black ABS housing.
- · Adhesive not included.
- Packaged in full-view clamshell.

Order No.	Description	Pack	Std Carton
598	10"	Viz Pack	6
805	8"	Viz Pack	6




605

5" Round Mirror

- 5" diameter flat glass mirror.
- Adjustable ball stud with 5/16" internal thread.
- Includes bright plated right angle bracket.
- Durable black enamel finish.
- · Packaged in see-through display box.

Order No.	Description	Pack	Std Carton
605	black	display b	oox 12





807

Wide-Angle Safety Mirror


- 5-panel mirror design provides broader, safer viewing area.
- Fits most full-size cars, trucks, and vans.
- Special glass eliminates night glare.
- Includes all mounting hardware.

Order No.	Description	Pack	Std (Carton
807	5 panel	display b	ООХ	6










667 **Pillow-Back Mirror Assembly**

- Fully adjustable West Coast mirror assembly.
- Pillow-back, steel mirror head.
- Domed end caps assure rigidity and protect glass.
- Sturdy 3/4" arms and brace reduce flutter and vibration.
- 18" to 25" horizontal adjustment.
- · Bright stainless steel finish.
- Uses replacement mirror head 617X.

Order No.	Description	Pack	Std Carton
667X	stainless steel	display l	box 6



810 **Universal Swing-Away Mirror**

- Bracket assembly fits most passenger car and light trucks.
- Stainless steel mirror head and arms.
- Rubber tips on attachment points of arms protect vehicle finish.
- Packaged in attractive display box.

Order No.	Description	Pack Std Carton
810	stainless	display box 6
832	replacement head	Viz Pack 6


820/821

Universal Swing-Away Mirror

- Universal tripod mount fits Chevrolet, GMC, Ford, and others.
- Reversible for left and right hand application.
- Large mirror head features swing away design.
- 820 has black ABS head and epoxy coated steel arms.
- 821 features all stainless-steel construction.
- Packaged in attractive display, blister box.

Order No.	Description	Pack Std Ca	arton
820	black	display box	6
821	bright stainless	display box	6
832	stainless replacement head	Viz Pack	6





RELATED ACCESSORIES

REPLACEMENT MIRROR HEADS




Universal Replacement Mirror Head

- Replacement mirror head fits nearly all stud-mount bracket.
- Features white enamel finish and vinyl cushioned glass.
- Rugged, double-washer tensioning for secure positioning.
- Features 1/4" x 1 1/2" offset ball stud.

Order No.	Description	Pack Std C	arton
609	white	display box	24





830


Replacement Head for Fender-Mount Mirrors



- Stainless steel mirror head.
- Replacement for many universal-fit fender-mount towing mirror assemblies.

Order No.	Description	Pack	Std Carton
830	stainless replacement head	Viz Pack	6






835/836

Low-Mount Replacement Mirror Head





- Reversible for both left- and right-hand applications.
- Mirror head features durable, corrosion-free ABS construction.
- · Available with black or chrome finish.
- Packaged in full-view clamshell.

Order No.	Description	Pack	Std Carton
836	chrome replacement head	Viz Pacl	6
B835	black replacement head	mfg. pad	ck 16




615

6 1/2" x 16" Economy Replacement Mirror

- Replacement mirror head fits West Coast-style brackets.
- Durable anodized aluminum back with black aluminum end caps.
- 1/4" mounting studs.
- Angled back style.
- Packaged in see-through display box.

Order No.	Description	Pack	Std Carto	n
615	aluminum	display b	оох	6






616

7" x 16" Flat Ribbed-Back Replacement Mirror


- Universal OEM-style, West Coast replacement mirror head.
- One-piece design with cushioned glass.
- 5/16" mounting studs.
- Available in black or white enamel finish.
- Packaged in see-through display box.

Order No.	Description	Pack Std Carton
616	black	display box 6
616W	white	display box 6









617 6 1/2" x 16" Pillow-Back Replacement Mirror

- Universal OEM-style, West Coast replacement mirror head.
- 5/16" center rod.
- Bright, stainless-steel finish.
- · Packaged in see-through display box.

Order No.	Description	Pack	Std Car	ton
617X	stainless steel	display	box	6

RELATED ACCESSORIES



95010/95011 Universal Rubber-Mast Antennas



- 13" single-section, flexible, rubberized antennas fit most vehicles.
- Available in either top or combination top/side mount.
- Includes swivel base and 54" cable.
- Some applications may require extension cable.

Order No.	Description	Pack Std Ca	arton
95010-1	top mount, black	Viz Pack	6
95011-1	top/side mount, black	Viz Pack	6
95093-1	144" extension cable	Viz Pack	12



95020

Universal Stainless Steel Antenna



- Universal top-mount design.
- Three-section, 38" stainless steel mast.
- Base mounts on 0-30° angle.
- Includes 47" cable.
- Some applications may require extension cable.

Order No.	Description	Pack Std C	arton
95020-1	stainless steel	Viz Pack	6
95093-1	144" extension cable	Viz Pack	12



95021/95083/95087 Universal Stainless Steel Antenna



- Universal top-mount design.
- Single-section, 31" mast.
- Stainless steel mast.
- Includes 47" cable.
- Some applications may require extension cable.

Order No.	Description	Pack	Std Carton
95021-1	stainless steel	Viz Pack	6
95083-1	black replacement mast	Viz Pack	12
95087-1	stainless replacement mast	Viz Pack	12
95093-1	144" extension cable	Viz Pack	12

- Universal top- or side-mount design with swivel base.
- Spring-mounted, three-piece 50" stainless steel mast.
- Includes 47" cable.
- Some applications may require extension cable.

Order No.	Description	Pack	Std Carton
95023-1	stainless steel	Viz Pack	6
95093-1	144" extension cable	Viz Pack	12



95051

Fully Automatic AM/FM Antenna



- 30" five-section, stainless steel mast.
- Automatically extends when AM/FM radio is turned on.
- Three mounting heads for universal application.
- Waterproof motor.
- Includes 47" cable.
- 12.5" inches of vertical space is required for installation.

Order No.	Description	Pack Std Carton
95051-1	stainless steel	Viz Pack 6

95093

Antenna Extension Cable



• Universal extension cables include plug and jack.

Order No.	Description	Pack	Std Carton
95093-1	144" extension cable	Viz Pacl	(12



ACCESSORIES & REPLACEMENT BULBS



62 Bearing Protectors



- Protects against premature bearing failure.
- Automatically feeds grease to the wheel bearing.
- Corrosion-proof, clear polycarbonate housing allows easy monitoring of grease level.
- Stainless steel pressure spring and heavy duty pressure plate.
- Overload outlet prevents component damage when refilling.

Order No.	Description	Pack	Std Carton
B62	1.980" dia.	mfg. pad	ck 200



549 Nightwatcher® LX 100 Watt Halogen Bulb



- 100 watt, 12 volt replacement bulb.
- Fits all halogen auxiliary lights using H3 bulb.
- Fits blade and bullet terminals.
- Off road use only.
- Self-service Viz Pack packaging.

Order No.	Description	Pack	Std Carton
VH549	replacement bulb	Viz Pacl	1 2



550 Nightwatcher® LX 55 Watt Halogen Bulb



- 55 watt, 12 volt replacement bulb.
- Fits all halogen auxiliary lights using H3 bulb.
- Fits blade and bullet terminals.
- 70 watt, 24 volt version also available.
- Self-service Viz Pack packaging.

Order No.	Description	Pack	Std Carton
VH550	replacement bulb	Viz Pack	12
H3-70W-24V	24 volt version	mfg. pac	k 1

RELATED ACCESSORIES

NOTE! Bulbs noted as "for reference only" are not stocked by Peterson, and should be procured locally.





2.0"

1.44"

1.06"





2.125"

67 — reference only

13.5 V, 0.59 amp, 4 cp

93 — reference only

14 V, 1.04 amp, 15 cp

97 — reference only

13.5 V, 0.69 amp, 4 cp

168/464 - reference only

168: 14 V, 0.35 amp, 3 cp 464: 28 V, 0.17 amp, 3 cp

193/194 - reference only

193: 14 V, 0.30 amp, 2 cp 194: 14 V, 0.25 amp, 1.5 cp

795/796 - reference only

795: 12.8 V. 35 watt. 60 cp 796: 12.8 V, 50 watt, 108 cp



1.75"



2.0"



2.0"





1.07"

1003 — reference only

12.8 V, 1.17 amp, 15 cp

1141 — reference only

12.8 V, 28 watt, 21 cp

1156 — reference only

12.8 V, 2.1 amp, 32 cp

1157 — reference only

Twin filmnt, 12.8/14 V, 2.2/0.59 amp, 32/3 cp

1895 — reference only

14 V, 0.27 amp, 2 cp



2.0"



2.0"



2.10"



4.50'



2.25"

2057 — reference only

Twin filmnt, 12.8/14 V, 2.1/0.48 amp, 32/2 cp

2357 — reference only

Twin filaments, 12.8/14 V, 2.2/0.59 amp, 40/3 cp

3157 — reference only

Twin filaments, 12.8/14 V, 0.59/0.16 amp, 32/3 cp

4411 — reference only

12.8 V, 2.34 amp, 35000 cp PAR 36, 11° horiz/4° vert beam


1195 — reference only 14 V, 3.0 amp, 50 cp







3.0"



H1/55W

3.0 amp, 14 V, 50 cp

L2-77/L2X-77

L2-77: Fits 765, 769 & 769-1 L2X-77: Fits 769-2

L3-77

Fits 789 strobe beacon

L7-77

Fits 790 & 793 strobe beacons



585-77

Fits 788 strobe light



STU15AM-77

Fits 787 strobe light



VH549

12 V, 100 watts, 5 amp



VH550

12 V, 4.58 amps, 55 watt Not for use on 408, 502 & 503 Series



H3-70W-24V

VH550 repl. for 24V systems

ACCY

REPLACEMENT BULBS

PM#	Bulb Type
100	193 or 194
102	193 or 194
104	193 or 194
104-3	193 or 194
106	193 or 194
107	193 or 194
107-24	464
107-3	193 or 194
108	193 or 194
109	97
110	193 or 194
114	193 or 194
115	193 or 194
117	67F
118	97
119	168
120	193 or 194
120-24	464
122	193 or 194
122-24	464
123	97
124	193 or 194
125	193 or 194
126	193 or 194
128	193 or 194
130	193 or 194
130-24	464
131	193 or 194
132	193 or 194
135	193 or 194
136	193 or 194
136-3	193 or 194
137	193 or 194
138	193 or 194
138-24	464
139	193 or 194
159	193 or 194
305	1156
306	2057
313R	1156
313AA	
	2057
313-2	2057
320	2357
321	2357
324	2357
325	2357
326	2357
334-2	2057
335	2057

PM#	Bulb Type	
335-2	2057	
337	2057	
337-2	2057	
339-2	1157	
343	3157	
344	3157	
375	1003	
376	1003	
377	1003	
378	1003	
380	1141	
382	1141	
383	1141	
384	93	
385	93	
389	1141	
390	1141	
391	1141	
392	1156	
392-24	1683	
393A	1156	
393C	1141	
394	1141 (21 cp)	
	1156 (32 cp)	
	1195 (50 cp)	
395	1156	
396	912	
400	168	
408	VH550	
410-2	1157	
411	1156	
411-24	1683	
413	1157	
413-24	1683	
413-3	1157	
419	1157 (stop/tail)	
	1156 (turn)	
419-24	P21/5W	
425	1157	
425-3	1157	
428	1157	
430	1157	
433	193 or 194	
434	193 or 194	
435	193 or 194	
436	168	
437	67	
438		
440	193 1157 (stop/tail)	
11 0	1101 (StOp/tall)	

PM#	Bulb Type
	1895 (side)
441	1157 (stop/tail)
	1895 (side)
442	1157 (stop/tail)
	1156 (back-up)
444	1157 (stop/tail)
	193/194 (side)
445	1157 (stop/tail)
	1156 (back-up)
451	1157 (stop/tail)
	193/194 (side)
452	1157 (stop/tail)
	193/194 (side)
454	1157 (stop/tail)
	1156 (back-up)
456	1157 (stop/tail)
	193/194 (side)
457	1157
502	VH550
503	VH550
504	VH550
504M	VH550
505	HP6545 (head)
303	2357 (turn)
507	PAR 36
507	
508	PAR 36
509	H9411
511	PAR 36
513	VH550
517	VH550
525	VH550
526	VH550
527	VH550
529	VH550
530	VH549
531	VH549
534	VH550
538	VH550
539	VH549
552	VH550
555	1157
556	VH550
557	VH550
562	VH550
566	VH550
580	VH549
582	VH550
583	VH550
500	***************************************

PM#	Bulb Type	
590	VH550	
593	VH550	
597	VH550	
746	1195	
753	H1/55W	
754	4416	
755	4416	
756	1195	
757	795	
759	4416	
760	L3-77	
761	795	
763	1195	
765	L2-77	
769	L2-77	
769-1	L2-77	
769-2	L2X-77	
771	1141	
773	1141	
774	1141	
775	H1/55W	
776	H1/55W	
777	H1/55W (rot.)	
	1156 (stat.)	
787	STU15-77	
788	STRA-77	
789	L3-77	
790	L7-77	
792	L3-77	
793	L7-77	
2546	193 or 194	
2547	193 or 194	
2549	193 or 194	
25911	1157	
25912	1157 (stop/tail)	
	1156 (back-up)	
25913	1157	
25914	1157 (stop/tail)	
	1156 (back-up)	
25921	1157	
25922	1157 (stop/tail)	
	1156 (back-up)	
25923	1157	
25924	1157 (stop/tail)	
	1156 (back-up)	

ACCY



Fits old style 114/AR, 115 A/R, 440/L & 441/L			
amber	55-15A		
red	55-15R		



Fits 452	2 & 452L	
red	56-15R	



Fits 100A/	R, 104A/R, 1	04-3R, 131A/R & 141A/R
amber	100-15A	B100-15A
red	100-15R	B100-15R



Fits 102A/R			
amber	102-15A		
red	102-15R		



Fits 107\	NA/WB/WG/W	R, 107-6A/6R	, 107-3A/3R
amber	107-15A	B107-15A	V107-15A
blue	107-15B		
red	107-15R	B107-15R	V107-15R



Fits 106A/R & 108WA/WR			
amber	108-15A	B108-15A	V108-15A
red	108-15R	B108-15R	V108-15R
Fits lights manufactured prior to 2012			



Fits 108		
amber	108-151A	B108-151A
red	108-151R	B108-151R
Fite lights manufactured prior 2012_2018		



Fits 109A		
amber 10	09-25A	



Fits 110A	/B/C/G/R, 111R	
amber	110-15A	V110-15A
blue	110-15B	
clear	110-15C	
green	110-15G	
red	110-15R	V110-15R



Fits 112A, new style 114A/R, 115A/F	₹,
440 & 440L, 441 & 441L	

amber	114-15A	
red	114-15R	



Fits 117A		
amber	117-25	



Fits 118A/KA		
amber	118-15A	

RELATED ACCESSORIES

REPLACEMENT LENSES



Fits 119A/R		
amber	119-15A	
red	119-15R	



Fits 122A/R, 122XA/XR, 123A/R, 124A/R		
amber	124-15A	
red	124-15R	



Fits 125A	/R
amber	125-15A
red	125-15R



Fits 126A/C/R		
amber	126-25A	
clear	126-25C	
red	126-25R	




Fits 130A	/R	
amber	130-25A	
red	130-25R	



Fits 35A/R, 135A/R			
amber	134-15A	B134-15A	V134-15A
red	134-15R	B134-15R	V134-15R







Fits 38A/R, 138A/B/C/G/R & 139A/R			
amber	138-15A	B138-15A	V138-15A
blue		B138-15B	
clear		B138-15C	
green		B138-15G	
red	138-15R	B138-15R	V138-15R



Fits 306A/R & 393C		
amber	306-25A	
clear	306-25C	
red	306-25R	



Fits 308A/F	1
red	308-15R
black	308-15BLK (cover)



Fits com	petitive lamps	
amber	310-15A	



Fits 313 &	314MA	
amber	313-15A	
red	313-15R	
black	313-15BLK	(cover)

RELATED ACCESSORIES







Fits 334-2		
amber	334-15A	B334-15A
blue	334-15B	B334-15B
red	334-15R	B334-15R

Fits 313A/R, 313RA & 339-2			
amber	338-15A	B338-15A	
red	338-15R	B338-15R	

Fits 343A		
amber	343-25A	



Fits 375, 37	5S, 376S, 377S & 378S
clear	375-15C



Fits 380S		
clear	380-25C	



Fits 382 & 383	
amber	383-25A
clear	383-25C



Fits 384, 384S, 384-P & 385S		
amber	384-15A	
clear	384-15C	



Fits 389S		
opaque	389-15C	



Fits 391C		
clear	391-25	



1 110 0020		
clear	392-25C	



Fits 413	Fits 413 & 425 series			
amber	410-15A			
blue	410-15B			
red	410-15R	B410-15R	V410-15R	
red polyc	arbonate	410-25R		
'				



Fits 411C/SC		
clear	414-15C	

ACCY

RELATED ACCESSORIES

REPLACEMENT LENSES







Fits 419		
amber	419-25A	
red	419-25R	



Fits 428 series		
red	420-15	V420-15



Fits 436			
clear	436-25		



Fits 440)/L, 441/L, 444/L, 452/L	
red	440-15	V440-15



Fits 444, 444L		
red	444-151R	



Fits 445		
red/white	445-25	



Fits 457/L		
red	B457-15	
red w/ licence light	B457L-15	



Fits 754A & 755A		
amber	755-15A	



Fits 756 & 763		
amber	756-15A	
blue	756-15B	
red	756-15R	



Fits 760 & 761			
amber	760-25A		
clear	760-25C		



Fits 765A/R, 769A/B/C/R & 769MA		
amber	769-25A	
blue	769-25B	
clear	769-25C	
red	769-25R	



Fits 769-1HA & 788 769-25HA amber



Fits 771A/B, 773A & 768A/B		
amber	771-15A	
blue	771-15B	



Fits 774A	VR	
amber	774-15A	
red	774-15R	



Fits 791 791-25A amber



Fits 844 844-252 red



Fits 844 844-253 red



Fits 108 & 2549



Fits 25911 red V25911-25



Fits 25912 red w/ clear V25912-25



Fits 25913 red w/ clear V25913-25



Fits 25914 red w/clear V25914-25



Fits 25921 V25921-25 red



Fits 25922 red w/clear V25922-25



Fits 25923 red w/clear V25923-25



Fits 25924 red w/clear V25924-25

MOUNT

REFLECT

ACCY

ECH

MERCHANDISING PLAN-A-GRAMS



Peterson offers more than product. You get a proven track record of success.

Peterson's eye-grabbing plan-a-grams are packed with hottest-selling items in safety lighting and accessories. No matter what your store's speciality, they're ready to help you build store traffic—and profits!

But as a Peterson retailer, you get more than just product. No matter which plan-a-gram you choose, you'll benefit from Peterson's reputation for quality and exceptional customer service. It's a a reputation we've worked hard to maintain since 1945.

Peterson offers assortments from 2' to 16'. Each one provides an unbeatable assortment of our most popular, quick-turn items for both the self-service and commercial/fleet markets. Better yet, our plan-a-grams' unitized design gives you total flexibility in tailoring your coverage to your customers' needs.

Your local Peterson representative will assist you in customizing your order by providing photos, schematics, corresponding part numbers and quantities for each plan-a-gram unit.



Ask your Peterson rep about our wide selection of retail plan-a-gram layouts.

Peterson has exciting new Viz-Pack retail packaging with contemporary "carbon fiber" graphics.

New, thicker, commercial poly bags match this eye-catching look.



Lighted Retail Displays

Bright displays grab customers' attention



LumenX® LED vs Incandescent Battery-Operated Counter Display 14.75" H x 8.5" W x 4.5" D



D17PM LED Lighted
Wall-Mount Display

15" H x 21" W x 3" D



16" H x 11" W x 6" D

D10 Commercial LED Lighted Wall-Mount Display 15.5" H x 48" W x 3" D





D16
LED Lighted Wall-Mount
Display
23" H x 22" W x 3".25 D
Power supply not included.





D31
Battery-Operated
LED Work Light
Counter Display
12.5" H x 12.7" W x 9.3" D



Header/Fixture Signs

Give your Plan-A-Gram more pulling power



D7

Safety Lighting Header Same design on both sides 48" W x 8.25" H





D27

Light-Up Header Sign Printed one side only 48" W x 8.25" H



D13

Double-Sided "Land or Water" Safety Lighting Header 48" W x 8.25" H





Display Banner 68.5" W x 21.75" H



D15-RV

RV Lighting Header 24" W x 8.25" H






D21-02

Display Banner 24" W x 16" H



D11 Magnetic Vertical Blade Sign (2 per kit) 5.5" W x 24" H



Ę

Counter Displays & Extras

Round out your merchandising efforts with proven eye-catchers



D20-12
Small (4")
Med (6")
PM-CM-0714-Z
Full Product Line

Small (4")

& Large (12")
Bin Boxes





LCM-1018

Counter Mat 16" H x 20" W

PM-CM-1018-Z 12 Volt HD Counter Mat 16" H x 20" W







PM-ICM-0919-Z Multi-Volt HD Counter Mat

16" H x 20" W

D22-M D22-L Small (7") Med (10") & Large (21") Merchandising Baskets








D4 New Item Tag




D3 Black Plan-A-Gram Kit 48" x 60"

OV10-72 Out of Stock/ Reorder Card

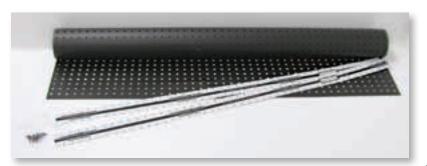


LIGHTING REGULATIONS

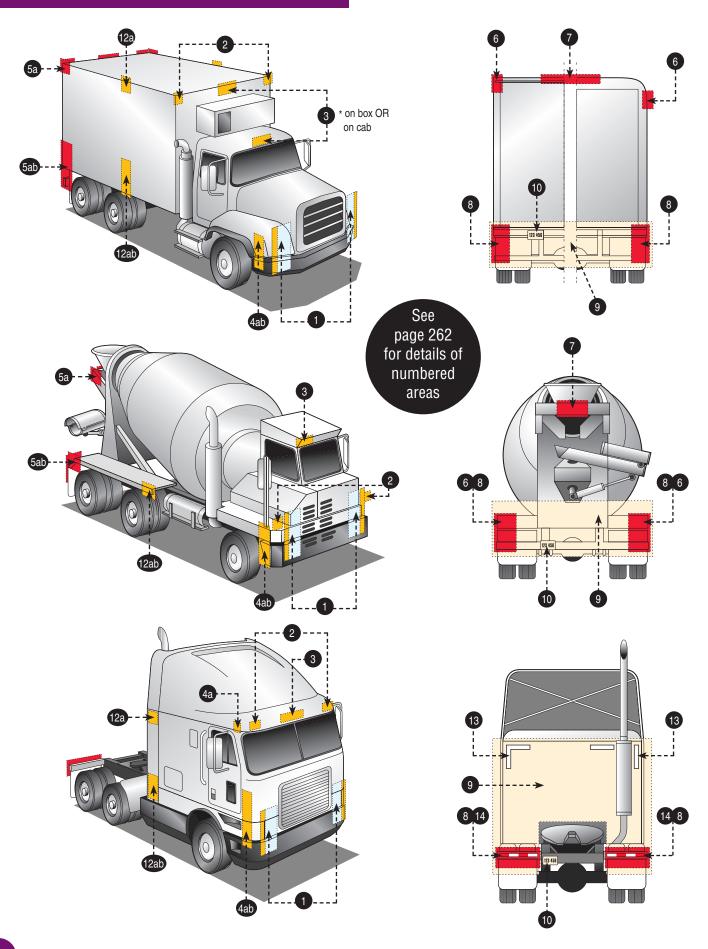

ES

TURN

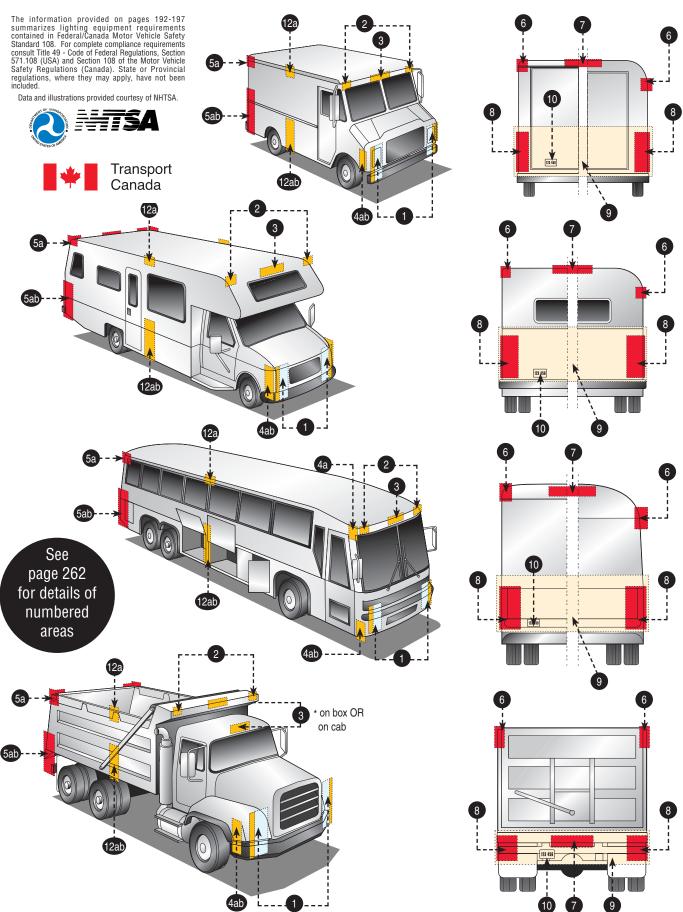

LIGHTING REGULATIONS

IMPORTANT NOTE: Every lamp, reflex reflector, and conspicuity treatment must be permanently attached in the location specified below and must comply with all applicable requirements prescribed for it by FMVSS/CMVSS 108. The face of any device on the front/rear and sides should be, respectively perpendicular and parallel to the vehicle's centerline, unless it is photometrically certified at installation angle. No part of the vehicle shall prevent any device from meeting its prescribed requirements unless an auxiliary device meeting all prescribed requirements is installed.

IN CANADA: Manufacturers and importers of vehicles must have the proper certification test records demonstrating compliance of lighting components with all prescribed requirements.

BASIC EQUIPMENT REQUIRED ON ALL TRUCKS, BUSES & MPVs

	DESCRIPTION			MANDA	TORY REQUIREMEN	ITS	
Area	Equipment	SAE Lens Coding	Functional Purpose	Quantity	Color	Location	Height mm(in.) from the ground
1	Headlamps - Lower Beam US requires "DOT" lettering on lens US & Canada - light source code required	(H, HR)	Forward road illumination	Minimum 2	White	On the front - symmetrical as far apart as practicable If 4 lamp system - outboard or above upper beams	560-1370 (22-54)
	Headlamps - Upper Beam US requires "DOT" lettering on lens US & Canada - light source code required	(H, HR) on lens	Forward road illumination	Minimum 2	White	On the front - symmetrical If 4 lamp system - inboard or below lower beams	560-1370 (22-54)
	Parking Lamps Vehicles less than 2032mm wide	(P)	Indicate parked vehicle	Minimum 2	White or Yellow	On the front - symmetrical as far apart as practicable	380-1530 (15-60)
	Daytime Running Lamps (DRL) Canada - required / US - option US requires "DRL" lettering on lens if not hea	(Y2)	Indicate in use vehicle	Minimum 2	White or Yellow	On the front - symmetrical as far apart as practicable	380 (15) min. Max. depends on type of DRL
	Front Turn Signal/ Hazard Warning Lamps	(1)	Indicate direction of turn/ identify disabled vehicle	Minimum 2	Yellow	On the front- symmetrical as far apart as practicable	380-2110 (15-83)
2	Front Clearance Lamps Vehicles 2032mm wide or wider *photometrically certified at installation angle	(P2, PC* or P3, PC2*)	Show vehicle's width	Minimum 2	Yellow	At widest point - symmetrical on the front or near the front facing forward	As high as practicable
3	Front Identification Lamps (ID) Vehicles 2032mm wide or wider	(P2 or P3)	Indicate presence of a wide vehicle	Exactly 3	Yellow	On the front - center horizontally spaced 150 mm (6 in.) to 300 mm (12 in.) apart	As high as practicable or on top of the cab
4	a Front Side Marker Lamps *ohotometrically certified at installation	(P2, PC* P3, PC2*) angle]	Minimum 2	Yellow	Each side at front as far forward as practicable	380 (15) minimum
	Front Side Reflex Reflectors	(A)	Front and rear side marker lamps /	Minimum 2	Yellow	At front - symmetrical as far forward as practicable facing sideward	380-1530 i (15-60)
5	Rear Side Marker Lamps ** *photometrically certified at installation	(P2, PC* or P3, PC2*) angle	side reflex reflector indicate vehicle's presence and length	Minimum 2	Red	Each side at rear as far back as practicable	380 (15) minimum
	Rear Side Reflex Reflectors ** **not required on Truck Tractors	(A) -		Minimum 2	Red	Each side at rear as far back as practicable facing sideward	380-1530 (15-60)
6	Rear Clearance Lamps Vehicles 2032mm wide or wider Not required on Truck Tractors "photometrically certified at installation angle	(P2, PC* or P3, PC2*)	Show vehicle's width MAY NOT be combined with tail lamps	Minimum 2	Red	At widest point - symmetrical on the rear or near the rear facing rearward	As high as practicable may be lower only if rear ID lamps are at the top
7	Rear Identification (ID) Lamps Vehicles 2032mm wide or wider Not required on Truck Tractors	(P2 or P3)	Indicate presence of a wide vehicle	Exactly 3	Red	On the rear - center horizontally spaced 150mm (6 in.) to 300mm (12 in.) apart facing rearward	In Canada: at the top - lower if door header narrower than 25mm In USA: as high as practicable
Q	Tail Lamps	(T)	Indicate vehicle's presence and width	Minimum 2	Red	On the rear - symmetrical as far apart as practicable	380-1830 (15-72)
	Stop Lamps	(S)	Indicate braking	Minimum 2	Red	On the rear - symmetrical as far apart as practicable	380-1830 (15-72)
	Rear Turn Signal/ Hazard Warning Lamps	(1)	Indicate direction of turn/ identify disabled vehicle	Minimum 2	Red or yellow	On the rear - symmetrical as far apart as practicable	380-2110 (15-83)
	Rear Reflex Reflectors	(A)	Show vehicle's presence and width	Minimum 2	Red	On the rear - symmetrical as far apart as practicable	380-1530 (15-60)
9	Backup Lamp	(R)	Illuminates ground behind the vehicle and alert road users	Minimum 1	White	Rear	No requirement
10	License Plate Lamp(s)	(L)	Illuminates license plate	Minimum 1	White	On the rear - above or at the sides of license plate	No requirement
1	Center High Mounted Stop Lamp Vehicles less than 2032mm wide and 4536	(U3)	Indicates braking	1	Red	On the rear - centerline of the vehicle	860 (34) minimum

ADDITIONAL EQUIPMENT FOR SPECIFIC VEHICLES


VEHICLES 9.1m (30 ft.) LONG OR LONGER

	DESCRIPTION				MANDAT	ORY REQUIREMEN	ITS			
Area	SAE Lens Functional ea Equipment Coding Purpose		Quantity	Color	Location	Height mm(in.) from the ground				
12	a Intermediate Side Marker Lamps	(P2 or P3)	Indicate presence of a long vehicle	Minimum 2	Yellow	Each side near center	380 (15) minimum			
	Intermediate Side Reflex Reflectors	(A)	Indicate presence of a long vehicle	Minimum 2	Yellow	Each side near center facing sideward	380-1530 (15-60)			


Truck Tractors

	DESCRIPTION			M	ANDATORY REQUIREM	ENTS	
Area	Conspicuity Treatment	DOT Coding	Quantity	Color	Location	Height	Options
13	Rear Upper Body Markings	DOT-C DOT-C2	Exactly 2 pairs of 300mm long strips	White	Rear upper corners of cab facing rearward	As high as practicable excluding fairings	
14	Rear Marking	DOT-C3 DOT-C4	Exactly 2 sections of min. 600mm each	Red/ White	Rear - facing rearward - on fenders, on mud flap brackets, or within 300mm below the top of mud flaps	As horizontal as practicable and not higher than 1525mm from the ground	If mud flaps not used - on the cab or frame mounted brackets

ACCY

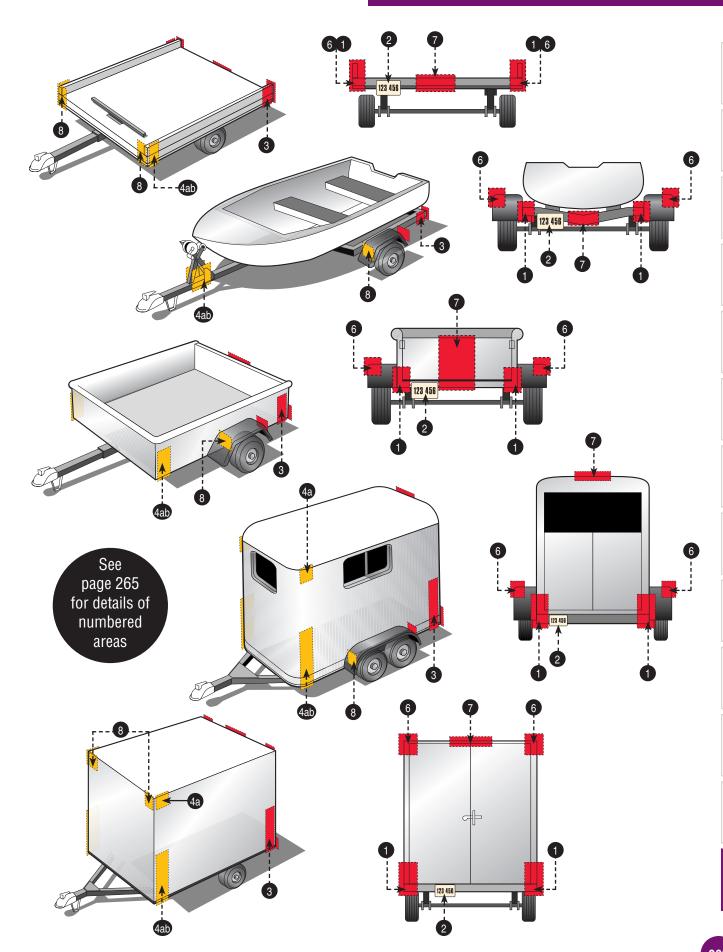

LIGHTING REGULATIONS

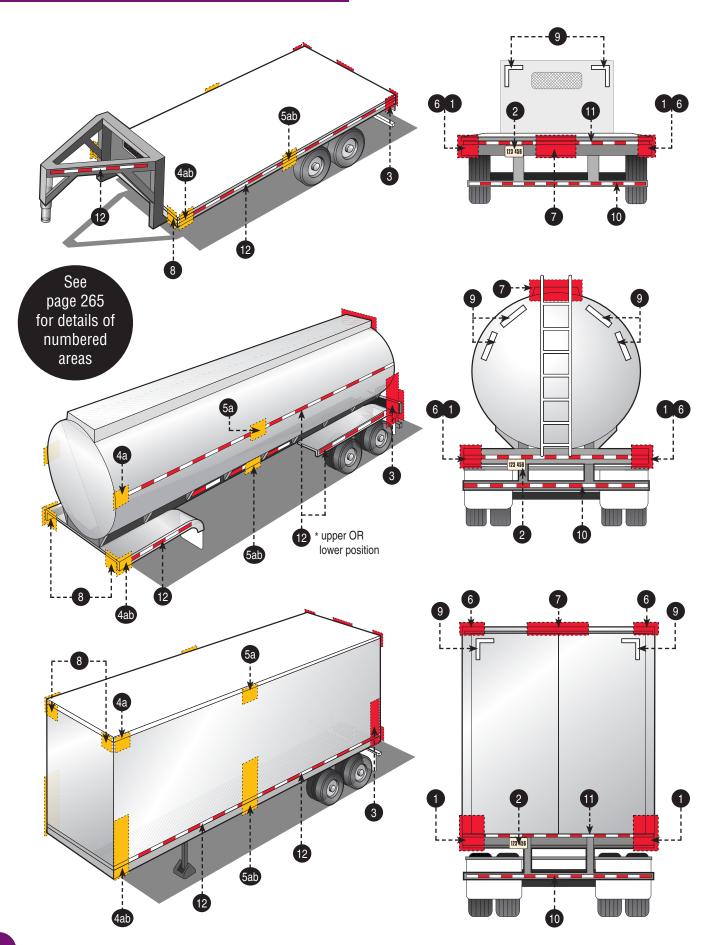

IMPORTANT NOTE: Every lamp, reflex reflector, and conspicuity treatment must be permanently attached in the location specified below and must comply with all applicable requirements prescribed for it by FMVSS/CMVSS 108. The face of any device on the front/rear and sides should be, respectively perpendicular and parallel to the vehicle's centerline, unless it is photometrically certified at installation angle. No part of the vehicle shall prevent any device from meeting its prescribed requirements unless an auxiliary device meeting all prescribed requirements is installed.

IN CANADA: Manufacturers and importers of vehicles must have the proper certification test records demonstrating compliance of lighting components with all prescribed requirements.

BASIC EQUIPMENT REQUIRED ON ALL TRAILERS

		DESCRIPT	TON		MANDAT	ORY REQUIREMEN	TS
Area	Equipment	SAE Lens Coding	Functional Purpose	Quantity	Color	Location	Height mm(in.) from the ground
1	Tail Lamps	(T)	Indicate vehicle's presence and width	Minimum 2	Red	On the rear - symmetrical as far apart as practicable	380-1830 (15-72)
	Stop Lamps	(S)	Indicate braking	Minimum 2	Red	On the rear - symmetrical as far apart as practicable	380-1830 (15-72)
	Rear Turn Signal Lamps	(1)	Indicate direction of turn	Minimum 2	Red or Yellow	On the rear - symmetrical as far apart as practicable	380-2110 (15-83)
	Rear Reflex Reflectors	(A)	Indicate vehicle's presence and width	Minimum 2	Red	On the rear - symmetrical as far apart as practicable facing rearward	380-1530 (15-60)
2	License Plate Lamp(s)	(L)	Illuminates license plate	Minimum 1	White	On the rear - above or at the sides of license plate	No requirement
3	Rear Side Marker Lamps *photometrically certified at insta	(P2, PC* or) P3, PC2*) Ilation angle		Minimum 2	Red	Each side at rear as far back as practicable under 2032mm (80") wide	380-1530 (15-60) no max. for veh.
	Rear Side Reflex Reflectors	(A)	Front and rear side marker lamps / side reflex reflectors	Minimum 2	Red	Each side at rear as far back as practicable	380-1530 (15-60) facing sideward
4	Front Side Marker Lamps *photometrically certified a	(P2, PC* or P3, PC2*) t installation angle	indicate vehicle's presence and length	Minimum 2	Yellow	Each side at front as far forward as practicable	380 (15) minimum
†not require	Front Side Reflex Reflectors	(A)		Minimum 2	Yellow	Each side at front as far forward as practicable facing sideward	380-1530 (15-60)

ADDITIONAL EQUIPMENT FOR TRAILERS EXCEEDING THE FOLLOWING PARAMETERS

Length 9.1m (30 ft.) or longer

		DESCRIPTIO	N		MANDAT	ORY REQUIREMEN	NTS
Area	Equipment	SAE Lens Coding	Functional Purpose	Quantity	Color	Location	Height mm(in.) from the ground
5	a Intermediate Side Marker Lamps	(P2 or P3)	Indicate presence of a long vehicle	Minimum 2	Yellow	Each side near center facing sideward	380 (15) minimum
3	Intermediate Side Reflex Reflectors	(A)	Indicate presence of a long vehicle	Minimum 2	Yellow	Each side near center facing sideward	380-1530 (15-60)

Width 2032mm (80 in.) or wider

	DESCRIPTIO	N		MANDATORY REQUIREMENTS					
Area	Equipment	SAE Lens Coding	Functional Purpose	Quantity	Color	Location	Height		
6	Rear Clearance Lamps *photometrically certified at insta	(P2, PC* or P3, PC2*) allation angle	Show vehicle's width MAY NOT be combined with tail lamps	Minimum 2	Red	At widest point - symmetrical on the rear or near the rear facing rearward	As high as practicable may be lower only if ID lamps are at the top		
7	Rear Identification (ID) Lamps	(P2 or P3)	Indicate presence of a wide vehicle	Exactly 3	Red	On the rear - center horizontally spaced 150mm (6 in.) to 300mm (12 in.) apart facing rearward	In Canada: at the top - may be lower if door header narrower than 25mm In USA: as high as practicable		
8	Front Clearance Lamps *photometrically certified at installa	(P2, PC* or P3, PC2*) tion angle	Show vehicle's width	Minimum 2	Yellow	At widest point - symmetrical on the front or near the front facing forward	As high as practicable		

Width 2032mm (80 in.) or wider AND GVWR 4536 kg (10,000 lb.) or more

Area	DESCRIPTION Conspicuity Treatment	DOT Coding	Quantity	/IANDATOF	RY REQUIREMENTS Location	Height	Options
9	Rear Upper Body Markings	DOT Occuring	Exactly 2 pairs of 300mm long strips	White	On the rear upper corners facing rearward	At the top	Reflex reflectors may not be
10	Bumper Bar Marking	DOT-C DOT-C2	Continuous	Red/White	On the rear bumper bar's horizontal element full width - facing rearward	No requirement	required if they are replaced in their required location with conspicuity treatment.
1	Rear Lower Body Marking	DOT-C2 DOT-C3 DOT-C4	Continuous	Red/White (see options)	On the rear full width of the vehicle facing rearward	As horzontal as practicable and as close as practicable to the range of 375 to 1525mm from the ground	Optional in Canada: Rear lower body and side conspicuity
12	Side Marking		(see location)	Red/White (see options)	Each side - facing sideward continuous, or evenly spaced over minimum of 50% of length starts and ends as close to the front and rear of the vehicle as practicable	As horizontal as practicable and as close as practicable to the range of 375 to 1525mm from the ground	treatment may also be solid white, solid yellow, or white and yellow.

TURN

MARKE

B-U/UTIL

SPEC

EMER

MOOM

GLOSSARY

AUTO SELECT™

Auto Select is Peterson's trademark name for a selected group of imported automotive products. Unlike other imported products, Auto Select are designed, built and quality-inspected to PM's stringent standards.

ASAE

American Society of Agricultural Engineers. Defines industry standards for agricultural equipment, including ASAE S279.17, Lighting & Marking of Agricultural Equipment on Highways.

BLADELIGHTS®

Peterson's trademark name for snowplow and emergency lights.

BEACON See WARNING BEACON

BULBS

A glass capsule containing electrodes or a filament which glows when connected to an electrical source. Three bulb types are generally used for illumination and vehicle safety lighting:

- Incandescent—there are two basic incandescent bulb styles most frequently used in general lighting products.
- Bayonet Base—a traditional, widely used metal-based bulb such as 1156, 1157 or 1895.
- Wedge Base—a non-indexed, baseless, all-glass bulb such as 3056, 3157 or 193
- An incandescent bulbs is rated by the number of hours it will burn under ideal laboratory conditions. Peterson uses 15,000 hour-rated bulbs whenever possible to achieve maximum performance.
- Halogen—commonly known for bright, intense light from a small package. In halogen bulbs, tungsten particles from the filament are continually redeposited back on the filament to extend its life. Halogens are available in H1, H3 bulb and sealed beam configurations.
- Xenon—a bulb type commonly used in emergency warning lights. Xenon
 refers to the gas sealed inside the bulb. It serves as a starter in order to
 accelerate the start up process of high-intensity discharge headlights.

See also: LED, WARNING BEACON

CANDELA

A standard unit measuring the amount of visible light emitted by a light source in one direction.

CANDELA-SECOND

A standard unit measuring the amount of light seen through a clear lens during one second.

DOT

US Department of Transportation; a cabinet-level Federal department which governs transportation systems in the United States.

See also: FMVSS 108, NHTSA

DRIVING LIGHT

A front-mounted white light which produces a long-range, pencil-shaped light pattern. Greatly increases nighttime visibility at highway speeds. See illustration of fog and driving light beam patters on page 271.

See also: FOG LIGHT

EMERGENCY BEACON See WARNING BEACON

FMVSS 108

Federal Motor Vehicle Safety Standard No. 108; Part of the Department of Transportation's uniform safety standards for new vehicles and vehicle components. FMVSS 108 regulates head lamps, tail lamps, stop lamps, reflectors, marker lamps, turn signals, ID lamps, etc. Peterson products exceed this regulation.

See also: DOT, NHTSA

FOG LIGHT

A front-mounted lamp which produces a low, wide beam pattern in front of the vehicle to greatly increase short-range visibility. Ideal for added driving safety in rain, snow or fog. See illustration of fog and driving light beam patters on page 271

See also: DRIVING LIGHT

FRESNEL LENS

A compound-angle refracting lens divided into prismatic sections. Designed to collect light and concentrate output in a specific direction.

See also: LENS GREAT WHITE®

Peterson's trademark name for our white light-emitting diodes.

See also: LED

GROMMET See MOUNTING CONFIGURATIONS

HALOGEN See BULBS

HARDWIRED

A term for permanently attaching lead wires to a lamp assembly, rather than using a detachable terminal plug. Hardwired lamps are better sealed and have fewer connection points for greater durability and better corrosion resistance.

INCANDESCENT See BULBS

LED (LIGHT EMITTING DIODE)

A small, solid-state, electronic light source. Some of the advantages of LED-based lamps are:

- up to 100,000-hour rated life
- · Solid state—Vibration resistant, with no filament to break
- Low amp draw-90% less than standard bulbs
- · Faster response time for added safety
- Maintenance free

LENS

A transparent or translucent cover over a bulb or LED. In accordance with FMVSS 108, Peterson manufactures lenses with two thermal plastic resins:

- Acrylic—the most widely used material for lenses. Features moderate heat and impact-resistance.
- Polycarbonate—a premium material with higher impact and heat resistance than acrylic.

See also: FMVSS 108, FRESNEL LENS

LUMEN

A standard unit measuring the flux emitted by a light source in a solid angle of 1 steradian by a point source having a uniform intensity of 1 candela. *Measured lumens* is the flux emitted by a complete lighting assembly as observed in a lab. *Calculated lumens* for an LED light assembly is derived by multipying the flux of a single diode by the total number of diodes contained in the assembly.

LUMINOUS FLUX

The perceived power or visual intensity of a light source.

JOULE

A standard unit measuring energy generated by an electrical circuit. For a strobe circuit, the figure may refer to the energy of a single flash or to a succession of rapid flashes.

See also: WARNING BEACON

MAXI-SEAL®

Peterson's trademark name for our custom wire harness systems specifically designed for medium- and heavy-duty trucking industry, and our electrical accessory program for the aftermarket.

MIRRORS

Peterson offers a complete line of passenger car, light truck and van, and heavy duty mirrors and assemblies.

- Convex—also known as "blind spot" mirrors. Features a fish-eye design permitting a wider view angle than a traditional mirror.
- Elliptical—features a protruding, half-moon shape that allows driver to view a 180° area with a minimum of distortion.
- Wedge Base Convex—an improved version of the traditional convex. Allows over 50° increase in viewing area with less distortion.
- West Coast—A style of rear-view mirror assembly designed for large trucks characterized by a tall, narrow mirror face and two or three mounting arms that attach to the door above and below the window opening.

MOUNTING CONFIGURATIONS

Peterson offers many mounting options for our vehicle lights The three most common are:

- Flush mount—a metal or rigid plastic bracket locates the light behind or within
 a pre-cut mounting hole so that the light does not protrude appreciably beyond
 the mounting surface.
- Grommet mount—a rubber or flexible plastic collar push-fits between the light assembly and a pre-cut mounting hole of specific size and shape. Provides some degree of vibration isolation. Often allows lamp removal without tools.
- Surface mount— light is attached above the surface of the vehicle. Usually
 prevents the need for creating large holes in the material, but small holes
 may be required for routing wires and attachment hardware such as screws,
 bolts, or rivets. Light assembly may mount directly to the vehicle, or may use a
 separate mounting bracket.

NHTSA

National Highway Transportation Safety Administration; A part of the Department of Transportation, this Federal agency oversees and regulates many aspects of vehicle construction and highway travel.

See also: DOT, FMVSS 108

NIGHTWATCHER®

Nightwatcher® is Peterson's trademark name for the entire line of high quality fog and driving lights, off-road lights including LED bar light retail series, and related accessories.

PAR 36

An industry standard size and shape for directional sealed beams. Does not designate voltage, brightness or beam pattern.

PHOTOMETRIC

Photometry is the calculation and measurement of quantities of light, such as luminous intensity. This is usually measured in candela or candle power.

PIRANHA®

Peterson's trademark name for our premium LED lights with a higher number of didoes for a distinctive multi-diode lens look. Piranha® lights not only use state-of-the-art LED circuitry, but are designed and manufactured to be unsurpassed in optical performance and durability while exceeding all applicable regulations and standards.

REFLEX

The characteristic of efficiently reflecting light directly back towards its source regardless of the source's location. Also, a surface or component having this characteristic.

SAE

Society of Automotive Engineers; A non-governmental body which establishes standards for the automotive industry.

SPITFIRE®

Peterson's trademark name for our exclusive microprismatic, wide angle reflectors. 47,000 microprisms per square inch provide superior candle power compared to conventional reflectors.

STROBE See WARNING BEACON

SUBMERSIBLE

A submersible light allows water into the unit when submerged. The bulb and socket are protected by an air pocket formed by the belljar principle which permits only a certain amount of water to enter by capturing a pocket of air within the lens assembly, preventing water from contacting the bulb.

VIBAR® and VIBAR II® (VIBRATION IMPACT BARRIER)

Developed in the 1960's, Peterson's Vibar® was the first real shock-mounted socket in the industry and eventually became the standard. This exclusive, resilient socket absorbs road shock and vibration for longer bulb life.

WARNING BEACON

There are three basic types of warning beacons:

- Flashing—an emergency lamp which provides intermittent power to a stationary bulb, causing it to flash or blink on and off.
- · Revolving—revolving lights are available in several variations:
- 2-Beam—an emergency lamp with two sealed beams or light bulbs which rotate to produce a full, 360° warning.
- 4-Beam—an emergency lamp with four bulbs. Compared to a similar 2-beam unit, produces twice the light output and twice as many flashes for a given rotation speed.
- Rotating Reflector—features a stationary light source with a revolving reflector to produce the 360° warning. This design is commonly used in light bars and compact units.
- Strobe—lamp which energizes a gas-filled glass tube to produce, quick, extremely bright flashes.
- Dual Flash/Quad Flash—a unit which flashes one strobe light head several times in quick succession before a longer pause. If the system is equipped with multiple strobe heads, each head flashes multiple times in turn.
- Master/Slave Units—the master unit has a built-in control circuit, will operate
 independently by itself and can operate a slave unit. The slave unit has no
 built-in control circuit and requires the master unit to operate.

See also: CANDELA-SECOND, JOULE, WATT-SECOND

WATT-SECOND

A standard unit measuring the amount of the electrical current delivered per second.

WELDING

Fusing plastic components together by quickly generating friction heat to momentarily melt the mating surface and create a strong, hermetically-sealed bond. Peterson uses three distinct plastic welding techniques:

- $\bullet\,$ Linear—vibrating one part against another in a single direction.
- Sonic—subjecting the assembly to high-frequency sound waves which vibrate the seams of the plastic.
- Spin—rotating one component against another at high speed to create a circular bonding surface

XENON See BULBS

VIZ PACK

Peterson's term for a variety of retail-friendly, transparent package designs, including clamshells, blister packs, and bags. All Viz Packs are clearly labeled with part number and description, are pilfer-resistant and tamper-evident, and nearly all are hangable.


SAE LIGHTING IDENTIFICATION CODES & STANDARDS


- A Reflex reflectors
- A2 Wide angle reflex reflectors
- C Motorcycle auxiliary front lamps
- D Motorcycle and motor-driven cycle turn signal lamps
- E Side turn signal lamps—vehicles 12 m or more in length
- E2 Side turn signal lamps—vehicles less than 12 m in length
- F Front fog lamps
- F2 Fog tail lamps
- G Truck cargo lamps
- H Sealed beam headlamps
- HG Discharge forward lighting headlamps
- HH Sealed beam headlamp housings
- HR Replaceable bulb headlamps
 - I Turn signal lamps
- 13 Turn signal lamps spaced from 75 mm to less than 100 mm from headlamp
- 14 Turn signal lamps spaced from 60 mm to less than 75 mm from headlamp
- 15 Turn signal lamps spaced less than 60 mm from headlamp
- 16 Rear mounted turn signal lamps and front mounted turn signal lamps mounted 100 mm or more from the headlamp, for use on vehicles 2032 mm or more in overall width
- 17 Front mounted turn signal lamps mounted less than 100 mm from the headlamp, for use on vehicles 2032 mm or more in overall width
- K Front cornering lamps
- K2 Rear cornering lamps
- L License plate lamps
- M Motorcycle and motor-driven cycle headlamps—motorcycle type
- N Motorcycle and motor-driven cycle headlamps—motor-driven cycle type
- O Spot lamps
- P Parking lamps
- P2 Clearance, side marker and identification lamps
- P3 Clearance, side marker and identification lamps for use on vehicles 2032 mm or more in overall width
- PC Combination clearance and side marker lamps
- PC2 Combination clearance and side marker lamps for vehicles 2032 mm or more in overall width
 - Q Turn signal operating units—Class A

RATINGS CODES & STANDARDS

- QB Turn signal operating units—Class B
- QC Vehicular hazard warning signal operating unit
 - R Backup lamps
 - S Stop lamps
- S2 Stop lamps for use on vehicles 2032 mm or more in overall width
- T Tail lamps (rear position lamps)
- T2 Tail lamps (rear position lamps) for use on vehicles 2032 mm or more in overall width
- U Supplemental high-mounted stop and turn lamps
- U2 Supplemental high-mounted stop and turn lamps for use on vehicles 2032 mm or more in overall width
- U3 Center high-mounted stop lamps for passenger cars, light trucks and MPVs
- Warning lamps for emergency, maintenance and service vehicles
- W2 Warning lamps for school buses
- W3 360-degree emergency warning lamps
- W4 Emergency warning devices
- W5-1 360-degree gaseous discharge lamps—Class 1
- W5-2 360-degree gaseous discharge lamps—Class 2
- W5-3 360-degree gaseous discharge lamps—Class 3
 - Y Driving lamps
 - Y2 Daytime running lamps
 - Z Auxiliary low beam lamps
- J590 Turn signal flashers
- J595 Directional Flashing Optical Warning Devices for Authorized Emergency, Maintenance, and Service Vehicles
- J845 Omnidirectional Optical Warning Devices for Authorized Emergency, Maintenance, and Service Vehicles
- J914 Side Turn Signal Lamps for Vehicles Less than 12 m in Length
- J945 Vehicular Hazard Warning Flashers Canceled July 1999
- J1054 Warning Lamp Alternating Flashers
- J1318 Gaseous Discharge Warning Lamp For Authorized Emergency, Maintenance, And Service Vehicles
- J1690 Vehicular Hazard Warning Flashers
- J2039 Side Turn Signal Lamps for Vehicles 12 m or More in Length

SAE PC RATING EXPLAINED





SAE CLASS RATINGS - BACK-UP ALARMS

Class	Sound Level
Α	112 dB(A)
В	107 dB(A)
С	97 dB(A)
D	87 dB(A)
Е	77 dB(A)
F	Other

The Society of Automotive Engineers (SAE) has developed performance standards for electric back-up alarms that are intended for use on heavy construction machinery. This chart shows the decibel level established for each of six classes defined in SAE Standard J944. The sound level tolerance for each

class is +/- 4 dB(A). Alarms conforming to SAE J944 must also meet additional criteria relating to sound frequency, temperature range and resistance to rain, vibration and corrosion.

SAE CLASS RATINGS – STROBES

Class	Intended Function
1	Emergency Response
2	Warning
3	Identification

The Society of Automotive Engineers (SAE) has developed performance standards for strobe/warning lights. This chart shows the three classes defined in various SAE standards and their intended use. Each class is defined by specific photometric criteria for flash brightness

and distribution that are too complex and numerous to be listed here. Strobes conforming to SAE standards must also meet additional criteria relating to housing durability, temperature range and resistance to rain, vibration and corrosion.

RECOMMENDED WIRE GAUGES

American Wire Gauge (AWG) is the standard measurement of wire sizes in the US. The higher the gauge number, the thinner the conductor.

Heavier gauge wire is required as either amperage or wire length increases. Overloaded wiring can negatively affect reliability and safety due to excessive voltage drop and heat. Wires thinner than 18 AWG are not recommended for vehicular use.

Wire Gauge Specification

Gauge (AWG)	Diameter (inch)	Diameter (mm)	Cross Section (mm²)
0000	0.46	11.68	107.16
000	0.4096	10.40	84.97
00	0.3648	9.27	67.40
0	0.3249	8.25	53.46
1	0.2893	7.35	42.39
2	0.2576	6.54	33.61
3	0.2294	5.83	26.65
4	0.2043	5.19	21.14
5 6	0.1819	4.62	16.76
	0.162	4.11	13.29
7	0.1443	3.67	10.55
8	0.1285	3.26	8.36
9	0.1144	2.91	6.63
10	0.1019	2.59	5.26
11	0.0907	2.30	4.17
12	0.0808	2.05	3.31
13	0.072	1.83	2.63
14	0.0641	1.63	2.08
15	0.0571	1.45	1.65
16	0.0508	1.29	1.31
17	0.0453	1.15	1.04
18	0.0403	1.02	0.82
20	0.032	0.81	0.52
22	0.0254	0.65	0.33
24	0.0201	0.51	0.20

The tables below provide general guidelines for choosing wire. Remember that common ground wires must be adequate to carry the total amperage on the circuit, even if separate hot wires are used.

The data included here only illustrates general wiring principles. Variables such as the exact type of wiring used and the type of devices connected will effect the actual performance of any circuit. Always verify proper operation after installation.

Wire Gauge Required for 3% Voltage Drop at 12 Volts

Circuit	Total	Circuit A	mps				
Length	1	5	10	20	30	40	50
10'	18	16	14	12	10	8	8
20'	16	14	12	8	6	6	4
30'	16	12	10	6	4	4	2
40'	16	12	8	6	4	2	2
50'	16	10	8	4	2	2	1
60'	16	10	6	4	2	1	0
80'	14	8	6	2	1	0	00
100'	14	6	4	2	0	00	000
120'	14	6	4	1	00	000	0000

Wire Gauge Required for 10% Voltage Drop at 12 Volts

Circuit	Total Circuit Amps						
Length	1	5	10	20	30	40	50
10'	24	18	18	16	14	14	12
20'	22	18	16	14	12	10	10
30'	20	18	16	12	10	8	8
40'	20	16	14	10	8	8	6
50'	18	16	12	10	6	6	2
60'	18	16	12	8	4	4	2
80'	16	10	8	4	2	2	1
100'	16	8	6	4	2	1	0
120'	14	8	6	2	1	0	00

TURN

MARKER

B-U/UTIL

SPE

EMER

> _ _

> HEC E

ACCY

MERCH

RATINGS CODES & STANDARDS

INTERNATIONAL IP (Ingress Protection) RATINGS EXPLAINED

1st Digit	Protection Level Against Solid Ingress
0	Non-protected (or not rated)
1	> 50 mm gap for entry
2	> 12 mm gap for entry
3	> 2.5 mm gap for entry
4	> 1.0 mm gap for entry
5	Dust resistant
6	Dust tight


Example: IP67 = [6] dust tight + [7] immersible up to 1 meter for 30 minutes

2nd Digit	Protection Level Against Liquid Ingress
0	Non-protected (or not rated)
1	Vertically dripping water
2	Dripping water tilted at 15 degrees
3	Spraying water at an angle of 60 degrees
4	Splashing water at any direction
5	Jets of water from any direction
6	Heavy seas or powerful jets of water
6K	Powerful water jets with increased pressure
7	Harmful ingress of water when immersed to 1 meter for 30 min.
8	Continuous immersion in water
9K	Powerful high temperature water jets

fractional inch	decimal inch	millimeters
	0.010	0.25
	0.020	0.5
1/32	0.031	0.794
	0.039	1
	0.050	1.27
1/16	0.063	1.588
	0.079	2
	0.100	2.54
	0.118	3
1/8	0.125	3.175
	0.150	3.81
	0.157	4
3/16	0.188	4.763
	0.197	5
1/5	0.200	5.08
	0.236	6
1/4	0.250	6.35
	0.276	7
	0.300	7.62
5/16	0.313	7.938
	0.315	8
1/3	0.333	8.466
	0.350	8.89
	0.354	9
3/8	0.375	9.525
	0.394	10
2/5	0.400	10.16
	0.433	11
7/16	0.438	11.113
	0.450	11.43
	0.472	12
1/2	0.500	12.7
	0.512	13
	0.550	13.97
	0.551	14
9/16	0.563	14.288
	0.591	15
3/5	0.600	15.24
5/8	0.625	15.875
	0.630	16
	0.650	16.5
2/3	0.666	16.933

fractional inch	decimal inch	millimeters
	0.669	17
11/16	0.688	17.463
	0.700	17.78
	0.709	18
3/4	0.750	19
	0.787	20
4/5	0.800	20.32
13/16	0.813	20.638
	0.827	21
	0.850	21.59
	0.866	22
7/8	0.875	22.225
	0.900	22.86
	0.906	23
15/16	0.938	23.813
	0.945	24
	0.950	24.13
	0.984	25
1	1.000	25.4
1 1/4	1.250	31.75
1 1/2	1.500	38.1
1 3/4	1.750	44.45
	1.969	50
2	2.000	50.8
2 1/4	2.250	57.15
2 1/2	2.500	63.5
2 3/4	2.750	69.85
	2.953	75
3	3.000	76.2
3 1/4	3.250	82.55
3 1/2	3.500	88.9
3 3/4	3.750	95.25
3 15/16	3.937	100
4	4.000	101.6
4 1/4	4.250	107.95
4 1/2	4.500	114.3
4 3/4	4.750	120.65
	4.921	125
5	5.000	127
	5.906	150
6	6.000	152.4
	6.890	175

7 7.000 177.8 77/8 7.874 200 8 8.000 203.2 8.858 225 9 9.843 250 10 10.000 254 10.827 275 11 11.000 279.4 11.811 300 12 12.000 304.8 12.795 325 13 13.000 330.2 13.780 350 14 14.000 355.6 14.764 375 15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 <th>fractional inch</th> <th>decimal inch</th> <th>millimeters</th>	fractional inch	decimal inch	millimeters
77/8 7.874 200 8 8.000 203.2 8.858 225 9 9.000 228.6 9.843 250 10 10.000 254 10.827 275 11 11.000 279.4 11.811 300 12 12.000 304.8 12.795 325 13 13.000 330.2 13.780 350 14 14.000 355.6 14.764 375 15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600			
8 8.000 203.2 8.858 225 9 9.000 228.6 9.843 250 10 10.000 254 10.827 275 11 11.000 279.4 11.811 300 12 12.000 304.8 12.795 325 13 13.000 330.2 13.780 350 14 14.000 355.6 14.764 375 15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.		-	
8.858 225 9 9.000 228.6 9.843 250 10 10.000 254 10.827 275 11 11.000 279.4 11.811 300 12 12.000 304.8 12.795 325 13 13.000 330.2 13.780 350 14 14.000 355.6 14.764 375 15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.			
9 9.000 228.6 9.843 250 10 10.000 254 10.827 275 11 11.000 279.4 11.811 300 12 12.000 304.8 12.795 325 13 13.000 330.2 13.780 350 14 14.000 355.6 14.764 375 15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528			
9.843 250 10 10.000 254 10.827 275 11 11.000 279.4 11.811 300 12 12.000 304.8 12.795 325 13 13.000 330.2 13.780 350 14 14.000 355.6 14.764 375 15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000	9		
10 10.000 254 10.827 275 11 11.000 279.4 11.811 300 12 12.000 304.8 12.795 325 13 13.000 330.2 13.780 350 14 14.000 355.6 14.764 375 15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2			
10.827 275 11 11.000 279.4 11.811 300 12 12.000 304.8 12.795 325 13 13.000 330.2 13.780 350 14 14.000 355.6 14.764 375 15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 35.433 <td>10</td> <td></td> <td></td>	10		
11 11.000 279.4 11.811 300 12 12.000 304.8 12.795 325 13 13.000 330.2 13.780 350 14 14.000 355.6 14.764 375 15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 35.433 900 36			
11.811 300 12 12.000 304.8 12.795 325 13 13.000 330.2 13.780 350 14 14.000 355.6 14.764 375 15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 33.465 850 35.433 900 36 36.000	11		279.4
12 12.000 304.8 12.795 325 13 13.000 330.2 13.780 350 14 14.000 355.6 14.764 375 15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 35.433 900 36 36.000 914.4 37.402 950 39.370 <td></td> <td></td> <td></td>			
12.795 325 13 13.000 330.2 13.780 350 14 14.000 355.6 14.764 375 15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter	12		304.8
13 13.000 330.2 13.780 350 14 14.000 355.6 14.764 375 15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters			
14 14.000 355.6 14.764 375 15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters	13		330.2
14.764 375 15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters		13.780	350
15 15.000 381 15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters	14	14.000	355.6
15 3/4 15.748 400 16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters		14.764	375
16 15.000 406.4 16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters	15	15.000	381
16.732 425 17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31.1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters	15 3/4	15.748	400
17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 27.559 700 29.528 750 30 30.000 762 31.1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters	16	15.000	406.4
17 17.000 431.8 17.717 450 18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 27.559 700 29.528 750 30 30.000 762 31.1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters		16.732	425
18 18.000 457.2 18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31.1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters	17		431.8
18.701 475 19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters		17.717	450
19.685 500 21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters	18	18.000	457.2
21 21.000 533.4 21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters		18.701	475
21.654 550 23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31.1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters		19.685	500
23.622 600 24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31.1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters	21	21.000	533.4
24 24.000 609.6 25.591 650 27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters		21.654	550
25.591 650 27.559 700 29.528 750 30 30.000 762 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters		23.622	600
27.559 700 29.528 750 30 30.000 762 31 1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters	24	24.000	609.6
29.528 750 30 30.000 762 31 1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters		25.591	650
30 30.000 762 31 1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters		27.559	700
31 1/2 31.496 800 33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters		29.528	750
33.465 850 35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters	30	30.000	762
35.433 900 36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters	31 1/2	31.496	800
36 36.000 914.4 37.402 950 39.370 1 meter 78.740 2 meters		33.465	850
37.402 950 39.370 1 meter 78.740 2 meters		35.433	900
39.370 1 meter 78.740 2 meters	36	36.000	914.4
78.740 2 meters		37.402	950
		39.370	1 meter
196.85 5 meters		78.740	2 meters
		196.85	5 meters

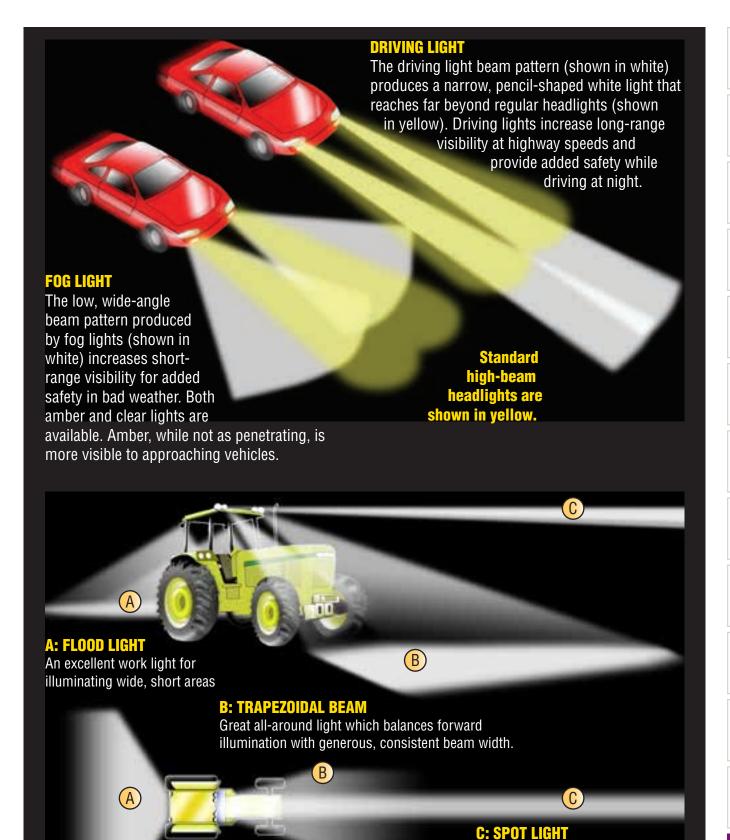

Extremely long-range for marking

rows, fence lines, etc.

PRODUCT SPECIFICATIONS

LED AMP DRAW SPECIFICATIONS

LLU AIVIF DI	AW SF	LOII
Part No.	@12V (Color 1 /2)	@24V (Color 1/2)
35A-MV/R-MV	0.09	0.05
38A-MV/R-MV	0.09	0.05
60A-MV/R-MV	0.03	0.04
72 R	0.07	
121A	0.12	
129A/R	.04/.04	
133A/R	.03/.06	
153A/R	.04/.04	
153C-MV	0.07	0.08
153C-P	0.07	
153CTP-BT3	0.14	
161A/R	.02/.02	
161A-R	0.08	-
162A/R	.05/.05	
163A/R	.18/.14	
163A-MV/R-MV	.16/.12	.08/.07
164A/R	.05/.05	
165A/R	.18/.14	
165A-MV/R-MV	.16/.12	.08/.07
166A/R	.03/.03	.007.07
168A/R/CA/CR	.04/.04/.04/	04
168A-MV/R-MV	.03/.03	.03/.03
168C	0.03	.037.03
169-3R/3A	.11/.11	
169A/R	.03/.03	
170A/R	.04/.04	
171A/C/R	0.07	0.04
171W-MV	0.03	0.04
173A/R	.08/.08	
175A/R	.04/.04	
176A/R	.07/.07	
176RGB	.04 per color	
177A/R	.07/.07	
177-3R	0.25	
178A/R/CA/CR	.06/.07/.06/	
178A-MV/R-MV / A-MVC	.06/.06/.06	.04/.04/.04
178W-MV	0.02	0.02
179A/R		
400 A / D	.09/.1	
180A/R	.09/.1	
180A/R 181A/R		
	.03/.03	0.04
181A/R	.03/.03	0.04
181A/R 181A-MV/R-MV	.03/.03 .07/.04 0.03	0.04
181A/R 181A-MV/R-MV 186A/R	.03/.03 .07/.04 0.03 0.07	0.04
181A/R 181A-MV/R-MV 186A/R 186W	.03/.03 .07/.04 0.03 0.07 0.13	0.04
181A/R 181A-MV/R-MV 186A/R 186W 186CTP	.03/.03 .07/.04 0.03 0.07 0.13	0.04
181A/R 181A-MV/R-MV 186A/R 186W 186CTP	.03/.03 .07/.04 0.03 0.07 0.13 0.08	0.04
181A/R 181A-MV/R-MV 186A/R 186W 186CTP 186-3R	.03/.03 .07/.04 0.03 0.07 0.13 0.08 0.25	
181A/R 181A-MV/R-MV 186A/R 186W 186CTP 186-3R 187A/R	.03/.03 .07/.04 0.03 0.07 0.13 0.08 0.25 0.05	

Part No.	@12V	@24V (Color 1/2
	(Color 1 / 2)	(Color 1/2
191-3RL	0.11	
191A/R	.04/.03	
192A/R	.04/.05	
193A/R	.10/.14	
193A-MV/R-MV	0.07	0.04
194A/R	.05/.05	
195A/R	.19/.15	
195A-MV	0.19	0.09
195R-MV	0.16	0.08
196A/R	.04/.04	
197A/R	.04/.04	
198A/R	.04/.04	
199A/R	.04/.04	
203A/R	0.055	
203C/W	0.04	
215A/R	.01/.01	
233A	0.48	
233A low light	0.02	
233R	0.23	
233R low light	0.03	-
233CA	0.48	
233CA low light	0.02	
233CR	0.23	
233CR low light	0.03	
250W-BT2	0.11	
253A/R	.07/.08	
253A/R low light	.02/.02	
		0.2
253SA-1/-2 253SW-1/-2	0.42	0.2
271A/R	.07/.07	
271A/R low light	.01/.01	
272A/R	.09/.09	
274A/R	.07/.07	
277K/KL	0.12/.08	
286A/R	.17/.17	
286A/R low light	0.03/.03	
290/290C	0.05	
290-MV/290C-MV	0.04	0.03
291C-BT2	0.07	
296C/XC	0.01	
298C	0.02	
318L/R	1.25/1.25	
318L/R low light	.01/.01	
318L/R red	0.2/0.2	
319AA	0.45	
319AA low light	0.03	
319R	0.07	
319R low light	0.01	
320A/321A	0.31	
320A/321A Low light	0.02	

Color 1/2 Color 1/2	Part No.	@12V	@24V
327L/R flashing			
338-2			
339A/R 350A-P 0.2 0.38 350A-P low light 0.04 0.09 351A 0.2 0.38 351A low light 0.04 0.09 353A/R 0.15 353A/R low light 0.2/.11 355A 0.2 0.34 355A low light 0.04 0.09 356A 0.54 356A low light 0.03 358-1/-2/-3/-4 28/.17/.36/.36 359-1/-2/-3/-4 28/.17/.36/.36 360/360-1 1.82 0.93 362-1/-2 13/.13 363-1/-2 28/.24 364-1 0.49 0.9 365 1.75 366 0.14 368 0.11 369S 0.1 370 0.21 371 0.22 379S 0.12 381 0.09 388A/R 1.0/.11 0.7/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P low light 0.05 417TA-P 0.17 418R/R-P low light 0.01 423A-4 low light 0.02 0.1 423A-4 low light 0.02 0.1 423A-4 low light 0.05 0.03 423QA-P 0.14	327L/R flashing		
350A-P low light 0.04 0.09 351A 0.2 0.38 351A low light 0.04 0.09 353A/R 0.15 353A/R low light 0.2/.11 355A 0.2 0.34 355A low light 0.04 0.09 356A 0.2 0.34 356A low light 0.04 0.09 356A 0.54 356A 0.54 356A low light 0.03 358-1/-2/-3/-4 28/.17/.36/.36 359-1/-2/-3/-4 28/.17/.36/.36 360/360-1 1.82 0.93 362-1/-2 1.3/.13 363-1/-2 2.8/.24 364-1 0.49 0.9 365 1.75 366 0.14 368 0.11 369S 0.1 370 0.21 371 0.22 379S 0.12 381 0.09 388A/R .10/.11 .07/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P low light 0.05 417TA-P 0.2 417TA-P 0.17 417R/R-P low light 0.05 418TA-P low light 0.11 418R/R-P 0.17 418R/R-P 0.17 418R/R-P 0.17 418R/R-P low light 0.05 418TA-P low light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P 0.4 420QA-P 0.4 420QA-P 0.4 420QA-P 0.4 420QA-P 0.15 423A-4 0.26 0.15 423A-4 low light 0.05			
350A-P low light 0.04 0.09 351A 0.2 0.38 351A low light 0.04 0.09 353A/R 0.15 353A/R 0.15 353A/R low light 0.02/.11 355A 0.2 0.34 355A low light 0.04 0.09 356A 0.54 356A low light 0.03 358-1/-2/-3/-4 28/.17/.36/.36 359-1/-2/-3/-4 28/.17/.36/.36 360/360-1 1.82 0.93 362-1/-2 1.3/.13 363-1/-2 2.8/.24 364-1 0.49 0.9 365 1.75 366 0.14 368 0.11 369S 0.1 370 0.21 371 0.22 379S 0.12 381 0.09 388A/R .10/.11 .07/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P low light 0.05 417TA-P 0.2 417R/R-P low light 0.11 418R/R-P 0.17 417R/R-P low light 0.11 418R/R-P 0.4 418TA-P 0.4 420A-P 0.4 420A-P 0.4 420A-P 0.4 420A-P 0.4 420A-P 0.4 420A-P 0.4 423A-4 low light 0.05 423A-4 low light 0.02 423A-4 low light 0.02 423A-4 low light 0.05			
351A 0.2 0.38 351A low light 0.04 0.09 353A/R 0.15 353A/R 0.15 353A/R 0.2 0.34 355A 0.2 0.34 355A 0.04 0.09 356A 0.54 356A 0.54 356A 0.54 356A 0.54 356A 0.64 356A 0.64 356A 0.65 359-1/-2/-3/-4 2.8/.17/.36/.36 360/360-1 1.82 0.93 362-1/-2 1.3/.13 363-1/-2 2.8/.24 364-1 0.49 0.9 365 1.75 366 0.14 368 0.11 369S 0.1 370 0.21 371 0.22 379S 0.12 381 0.09 388A/R 10/.11 0.7/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P 0.17 417R/R-P 0.17 417R/R-P 0.17 418R/R-P 0.17 418R/R-P 0.17 418R/R-P 0.17 418R/R-P 0.4 420QA-P 0.15 423A-4 0.26	350A-P		0.38
351A low light 0.04 0.09 353A/R 0.15 353A/R low light .02/.11 355A 0.2 0.34 355A low light 0.04 0.09 356A 0.54 356A 0.54 356A 0.54 356A low light 0.03 358-1/-2/-3/-4 .28/.17/.36/.36 359-1/-2/-3/-4 .28/.17/.36/.36 360/360-1 1.82 0.93 362-1/-2 .13/.13 363-1/-2 .28/.24 364-1 0.49 0.9 365 1.75 366 0.14 368 0.11 369S 0.1 370 0.21 371 0.22 379S 0.12 381 0.09 388A/R .10/.11 .07/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P low light 0.05 417TA-P low light 0.05 418TA-P low light 0.11 418R/R-P 0.17 417R/R-P low light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P 0.4 420QA-P 0.4 420QA-P 0.4 420QA-P 0.4 420QA-P 0.15 423A-4 low light 0.02 0.1 423A-4 low light 0.05	350A-P low light	0.04	0.09
353A/R low light .02/.11 355A	351A	0.2	0.38
353A/R low light	351A low light	0.04	0.09
355A	-	0.15	
355A low light 0.04 0.09 356A 0.54 356A 0.54 356A low light 0.03 358-1/-2/-3/-4 2.8/.17/.36/.36 359-1/-2/-3/-4 2.8/.17/.36/.36 360/360-1 1.82 0.93 362-1/-2 .13/.13 363-1/-2 2.8/.24 364-1 0.49 0.9 365 1.75 366 0.14 368 0.11 370 0.21 371 0.22 379S 0.12 381 0.09 388A/R .10/.11 .07/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P low light 0.05 417TA-P low light 0.11 418R/R-P 0.17 418R/R-P low light 0.11 418R-P 0.4 418TA-P low light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P 0.15 423A-4 0.26 0.15 423A-4 low light 0.05 423QA-P 0.14	353A/R low light	.02/.11	
356A 0.54 356A o.03 358-1/-2/-3/-4 .28/.17/.36/.36 359-1/-2/-3/-4 .28/.17/.36/.36 360/360-1 1.82 0.93 362-1/-2 .13/.13 363-1/-2 .28/.24 364-1 0.49 0.9 365 1.75 366 0.14 368 0.11 369S 0.1 370 0.21 371 0.22 379S 0.12 381 0.09 388A/R .10/.11 .07/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P 0.17 417R/R-P owlight 0.05 417TA-P owlight 0.11 418R/R-P 0.17 418R/R-P 0.17 418R/R-P 0.17 418R/R-P 0.4 420QA-P 0.4 420QA-P owlight 0.01 423A-4 0.26 0.15 423A-4 owlight 0.05 0.03 423QA-P 0.14 0.05 0.03 0.05 0.	355A	0.2	0.34
358-1/-2/-3/-4	355A low light	0.04	0.09
358-1/-2/-3/-4	356A	0.54	
359-1/-2/-3/-4 .28/.17/.36/.36 360/360-1 1.82 0.93 362-1/-2 .13/.13 363-1/-2 364-1 0.49 0.9 365 1.75 366 368 0.11 369S 370 0.21 371 371 0.22 379S 381 0.09 388A/R 380C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P low light 0.05 417TA-P low light 0.05 418R/R-P low light 0.05 418TA-P low light 0.11 418R-4 0.14 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R 0.46 1.23 420A-P low light 0.02 0.1 423A-4 low light 0.05 0.03 423A-4 low light 0.05 0.03	356A low light	0.03	
360/360-1 1.82 0.93 362-1/-2 1.3/.13 363-1/-2 2.28/.24 364-1 0.49 0.9 365 1.75 366 0.14 368 0.11 369S 0.1 370 0.21 371 0.22 379S 0.12 381 0.09 388A/R 1.0/.11 0.7/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P 0.17 417R/R-Plow light 0.05 417TA-P 0.2 417TA-P 0.2 417TA-P low light 0.11 418R/R-P 0.17 418R/R-P low light 0.11 418R-P 0.4 418TA-P low light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P low light 0.03 420R/423R 0.46 1.23 423A-4 low light 0.05 0.03	358-1/-2/-3/-4	.28/.17/.36/	.36
362-1/-2 .13/.13	359-1/-2/-3/-4	.28/.17/.36/	.36
363-1/-2 .28/.24 364-1 0.49 0.9 365 1.75 366 368 0.11 369S 370 0.21 371 371 0.22 379S 381 0.09 388A/R 380 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P low light 0.05 417TA-P low light 0.05 417TA-P low light 0.11 418R/R-P low light 0.05 418TA-P low light 0.05 418TA-P low light 0.11 418R-4 0.14 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 low light 0.05 0.03 423A-2 low light 0.05 0.03 423A-2 low light 0.05 0.03	360/360-1	1.82	0.93
364-1 0.49 0.9 365 1.75 366 0.14 368 0.11 369S 0.1 370 0.21 371 0.22 379S 0.12 381 0.09 388A/R .10/.11 .07/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P 0.17 417R/R-P low light 0.05 417TA-P low light 0.11 418R/R-P 0.17 418R/R-P low light 0.11 418R-P 0.4 418TA-P low light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P low light 0.03 420R/423R 0.46 1.23 423A-4 low light 0.05 423A-4 low light 0.05 423A-4 low light 0.05 423A-4 low light 0.005 423A-4 low light 0.005 423A-4 low light 0.02 0.1	362-1/-2	.13/.13	
365 1.75 366 0.14 368 0.11 369S 0.1 370 0.21 371 0.22 379S 0.12 381 0.09 388A/R .10/.11 .07/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P 0.17 417R/R-P low light 417TA-P low light 0.05 417TA-P low light 0.11 418R/R-P low light 0.05 418TA-P low light 0.05 418TA-P low light 0.11 418R-4 0.14 420QA-P low light 0.03 420R/423R low light 0.02 0.1 423A-4 low light 0.05 0.03 423A-4 low light 0.05 0.03 423A-P 0.14 0.05	363-1/-2	.28/.24	
366 0.14 368 0.11 369S 0.1 370 0.21 371 0.22 379S 0.12 381 0.09 388A/R .10/.11 .07/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P 0.17 417R/R-P low light 417TA-P 0.2 417TA-P low light 418R/R-P low light 0.11 418R/R-P low light 418TA-P low light 0.05 418TA-P low light 418TA-P low light 0.11 418R-4 418TA-P low light 0.11 420QA-P low light 420QA-P low light 0.03 420QA-P low light 420A-P low light 0.02 0.1 423A-4 low light 0.05 0.03 423A-4 low light 0.05 0.03 423A-P 0.14 <td>364-1</td> <td>0.49</td> <td>0.9</td>	364-1	0.49	0.9
368 0.11 369S 0.1 370 0.21 371 0.22 379S 0.12 381 0.09 388A/R .10/.11 .07/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P 0.17 417R/R-P low light 0.05 417TA-P 0.2 417TA-P 0.2 417TA-P 0.17 418R/R-P 0.17 418R/R-P low light 0.11 418R-P 0.17 418R-P low light 0.11 418R-P 0.4 420A-P 0.4 420QA-P 0.14 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423A-4 low light 0.05 0.03	365	1.75	
369S 0.1 370 0.21 371 0.22 379S 0.12 381 0.09 388A/R .10/.11 .07/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P 0.17 417R/R-P low light 417TA-P 0.2 417TA-P low light 418R/R-P 0.17 418R/R-P low light 418TA-P low light 0.05 418TA-P low light 0.11 418R-4 0.14 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 low light 0.05 0.03 423A-2 low light 0.05 0.03 423A-2 low light 0.05 0.03	366	0.14	
370 0.21 371 0.22 379S 0.12 381 0.09 388A/R .10/.11 .07/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P 0.17 417R/R-P low light 0.05 417TA-P 0.2 417TA-P 0.2 417TA-P low light 0.11 418R/R-P 0.17 418R/R-P low light 0.05 418TA-P 0.4 418TA-P low light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R 0.46 1.23 423A-4 low light 0.05	368	0.11	
371 0.22 379S 0.12 381 0.09 388A/R .10/.11 .07/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P 0.17 417R/R-P low light 0.05 417TA-P 0.2 417TA-P low light 0.11 418R/R-P 0.17 418R/R-P 0.17 418R/R-P 0.17 418R/R-P 0.104 420QA-P 0.4 420QA-P 0.14 420QA-P 0.15 423A-4 0.26 0.15 423A-4 low light 0.05 423A-4 low light 0.05 423A-4 low light 0.05 423A-4 low light 0.05	369S	0.1	
379S 0.12 381 0.09 388A/R .10/.11 .07/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P 0.17 417R/R-P low light 0.05 417TA-P 0.2 417TA-P 0.2 417TA-P 1ow light 0.11 418R/R-P 0.17 418R/R-P low light 0.11 418R-P 0.4 418TA-P 10w light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P 0.4 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R 0.46 1.23 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14	370	0.21	
381 0.09 388A/R .10/.11 .07/.07 388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P 0.17 417R/R-P low light 0.05 417TA-P 0.2 417TA-P low light 0.11 418R/R-P 0.17 418R/R-P low light 0.05 418TA-P 0.4 418TA-P low light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P 0.4 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R 0.46 1.23 423A-4 low light 0.05 423A-7 0.14	371	0.22	
388A/R .10/.11 .07/.07 388C .0.07 .0.06 388WB .0.07 .0.04 397C .0.11 .0.58 398-BT2 .0.39 .0.2 417R/R-P .0.17 417R/R-P low light .0.05 417TA-P .0.2 417TA-P low light .0.11 418R/R-P .0.17 418R/R-P .0.17 418R/R-P low light .0.05 418TA-P .0.4 418TA-P low light .0.11 418R-4 .0.14 420QA-P .0.4 420QA-P low light .0.03 420R/423R .0.46 .1.23 420R/423R low light .0.02 .0.1 423A-4 .0.26 .0.15 423A-4 low light .0.05 423QA-P .0.14	379S	0.12	
388C 0.07 0.06 388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P 0.17 417R/R-P low light 417TA-P 0.2 417TA-P low light 418R/R-P 0.17 418R/R-P low light 418TA-P low light 0.05 418TA-P low light 0.11 418TA-P low light 0.11 418R-4 0.14 420QA-P low light 0.03 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14	381	0.09	
388WB 0.07 0.04 397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P 0.17 0.05 417TA-P 0.2 0.2 417TA-P low light 0.11 0.11 418R/R-P low light 0.05 0.05 418TA-P low light 0.05 0.4 418TA-P low light 0.11 0.11 418R-4 0.14 0.14 420QA-P low light 0.03 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14	388A/R	.10/.11	.07/.07
397C 0.11 0.58 398-BT2 0.39 0.2 417R/R-P 0.17 417R/R-P low light 0.05 417TA-P 0.2 417TA-P low light 0.11 418R/R-P 0.17 418R/R-P low light 0.05 418TA-P 0.4 418TA-P low light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R 0.46 1.23 423A-4 low light 0.05 423A-4 low light 0.05 423A-4 low light 0.05 0.03 423QA-P 0.14	388C	0.07	0.06
398-BT2 0.39 0.2 417R/R-P 0.17 417R/R-P low light 0.05 417TA-P 0.2 417TA-P low light 0.11 418R/R-P 0.17 418R/R-P low light 0.05 418TA-P 0.4 418TA-P low light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R 0.46 1.23 423A-4 low light 0.05 0.03 423A-4 low light 0.05 0.03 423A-4 low light 0.05 0.03	388WB	0.07	0.04
417R/R-P 0.17 417R/R-P low light 0.05 417TA-P 0.2 417TA-P low light 0.11 418R/R-P 0.17 418TA-P low light 0.05 418TA-P low light 0.11 418R-4 0.14 420QA-P low light 0.03 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14	397C	0.11	0.58
417R/R-P low light 0.05 417TA-P 0.2 417TA-P low light 0.11 418R/R-P 0.17 418R/R-P low light 0.05 418TA-P low light 0.11 418R-4 0.14 420QA-P low light 0.03 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14	398-BT2	0.39	0.2
417R/R-P low light 0.05 417TA-P 0.2 417TA-P low light 0.11 418R/R-P 0.17 418R/R-P low light 0.05 418TA-P low light 0.11 418R-4 0.14 420QA-P low light 0.03 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14	417R/R-P	0.17	
417TA-P 0.2 417TA-P low light 0.11 418R/R-P 0.17 418R/R-P low light 0.05 418TA-P low light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14		0.05	
417TA-P low light 0.11 418R/R-P 0.17 418R/R-P low light 0.05 418TA-P 0.4 418TA-P low light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14		0.2	
418R/R-P 0.17 418R/R-P low light 0.05 418TA-P 0.4 418TA-P low light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14			
418R/R-P low light 0.05 418TA-P 0.4 418TA-P low light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14			
418TA-P 0.4 418TA-P low light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14			
418TA-P low light 0.11 418R-4 0.14 420QA-P 0.4 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14		-	
418R-4 0.14 420QA-P 0.4 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14			
420QA-P 0.4 420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14	•	-	
420QA-P low light 0.03 420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14			
420R/423R 0.46 1.23 420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14			
420R/423R low light 0.02 0.1 423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14		-	1 23
423A-4 0.26 0.15 423A-4 low light 0.05 0.03 423QA-P 0.14			
423A-4 low light 0.05 0.03 423QA-P 0.14			
423QA-P 0.14			
			0.00
TEOGRATI IUW IIGIIL U.UU			
		0.00	

Part No.	@12V (Color 1 /2	@24V) (Color 1/2)
423W-4	(Color 1 / 2 0.16	0.1
701C & 701C-ECE	1.96	0.97
702C	1.05	0.07
703C	1.17	
705C	0.51/2.23	
711	1.45	0.715
717A	0.27	0.13
717C	0.25	0.12
717R	0.14	0.08
717R low light	0.06	0.3
744A	0.1	0.0
745A	1.14	0.46
748A	0.26	0.1
748C	0.287	0.102
751A	2.88	1.44
752A/752MA	1.16/1.49	.48/.76
762A	0.18	0.18
764A	0.17	0.08
764A-2		.1 (.07 @ 36V)
772A	0.09	.1 (.07 @ 304)
778A	2.724	
779-1A	3.59	
789A		1.16
791A/MA	2.43 1.15/1.14	.48/.60
792C	1.13/ 1.14	0.65
794A-1 & 2	.28/.47	.25/.18
797A	0.57	0.28
798A	2.1	1
799A	1.2	0.6
800W-9	0.65	0.0
814R/816R	0.03	
814R/816R low light	0.02	
817A-7/818A-7	0.02	
817A-7/818A-7 low light	0.01	
817A-9/818A-9	0.24	0.15
817A-9/818A-9 low light	0.02	0.03
817A-36/818A-36	0.53	0.00
817A-36/818A-36 low light	0.04	
817C-7/818C-7	0.23	
817C-9/818C-9	0.25	
817CR-2/818CR-2	0.08	0.15
817CR-2/818CR-2 low light	0.01	0.01
817CR-36/818CR-36	0.33	0.17
817CR-36/818CR-36 low light	0.02	0.03
817R-36/818R-36	0.53	0.00
817R-36/818R-36 low light	0.04	
817R-7/818R-7	0.04	
817R-7/818R-7 low light		
	0.01	0.38
817R-9/818R-9 817R-0/818R-0 low light		
817R-9/818R-9 low light	0.02	0.05

LED AMP DRAW SPECIFICATIONS

LED AMP DR		
Part No.	@12V (Color 1 /2)	@24V (Color 1/2)
817SA-1/-2	0.36	0.36
817SA-9/818SA-9	0.59	0.45
817SR-9/818SR-9	0.59	0.45
817SW-9/818SW-9	0.59	0.45
817TA-2C & 818TA-2C	.34/.33	.21/.20
817TA-2C & 818TA-2C flashing	.09/.09	.07/.07
817W-9	0.38	0.27
817YA/818YA flashing & steady	0.79	
817YA/818YA low light	0.02	
818SA-1/-2	0.36	
820A-7/823A-7	0.29	
820A-7/823A-7 low light	0.03	
820A-10/823A-10	0.3	0.15
820A-10/823A-10 low light	0.02	0.03
820A-22/823A-22	0.36	
820A-22/823A-22 low light	0.02	
820C-7/823C-7	0.23	
820C-10/823C-10	0.22	0.49
820QA/823QA	0.45	0.55
820QA/823QA low light	0.2	0.24
823QCA	0.45	0.55
823QCA low light	0.02	0.24
820R-7/823R-7	0.24	
820R-7/823R-7 low light	0.01	
820R-10/823R-10	0.33	0.17
820R-10/823R-10 low light	0.02	0.03
820R-22/823R-22	0.36	
820R-22/823R-22 low light	0.02	
820SA-1/-2, 823SA-1/-2	0.24	0.17
820SR-1/-2	0.24	0.17
820SA-10/823SA-10	0.52	0.4
820SR-10/823SR-10	0.52	0.4
820SW-10/823SW-10	0.52	0.4
821A-7/822A-7	0.24	
821A-7/822A-7 low light	0.01	
821A-10/822A-10	0.3	0.15
821A-10/822A-10 low light		0.03
821A-22/822A-22	0.36	
821A-22/822A-22 low light		
821C-7/822C-7	0.23	
821R-7/822R-7	0.22	
821R-7/822R-7 low light	0.01	
821R-10/822R-10	0.33	0.17
821R-10/822R-10 low light		0.03
821R-22/822R-22	0.36	
821R-22/822R-22 low light		
826A-MV/824A-MV	0.17	0.1
826A-MV/824A-MV low light	0.04	0.03
826C-MV/824C-MV	0.18	0.09
826R-MV/824R-MV	0.10	0.07
OLOT CIVIV / OLAH LANIV	V-12	0.01

ATIONS		
Part No.	@12V (Color 1 /2)	@24V (Color 1/2)
826R-MV/824R-MV low light	0.03	0.02
826R/824R	0.27	
826R/824R low light	0.02	
826A-7/824R-7	0.24	
826A-7/824R-7 low light	0.01	
826C-7/824C-7	0.38	
826R-7/824R-7	0.41	
826R-7/824R-7 low light	0.01	
826A-9/824A-9	0.24	0.15
826A-9/824A-9 low light	0.02	0.03
826C-7/824C-7	0.23	
826R-9	0.21	0.38
826R-9 low light	0.02	0.05
827R	0.17	
827R low light	0.01	
829C-7	0.4	
829R-7	0.39	
829R-7 low light	0.01	
840/840L	.28/.33	
840/840L low light	.11/.15	
844/844L	0.6	
844/844L low light	0.25	
845/845L		
	.19/.16	
845/845L low light		0.01
850A/850A-1	0.38	0.21
850A-R	0.23	0.14
850A-R low light	0.16	0.1
850C	0.66	0.33
850F-SW	0.3	0.3
850F-C-SW	0.67	0.33
850R/850R-1	0.37	0.21
850R/850R-1 low light	0.04	0.05
850SA	0.125	0.06
856	0.15	
856 low light	0.05	
856L	0.19	
856L low light	0.09	
860SA-1/-2 (turn/strobe)	.33/.35	.30/.26
861SA-1/-2 (turn/strobe)	.33/.35	.21/.27
861SA-1/-2/-3/-4 (turn/strobe)	.66/.77	.42/.54
866SA-1/-2 (turn/strobe)	.48/.50	.31/.40
866SA-1/-2/-3/-4 (turn/strobe)	1-Jan	.62/.80
867SA-1/-2 turn (turn/strobe)	.33/.35	.3/.25
869R	0.16	
869R low light	0.01	
870W	0.27	0.19
872W	0.28	0.18
880-7/881-7	0.19	
880-7/881-7 low light	0.02	
880-7/881-7 reverse	0.51	

Part No.	@12V (Color 1 /2)	@24V (Color 1/2)
882-7/883-7	0.18	
882-7/883-7 low light	0.02	
882-7/883-7 reverse	0.51	
901-MV	0.57	0.27
903-MV	2.89	1.27
904-MV	1.07	0.51
905-MV	0.4	0.2
906-MV	0.82	0.4
907	0.2	0.12
907-MV	0.29	0.22
908	1.61	0.76
910-MV/910M-MV	1.73	0.83
911-MV	1.15	0.61
912-MV	NA	
913-MV	1.5	0.74
915-MV	2.8	1.5
916S	0.38	0.27
918S	0.65	
919-MV	1.64	0.83
920B-MV	0.6	0.3
921-MV	1.23	0.59
928-MV	2.15	1.03
930-MV	16.5	7.7
931-MV	12.7	6
932-MV	3.4	1.77
933-MV	3.36	1.53
934-MV	7.98	3.14
1288	0.03	0.03
1289	0.24	0.14
1197SA	0.14	
1200A/C/R	.04/.01/.02	.04/.01/.02
1203A/C/R	0.32	0.19
10174 1/10		
1217A-1/-1C	0.07	0.19
1217A-1/-1C 1217A-1/-1C low light	0.07	0.19
1217A-1/-1C low light	0.13	0.19
1217A-1/-1C low light 1217A-9 1217A-R	0.13 0.13	0.19 0.08
1217A-1/-1C low light 1217A-9	0.13 0.13 0.04	0.19 0.08
1217A-1/-1C low light 1217A-9 1217A-R 1217A-R low light 1217C-9	0.13 0.13 0.04 NA	0.19 0.08 0.02
1217A-1/-1C low light 1217A-9 1217A-R 1217A-R low light	0.13 0.13 0.04 NA 0.29	0.19 0.08 0.02 0.15
1217A-1/-1C low light 1217A-9 1217A-R 1217A-R low light 1217C-9 1217F- 1217F-C	0.13 0.04 NA 0.29 0.38 0.09	0.19 0.08 0.02 0.15 0.19
1217A-1/-1C low light 1217A-9 1217A-R 1217A-R low light 1217C-9 1217F 1217F-C 1217G-R	0.13 0.04 NA 0.29 0.38 0.09 0.17	0.19 0.08 0.02 0.15 0.19
1217A-1/-1C low light 1217A-9 1217A-R 1217A-R low light 1217C-9 1217F 1217F-C 1217G-R 1217R-9	0.13 0.04 NA 0.29 0.38 0.09	0.19 0.08 0.02 0.15 0.19 0.06
1217A-1/-1C low light 1217A-9 1217A-R 1217A-R low light 1217C-9 1217F 1217F-C 1217G-R	0.13 0.04 NA 0.29 0.38 0.09 0.17 0.02	0.19 0.08 0.02 0.15 0.19 0.06 0.29 0.06
1217A-1/-1C low light 1217A-9 1217A-R 1217A-R low light 1217C-9 1217F 1217F-C 1217G-R 1217R-9 1217R-9 low light 1218A-1	0.13 0.04 NA 0.29 0.38 0.09 0.17 0.02 0.18 0.07	0.19 0.08 0.02 0.15 0.19 0.06 0.29 0.06 0.18
1217A-1/-1C low light 1217A-9 1217A-R 1217A-R low light 1217C-9 1217F 1217F-C 1217G-R 1217R-9 1217R-9 1217R-9 low light 1218A-1 low light	0.13 0.04 NA 0.29 0.38 0.09 0.17 0.02 0.18 0.07 0.32	0.19 0.08 0.02 0.15 0.19 0.06 0.29 0.06 0.18 0.19 0.18
1217A-1/-1C low light 1217A-9 1217A-R 1217A-R low light 1217C-9 1217F 1217F-C 1217G-R 1217R-9 1217R-9 low light 1218A-1 1218A-1 low light 1218A-1 low light	0.13 0.04 NA 0.29 0.38 0.09 0.17 0.02 0.18 0.07 0.32 0.14	0.19 0.08 0.02 0.15 0.19 0.06 0.29 0.06 0.18 0.19 0.18 0.19
1217A-1/-1C low light 1217A-9 1217A-R 1217A-R low light 1217C-9 1217F 1217F-C 1217G-R 1217R-9 1217R-9 low light 1218A-1 1218A-1 1218A-1C 1218A-9	0.13 0.04 NA 0.29 0.38 0.09 0.17 0.02 0.18 0.07 0.32 0.14 0.12	0.19 0.08 0.02 0.15 0.19 0.06 0.29 0.06 0.18 0.19 0.18 0.19 0.18
1217A-1/-1C low light 1217A-9 1217A-R 1217A-R low light 1217C-9 1217F 1217F-C 1217G-R 1217R-9 1217R-9 low light 1218A-1 1218A-1 low light 1218A-1 low light	0.13 0.04 NA 0.29 0.38 0.09 0.17 0.02 0.18 0.07 0.32 0.14	0.19 0.08 0.02 0.15 0.19 0.06 0.29 0.06 0.18 0.19 0.18 0.19

Part No.	@12V (Color 1 /2)	@24V (Color 1/2)
1218R-9	0.02	0.06
1218R-9 low light	0.13	0.21
1220A-10	0.21	0.44
1220C-10	0.21	0.37
1220R-10	0.02	0.05
1220R-10 low light	0.13	0.07
1223A-4	0.15	0.08
1223A-R-MV	0.001	0.01
1223A-R-MV low light	0.21	0.36
1223R-10	0.02	0.06
1223R-10 low light	0.11	0.06
1223R-4	0.04	0.02
1223R-4 low light	0.06	
1268A-MTC	.03/.03	.03/.03
1268A-MV/-MVC	0.02	0.02
1268A-R-MV	.03/.02	.02/.02
1268R-MV/-MVC	0.01	0.01
1268W-MV	0.18	0.19
1288 low light	0.19	0.1
1288 back up	0.07	0.06
1288 side marker	0.12	0.08
1288 turn	0.35	0.19
1288A	0.16	0.09
1288B	0.18	0.1
1288C	0.17	0.11
1288F	0.17	0.09
1288R	0.07	0.04
1288R low light	0.08	0.07
1288TA	0.13	0.07
1289 low light	0.21	0.14
2217A-R/2218A-R/2219A-R High Red (Brake)	0.145	0.08
2217A-R/2218A-R/2219A-R Amber Tum	0.065	0.037
2217A-R/2218A-R/2219A-R low light	0.02	0.018
2217F-C/2218F-C/2219F-C Rev 2 fcn	.17/.24	.09/.12
2217F-C/2218F-C/2219F-C Fog 2 fcn	0.24	0.12
2268A-R-MV	0.03	
2290A-R (Red High/Brake) 3fcn	0.14	0.08
2290A-R (Amber Tm) 3fcn	0.12	0.067
2290A-R low light	0.019	0.017
2291A-R (Red High/Brake) 3fcn	0.3	0.16
2291A-R (amber/Tm) 3fcn	0.2	0.11
2291A-R low light	0.025	0.015
2291F-C Rev/Fog 2 fcn	.29/.30	.14/.14
4484A-1/R-1	0.04	
4153SA	0.8	0.44
4154SA	0.8	0.44
4155SA	1	1
	0.33	0.18

@12V @24V

GROMMET & FLANGE MOUNTING DIMENSIONS


Dimensions given are for reference only. Due to various panel thickness, the size of the hole may need to be adjusted.

Grommet No.	Description	Hole Size	Max. Panel Thickness
127-18	Grommet, rectangle, flush mount, black	3.50" x 2.40"	0.16"
127-181	Grommet, rectangle, flush mount, white	3.50" x 2.40"	0.16"
142-17	Grommet, round, raised mount	2.75" diameter	0.18"
142-18	Grommet, round, recess mount	3.125" diameter	0.18"
142-181	Grommet, round, recess mount	3.125" diameter	0.18"
143-17	Grommet, round, flush mount, closed-back	3.125" diameter	0.15"
143-18	Grommet, round, flush mount	2.75" diameter	0.25"
144-18	Grommet, round, flush mount, closed-back	2.75" diameter	0.075"
146-18	Grommet, round, flush mount	2.25" diameter	0.25"
146-181	Grommet, round, raised mount	2.125" diameter	0.25"
146-182	Grommet, round, flush mount, closed-back	2.25" diameter	0.25"
146-184	Grommet, round, raised mount	2.25" diameter	0.17"
150-18	Grommet, rectangle, flush mount	2.88" x 1.53"	0.25"
150-181	Grommet, rectangle, flush mount	3.00" x 1.65"	0.25"
177-18	Grommet, round, flush mount	0.75" diameter	0.20"
421-18	Grommet, oval, flush mount	2.50" x 6.75" 1.25" r. corne	rs 0.0179-0.25"
426-18	Grommet, round, flush mount	4.50" diameter	0.25"
450-18	Grommet, rectangular, flush mount	5.43" x 3.58"	0.23"
850-18	Grommet, rectangular, flush mount	5.43" x 3.58"	0.375"

Lamp Series w/ Flange	Lamp Type	Mounting Hole Diameter
411, 413, 418, 424, 425, 814, 818, 824	4" Round	4.5"
350F, 354F, 423, 822, 823, 2875	Oval	6.75" x 2.5"
162, 163, 175, 192, 193, 197	2 1/2" Round	2.75"
146, 164, 165, 194, 195, 199	2" Round	2.25"



INSTALLING PETERSON LIGHTS WITH INTEGRAL WEATHERPROOF CONNECTOR RECEPTACLES

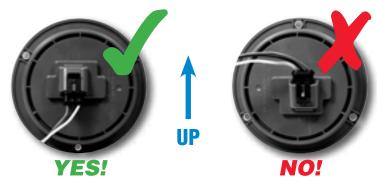

Many Peterson LED vehicle lights have an angled receptacle built into the rear of the housing. This receptacle is designed to accept AMP SuperSeal 1.5 Series and compatible sealed, weatherproof plugs. While this type of plug is among the very best in the industry at keeping out moisture and foreign matter, proper installation will ensure these lights provide the very longest, most trouble-free service life possible.

When installing these lights, the light housing should be oriented on the vehicle so that the receptacle opening faces downward. This will protect the light and wiring in two ways:

- 1. The housing shrouds the opening to help keep environmental liquids and debris from dropping or running down into it.
- 2. Material that does come into contact with the sealing surfaces will be drawn by gravity down, out and away, rather than being pulled further into the connector.

It is important to always orient the receptacle opening properly when attaching the housing to the vehicle body. When doing maintenance on a vehicle, verify the orientation of the light housings whenever possible.

OBSOLETE PART NUMBERS

153SB-1

305-25R

417SA-1

449-2

794A-1

M4260R

PRODUCT SPECIFICATIONS

The following parts previously offered by Peterson are no longer available and do not appear in this catalog.

40.44	L 4500D 0	L MOOFA	1 44704 0	L 14450A	7044.0	MACCODE
18-41	153SB-2	M305A	417SA-2	M450A	794A-2	M4260RF
B61	153SC-1	M305R	417SR-1	M450C	V809	4332
104-3R	153SC-2	M306A	417SR-2	450KC	817SW-1	4333
M104-3R	153SR-1	M306R	M417TA	461RSK	817SW-2	4343A-1
M104A	153SR-2	308-15A	417YA-P	468K	820R-10	4343A-1X
M104R	B154-12K	308L-PKD	M418C-1	B473A	831	4343A-2
107-3A	154-49	308R-PKD	M418C-1P	B473R	833	4343A-2X
V107-6A	B154-121K	310-15R	418C-P	B485A	850-092HAR	4343A-3
M107WA-24	160-3R	V314MA	M418C-P	B485R	850-092VAR	4343A-3X
M112A	160-493	319AA-P	418SA-1	V490A	850-093HARC	4343A-4
M115A	M160A	319R-P	418SA-2	V490R	850-093HARR	4343A-4X
M115R	160KA	325-2	418SR-1	M503HT	850-093VARC	4344A-1
117A	V160KA	325-15A	418SR-2	V504HFM	850-093VARR	4344A-2
B119-15B	160KR	325-15R	M418TA	V506	850A-R	4344A-3
B119-15G	V160KR	325-151A	418YA-24V	507F	850A-R-SW	4344A-4
120-49	M160R	326-2	418YA-P	V507F	850C-BT2	4353A-1
M120A	B162-491	335	419	508	M850F-C	4353A-1X
V120A	B167-09	B338-15B	M420HC-1AMP	M509	850HC	4353A-2
M120A-1	B167-49	338-18	M420HC-1P	V509	850R-AMP	4353A-2X
M120R	B167-491	V339-2	M420R	511	M852	4353A-3X
M120R-1	B167-492	M350AF-PKD	M420R-P	M513	M852L	4353A-4X
M129R-BT2	M167A	360-25C	420SA-1	V520-10	V869R	4547
B134-15C	167KA	M361	420SA-1AMP	B521-20C	M881TL-7	4741B-MV
136-3A	V167KA	V361	420SA-2	M525S	902-MV	4741C
M138A-24V	167KR	367	420SA-2AMP	V531	V902-MV	4741C-MV
M138B-24V	V167KR	M367	420SB-1	V538	909-MV	4741G
M138C-24V	M167R	M368-BT2	420SB-2	M545	V911-MV	4741G-MV
M138G-24V	176A-BT2	M368-MLX	420SR-1	V552-2	914S-MV	4741P
M138R-24V	176R-BT2	375-15W	420SR-2	V556-2	V940	4741P-MV
B140-24	B177-181	V375S	M420VC-1P	V557-2	1195	4741PK
M142A-24V	V179A	V376S	B421-493	B560	1200-09V	4741PK-MV
M142R-24V	V179R	M382A	M421A-24V	V562-1	1283A	4741T
M145A	M180A-24V	M383A	421R-24V	V581B-2PL	1283R	4741T-MV
M145R	M180R-24V	M383C	M421R-24V	V581C-2PL	1283W	4741Y
B146-184	PMD180-100-10	M392C	423HSA-1	V583-2	M1290A-R	4741Y-MV
M146A-24V	M214A	V392C	423HSA-2	M584	V2546-15A	5100
M146FA	V214A	393A	423QA-P-24V	M588	V2546-15R	5124
M146FR	M214A-BT1	394C	M423R	V590-2	V2546A	5200
146KA	215-15A	410-25A	M423R-P	V597-2	V2546R	5300
M146R-24V	215-15R	B411-07	423SA-1	V599	V2547-15A	5400
M147A	M233SR	B413-07	423SA-1AMP	V600B-2	V2547-15R	5424
M150-3A	272KR	M413-24V	423SA-2	V603L	V2547A	V7011S
V150-3R	M272R	416-24V	M423VC-1P	V604	V2547R	V70113
B150-097	294-09	417-093ARC	424-15R	617XH	M2875A-P	8344A-1
152-09	294	417-093ARR	424R	672X	M2875AF-P	8344A-2
152-091	M294	B417-482	M425-3	700-15C	4169A	8363A-1
B153-493	V294	B417-486	426A-24V	748-25A	4169R	8363A-2
B153-494	M294C	417C	431A	748-25C	4177CA	95041-1
153C-143	M294C-BT2	M417C-1	M431A	748A	4177CA 4177CR	95080-1
153C-143 153C-BT236	M294C-PKD	M417C-1AMP	431KR	748C	4258A-1	95091-1
M153C-BT236	M294WW-MV	M417C-1AWF	433-15C	766-25A	4258A-1X	PMPL10-100-12
	M294-BT2	· ·				
153KC-BT236	l -	M417C-BT2 417C-P	M433S 437	766A V766MA	4258A-2	PMPL3-100-12
153SA-1	M294-MV	417С-Р M417С-Р			4258A-2X	
153SA-2	305-25A	M417C-P	M439B	766ST	M4260A	

COMPETITIVE INTERCHANGE

Grote

GROTE	PETERSON	GROTE	PETERSON	GROTE PETERSON	GROTE PETERSON	GROTE PETERSON	GROTE PETERSON
	358-3		V487A	43362-3421-09	45172 119R	46282 123R	47123-3M196A
61F81	M365	40152	476R	43370150-091	45173119A	46283123A	47202 M162FR
	V933-MV		B476R	43380150-091	45232 127R	46302 130R	47212 166R
	V934-MV		476A	43390 154-09K	45232-3 M127R	46302-3 M130R	47212-3 M166R
	V603		B476A	4341145	45233127A	46303130A	47213166A
12004-5	V603		B460R	43411-345	45233-3M127A	46303-3M130A	47213-3M166A
	655		B460A	4342445	45252 136R	46393-5 V112A	47232 197R
12053	655X		B472R	434637005S	45252-3 M136R	46412 150R	47232-3 M197R
	609	40232-3	B472R	43463-3 B7005S	45252-5 V136R	46412-3 M150R	47233197A
	830		V472R	43512143-092	45253136A	46412-5V150R	47233-3M197A
12073	830		B472A	43522143-092	45253-3M136A	46413150A	47322163R-MV
12073-5	830		V472A	43532146-092	45253-5 V136A	46413-3M150A	47323163A-MV
12113-5	832		B483R	43572426-09	45262 135R	46413-5 V150A	47332165R-MV
	668X		B483A	43655426-10	45262-3 M135R	46422-5V150KR	47333 165A-MV
	V602	40641	467-1	43655-3426-10	45262-5 V135R	46423-5V150KA	47372 M197FR
	V602		467-4K	43673 B106-09	45263135A	46543M118A	47372-3 M197FR
	608XO		465-2	43673-5 V106-09	45263-3M135A	46543-5 V118A	47373M197FA
	608XO		465-4K	43780 B154-09	45263-5 V135A	46702108WR	47472V196KR
12182	608	41002	481R	43783 B154-10	45333 V109A	46703 108WA	47473V196KA
	608X		481A	43790 154-09K	45412 M102R	46712108WR	47502 M129R
12201-5	V600		477R	43790-3 154-09K	45412-3 M102R	46712-5V108WR	47502-3 M129R
	832		477A	438237007S	45412-5 V102R	46713 108WA	47503M129A
	836		B480R	43823-3 B7007S	45413M102A	46713-5 V108WA	47503-3M129A
	658X	41032-3	B480R	43842440-09	45413-3M102A	46740154A-R	47772M178CR-BT2
	608X		V480R	43850 154-09K	45413-5 V102A	46742 154R	47773 M178CA-BT2
12983	608X		B480A	43850-3 154-09K	45432 135R	46742-3 M154R	47853-5 V170A
16023	617X		V480A	4390146	45433135A	46742-5V154R	47912 4354R
	608		B479R	43960150-14	45442 130R	46743154A	479134354A
	608X		B479A	43960-3 B150-14	45443130A	46743-3M154A	48072500
	616W		464-2	43970150-09 / 142-49	45462 130R	46743-5 V154A	48272500
	616	41133	469-1	43970-3150-09 / B142-49	45463130A	46791 M138C	48282V500
	615		490R	43980150-10	45582V178XR	46792 138R	49062 136-3R
	615		490A	440105000	45583V178XA	46792-3 M138R	49112 107-3R
	615	41152	491R	4413418-41	45623 V178A	46792-5V138R	49112-5V107-3R
	598		491A	4442119-41	45662 M137R	46793138A	49172 150-3R
	616W		465-1	44530570	45663M137A	46793-3M138A	49192 169-3R
	654		7011S	44530-3570	45812 142R	46793-5 V138A	49212-5V191-3RL
	654X		176-10	44530-5V570	45812-3 M142R	46832 155R	49223 M169-3A
	654X		B176-10	44540571	45812-5 V142R	46833155A	49242-5V169-3R
	655		176-13	44540-3571	45813142A	46882107WR	49262 M181R-MV-BT2
	655X		B176-13	44690573	45813-3M142A	46882-5V107WR	49263 M181A-MV-BT2
	821		150-091	44690-3573	45813-5 V142A	46883 107WA	49322 181KR-BT2
	605		B150-091	44700574	45821146C	46883-5V107WA	49322-5 V181R-BT2
28162	605	42152	820-09	44710576	45821-3 M146C	46892 M122XR	49323 181KA-BT2
	810		B820-09	44720577	45822 146R	46892-5V122XR	49323-5 V181A-BT2
	655X		820-10	44730579	45822-3 M146R	46893 M122XA	49332176KR
	B475R		165-10	44810554	45822-5V146R	46893-5V122XA	49333176KA
	B475R		176-12	44810-3554	45823146A	46982-5V114R	49362M271R-BT3
	V475R		176-12	44810-5V554	45823-3M146A	46983-5 V114A	49363M271A-BT3
	B475A		176-11	44820557	45823-5 V146A	47012 168R	49392187R
	B475A		176-11	44840-5 V520-40	45832143R	47012-3 M168R	49393187A
	V475A		176-14	44892571	45832-3 M143R	47013168A	50222413
	V475R		176-14	45002-5 V168R	45833143A	47013-3M168A	50232413
	V475A	42312	176-16	45003-5 V168A	45833-3M143A	47052V126R	50232-5V413
	B481R		176-16	45012 119R	45932 M106R	47053V126A	50532440L
	B481R		428-09	45013119A	45932-3 M106R	47082153R	50542440
	481R		V428-09	45022M110R	45933M106A	47083153A	50542-5V440
	B481A		794-09	45022-5V110R	45933-3M106A	47092161R	50630313-2RA
	481A		B154-092	45023M110A	46072155R	47093161A	50630-5 V313-2RA
	477R		V440-09	45023-5 V110A	46073155A	47112198R	50642313-2
	477A		428-09	45042142KR	46132165R	47112-3 M198R	50642-5 V313-2
	B487R		V428-09	45043142KA	46133165A	47113198A	50872428
	B487R		510-9	45062M146KR	46142163R	47113-3M198A	50872-5V428
	V487R		510-9	45063 M146KA	46142-3 M163R	47122196R	50920845L
	B487A		7009S	45092154KR	46143163A	47122-3 M196R	50972445
40133-3	B487A	43362	421-09	45093 154KA	46143-3M163A	47123196A	50972-5V445

Grote (cont.)

53672.....M441L

62151.....M411SC

66981.....153-49

90152-5 136-15R

93760-3 ... 146-09 / 146-181

COMPETITIVE INTERCHANGE

	PETERSON	GROTE PETERSON		GROTE PETERSON	GROTE PETERSON	GROTE PETERSON
	454	54032 818R-		67000431-491	90153 136-15A	94000 142-18K
	840	54142820R-		67000-3 B431-491	90153-3 136-15A	94010 143-18K
	V840	54143 820A-	7 62181415K	67001162-49	90162 100-15R	94100 146-18K
	840L	54172821R-	7 62181-3415K	67001-3 B162-49	90163 100-15A	94180450-18
	V840L	54173 821A-		67006 417-491MP	90172130-25R	94180-3 B450-18
	844	54193356/		67010431-49	90173 130-25A	94233150-10
	V844	54213 356AI		67011431-49	90202108-15R	94411-5V703C
	844L	54282826R-M\		67014421-49	90202-5V108-15R	94421-5V702C
	V844L	54292817R-	9 62291 M393C	67050142-49	90203 108-15A	99170PM-ECK-T
	421R	54313 817A-	9 62331415K	67050-3 B142-49	90203-5 V10815A	99170-1 PM-ECK-T
	V421R	54342 826F		67090421-491	90252334-15R	99580PMV0099PT
	421A	54342-3 M826F		67090-3 B421-491	90302110-15R	99593 425S-21
	421A	54343826A-M\		67090-5421-491	90303 110-15A	99593-3 425S-21
	352A	54362 816F		68130413-07	90762V410-15R	99595410-21
	M352A	54363 817A-	9 62751821C-7	68170411-07	90922124-15R	99595-3410-21
	450KR	54562817R-	7 62751-3 M821C-7	68420B5425Y	90923 124-15A	BZ101-5 921-MV
	450KA	54572818R-		68540-5 V5425Y	90941-5V701C	BZ111-5 912-MV
	M352KA	54573 1218R-		71152459	90951-5V705C	BZ201-5 910-MV
	440	54682 M880-PL		71422449	90971-5VH550	BZ551-5 913-MV
	V440	54722820R-		73030785 73040780	91042130-25R	BZ601-5 904-MV
	440L	55223313A/			91043 130-25A	G1002173R
	V440L	55223-5V313AA 55280 V313-2RA		73040-5V780	9111255-15R	G1003173A G1032163R
	V456L			73080785	9111355-15A	
	V456	55290337-		73090781	9112256-15R	G1033163A
	M444 M444L	55982717F 55983717		73160786-102	91302445-25	G1082V72R G1092163R
	V456	55992717F		73220786-97 76032V774R	91380150-181 91400143-18	G1092163A
	V456L	55993717		76032V774A	91400-3 B143-18	G1502203R
	352A	56000337-		76253798A	91410142-18	G1503203A
	M413S	56020 V335-	2 63821-5V711	76263798A	91482420-15	G1902 161R
	421KR	6000140		77473764A	91572134-15R	G1902-5V161KR
	V423XR-4	60001-3 M400		77483 V764MA	91573 134-15A	G1903161A
	454	60011436S		77813791A	91582334-15R	G1903-5V161KA
	429R	60011-5V436SX		77823791MA	91583 334-15A	G2102188R
	M429R	60081M436E		77912740R	91683 118-15A	G2103188A
	426R	6010143		77913740A	91740426-18	G3002165R
	M426R	60101-3 M43		78033798A	91740-3 B426-18	G3003165A
	V426R	60101-5V43		78093762A	91961B138-15C	G3092166R
	426A	6012140		78113744A	91962138-15R	G3093166A
	426KR	6015143		78143 4153SA	91962-3B138-15R	G4002M417R-P
	421R	60151-5V43		78163 4155SA	91963 138-15A	G4002-5V417KR
	M421R	6025143	7 64931-5V507	78200778A	91963-3 B138-15A	G4003M417TA-P
	V421R	60251-5V43		78333M146ABS	91964B138-15G	G4012V417KR
52893	421A	60261 1500		78343M142ABS	91965B138-15B	G4502850R-1P
52893-5	421A	60261-3 M1500	65203161KA	78343-3M142ABS	92070144-18	G4503850A-1P
52902	442	60271150V	V 65300-5V547	78433M198ABS	92120146-18	G460238R-MV
52912	442L	60291 1540	C 65320-5V941	78433-3M198ABS	92120-3 B146-18	G4602-5V38R
52922	431R	60291-3 M1540	C 65370-5V540	78460 4153SA	92150146-182	G460338A-MV
52922-3	M431R	60301 1540	C 65380-5541	78460-5P4153SA	92150-3 B146182	G4603-5 V38A
52922-5	V426R	60381290C-BT	2 65440-5V544	79053751A	92420421-18	G5053121A
52923	426A	60460 150C / 150-1	4 65720-5V955	872205407S	92420-3 B421-18	G5082845
53000	337-2	60591V3698	65730-5V555	872505407S	92432 107-15R	G5082-5V845
53012	M431KR	60671153C-BT		878605407S	92433 107-15A	G5092845L
53012-5	V426KR	610913898	66812431-491	90011 414-15C	92510424-09	G5092-5V845L
	V335-2	61091-53898		90012 410-15R	92511424-09	G5300 V338-2
	421KR	61171V3798		90012-3B410-15R	92512424-09	G5530V327L
	421KA	61261 M36		90012-5V410-15R	92773117-25	G5540V327R
	306R	61291M36		90013 410-15A	92792440-15	G6002821R-22
	306A	61491-5V3910		90052119-15R	93400127-181	G6002-5V821R-22
	717R	61501M43		90053 119-15A	93402127-18	G6003 821A-22
	M417R	61501-5V43		90122134-15R	93552424-09	G6121298C
	817R-7	61611V503HI		90122-5V134-15R	93552-3424-09	G6121-5V298C
	817A-7	61861366		90123 134-15A	93750142-09 / 143-18	G6151290
	869R	62101817C-		90123-5 V134-15A	93750-3 142-09 / 143-18	G6151-5V290
53662	M441	62101-3 M817C-	7 66932160-493	90152136-15R	93760 146-09 / 146-181	

COMPETITIVE INTERCHANGE

Truck-Lite

Iruck-Lite	
TRUCK-LITE PETERSON	
00790150-09	
00791150-10	
00793B150-12	
00802150-13	
00809150-092	
1001V110R	
1001AV110A	
10075R197KR 10075Y197KA	
10079R197KFR	
10079Y197KFA	
10086R163KR-MV	
10086Y163KA-MV	
10133176-12	
10202R142R	
10202Y142A 10205R143R	
10205Y143A	
10208R143R	
10208Y143A	
10212YM142ABS	
10275R197R	
10275Y197A	
10276RV72R 10279R197FR	
10279Y197FA	
10286R163R	
10286Y163A	
10288R163FR	
10288Y163FA	
10401143-18K	
10404142-18K	
1050162R 1050A162A	
1052162R	
1052A162A	
1058197R	
1058A197A	
1070 162FR	
1070A162FA	
10700143-18 10702144-18	
10704142-18	
10708B142-17	
107157007S	
107202594	
10724165-10	
10725142-09	
10728165-10 10729143-092	
10731B142-091	
10740V7007	
1075V72R	
1211138R	
1211A138A	
1211WM138C	
1213138R 1213A138A	
1222108WR	
1222A108WA	
1259135R	
1259A135A	
1264108WR	
1264A108WA	
1320A V118A 14200R127R	
14200Y127A	
14700127-181	
14701127-18	
15033RV153KR	
15033YV153KA	
15043 153C-142	
15056 153C-143	

TRUCK-LITE PETERSON
1507107WR
1507A107WA
15200C150W
15200R150R
15200Y150A
15205153C-P
15208150C 15227153C-BT2
15250R153R
15250Y153A
15408150-092
15409150-102
15506RV150KR
15506YV150KA
1555136R
1555A136A
1560203R
1560A203A 1570V114R
1570AV114A
15702B150-181
15728150-091
15729150-14
15730150-141
15745R150-3R
15905153C-MV
172570
173571
182573 183574
19002R154KR
19002Y
19006R161KR
19006Y161KA
19200C154C
19200R154R
19200Y154A
19206154C
19250R161R 19250Y161A
1960161R
1960A161A
19680A778A
19720B154-09
19721154-09K
19724B154-092
19726154-11K
19729B154-11 19739154-10K
19740B154-11K-BT1
19748B154-10
21251R187R
21251Y187A
21256R187R-MV
21256Y 187A-MV
21275R187R
21275Y187A 2150188R
2150A188A
22202Y343A
262554
26250R133R
26250Y133A
263557
26302G M138G
26311R123R
26311Y123A 26313RM122R
26313YM122A
26315R119R
26315Y119A
26330 435

TRUCK-LITE PETERSON
26331 M432
26335400
26336437
26336-1V437
26393CM394C
2660V180R
2660AV180A
26765YM118A
26765Y1V118A 26901R135R
26902R135R
26902Y135A
27270C701C
27291C701C-ECE-LHT
27450C705C
2750V338-2
2751V339R
2751A V339A
2758V327R 2759V327L
27640C702C
27645C703C
2803V335-2
282576
283577
286579
30075R199KR
30075Y 199KA
80080R199KFR
30080Y 199KFA 30133176-11
30200CM146C
30200R146R
80200R1V146R
30200Y146A
30200Y1V146A
80201RM145R
30201YM145A 30222RM146SR
30222Y M146SA
B0230YM146ABS
30264YM199A
30269YM199FA
80275RM199R
30275YM199A 30279RM199FR
30279YM199FA
80285R165R
30285Y165A
30288R M165FR
30288YM165FA
80289RM165FR
30289YM165FA 30401146-18K
3050164R
3050A164A
80503RV146KR
30503R1V146KR
30503YV146KA
30503Y1V146KA
3058199R 3058A199A
307A764A
3070 164FR
3070A164FA
30700146-18
30702146-182
307087005S 30713V7005
30713V7005 307202593
30721146-09
30728146-092

30729.....B146-093

TRUCK-LITE PETERSON	
3075166R	
3075A166A	
313A V764MA	
32B484R	
32A B484A	
33010C291KC-BT2	
33050RM181R-BT2	
33050Y	
33060C171KC-BT2 33065C171KC-BT2	
33075RM181R-BT2	
33075Y M181A-BT2	
33203RM271R-BT3	
33203YM271A-BT3	
33204RM271R-BT3	
33204Y M271A-BT3	
33210CM291C-BT2	
33250RM171R-BT2	
33250Y M171A-BT2 33260CM171C-BT2	
33265B4741B	
33265CM171C-BT2	
33265RM171R	
33265YM171A	
33275RM181R-BT2	
33275Y M181A-BT2	
33285R177CR-BT2	
33285Y177CA-BT2	
33700B177-18	
33711176-10 33715176-13	
33800B176-09	
33810B176-09X	
355060R	
3550A60A	
35720160-09	
37465-4	
3753313R 3755313R	
3755DV313R	
3812337-2	
3850313-2RA	
3850AA313AA	
3863V335-2	
40002R426KR	
40002Y	
40028RM431KR	
40028Y 426KA	
40041Y 426KA	
40042R426KR	
40044415K	
40058RM431KR 40202R426R	
40202R1V426R	
40202Y426A	
40204415	
40206R429R	
40222RM424R	
40233RM424R	
40241Y426A 40242R426R	
40244426	
40247R426R	
40258RM424R	
40259RM424R	
4027445	
4027DV445	
40282R431R 40282Y426A	
4050826R-7	
4050A826A-7	
4053 824R-7	

TRUCK-LITE PETERSON
4053A824A-7
4058
4058A826A-7
4060C826C-7
4063C824C-7
40700426-18
40720426-09
40725426-10
41B472R
41A B472A
42722428-09
43 B460R
43A B460A
434WDV434
44001YV417KTA
44002RV817KR-36
44002R1V817KR-36
44003Y 817KA-9
44023Y 818KA-9
44024Y 818KA-9
44026RV418KR
44027YV418KTA
44030R817KR-7
44032R818KR-7
44032H818KR-7
44040C817KC-9
44041C817KC-9
44044C818KC-9
44045C 818KC-9
44071Y 817KA-9
44082RV817KR-36
44091Y 817KA-7
44092R817KR-7
44092Y 818KA-7
44094Y 817KA-7
44095Y 817KA-7
44141C817KC-9
44146C818KC-9
44180C817KC-7
44181C818KC-7
44182C818KC-7
44183C817KC-7
44184C817KC-7
44201Y817A-36
44202R817R-36
44203Y817A-9
44206C 817C-9
44211Y817SA-1/-2
44213Y818SA-1/-2
44221Y818A-36
44222R818R-36
44223Y818A-9
44224Y818A-9
44226R818R-36
44227Y818A-36
44235C818C-9
44236C 818C-9
44240C 818C-9
44253R817R-9
44266R818R-9
44276Y818A-9
44291Y817A-7
44292Y818A-7
44294Y817A-7
44295Y818A-7
44302R817R-7
44304C800W-9
44308C817W-9
44322R818R-7
44326R818R-7
44339C818W-9
44344C818C-7
44346C818C-7

TRUCK-LITE PETERSON

Truck-Lita (cont.)

COMPETITIVE INTERCHANGE

TRUCK-LITE PETERSON TRUCK-LITE PETERSON 44350R M417R 60052R 823KR-7 44350C 817C-7 60056R 823KR-7 44362R M418R 60062R 823KR-7 44362R M418R 60062R 823KR-7 44363C V379S 60074Y 820KA-10 44701 V7009 60075Y 820KA-10 44701-1 V7009 60083R 421KR 44701-1 V7009 60088R 820KR-10 44871Y 818A-9 60098C 232KA-10 44877Y 818A-9 600994Y 820KA-10 44877Y 818A-9 600994Y 820KA-10 44881Y 817A-36 60096Y 823KA-10 44881Y 818A-36 60201R 421R 44887Y 818A-36 60201R 421R 44953R M41RP 6022DR M21R 44953R M41RP 6022PR M221R 44953R M41RP 60	Truck-Lite (cont.)				
44351R M417R-P 60056R 823KR-7 44351R M417R-P 60061R 820KR-7 44362R M418R 60062R 823KR-7 44363R M418R-P 60072Y 823KA-10 44438C 3739S 60074Y 820KA-10 44701 V7009 60075Y 820KA-10 44701-1 V7009 60082Y 423QA-P 44705 7009S 60083R 421KR 44871Y 817A-9 60085R 820KR-10 44871Y 818A-9 60092C 416K 44878Y 817A-36 60096Y 823KA-10 44881Y 817A-36 60096Y 823KA-10 44882R 817R-36 60097Y 823KA-10 448887 818A-36 60201P 421R 448953R M418R 60202R 421R 44953R M418R 60202R 421R 44954R M18R-P 60202P M421R 44954R M18R-P 60202P M421R 44954R M18R-P 60202P M21R 44960R M417R-P 60250R 820R-1 44980R 817R-7 60250R 820R-1 44980R 818R-7 60252R 823RL-1 44980R 818R-7 60252R 823RL-1 44980R 818R-7 60252R 823RL-1 44980R 818R-7 60256R 820RT-1 44991C 816C-7 60256R 823RL-1 44990C 817C-7 60256R 823RL-1 44990C 817C-7 60256R 823RL-1 45001R M450R 6027Y 820A-12 45002R 450KR 6027Y 820A-12 45002R 450KR 6026R 823RL-1 45001R M450R 6027Y 820A-12 45002R 450KR 6026R 823RL-1 45001R M450R 6027Y 820A-12 45002R 450KR 6026R 823RL-1 45001R M450R 6027Y 820A-12 45002R 450KR 6026R 823RL-1 45258R 850R-1P 60284R 820R-10 45258R 850R-1P 60284R 820R-10 45258R 850R-1P 60284R 820R-1 4550 850R-1P 60284R 820A-1 4550 850R-1P 60286R 823RL-7 47A 8456R 6036R 823RL-7 5050DK V941 60360R 820A-1 4550 850R-1P 60291Y M823ATL-1 45600 850C-1P 60315Y 356A 45204 415 60283R 421R 4550R 850R-1P 60291Y M823ATL-1 45600 850C-1P 60315Y 356A 45204 415 60288R 820R-1 4550 850R-1P 60291Y M823ATL-1 45001R 825BR 850R-1P 60291Y M823ATL-1 45600 850C-1P 60315Y 356A 45204 415 6036R 822Y 823QA-1 45204 415 6036R 823RL-7 50600 850C-1P 60315Y 356A 45204 415 6036R 823RL-7 505DK V941 60360Y 820A-10 4558 850R-1P 60291Y M823ATL-10 4550 850R-1P 60391Y 823A-12 45001R 825BR 850R-1P 60391Y 823A-12 45001R 821KR 60000R 820Y 820A-10 45001R 821KR 60000R 820Y 820A-10 45001R 821KR 60000R 820Y 820A-10 45000R 821KR 60000R	TRUCK-LITE	PETERSON	TRUCK-LITE PETERSON		
44361R M417R-P 60061R 823KR-7 44362R M418R 60062R 823KR-7 44363R M418R-P 60072Y 823KA-10 444363R M418R-P 60072Y 823KA-10 444363R M418R-P 60072Y 820KA-10 444361 V7009 60075Y 820KA-10 44701 V7009 60075Y 820KA-10 44701 V7009 60082Y 423QA-P 44705 7009S 60083R 421KR 44871Y 817A-9 60085R 820KR 44877Y 818A-9 60092C 416K 44877Y 818A-9 60092C 416K 44878Y 818A-9 60094Y 820KA-10 44881Y 817R-36 60097Y 823KA-10 44882R 817R-36 60097Y 823KA-10 44883R 818R-36 60201R 421R 44887Y 818A-36 60201R 421R 44987Y 818A-36 60201R 421R 44954R M418R-P 60202R 421R 44954R M418R-P 60202Y M421A 44959R M417R 60215Y 352A 44960R M417R-P 60250R 820R-7 44982R 817R-7 60052R 823KR-10 44980R 818R-7 60052R 823KR-10 44980R 818R-7 60052F 823KR-10 44990C 817C-7 60056R 823R-12 44991C 818C-7 60260R 820R-1 44991C 818C-7 60260R 820R-1 44991C 818C-7 60260R 820R-1 6025R 823R1L-7 44991C 818C-7 60260R 820R-1 6025R 823R1L-7 44991C 818C-7 60260R 820R-1 6025R 823R1L-7 550- 818C-7 60260R 820R-1 60260R 820R-1 6025R 823R1L-7 550- 818C-7 60260R 820R-1 60	44350R	M417R	60052R823KR-7		
44362R M418R 60062R 823KA-10 44363R M418R-P 60072Y 823KA-10 44438C 3798 60074Y 820KA-10 44701 77009 60075Y 820KA-10 44701 77009 60082P 423QA-P 44705 70085 60083R 421KR 44871Y 817A-9 60085R 820KR 44871Y 817A-9 60085R 820KR 44871Y 818A-9 60094Y 820KA-10 44881Y 817A-36 60096Y 823KA-10 44882R 817R-36 60096Y 823KA-10 44881Y 817A-36 60096Y 823KA-10 44881Y 818A-36 60201R 421R 44887Y 818A-36 60201R 421R 4485Y 818A-36 60202R 421R 44953R M418R 6022R1 7421A 44953R M418R 6022R1 7421A 44953R M418R 6022P1 M421A 44959R M417R 60215Y 352A 44960R M417R-P 60250R 820R-7 44982R 817K-7 60252R 823TL-7 44983R 818R-7 60252R 823TL-7 44981C 818C-7 60266R 823TL-7 44991C 818C-7 60266R 823RTL-7 44991C 818C-7 60266R 823RTL-7 44991C 818C-7 60266R 823RTL-7 44991C 818C-7 60266R 823RTL-7 45A 481A 60272Y 823A-22 45002R 450KR 60276Y 823A-2 45002R 850K-1P 60284R 823A-2 45002R M450R 60287Y 823A-2 45002R M50A 6028Y 823A-2 45007R M450R 6028Y 823A-2 45007R M450R 6028Y 823A-2 45007R M50A 6028Y 823A-1 5056D V940L 6056 828F-7 5056D V940L 6056 828F-7 5056D V940L 6056 828F-7 5056B P411 60552R M881-7 50868 P373 6053A 822R-7 50869 P411 60560 828F-7 50869 P411 60560 828Y 823A-1 50869 P411 60560 828F-7 50869 P411 60560 828F-7 50869 P411 60560 828F-7 50868 P373 6053A 822R-7 50869 P411 60560 828F-7 50869 P411 60560 828F-7 50869 P411 60560 828F-7 50868 P373 6053A 822R-7 50869 P411 60560 828F-7 50868 P373 6053A 822R-7 50869 P411 60560 828F-7 50868 P373 6053A 822R-7 50869 P411 60560 828F-7 50868 P373 6053	44350C	817C-7	60056R823KR-7		
44363R M418R-P 60072Y 823KA-10 44438C V379S 60074Y 820KA-10 44701 V7009 60075Y 820KA-10 44701-1 V7009 60082Y 423QA-P 44705- 7008S 60085R 820KR 44871Y 817A-9 60085R 820KR 4487Y 818A-9 60092C 416K 44881Y 817A-36 60096Y 823KA-10 44882R 817R-36 60097Y 823KA-10 44883R 818R-36 60201R 421R 44888Y 818A-36 60201F 421R 44953R M418R 60202R 421R 44954R M418R 6022P M221R 44956R M417R 6022P M221R 44956R M417R 6025P 352A 49960R M417R 6025P 820R-7 4980R 818R-7 6025P 823R-1-7 49982R 818R-7 6025P 823R-1-7<	44351R	M417R-P	60061R820KR-7		
44438C V379S 60074Y 820KA-10 447011 V7009 60075Y 820KA-10 44701-1 V7009 60082Y 4230A-P 44705-5 7009S 60083R 421KR 44871Y 817A-9 60082C 416K 4487YY 818A-9 60092C 416K 4487Y 818A-9 60094Y 820KA-10 44881Y 817A-36 60097Y 823KA-10 44883R 818R-36 60201R 421R 44887Y 818A-36 60201R 421R 44853R 818A-36 60202R 421R 44953R M418R 60202P M421A 44953R M418R-9 60202P M421A 44953R M418R-P 6022P M421A 44953R M417R 6022P M241A 44953R M418R-P 6022P M241A 44953R M417R 6022P 823RTL-7 44950R 818R-7 60250R 823R			60062R823KR-7		
44701			60072Y 823KA-10		
44701-1	44438C	V379S			
44705					
44871Y 817A-9 60085R 820KR 44877Y 818A-9 60094Y 820KA-10 44881Y 817A-36 60096Y 823KA-10 44882R 817R-36 60096Y 823KA-10 44883R 818R-36 60201R 421R 44887Y 818A-36 60201R 421R 44887Y 818A-36 60201R 421R 44887Y 818A-36 60201R 421R 44953R M418R 60202R 421R 44953R M418R 60202R 421R 44953R M418R 6022QY M421A 44959R M417R 6025DR 820R-1 44959R M417R-P 6025DR 820R-1 44963R 818R-7 60252R 823RTL-7 44983R 818R-7 60253R 820R-10 44982B 817R-7 60256R 823RL-7 44990C 817C-7 60266R 823RL-7 44991C 818C-7 60264R					
44877Y 818A-9 60092C 416K 44878Y 818A-9 60094Y 820KA-10 44881Y 817A-36 60096Y 823KA-10 44882R 817R-36 60097Y 823KA-10 44887Y 818A-36 60201R 421R 44887Y 818A-36 60202R 421R 44853R M418R 60202R 421R 44953R M418R 60202P M421A 44953R M418R-P 60250R 820R-7 44950R M417R-P 60250R 820R-7 44950R M417R-P 60250R 820R-7 44980R 818R-7 60253R 820R-10 44980R 818R-7 60255R 820R-10 44990C 817C-7 60256R 823R1L-7 44991C 818C-7 60256R 823R1L-7 44992C 818C-7 60266R 823R1L-7 44992C 818C-7 60266R 823R1L-7 450 481R 60266R					
44878Y .818A-9 60094Y 823KA-10 44881Y .817A-36 60096Y .823KA-10 44882R .817R-36 60097Y .823KA-10 44883R .818R-36 60201R .421R 44888Y .818A-36 60202R .421A 44853R .8148R 60202R .421R 44953R .8418R 60202Y .421A 44953R .8418R 60202Y .421R 44954R .8418R 60205Y .421R 44954R .8418R 60259R .820R-7 44958R .8418R 60259R .820R-7 44980R .818R-7 60253R .820R-10 44989C .818C-7 60256R .823RTL-7 44991C .818C-7 60256R .823R-10 44999C .818C-7 60260R .820R-10 44992C .818C-7 60260R .823R-10 45A .481A 6027Y .823A-22 45001R .481A					
44881Y 817A-36 60096Y 823KA-10 44882R 817R-36 60097Y 823KA-10 44883R 818R-36 60201R 421R 4488Y 818A-36 60201Y 421A 44953R M418R 60202R1 V421R 44953R M418R 60202Y M421A 44959R M417R 6025Y 352A 44960R M417R-P 60250R 820R-7 44982R 817R-7 60253R 820R-10 44983R 818R-7 60253R 820R-10 44980C 817C-7 60256R 823RTL-7 44991C 818C-7 60256R 820R-7 44992C 818C-7 60264R 820R-10 45 481R 60276Y 823A-22 45001R M450R 60275Y 820A-22 45002R 450KA 60280Y 823A-22 45002R 450KA 60280Y 823A-24 45002P 450KA 60280Y					
44882R 817R-36 60097Y 823KA-10 44883P 818R-36 60201R 421R 44887Y 818A-36 60201Y 421A 44888Y 818A-36 60202R 421R 44953R M418R 60202R1 V421R 44959R M417R 60215Y 352A 4960R M417R-P 60250R 820R-7 44980R 818R-7 60253R 820R-10 44980R 818R-7 60253R 820R-10 44980R 818R-7 60256R 823RTL-7 44980C 817C-7 60256R 823RTL-7 44990C 81C-7 60260R 820R-10 44990C 81C-7 60260R 820R-10 44990C 81C-7 60264R 820R-10 44992C 81C-7 60264R 820R-10 45 481R 60266R 823RTL-7 45001R M450R 60275Y 820A-22 45001R M450R 60279Y <td< td=""><td></td><td></td><td></td></td<>					
44883R 818A-36 60201R 421R 44888Y 818A-36 602017 421A 44888Y 818A-36 60202R 421R 44953R M418R 60202P1 V421R 44953R M418R-P 60202Y M421A 44959R M417R-P 60250R 820R-7 44980R 817R-7 60252R 823RTL-7 44982R 818R-7 60253R 820R-10 44986R 818R-7 60255Y 820R-10 44980C 817C-7 60256R 823RTL-7 44991C 818C-7 60260R 820R-10 44991C 818C-7 60260R 820R-10 45 4481R 60266R 823RTL-7 44991C 818C-7 60260R 820R-10 45 4481R 60266R 823RTL-1 45 441R 60266R 823RTL-1 450 441R 60266R 823R-22 45001R 450KR 6027Y 823A-2					
44887Y 818A-36 60201Y 421A 44888Y 818A-36 60202R 421R 44953R M418R 60202P1 V421R 44954R M418R-P 60202Y M421A 44959R M417R 60215Y 352A 44960R M417R-P 60252R 820R-10 44982R 817R-7 60253R 820R-10 44983R 818R-7 60253R 820R-10 44980C 817C-7 60256R 823RTL-7 44991C 818C-7 60260R 820R-7 44992C 818C-7 60260R 820R-10 45 481R 60260R 823RTL-7 44992C 818C-7 60264R 820R-10 45 481A 60272Y 823A-22 45001R M450R 60275Y 820A-22 45002P 450KR 60276Y 823A-22 45002P 450KR 60289Y 823A-22 45002P 450KR 60289Y 823A					
44888Y .818A-36 60202R .421R 44953R M418R 60202Y M421A 44954R M418R-P 60202Y M421A 44959R M417R 60215Y .352A 44960R M417R-P 60250R .820R-7 44980R 818R-7 60253R .820R-10 44980R 818R-7 60255Y .820A-10 44990C 817C-7 60256R .823RTL-7 44991C 818C-7 60260R .820R-10 44990C 817C-7 60256R .823RTL-7 44991C 818C-7 60260R .820R-10 45 481R 60266R .823RTL-7 44992C 818C-7 60266R .823RTL-7 45001R M450R 60275Y .820A-22 45001R M450R 60275Y .820A-22 45002R .450KR 60276Y .823A-22 45002P .450KR 6028Y .820QA 45207R M450R 6028Y					
44953R M418R 60202R1 V421R 44954R M418RP 60202Y M421A 44959R M417R 60215Y 352A 44960R M417R-P 6025DR 820R-10 44982R 817R-7 6025SR 820R-10 44986R 818R-7 6025SY 820A-10 44990C 817C-7 60266R 828TL-7 44991C 818C-7 60260R 820R-10 44991C 818C-7 60260R 820R-10 44991C 818C-7 60260R 820R-7 44991C 818C-7 60260R 823RTL-7 44991C 818C-7 60260R 823R-12 4501R 60276Y 823A-22					
44954R M417R 60202Y M421A 44959R M417R 60215Y 352A 44960R M417RP 6025DR 820R-7 44982R 817R-7 60252R 823RTL-7 44983R 818R-7 6025SP 820R-10 44980C 817C-7 60256R 823RTL-7 44991C 818C-7 6026BR 820R-10 44992C 818C-7 6026BR 820R-10 45 481R 6026GR 823RTL-7 44992C 818C-7 6026BR 823RTL-7 45 481R 6026GR 823RTL-7 450 481A 60272Y 823A-22 45001R M450R 60226Y 823A-22 45002R 450KR 60276Y 823A-22 45002R M450K 60280Y 823QA 45202R M450K 6028Y 823CA 45207R M450R 60283Y 421A 45251Y 850A-1P 6028BY 823CA					
44959R M417R 60215Y 352A 44960R M417RP 60250R 820R-7 44982R 817R-7 60252R 823RTL-7 44986R 818R-7 60255Y 820A-10 44980C 817C-7 60256R 823RTL-7 44991C 818C-7 60266R 823RTL-7 44992C 818C-7 60266R 823RTL-7 45. 481R 60279Y 820A-22 45001R M450R 60275Y 820A-22 45002P 450KA 60280Y 820A-2 45002P 450KA 60280Y 820A-2 45002P 450KA 60280Y 823A-2 45002P 450KA 60283Y 421R 45251Y 850A-1P 60284C 416					
44960R M417R-P 60250R 820R-7 44982R 817R-7 60252R 823RTL-7 44986R 818R-7 60255Y 820A-10 44980C 817C-7 60256R 823RTL-7 44991C 818C-7 60260R 820R-10 44992C 818C-7 60264R 820R-10 45. 481A 60266R 823RTL-7 45A 481A 60266R 823RTL-7 45A 481A 60276Y 823A-22 45001R M450R 60276Y 823A-22 45002R 450KA 60280Y 820-24 45002P 450KA 60280Y 820-24 45002P 450KA 60280Y 823A-22 45002P 450KA 60280Y 820-24 45002P 450KA 60280Y 820-A 45002P 450KA 60280Y 820A-A 45204 415 60281Y 421A 45251Y 850A-1P 60284C 436					
44982R 817R-7 60252R 823RTL-7 44986R 818R-7 60255Y 820A-10 44990C 817C-7 60256R 823RTL-7 44991C 818C-7 60260R 820R-10 44992C 818C-7 60264R 820R-10 45. 481R 60266R 823RTL-7 45A 481A 60272Y 820A-22 45001R M450R 60275Y 820A-22 45002R 450KR 60276Y 823A-22 45002R 450KA 60280Y 820A-22 45002R 450KA 60280Y 820A-22 45002R M450R 6028Y 823QA 45204 415 60283Y 421A 45207 M450R 6028Y 823QA 45251Y 850A-1P 60284C 416 45258R 850R-1P 60280Y 820A-10 4550 850R-1P 60291Y M823ATL-10 4550 850R-1P 60291Y M823ATL					
44983R 818R-7 60253R 820R-10 44980C 818C-7 60256R 823RTL-7 44991C 817C-7 60256R 823RTL-7 44991C 818C-7 60266R 820R-10 44992C 818C-7 60266R 823RTL-7 445A 481A 60272Y 823A-22 45001R M450R 60275Y 820A-22 45002P 450KR 60276Y 823A-22 45002P 450KA 60280Y 820QA 45002P 450KA 60280Y 820QA 45002P 450KA 60282Y 823QA 45202R M450R 60283P 421R 45207R M450R 60283P 421R 45204 415 60283R 421R 45251Y 850A-1P 60286Y 823QA 45263Y 850A-1P 60286Y 823QA 45258R 850R-1P 60286Y 823A-1 4550 850C-1P 60315Y 356A					
44986R 818R-7 60255Y 820A-10 44990C 817C-7 60256R 823RTL-7 44991C 818C-7 60260R 820R-7 44992C 818C-7 60264R 820R-10 45 481R 60266R 823RTL-7 45A 481A 60275Y 823A-22 45001R M450R 60276Y 823A-22 45002R 450KR 60276Y 823A-22 45002R 450KR 60276Y 823A-22 45002R 450KR 6028Y 820QA 4520ZR M450R 60283Y 820QA 45204 415 60283R 421R 45207R M450R 60283Y 421A 45251Y 850A-1P 60286Y 820A-10 45263Y 850A-1P 60289Y 820A-10 4550 850R-1P 60291Y M823ATL-10 4560C 850R-1P 60291Y M823ATL-10 45700 450-18 60317Y 356A					
44990C 817C-7 60256R 823RTL-7 44991C 818C-7 60260R 820R-7 44992C 818C-7 60266R 823RTL-7 45. 481R 60266R 823RTL-7 45A 481A 60275Y 823A-22 45001R M450R 60276Y 823A-22 45002R 450KR 60280Y 820QA 45202R M450R 60280Y 820QA 45202R M450R 60283Y 421R 45207R M450R 60283Y 421A 45251Y 850A-1P 60286Y 823QA 45251Y 850A-1P 60286Y 823QA 45263Y 850A-1P 60286Y 823QA 4550 850R-1P 60291Y M823ATL-10 4560C 850R-1P 60291Y M823ATL-10 4560C 850R-1P 60291Y M823ATL-10 4560C 850C-1P 60315Y 356A 47- B475R 60351Y 356A					
44991C 818C-7 60260R 820R-7 44992C 818C-7 60264R 820R-10 45. 481R 60266R 823RTL-7 45A 481A 60275Y 822A-22 45001R M450R 60275Y 820A-22 45002R 450KR 60276Y 823A-22 45002Y 450KA 60280Y 820QA 45204 415 60283R 421R 45207R M450R 60283Y 421A 45207R M450R 60283Y 421A 45251Y 850A-1P 60286Y 823QA 45263Y 850A-1P 60286Y 823QA 45263Y 850A-1P 60286Y 823A-1 4550 850R-1P 60299Y 820A-10 4550 850R-1P 60291Y M823ATL-10 4560C 850C-1P 60315Y 356A 47 847 8475R 60356A 820C-7 47A 8475R 60356A 82					
44992C 818C-7 60264R 820R-10 45 481R 60266R 823RTL-7 45A 481A 60272Y 823A-22 45001R M450R 60275Y 820A-22 45002P 450KA 60280Y 820QA 45202R M450R 60282Y 823QA 45204 415 60283R 421R 45251Y 850A-1P 60284C 416 45258R 850R-1P 60286Y 823QA 45263Y 850A-1P 60284C 416 45263Y 850A-1P 60286Y 823QA 45263Y 850A-1P 60290Y 820A-10 4550 850R-1P 60291Y M823ATL-10 4560C 850C-1P 60315Y 356A 45700 45-18 60317Y 356A 4570 45-17 6036C 820C-7 47A 8475A 60356R 822R-7 505D 45-171 60360P 820SA-1/2					
45. .481R 60266R 823RTL-7 45A .481A 60272Y .823A-22 45001R .M450R 60276Y .820A-22 45002P .450KR 60276Y .823A-22 45002Y .450KA 60280Y .820QA 45202R .M450R 60282Y .823QA 45207R .M450R 60283Y .421R 45251Y .850A-1P 60284C .416 45258R .850R-1P 60284C .416 45258R .850R-1P 60284Y .823QA 45253Y .850A-1P 60286Y .823QA 45253Y .850A-1P 60284Y .823QA 45263Y .850A-1P 60284Y .823QA 45258 .850R-1P 60291Y .M823ATL-10 4558 .850R-1P 60291Y .M823ATL-10 4558 .850R-1P 60292Y .M823ATL-10 4560C .850C-1P 60315Y .356A 47 .845B 60					
45A 481A 60272Y 823A-22 45001R M450R 60275Y 820A-22 45002P 450KA 60276Y 823A-22 45002Y 450KA 60280Y 823QA 45202R M450R 60282Y 823QA 45204 415 60283R 421R 45207R M450R 60283Y 421A 45251Y 850A-1P 60284C 416 45258R 850R-1P 60286Y 823QA 45263Y 850A-1P 60290Y 820A-10 4550 850R-1P 60291Y M823ATL-10 4550 850R-1P 60291Y M823ATL-10 4560C 850C-1P 60315Y 356A 45700 450-18 60317Y 356A 47 8475R 60354C 820C-7 47A 8475A 60356R 822R-7 505DK 4941 60360R 820SA-1/-2 505DD V840 6036GY 823SA-1/-2 <td></td> <td></td> <td></td>					
45001R. M450R 60275Y 820A-22 45002R. 450KA 60276Y 823A-22 45002P. M450R 60280Y 820QA 45202R. M450R 60283Y 421R 45207R. M450R 60283Y 421A 45251Y. 850A-1P 60284C 416 45258R. 850R-1P 60286Y 823QA 45263Y. 850A-1P 60290Y 820A-10 4550. 850R-1P 60291Y M823ATL-10 4558. 850R-1P 60291Y M823ATL-10 4558. 850R-1P 60292Y M823ATL-10 4560C. 850C-1P 60315Y .356A 47 B475R 60354C 820C-7 47A. B475R 60354C 820C-7 47A. B475A 60356R 822R-7 50. 45-171 60360R 823SA-1/-2 5055D. V840 60360Y 820SA-1/-2 5055D. V840 6036Y					
45002R 450KA 60276Y 823A-22 45002Y 450KA 60280Y 820QA 45202R M450R 60282Y 823QA 45204 415 60283Y 421R 45207R M450R 60283Y 421A 45251Y 850A-1P 60284C 416 45258R 850R-1P 60286Y 823QA 45263Y 850A-1P 60290Y 820A-10 4550 850R-1P 60291Y M823ATL-10 4550 850C-1P 60317Y 356AF 45700 450-18 60317Y 356AF 47 8475R 60354C 820C-7 47A 8475A 60356R 822R-7 50 45-171 60360R 823SA-1/-2 5050DK V941 60360Y 820SA-1/-2 5050DK V840 60366Y 823SA-1/-2 5056D V840 6050A 821R-7 5071 845 6053 822R-7					
45002Y 450KA 60280Y 820QA 45202R M450R 60282Y 823QA 45204 415 60283R 421R 45207R M450R 60283Y 421A 45251Y 850A-1P 60284C 416 45258R 850R-1P 60286Y 823QA 45263Y 850A-1P 60290Y 820A-10 4550 850R-1P 60291Y M823ATL-10 4558 850R-1P 60291Y M823ATL-10 4550 850C-1P 60315Y 356A 45700 450-18 60317Y 356AF 47 8475R 60354C 820C-7 47A 8475A 60356R 822R-7 5050DK 4941 60360R 820SR-1/-2 5055D V840 60366Y 823SA-1/-2 5056D V840L 6050 821R-7 5070 845L 6050A 821R-7 5071 845 6053 822R-7					
45202R .M450R 60282Y .823QA 45204 .415 60283R .421R 45207R .M450R 60283Y .421A 45251Y .850A-1P 60284C .416 45258R .850R-1P 60290Y .820A-10 4550 .850R-1P 60291Y .M823ATL-10 4558 .850R-1P 60291Y .M823ATL-10 4560C .850C-1P 60315Y .356A 45700 .450-18 60317Y .356AF 47 .B475R 60354C .820C-7 47A .B475R 60356R .822R-7 5050DK .V941 60360Y .820SR-1/-2 5050DK .V941 60360Y .823SA-1/-2 5056D .V840 60366Y .823SA-1/-2 5056D .V840 60360Y .823SA-1/-2 5066D .V840 60360Y .821R-7 5070 .845L 6050 .821R-7 50868 .P373 6053A <td></td> <td></td> <td></td>					
45204 415 60283R 421R 45207R					
45207R .M450R 60283Y .421A 45251Y .850A-1P 60284C .416 45258R .850R-1P 60286Y .823QA 45263Y .850A-1P 60291Y .820A-10 4550 .850R-1P 60291Y .M823ATL-10 4558 .850R-1P 60292Y .M823ATL-10 4560C .850C-1P 60315Y .356A 45700 .450-18 60317Y .356AF 47 .B475R 60354C .820C-7 47A .B475A 60356R .822R-7 50 .45-171 60360R .820SA-1/-2 5050DK .V941 60360P .820SA-1/-2 5055D .V840 6036Y .823SA-1/-2 5056D .V840 6050 .821R-7 5070 .845L 6050 .821R-7 5071 .845 6053 .822R-7 50868 .P373 6053A .822A-7 50878 .P34 60553R					
45258R 850R-1P 60286Y 820A-1 45263Y 850A-1P 60290Y 820A-10 4550 850R-1P 60291Y M823ATL-10 4558 850R-1P 60292Y M823ATL-10 4560C 850C-1P 60315Y .356A 45700 450-18 60317Y .356AF 47 B475R 60356R 822C-7 47A B475A 60356R 822R-7 50 45-171 60360R 820SR-1/-2 5050DK V941 60360Y 820SA-1/-2 5055D V840 60366Y 823SA-1/-2 5056D V840L 6050 821R-7 5070 845L 6050 821R-7 5071 845 6053 822R-7 5086B P373 6053A 822A-7 50878 P374 60552R M881-7 50878 P374 60553R M881-7 50896 5407S 6058 821R-7			60283Y421A		
45263Y 850A-1P 60290Y 820A-10 4550 850R-1P 60291Y M823ATL-10 4558 850R-1P 60292Y M823ATL-10 4560C 850C-1P 60315Y .356A 45700 .450-18 60317Y .356A 47 .B475R 60354C .820C-7 47A .B475A 60356R .822R-7 50 .45-171 60360R .820SR-1/-2 5050DK .V941 60360Y .820SA-1/-2 5055D .V840 60366Y .823SA-1/-2 5056D .V840L 6050 .821R-7 5070 .845L .6050A .821A-7 5071 .845 .6053A .822A-7 50868 .P373 .6053A .822A-7 50878 .P374 .60552R .M881-7 50878 .P374 .60553R .M881-7 50896 .5407S .6058 .821R-7 528 .B477A .6060C <t< td=""><td></td><td></td><td>60284C416</td></t<>			60284C416		
4550 850R-1P 60291Y M823ATL-10 4558 850R-1P 60292Y M823ATL-10 4560C 850C-1P 60315Y 356A 45700 450-18 60317Y 356AF 47 B475A 60356R 820C-7 47A B475A 60356R 822R-7 50 .45-171 60360R 820SR-1/-2 5050DK .V941 60360Y 820SA-1/-2 5055D V840 60366Y 823SA-1/-2 5056D V840L 6050 821R-7 5070 .845L 6050A 821R-7 5071 .845 6053 822R-7 50868 .P373 6053A 822A-7 50878 .P374 60552R M881-7 50878 .P374 60553R M881-7 50896 .540F 60557R M880-7 52 .B47A 6060C 821C-7 528 .M456L 6063C 822C-7			60286Y823QA		
4558 850R-1P 60292Y M823ATL-10 4560C 850C-1P 60315Y 356A 45700 .450-18 60317Y .356AF 47 .B475R 60354C .820C-7 47A .B475A 60356R .822R-7 50 .45-171 60360R .820SR-1/-2 505DDK .V941 60360Y .820SR-1/-2 5055D V840 60366Y .823SA-1/-2 5056D V840L 6050 .821R-7 5070 .845L 6050A .821R-7 5071 .845 6053 .822R-7 50868 .P373 6053A .822A-7 50878 .P411 60552R M881-7 50878 .P374 60553R M881-7 50889 .P411 60553R M881-7 50887 .5406P 60557R M880-7 50896 .5407S 6058 .821R-7 522 .B477A 6060C .821C-7 <	45263Y	850A-1P	60290Y820A-10		
4560C 850C-1P 60315Y 356A 45700 450-18 60317Y 356AF 47 B475R 60354C 820C-7 47A B475A 60356R 822R-7 50 45-171 60360R 820SR-1/-2 5050DK V941 60360Y 820SA-1/-2 5055D V840 60366Y 823SA-1/-2 5056D V840L 6050 821R-7 5070 845L 6050A 821A-7 5071 845 6053 822R-7 50868 P373 6053A 822A-7 50869 P411 60552R M881-7 50878 P374 60553R M881-7 50886 5407S 6058 821R-7 50896 5407S 6058 821R-7 50896 5407S 6058 821R-7 528 B477R 6060C 821C-7 528 M456L 6063C 822C-7 529	4550	850R-1P	60291Y M823ATL-10		
45700 450-18 60317Y 356AF 47 B475R 60354C 820C-7 47A B475A 60356R 822R-7 50 45-171 60360R 820SA-1/-2 5050DK V941 60360Y 820SA-1/-2 5055D V840 60366Y 823SA-1/-2 5056D V840L 6050 821R-7 5070 845L 6050A 821A-7 5071 845 6053 822R-7 50868 P373 6053A 822A-7 50869 P411 60552R M881-7 50878 P374 60553R M881-7 50886 5407S 6058 821R-7 50887 5406P 60557R M880-7 50896 5407S 6058 821R-7 50896 5407S 6058 821R-7 528 B477A 6060E 821C-7 528 M456L 6063C 822C-7 528	4558	850R-1P	60292Y M823ATL-10		
47. B475R 60354C 820C-7 47A B475A 60356R 822R-7 50. .45-171 60360R 820SR-1/-2 5050DK .V941 60360Y 820SA-1/-2 5055D .V840 60366Y 823SA-1/-2 5056D .V840L 6050 821R-7 5070 .845L 6050A .821A-7 5071 .845 6053 822R-7 50868 .P373 6053A 822A-7 50869 .P411 60552R M881-7 50878 .P374 60553R M881-7 50887 .546P 60557R M80-7 50896 .5407S 6058 821R-7 528 .5407S 6058 821R-7 528 .M456L 6060C 821C-7 528 .M456L 6063C 822C-7 529 .M456 60700 421-18 530DK .V547 60703 .V7011	4560C	850C-1P	60315Y356A		
47A B475A 60356R 822R-7 50 .45-171 60360R 820SR-1/-2 5050DK .V941 60360Y 820SA-1/-2 5055D .V840 60366Y 823SA-1/-2 5056D V840L 6050 821R-7 5070 .845L 6050A .821A-7 5071 .845 6053 .822R-7 50868 .P373 6053A .822A-7 50869 .P411 60552R M881-7 50878 .P374 60553R M881-7 50887 .5406P 60557R M880-7 50896 .5407S 6058 .821R-7 52 .B477R 6058A .821C-7 528 .M456L 6063C .822C-7 528 .M456L 6063C .822C-7 529 .M456 60700 .421-18 530DK .V547 60703 .V7011 534D .V440L 60720 .421-09	45700	450-18	60317Y356AF		
50	47	B475R	60354C 820C-7		
5050DK V941 60360Y 820SA-1/-2 5055D V840 60366Y 823SA-1/-2 5056D V840L 6050 821R-7 5070 845L 6050A 821A-7 5071 845 6053 822R-7 50868 P373 6053A 822A-7 50869 P411 60552R M881-7 50878 P374 60553R M881-7 50887 5406P 60557R M880-7 50896 5407S 6058 821R-7 52 B477R 6058A 821A-7 528 M456L 6060C 821C-7 528 M456 6060C 822C-7 529 M456 60700 421-18 530DK V547 60703 V7011 534D V440L 60720 421-09 535D V440 60872Y 823A-22 54 B480R 60892Y 820A-10 60001R <	47A	B475A	60356R 822R-7		
5055D V840 60366Y 823SA-1/-2 5056D V840L 6050 821R-7 5070 845L 6050A 821A-7 5071 845 6053 822R-7 50868 P373 6053A 822A-7 50869 P411 60552R M881-7 50878 P374 60553R M881-7 50887 5406P 60557R M880-7 50896 5407S 6058 821R-7 52 B477R 6058A 821A-7 52A B477A 6060C 821C-7 528 M456L 6063C 822C-7 529 M456 60700 421-18 530DK V547 60703 V7011 533DK V540 60719 .7011s 534D V440L 60720 421-09 535D V440 60872Y 823A-22 54 B480R 60891Y 820A-10 60001R 42					
5056D V840L 6050 821R-7 5070 845L 6050A 821A-7 5071 845 6053 822R-7 50868 P373 6053A 822A-7 50869 P411 60552R M881-7 50878 P374 60553R M881-7 50887 5406P 60557R M880-7 50896 5407S 6058 821R-7 52 B477R 6058A 821A-7 52A B477A 6060C 821C-7 528 M456L 6063C 822C-7 529 M456 60700 421-18 530DK V547 60703 V7011 533DK V540 60719 7011S 534D V440L 60720 421-09 535D V440 60872Y 823A-22 54 B480R 60891Y 820A-22 549SWD V391C 60892Y 820A-10 60001R 421K					
5070					
5071 845 6053 822R-7 50868 P373 6053A 822A-7 50869 P411 60552R M881-7 50878 P374 60553R M881-7 50887 5466P 60557R M880-7 50896 5407S 6058 821R-7 52 B477R 6058A 821A-7 52A B477A 6060C 821C-7 528 M456L 6063C 822C-7 529 M456 60700 421-18 530DK V547 60703 V7011 533DK V540 60719 7011S 534D V440L 60720 421-09 535D V440 60872Y 823A-22 54 B480R 60895R 820R-7 54A B480A 60891Y 820A-10 60001R 421KA 610W V503HF 60001R 421KA 610W V503HF 60002R 421KA					
50868 P373 6053A 822A-7 50869 P411 60552R M881-7 50878 P374 60553R M881-7 50887 5406P 60557R M880-7 50896 5407S 6058 821R-7 52 B477R 6058A 821A-7 52A B477A 6060C 821C-7 528 M456L 6063C 822C-7 529 M456 60700 421-18 530DK V547 60703 V7011 533DK V540 60719 7011S 534D V440L 60720 421-09 535D V440 60872Y 823A-22 54 B480R 60885R 820R-7 54A B480A 60891Y 820A-22 549SWD V391C 60892Y 820A-10 60001R 421KR 610W V503HF 60001Y 421KA 613W M525 60002R					
50869 P411 60552R M881-7 50878 P374 60553R M881-7 50887 5406P 60557R M880-7 50896 5407S 6058 821R-7 52 B477R 6058A 821A-7 52A B477A 6060C 821C-7 528 M456L 6063C 822C-7 529 M456 60700 421-18 530DK V547 60703 V7011 533DK V540 60719 7011S 534D V440L 60720 421-09 535D V440 60872Y 823A-22 54 B480R 60895R 820R-7 54A B480A 60891Y 820A-22 549SWD V391C 60892Y 820A-10 60001R 421KR 610W V504H 60001P 421KR 620W 507 60002R 421KR 629WD V504HT 60004C					
50878 P374 60553R M881-7 50887 5406P 60557R M880-7 50896 5407S 6058 821R-7 52 B477R 6058A 821A-7 52A B477A 6060C 821C-7 528 M456L 6063C 822C-7 529 M456 60700 421-18 530DK V547 60703 V7011 533DK V540 60719 7011S 534D V440L 60720 421-09 535D V440 60872Y 823A-22 54 B480R 60895R 820R-7 54A B480A 60891Y 820A-22 549SWD V391C 60892Y 820A-10 60001R 421KR 610W V503HF 60001Y 421KA 613W M525 60002R 421KR 620W 507 60002R 421KR 629WD V504HT 60004C 4					
50887 5406P 60557R M880-7 50896 5407S 6058 821R-7 52 B477R 6058A 821A-7 52A B477A 6060C 821C-7 528 M456L 6063C 822C-7 529 M456 60700 421-18 530DK V547 60703 V7011 533DK V540 60719 7011S 534D V440L 60720 421-09 535D V440 60872Y 823A-22 54 B480R 60885R 820R-7 54A B480A 60891Y 820A-22 549SWD V391C 60892Y 820A-10 60001R 421KR 610W V503HF 60001R 421KR 613W M525 60002R 421KR 620W 507 60002R1 V421KR 627WD V504HT 60015Y M352KA 66050R 820KR-7					
50896 5407S 6058 821R-7 52 B477R 6058A 821A-7 52A B477A 6060C 821C-7 528 M456L 6063C 822C-7 529 M456 60700 421-18 530DK .V547 60703 .V7011 533DK .V540 60719 .7011S 534D V440L 60720 421-09 535D .V440 60872Y 823A-22 54 B480R 60885R 820R-7 54A B480A 60891Y 820A-22 549SWD V391C 60892Y 820A-10 60001R 421KR 610W V503HF 60002R 421KA 613W M525 60002R 421KR 620W 507 60002R1 V421KR 627WD V504HT 60015Y M352KA 66050R 820KR-7					
52 B477R 6058A 821A-7 52A B477A 6060C 821C-7 528 M456L 6063C 822C-7 529 M456 60700 421-18 530DK V547 60703 V7011 533DK V540 60719 7011S 534D V440L 60720 421-09 535D V440 60872Y 823A-22 54 B480R 60885R 820R-7 54A B480A 60891Y 820A-22 549SWD V391C 60892Y 820A-10 60001R 421KR 610W V503HF 60002R 421KA 613W M525 60002R1 V421KR 620W 507 60002R1 V421KR 627WD V504HF 60015Y M352KA 66050R 820KR-7					
52A B477A 6060C 821C-7 528 M456L 6063C 822C-7 529 M456 60700 421-18 530DK V547 60703 V7011 533DK V540 60719 7011S 534D V440L 60720 421-09 535D V440 60872Y 823A-22 54 B480R 60885R 820R-7 54A B480A 60891Y 820A-22 549SWD V391C 60892Y 820A-10 60001R 421KR 610W V503HF 60001P 421KA 613W M525 60002R 421KR 620W 507 60002R1 V421KR 627WD V504HT 60004C 416K 629WD V504HF 60015Y M352KA 66050R 820KR-7					
528. M456L 6063C 822C-7 529. M456 60700. 421-18 530DK V547 60703. V7011 533DK V540 60719. 7011S 534D V440L 60720. 421-09 535D V440 60872Y 823A-22 54. B480R 60885R 820R-7 54A B480A 60891Y 820A-22 549SWD V391C 60892Y 820A-10 60001R 421KR 610W V503HF 60001Y 421KA 613W M525 60002R 421KR 620W 507 60002R1 V421KR 627WD V504HT 60004C 416K 629WD V504HF 60015Y M352KA 66050R 820KR-7					
529 M456 60700 421-18 530DK V547 60703 V7011 533DK V540 60719 7011S 534D V440L 60720 421-09 535D V440 60872Y 823A-22 54 B480R 60885R 820R-7 54A B480A 60891Y 820A-22 549SWD V391C 60892Y 820A-10 60001R 421KR 610W V503HF 60001Y 421KA 613W M525 60002R 421KR 620W 507 60002R1 V421KR 627WD V504HT 60004C 416K 629WD V504HF 60015Y M352KA 66050R 820KR-7					
530DK V547 60703 V7011 533DK V540 60719 7011S 534D V440L 60720 421-09 535D V440 60872Y 823A-22 54 B480R 60885R 820R-7 54A B480A 60891Y 820A-22 549SWD V391C 60892Y 820A-10 60001R 421KR 610W V503HF 60001Y 421KA 613W M525 60002R 421KR 620W 507 60002R1 V421KR 627WD V504HT 60004C 416K 629WD V504HF 60015Y M352KA 66050R 820KR-7					
533DK V540 60719 7011S 534D V440L 60720 421-09 535D V440 60872Y 823A-22 54 B480R 60885R 820R-7 54A B480A 60891Y 820A-22 549SWD V391C 60892Y 820A-10 60001R 421KR 610W V503HF 60001Y 421KA 613W M525 60002R 421KR 620W 507 60002R1 V421KR 627WD V504HT 60004C 416K 629WD V504HF 60015Y M352KA 66050R 820KR-7					
534D V440L 60720 421-09 535D V440 60872Y 823A-22 54 B480R 60885R 820R-7 54A B480A 60891Y 820A-22 549SWD V391C 60892Y 820A-10 60001R 421KR 610W V503HF 60001Y 421KA 613W M525 60002R 421KR 620W 507 60002R1 V421KR 627WD V504HT 60004C 416K 629WD V504HF 60015Y M352KA 66050R 820KR-7					
535D V440 60872Y .823A-22 54 B480R 60885R .820R-7 54A B480A 60891Y .820A-22 549SWD V391C 60892Y .820A-10 60001R .421KR 610W .V503HF 60001Y .421KA 613W .M525 60002R .421KR 620W .507 60002R1 V421KR 627WD .V504HT 60004C .416K 629WD .V504HF 60015Y M352KA 66050R 820KR-7					
54 B480R 60885R 820R-7 54A B480A 60891Y 820A-22 549SWD V391C 60892Y 820A-10 60001R 421KR 610W V503HF 60001Y 421KA 613W M525 60002R 421KR 620W 507 60002R1 V421KR 627WD V504HT 60004C 416K 629WD V504HF 60015Y M352KA 66050R 820KR-7					
54A B480A 60891Y 820A-22 549SWD V391C 60892Y 820A-10 60001R 421KR 610W V503HF 60001Y 421KA 613W M525 60002R 421KR 620W 507 60002R1 V421KR 627WD V504HT 60004C 416K 629WD V504HF 60015Y M352KA 66050R 820KR-7					
549SWD V391C 60892Y 820A-10 60001R 421KR 610W V503HF 60001Y 421KA 613W M525 60002R 421KR 620W 507 60002R1 V421KR 627WD V504HT 60004C 416K 629WD V504HF 60015Y M352KA 66050R 820KR-7					
60001R 421KR 610W V503HF 60001Y 421KA 613W M525 60002R 421KR 620W 507 60002R1 V421KR 627WD V504HT 60004C 416K 629WD V504HF 60015Y M352KA 66050R 820KR-7					
60001Y 421KA 613W M525 60002R 421KR 620W 507 60002R1 V421KR 627WD V504HT 60004C 416K 629WD V504HF 60015Y M352KA 66050R 820KR-7					
60002R 421KR 620W 507 60002R1 V421KR 627WD V504HT 60004C 416K 629WD V504HF 60015Y M352KA 66050R 820KR-7					
60002R1 V421KR 627WD V504HT 60004C 416K 629WD V504HF 60015Y M352KA 66050R 820KR-7					
60004C					
	60004C	416K	629WDV504HF		
60050R820KR 66052R823KR-7	60015Y	M352KA	66050R820KR-7		
	60050R	820KR	66052R823KR-7		

TRUCK-LITE PETERSON
60052R823KR-7
60056R823KR-7
60061R820KR-7
60062R823KR-7
60072Y 823KA-10
60074Y 820KA-10
60075Y 820KA-10
60082Y 423QA-P
60083R421KR
60085R820KR
60092C416K
60094Y 820KA-10
60096Y 823KA-10
60097Y 823KA-10
60201R421R
60201Y421A
60202R421R
60202R1V421R
60202YM421A
60215Y352A
60250R820R-7
60252R823RTL-7
60253R 820R-10
60255Y820A-10
60256R823RTL-7
60260R820R-7
60264R820R-10
60266R823RTL-7
60272Y823A-22
60275Y820A-22
60276Y823A-22
60280Y820QA
60282Y823QA 60283R421R
60283Y421A
60284C416
60286Y823QA
60290Y820A-10
60291Y M823ATL-10
60292Y M823ATL-10
60315Y356A
60317Y356AF
60354C820C-7
60356R822R-7
60360R820SR-1/-2
60360Y 820SA-1/-2
60366Y 823SA-1/-2
6050821R-7
6050A821A-7
6053 822R-7
6053A822A-7
60552RM881-7
60553RM881-7
60557RM880-7
6058
6058A821A-7 6060C821C-7
6063C 822C-7
60700421-18
60703V7011
607197011S
60720421-09
60872Y823A-22
60885R820R-7
60891Y820A-22
60892Y820A-10
610WV503HF
613W M525
620W 507
627WDV504HT
629WDV504HF
66050R 820KR-7

TRUCK-LITE PETERSON
66056R823KR-7
66082R823KR-7
66085R820KR-7
66205C 820KC-7 66206C M823CTL-7
66250R820R-7
66252R823RTL-7
66256R823RTL-7
66882R823RTL-7
66885R820KR-7
70311313-2RA
70330R313R 7038V600
7039V603
7048V602
7268B835
7269836
7618598
7619805
797459
7973D650 798449
80162C368
80164C M368-BT2
80253C M360
80255C M365
80302R1425S
80304M411C
80334R425
80335R425S 80342M411C
80342-3M411C
80344M411SC
80345M411SC
80355M395C
80360507
80360-1V507
80361507 80364M408
80378M507S
80438508
80461R428
80462R428S
80490M396C
80525V566-1
80560VH549 80571VH550
80594V520-41
80720440-09
80888505K
81240911-MV
81250921-MV
81260907
81261M908
81300R425 81360911-MV
81380921-MV
8140912-MV
8150921-MV
81510910-MV
81520910-MV
8155904-MV
81560VH549
8160910-MV 8170910-MV
8192913-MV
8933108-15R
8933A108-15A
8935W 389-15C
8937 136-15R
8937A136-15A

8947..... 55-15R

8947A55-15A

TRUCK-LITE P	ETERSON
8948	440-15
900	
9004	
9004A 9004G	
9004W	
9007	
9007A	
9007B	
9007G 9007W	
9016	
9016A	
9016B	334-15B
9041	
9049	
9057 9057A	
9093	
9093A	
9102	
91241Y	
91242R 91243Y	
91244R	
91370Y	
92522Y	
92523Y	
92524Y 92525Y	
92534Y	
92539Y	
92560	
92864Y	
92868Y 92872Y	
92878	
92900	
92900-1	
92901	
92902 92916	
92918	
92924	
92925	
9342 9342A	
9371	
9371A	126-15A
9371W	
9372 9372A	
9373W	
9380SW	
94237	
94609	
94706 94707	
94718	
94727	
94729	
94743	
94759 94768	
94769	
94789	417-481
94902	
94909 94916	
94919	
94924	162-49
94925	
94926	431-491

94992	
	421-491\
	421-49
0-1000	421-491
05220	417-49
	817-49\
	B417-492
96830	701-491
	160-492
97159	5407F
	PMV03001
	605
	654>
	615
97659	B835
97681	810
97802	605
97803	608
	608
	832
	616W
	616
	617>
97814	608XC
97819	655>
	655
	617
	821
	615
97944	PM-1037
97960	46
97980	507LU
	B487F
	1V487F
	B487A
	1 V487 <i>A</i>
98006R	476F
98006Y	476A
98013	PM-1037
	B479F
	B479A
	465-2
	468-1C
98126	407
00120	467-1
	467-1
98127	
98127 98136	465-1
98127 98136 98137	465-1 465k 467-4k
98127 98136 98137 98165	
98127 98136 98137 98165	
98127 98136 98137 98165 98168 98175R	
98127 98136 98137 98165 98168 98175R 98175Y	
98127 98136 98137 98165 98168 98175R 98175Y	
98127 98136 98137 98165 98168 98175R 98175Y 98176R	
98127 98136 98137 98165 98168 98175R 98175Y 98176R	
98127 98136 98137 98165 98168 98175R 98175Y 98176R 99001R	
98127 98136 98137 98165 98168 98175R 98176R 98176Y 99001R	
98127 98136 98137 98165 98168 98175R 98176R 98176Y 99001R 99001Y	
98127 98136 98137 98165 98168 98175R 98176P 98176P 99001R 99001Y 99007C	
98127 98136 98137 98165 98168 98175R 98176R 98176Y 99001R 99001Y 99007C	
98127 98136 98137 98165 98168 98175R 98176R 98176Y 99001R 99001Y 99007C	
98127 98136 98137 98165 98175R 98175R 98176R 99001R 99001Y 99007C 99007R 99007Y 99008R	
98127 98136 98137 98165 98168 98175P 98176P 99001P 99001P 99007C 99007C 99007P 99008P	
98127 98136 98137 98165 98175 98175 98176 99001 99001 99007 99007 99007 99008 99008 99008	
98127 98136 98137 98165 98175P 98175P 98176P 99001P 99007C 99007C 99007P 99008P 99008P 99009P	
98127 98136 98137 98165 98175P. 98175P. 98176P. 99001P. 99007C. 99007C. 99007P. 99008P. 99008P. 99009P. 99009P.	465- 465- 465- 467-44 469- 469- 490- 490- 489- 489- 102-15- 102-15- 410-15- 410-25- 410-25- 338-15- 338-15-
98127 98136 98137 98165 98168 98175P 98176P 99001P 99007C 99007R 99007P 99008P 99009P 99009P 99009P 99039P	465- 465- 465- 467-4k 469-1 469-1 490- 490- 489- 102-15- 102-15- 410-15- 410-25- 410-25- 338-15- 338-15- 110-15- 110-15-
98127 98136 98137 98165 98168 98175R 98176Y 99001R 99007Y 99007R 99009Y 99009P 99009Y 99009P 99009Y 99009Y	465- 465- 465- 465- 467-4k 469-1 469-1 490- 490- 489- 489- 102-15- 410-15- 410-15- 410-25- 410-25- 338-15- 338-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15-
98127 98136 98137 98165 98168 98175P 98176P 99001P 99007C 99007P 99008P 99009P 99009P 99009P 99039Y 99041P	465- 465- 465- 465- 467-4k 469-1 469-1 490- 490- 489- 102-15- 102-15- 410-15- 410-15- 410-25- 338-15- 338-15- 110-15- 110-15- 110-15- 136-15-
98127 98136 98137 98165 98168 98175P 98176P 99001P 99007C 99007P 99008P 99009P 99009P 99009P 99039Y 99041P	465- 465- 465- 465- 467-4k 469-1 469-1 490- 490- 489- 489- 102-15- 410-15- 410-15- 410-25- 410-25- 338-15- 338-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15- 110-15-
98127 98136 98137 98165 98175Y 98176R 98176Y 99001Y 99007C 99007R 99007Y 99008R 99009Y 99039R 99039Y 99039R 99039Y 99041R 99041Y 99066Y	465- 465- 465- 465- 467-4k 469-1 469-1 490- 490- 489- 102-15- 102-15- 410-15- 410-15- 410-25- 338-15- 338-15- 110-15- 110-15- 110-15- 136-15-
98127 98136 98137 98165 98175Y 98175R 98176P 99001Y 99007C 99007R 99007Y 99009R 99009Y 99039P 99039P 99041Y 99061Y 99061Y 99041Y	465- 465- 465- 467-44 469- 469- 490- 490- 490- 489- 102-15- 102-15- 410-15- 410-15- 410-15- 410-15- 110-15-
98127 98136 98137 98165 98168 98175Y 98176R 98176Y 99001Y 99007C 99007R 99007Y 99008P 99009Y 99039P 99039Y 99041R 99041P 99064Y 99066Y 99090R	465- 465- 465- 467-4 469- 469- 490- 490- 490- 489- 102-15- 102-15- 410-15- 410-15- 410-15- 110-15-
98127 98136 98137 98165 98168 98175Y 98176R 98176Y 99001Y 99007C 99007R 99007Y 99008P 99009Y 99039P 99039Y 99041R 99041P 99064Y 99066Y 99090R	465- 465- 465- 467-44 469- 469- 490- 490- 490- 489- 102-15- 102-15- 410-15- 410-15- 410-15- 410-15- 110-15-
98127 98136 98137 98165 98168 98175Y 98176R 98176Y 99001Y 99007C 99007R 99007Y 99008P 99009Y 99039P 99039Y 99041R 99041P 99064Y 99066Y 99090R	465- 465- 465- 467-4 469- 469- 490- 490- 490- 489- 102-15- 102-15- 410-15- 410-15- 410-15- 110-15-

LED Limited Lifetime Warranty

LED lights manufactured by Peterson Manufacturing Company ("the manufacturer") and sold under the PM LED, LumenX®, Great White® and Piranha® brands are warranted to the original purchaser against defects in material and/or workmanship for the life of the product.

This Limited Lifetime Warranty is not transferable and applies only to the original installation of the product for as long as the original consumer owns the vehicle (lifetime).

This warranty is subject to Conditions and Exclusions as noted below.

Peterson®/Defender® LED 10-Year Limited Corrosion Warranty

PM LED® and LumenX® Brand LED lights manufactured by Peterson Manufacturing Company ("the manufacturer") and installed as a component part of the Peterson®/Maxi-Seal® Defender® brand Harness and Lighting System are warranted to the original purchaser against corrosion damage caused by the failure of the light or wiring

harness for a period of ten (10) years from the date of shipment. This Limited Warranty is not transferable and applies only to the original installation of the product.

This warranty is subject to Conditions and Exclusions as noted below.

LED Three-Year Limited Warranty

LED lights manufactured by Peterson Manufacturing Company ("the manufacturer") that are listed herein are warranted to the original purchaser against defects in material and/or workmanship for a period of three (3) years from the date of shipment:

- · LED headlights
- · Great White® LED work lights

- · Great White® LED strip lights
- Non-LumenX strobe beacons
- 215 Series clearance/marker lights
- Tunnel Lights™
- · Nightwatcher® LED bar lights

This warranty is subject to Conditions and Exclusions as noted below.

One-Year Limited Warranty

Incandescent, halogen and xenon lights and related accessories manufactured by Peterson Manufacturing Company ("the manufacturer") are warranted to the original purchaser against defects

in material and/or workmanship for one (1) year from the date of shipment.

This warranty is subject to Conditions and Exclusions as noted below.

Conditions & Exclusions

Conditions

Warranty claims require examination of the unserviceable part(s) by the manufacturer or an expressly designated agent. Refund, acceptance, return, or exchange of unserviceable parts by other parties, including the manufacturer's dealers and/or resellers, does not constitute a determination on behalf of the manufacturer that such part is deemed warrantable.

This warranty allows only for repair or replacement of the defective part, or refund of the purchase price, at the sole discretion of the manufacturer. The manufacturer makes no warranty regarding the fitness of its products for any particular purpose. The manufacturer is not liable for other incidental or consequential damages. In no circumstances shall this warranty be extended to third parties except those performing as, or on behalf of, the manufacturer's authorized distributors.

Any implied warranties are limited to the specified warranty period.

Exclusions

Any of the above warranties shall be null and void if any one of or combination of these exclusions apply:

- Failure to install, operate, and maintain the product in accordance with the manufacturer's recommendations and standard industry practices.
- The product is damaged due to accident, abuse, misuse, improper installation, unauthorized modification, or exposure to incompatible cleaners or solvents.
- Product failure is caused by the defect or malfunction of equipment or component(s) from a source other than the manufacturer.
- Product failure is caused by severe applications including (but not limited to) buses, off-road, and construction vehicles.
- Product failure is caused by corrosive chemicals including acid washes and highway snow and ice chemicals.
- Product failure is caused by connector failure and/or water penetration due to (but not limited to) cracked housing, cracked lens, wire wicking, or corrosion.

This warranty gives you specific legal rights. You may also have other rights that vary by state and country. Some jurisdictions do not allow limitations on the duration of implied warranties. Therefore, some of the above limitations may not apply to you.

NEW PART NUMBE	RS HIGHLIGH	TED IN YELLOW							
H1/55W	249	M106A	77	124R	82	M138G	85	150 -092	175
H <u>3</u> -70W-24V		M <u>106</u> R		M <u>124</u> R		138R		150-095	
D <u>3</u>		M <u>107</u> -3A		125-15A		M <u>138</u> R	85	B <u>150</u> -095	176
D <u>4</u>		<u>107</u> -3R		<u>125</u> -15R		V <u>138</u> R		<u>150</u> -102	
D <u>7</u>		M <u>107</u> -3R		M <u>125</u> A		<u>140</u> 24		<u>150</u> -141	
D <u>9</u> OV1 0 -72		V <u>107</u> -3R		M <u>125</u> R <u>126</u> -25A		M <u>140</u> FA M 140 FR		B <u>150</u> -141 B 150 -141B	
D10		<u>107</u> -15A B 107 -15A		126-25C		142-09		B <u>150</u> -141B B <u>150</u> -142	
D11		V107-15A		126-25R		B 142 -17		B <u>150</u> -143	177
D12		107-15B		M126A		142-18		B 150 -181	
D13		107-15R		V126A		B 142 -18		B 150 -491	
STU <u>15</u> AM-77		B <u>107</u> -15R		M <u>126</u> C	108	142-18K		B <u>150</u> -493	
D <u>15</u> -RV		V <u>107</u> -15R		M <u>126</u> R		<u>142</u> -49		<u>150</u> A	
D <u>16</u>		<u>107</u> WA		V <u>126</u> R		B <u>142</u> -49		M <u>150</u> A	
D <u>17</u>		M <u>107</u> WA		<u>127</u> -18		B <u>142</u> -50		V <u>150</u> A	88
<u>19</u> -41 D 20 -4		V <u>107</u> WA V <u>107</u> WB		B <u>127</u> -18		B <u>142</u> -51 B <u>142</u> -091		150 C M150 C	
D <u>20</u> -4 D 20 -6		107WR		<u>127</u> A M127A		142A		V150C	
D 20 -12		M107WR		V127KA		M142A		V150KA	
D <u>21</u> -02		V <u>107</u> WR		V <u>127</u> KR		V <u>142</u> A		150KC	
D <u>21</u>		108-15A		127R		M142 ABS		V150KR	
BB- <u>22</u>		B <u>108</u> -15A		M <u>127</u> R	83	142KA	86	150R	
D <u>22</u> -L		V <u>108</u> -15A		V <u>128</u> A		V <u>142</u> KA	86	M <u>150</u> R	
D <u>22</u> -M		<u>108</u> -15R		V <u>128</u> R		142KR		V <u>150</u> R	
D <u>22</u> -S		B <u>108</u> -15R		M <u>129</u> A		V <u>142</u> KR		<u>150</u> W	
D <u>24</u>		V <u>108</u> -15R		129KA		<u>142</u> R M142R		M <u>150</u> W V150W	
D <u>25</u> D 27		<u>108</u> -151A B 108 -151A		129KR M129R		W <u>142</u> R V142R		M <u>151</u> -3RL	
D <u>27</u>		108-151R		130-25A		B 143 -17		V151-3RL	
D 29		B 108 -151R		130-25R		143-18		151 A	
D31		108WA		130 A		B 143 -18		M151 A	
V <u>35</u> A-BT2	54	M <u>108</u> WA	78	M <u>130</u> A	84	143-18K	172	151R	
<u>35</u> A-MV	54	V <u>108</u> WA		<u>130</u> R		<u>143</u> -092		M <u>151</u> R	88
M <u>35</u> A-MV		<u>108</u> WR		M <u>130</u> R		<u>143</u> A		<u>152</u> -49	200
35 A-MV-BT2		M <u>108</u> WR		M <u>132</u> A		M <u>143</u> A		B <u>152</u> -49	200
M <u>35</u> A-MV-BT2		V <u>108</u> WR		V <u>132</u> A		V <u>143</u> A		152 A	
V <u>35</u> R-BT2		109-25A		M <u>132</u> R V <u>132</u> R		M <u>143</u> FA M <u>143</u> FR		M <u>152</u> A M <u>152</u> BKA	
35R-MV M35R-MV		V <u>109</u> A 110-15A		B 133 -10		143R		M152BKR	
35R-MV-BT2		V 110 -15A		133A		M143R		152R	
M35R-MV-BT2		110-15B		M133A		V <u>143</u> R		M <u>152</u> R	
V38A		110-15C		133R		144 -18		153 -49	
38 A-MV		110-15G	251	M <u>133</u> R	56	B <u>144</u> -18		B <u>153</u> -49	
M <u>38</u> A-MV		<u>110</u> -15R		V <u>133</u> XA		<u>146</u> -09		B <u>153</u> -181	
38A-MV-BT2		V <u>110</u> -15R		V <u>133</u> XR		B <u>146</u> -09		B <u>153</u> -492	
M <u>38</u> A-MV-BT2		M <u>110</u> A		134-15A		<u>146</u> -18		153 A	
V <u>38</u> R		V <u>110</u> A M110R		B <u>134</u> -15A V 134 -15A		B <u>146</u> -18 146-18K		M <u>153</u> A 153C-142	
M <u>38</u> R-MV		V110R		134-15R		B 146- 49		153C-BT2	
38R-MV-BT2		V112A		B <u>134</u> -15R		146-092		M153C-BT2	
M38R-MV-BT2		114-15A		V 134 -15R		B <u>146</u> -093	174	M153C-JAMP	
<u>45</u> -171	194	114-15R		135-951		146-181		153C-MV	
<u>45</u>		M <u>114</u> A		<u>135</u> A		B <u>146</u> -181		M <u>153</u> C-MV	
B <u>45</u>		V <u>114</u> A		M <u>135</u> A		<u>146</u> -182		M <u>153</u> C-MV-P	
<u>46</u>		M <u>114</u> R		V <u>135</u> A		B <u>146</u> -182		M <u>153</u> C-MV-PKD	
B <u>46</u> 55 -15A		V <u>114</u> R		135R		146A		<u>153</u> C-P	
<u>55</u> -15A		M <u>116</u> A <u>117</u> -25		M <u>135</u> R V135R		M <u>146</u> A V146A		M <u>153</u> C-P 153CTP-BT3	
56-15R		118-15A		136-3R		M <u>146</u> ABS		M153CTP-BT3	
60A-MV		M118A		136-15A		146C		V <u>153</u> KA	
M60A-MV		V118A		136-15R		M146C		V153KC-MV	
60 R-MV	55	V <u>118</u> KA	80	136A		M <u>146</u> KA		V <u>153</u> KR	
M <u>60</u> R-MV		<u>119</u> -15A		M <u>136</u> A		V <u>146</u> KA		<u>153</u> R	
B <u>62</u>		<u>119</u> -15R		V <u>136</u> A		M <u>146</u> KR		M <u>153</u> R	
V <u>72</u> R		<u>119</u> A		136R		V <u>146</u> KR		B <u>154</u> -09	
L2- <u>77</u>		M <u>119</u> A		M <u>136</u> R		<u>146</u> R		<u>154</u> -09K	
L3- <u>77</u> L7- 77		119R		V <u>136</u> R M137A		M <u>146</u> R V146R		B <u>154</u> -10 154-10K	
L2X-77		M <u>119</u> R 121A		M137R		M146SA		B154-11	
100-15A		M121A		138-15A		M146SR		154-11K	
B 100 -15A		M122A		B 138 -15A		150-3R		B <u>154</u> -11K	177
100-15R		M <u>122</u> R		V <u>138</u> -15A		M <u>150</u> -3R		B <u>154</u> -11K-BT1	
B <u>100</u> -15R		M <u>122</u> XA	81	B <u>138</u> -15B	252	<u>150</u> -09	175	B <u>154</u> -092	177
102-15A		V <u>122</u> XA		B 138 -15C		<u>150</u> -10	175	154A	
<u>102</u> -15R		M <u>122</u> XR		B <u>138</u> -15G		B <u>150</u> -12		M <u>154</u> A	
M <u>102</u> A		V <u>122</u> XR		138-15R		<u>150</u> -13		V <u>154</u> A	
V <u>102</u> A		123A		B <u>138</u> -15R		150-14		154A-R	
M <u>102</u> R V 102 R		<u>123</u> R 124-15A		V <u>138</u> -15R 138A		B <u>150</u> -14 B <u>150</u> -18		M <u>154</u> A-R <u>154</u> C	
PM-103T		124-15R		M138A		150-49		M154C	
B <u>106</u> -09		124A		V138A		<u>150</u> -091		154KA	
V <u>106</u> -09		M <u>124</u> A		M <u>138</u> C		B <u>150</u> -091		M <u>154</u> KA	

PART NUMBER INDEX

NEW PART NUMBERS HIGHLIGHTED IN YELLOW

NEW I	PART NUMBERS HIGHLIGH
	1 54 KR90
M:	<u>154</u> KR90
	<u>154</u> R90
_	<u>154</u> R90
-	154R90
	155A91
	<u>155</u> A91 155R91
	155R91
_	160 -09178
	160 -09178
_	160- 49201
В	160 -49201
	160 -491201
B ₂	<u>160</u> -491201
_	<u>160</u> -492201
	<u>160</u> -492201
	<u>160</u> -493201
_	161 A57
	<u>161</u> A57 161A-R57
_	161KA57
_	161KA57
	1 61 KR57
	1 61 KR57
	1 61 R57
-	1 61 R57
	162 -49201
	162 -49201
	<u>162</u> -49201
	<u>162</u> -093178
-	<u>162</u> -493201
	162 -493201
_	162 A64
	162 A64
_	<u>162</u> FA64 1 62 FR64
_	1 62 KA64
	1 62 KR64
_	1 62 R64
_	1 62 R64
	1 62 SA64
_	1 62 SR64
	163 A65
	<u>163</u> A65
	163 A-MV65
	163 A-MV65
	163 FA
	163 FA-MV65
	163 FA-MV65
	163 FR
	163 FR-MV65
	1 63 KA-MV65
	163KR-MV65
	1 63 R65
M.	1 63 R65
	163 R-MV65
-	<u>163</u> R-MV65
	<u>163</u> SA65
	163SR65
	164 A66
	164 A
	164 FA
	164KA66
	164KR66
_	1 64 R66
	1 64 R66
	164 SA66
	164SR66
-	165 -10178
В	<u>165</u> -10178
	165 A67
	165 A67
	165 A-MV67
	165 A-MV67
	165 FA67
	165 FA-MV
	165 FR
IVI	165 FR-MV67

M165FR-MV 67 165KA-MV 67 165KR-MV 67 165R 67 M165R 67 M165R-MV 67 M165SA 67 M165SA 67 M165SR-MV 67 M165SR-MV 67 M165SR-MV 67 M166A 57 M166A 57 M166B 57 V166A 57 M166B 57 V166B 57 M166B 57 V166B 57 M166B 57 V166B 57 M168B 19 B168-09 178 B168-10 179 168-18 179 B168-18 179 B168-092 179 B168-093 178 B168-18 179 B168-18 179 B168-18 179 B168-18 179	YELLOW
165KA-MV 67 165KR-MV 67 165R 67 M165R 67 165R-MV 67 M165R-MV 67 M165SA-MV 67 M165SR-MV 67 M165SR-MV 67 M165SR-MV 67 M165SR-MV 67 M166A 57 M166A 57 M166R 57 V166A 57 M166BR 57 V166R 57 M168-09 178 B168-09 178 B168-10 179 168-10K 179 B168-18 179 B168-18 179 B168-092 179 B168-092 179 B168-092 179 B168-092 179 B168-092 179 B168-093 178 B168-18 179 B168-092 179 B168-093	
165R 67 M165R 67 165R-MV 67 M165R-MV 67 M165SA 67 M165SA 67 M165SA 67 M165SR 67 M165SR-MV 67 166A 57 M166A 57 V166A 57 V166R 57 V166R 57 V166R 57 V166B 99 178 B168-09 179 B168-10 179 B168-18 179 B168-18 179 B168-09 179	
M165R 67 165R-MV 67 M165R-MV 67 M165SA 67 M165SA-MV 67 M165SR 67 M165SR-MV 67 166A 57 M166A 57 V166A 57 M166R 57 M166R 57 M166B 57 M166B 57 V166R 57 M168-09 178 B168-09 178 B168-10 179 168-10K 179 168-10K 179 168-18 179 B168-192 179 B168-092 179 B168-092 179 B168-092 179 B168-093 178 B168-092 179 B168-092 179 B168-092 179 B168-092 179 B168-092 179 B168-092 179<	
165R-MV	
M165R-MV 67 M165SA 67 M165SA 67 M165SR 67 M165SR 67 M165SR 67 M166A 57 M166A 57 V166A 57 M166B 57 M166B 57 V166R 57 M168-09 178 B168-09 178 B168-10 179 168-10K 179 168-10K 179 168-10K 179 B168-18 179 B168-092 179 B168-092B 179 B168-092B 179 B168-092B 179 B168-093 178 B168-181 179 B168-092B 179 B168-182 179 B168-184 179 B168-184 179 B168-184 179 B168-185 179 B168-186	
M165SA-MV 67 M165SR 67 M165SR-MV 67 166A 57 M166A 57 V166A 57 M166R 57 V166R 57 M166R 57 M166R 57 M166R 57 M166R 57 M168-09 178 B168-09 178 B168-10 179 168-18 179 B168-10 179 B168-18 179 B168-092 179 B168-093 178 B168-092 179 B168-093 178 B168-182 179 B168-093 178 B168-182 <t< td=""><td>165R-MV67</td></t<>	165R-MV67
M165 SR. 67 M165 SR-MV 67 166A 57 M166A 57 V166A 57 M166R 57 V166R 57 M166R 57 V166R 57 168-09 178 B168-09 178 B168-09 178 B168-10 179 168-18 179 B168-18 179 B168-092 179 B168-092 179 B168-092 179 B168-092 179 B168-093 178 B168-093 178 B168-094 179 B168-095 179 B168-096 179 B168-097 179 B168-098 179 B168-099 179 B168-099 179 B168-099 179 B168-099 179 B168-099 179 B168-099	
M165SR-MV 67 166A 57 M166A 57 V166A 57 166B 57 M166R 57 M166R 57 M166R 57 M166R 57 M166R 57 M168-09 178 B168-09 178 B168-10 179 168-18 179 B168-18 179 B168-18 179 B168-092 179 B168-093 178 B168-092 179 B168-092 179 B168-093	
166 A	
V166A 57 166R 57 M166R 57 V166R 57 168-09 178 B168-09 178 B168-10 179 168-18 179 B168-18 179 B168-18 179 B168-092 179 B168-092K 179 B168-092K 179 B168-181 179 B68-181 179 B68-182 179 B68A 58 M168A 58 M68A 58 M68A-W 58 M68C-B0 103 M168C-B0 103 M168C-B12 58 M168C-B12 58 M168R-W 58 M68R 58 V168R 58 V168R 58 V168XA 58 M169-3A 92 M169-3A 92 M169-3R 92	
166R 57 M166R 57 V166R 57 168-09 178 B168-09 178 B168-10 179 168-10K 179 168-18 179 B168-18 179 B168-092 179 B168-092B 179 B168-092B 179 B168-093 178 B168-181 179 B168-182 179 168A 58 M168A 58 M168A 58 M168A 58 M168A 58 M168C 103 M168C 103 M168C 103 M168CA-BT2 58 M168CA-BT2 58 M168CA-BT2 58 M168R 58 V168R 58 V168R 58 V168R 58 V168R-MV 58 M168CA-MV 58 <	
M166R 57 V166R 57 168-09 178 B168-09 178 B168-10 179 168-10K 179 168-10K 179 168-10K 179 168-18 179 B168-18 179 B168-092 179 B168-092K 179 B168-093 178 B168-181 179 B168-182 179 168A 58 M168A 58 V168A 58 V168A 58 V168A 58 M168C 103 M168C 103 M168C 103 M168CA-BT2 58 M168CA-BT2 58 M168R 58 V168R 58 V168R 58 V168R 58 V168R 58 V168XA 58 M168ZA-MV 58	
V166R 57 168-09 178 B168-09 178 B168-10 179 168-10K 179 168-18 179 B168-18 179 B168-092 179 B168-092B 179 168-092K 179 B168-093 178 B168-181 179 B168-182 179 168A 58 M168A 58 V168A 58 V168A 58 V168A 58 M168C 103 M168C 103 M168C-BT2 58 M168C-BT2 58 M168R-B 58 V168R 58 V168R-B 58 M168R-MV 58<	
B168-09 178 B168-10 179 168-10K 179 168-18 179 B168-18 179 B168-092 179 B168-092K 179 B168-092K 179 B168-092K 179 B168-181 179 B168-182 179 B168A 58 M168A 58 M168A 58 M168A-MV 58 M168C 103 M168CA-BT2 58 M168CA-BT2 58 M168CA-BT2 58 M168R-MV 58 M168R-B 58 V168R 58 M168R-MV 58 M168R-MV 58 M168R-MV 58 M168R-MV 58 M169-NW 58 M169-NW 58 M169-NW 58 M169-3AB 92 M169-3AB 92 M169-3AB <td></td>	
B168-10 179 168-10K 179 168-18 179 B168-18 179 B168-092 179 B168-092B 179 B168-092B 179 B168-093 178 B168-181 179 B168-182 179 168A 58 V168A 58 V168A 58 M168C 103 M168C 103 M168CC-8BT2 58 M168CR-BT2 58 M168CR-BT2 58 M168R 58 V168R 58 V168R 58 V168R 58 V168XA 58 V168XA 58 168XA-MV 58 V168XA 58 168XR-MS 58 169-3A 92 M169-3A 92 M169-3A 92 M169-3B 92 M169-3B 92 <td></td>	
168-10K 179 168-18 179 8168-18 179 8168-092 179 8168-092B 179 168-092K 179 168-093 178 8168-181 179 8168-182 179 168A 58 M168A 58 M168A 58 168C 103 M168C 103 M168CA-BT2 58 M168CA-BT2 58 M168CA-BT2 58 M168CA-BT3 58 M168CA-BT4 58 M168CA-BT5 58 M168CA-BT6 58 M168CA-BT8 58 M168CA-BT9 58 M168CA-BT9 58 M168R 58 M168R 58 M168R 58 M168R 58 M168R 58 M168R-MV 58 M168R-MV 58 M168R-MV	
168-18 179 B168-18 179 B168-092 179 B168-092B 179 168-092K 179 B168-093 178 B168-181 179 B168-182 179 168A 58 M168A 58 V168A 58 M168A-MV 58 168C 103 M168C 103 M168C-B12 58 M168C-B12 58 M168C-B12 58 M168R-B 58 V168R 58 V168R 58 V168R 58 V168R-B 58 V168R-BW 58 V168XA 58 V168XA 58 V168XA 58 V169-3A 92 M169-3A 92 M169-3A 92 M169-3A 92 M169-3A 92 M169-3A 92	
B168-092 179 B168-092K 179 168-092K 179 B168-093 178 B168-181 179 B168-182 179 168A 58 M168A 58 V168A 58 M168A-MV 58 M168C 103 M168CA-BT2 58 M168CA-BT2 58 M168CR-BT2 58 M168R 58 V168R 58 V168R 58 V168RA 58 V168XA 58 V168XA 58 V168XA 58 V168XA 58 V168XA 58 V168XA 58 V169-3AB 92 M169-3ABT1 92 M169-3RBT2 92 M169-3RBT2 92 M169-3RBT2 92 M169A 59 V169KA 59 V169R 59 </td <td></td>	
B168-092B 179 168-092K 179 B168-093 178 B168-181 179 B168-182 179 168A 58 M168A 58 V168A 58 M168A-MV 58 M168C 103 M168C 103 M168C-B8T2 58 M168C-B8T2 58 M168R 58 V168R 58 V168R 58 V168R-MV 58 V168XA 58 168XA-MV 58 V168XR 58 168XR-MV 58 V169-3A 58 169-3A 92 M169-3ABT1 92 M169-3RBT2 92 M169-3RBT3 </td <td></td>	
168-092K 179 B168-093 178 B168-181 179 B168-182 179 168A 58 M168A 58 V168A 58 M168A-MV 58 168C 103 M168C 103 M168C 103 M168C-BT2 58 M168C-BBT2 58 M168R 58 V168R 58 V168R 58 V168R-MV 58 V168XA 58 168XA-MV 58 V168XA 58 168XR-MV 58 V169-3A 92 M169-3ABT1 92 M169-3ABT1 92 M169-3RBT2 92 M169-3RBT2 92 M169-3RBT2 92 B169-18 180 169A 59 V169KA 59 V169KA 59 V169R 59	
B168-093 178 B168-181 179 B168-182 179 168A 58 M168A 58 V168A 58 M168A-MV 58 168C 103 M168C 103 M168C 103 M168CA-BT2 58 M168CA-BT2 58 M168CR-BT2 58 M168R 58 V168R 58 V168R 58 V168XA 58 M168XA-MV 58 V168XA 58 168XA-MV 58 M169-3A 58 V169-3A 92 M169-3ABT1 92 M169-3RBT2 92 M169-3RBT3 92 M169-3RBT2 92 M169-3BBT2 92 M169-3BBT2 92 M169-3BBT3 92 M169-A 59 V169KA 59 V169R <	
B168-182 179 168A 58 M168A 58 V168A 58 M168A-MV 58 M168C 103 M168C 103 M168CA-BT2 58 M168CR-BT2 58 M168CR 58 M168R 58 V168R 58 V168R 58 V168RA 58 V168XA 58 V168XA 58 V168XA 58 V168XA 58 V168XA 58 M169-3A 92 M169-3A 92 M169-3A 92 M169-3R 92 V169-3R 92 V169-3R 92 M169-3R 92 M169-3R 92 M169-3R 92 M169-3R 92 M169-3R 92 M169-3R 59 V169KA 59	
168A 58 M168A 58 V168A 58 V168A 58 168A-MV 58 M168A-MV 58 M168C 103 M168C 103 M168C-BT2 58 M168R 58 V168R 58 V168R 58 V168XA 58 V168XA 58 V168XA 58 V168 XA 58 V168 XA 58 V168 XA 58 V169 XA 58 V169 XA 92 V169 XA 92 M169 -3ABT1 92 M169 -3BBT1 92 M1	
M168A 58 V168A 58 168A-MV 58 M168A-MV 58 168C 103 M168C 103 M168C-BEZ 58 M168C-BEZ 58 M168C-BEZ 58 M168R 58 V168R 58 V168R-MV 58 V168XA 58 168XA-MV 58 V168XR 58 168XR-MV 58 M169-3A 92 M169-3ABT1 92 M169-3ABT1 92 M169-3RBT2 92 M169-3RBT2 92 M169-3RBT2 92 M169-3RBT2 92 M169-3BW 59 V169KA 59 V169KA 59 V169R 59 M169R 59 M169R 59 M169R 59	
V168A 58 168A-MV 58 M168C 103 M168C 103 M168CA-BT2 58 M168CR-BT2 58 M168CR-BT2 58 M168R 58 V168R 58 M168R-MV 58 V168XA 58 168XA-MV 58 V168XA 58 168XR-MV 58 M169-3A 92 M169-3A 92 M169-3A 92 M169-3R 59 V169KA 59 V169KA 59 V169R 59 M169R 59 M169R 59 M169R 59 M169R 59	
M168/A-MV 58 168C 103 M168C 103 M168CA-BT2 58 M168CR-BT2 58 168R 58 M168R 58 M168R 58 M168R-MV 58 M168R-MV 58 M168XA 58 168XA-MV 58 M169XR 58 M169-3A 92 M169-3A 92 M169-3A 92 M169-3A 92 M169-3R 92 M169A 59 V169KA 59 V169KB 59 V169R 59 M169R 59 M169R 59	168 A58
168 C 103 M168 C 103 M168 CA-BT2 58 M168 CR-BT2 58 168 R 58 168 R 58 M168 R 58 V168 R 58 M168 R-MV 58 M168 R-MV 58 V168 XA 58 V168 XA 58 V168 XR 58 M169 3A 92 M169 -3ABT1 92 M169 -3ABT1 92 M169 -3R 92 V169 -3R 92 V169 -3R 92 M169 -3RBT1 92 M169 -3RBT2 92 M169 -3BBT3 92 M169 -3 FB - 18 180 M69 A 59 V169 KA 59 V169 KA 59 V169 R 59 M169 R 59 M170 A 59	
M168 C 103 M168 CA-BT2 58 M168 CR-BT2 58 168 R 58 M168 R 58 V168 R 58 M168 R-MV 58 M168 R-MV 58 V168 XA 58 168 XA-MV 58 V168 XR 58 M169 XR 58 M169 -3A 92 M169 -3ABT1 92 M169 -3R 92 M169 -3R 92 M169 -3RBT1 92 M169 -3RBT2 92 M169 -3RBT2 92 B169 -18 180 169A 59 V169 KA 59 V169 KR 59 M169 R 59 M169 R 59 M170 A 59	
M168 CA-BT2 58 M168 CR-BT2 58 168R 58 M168 R 58 V168 R 58 M168 R-MV 58 M168 R-MV 58 V168 XA 58 168 XA-MV 58 V168 XR 58 168 XR-MV 58 169 3A 92 M169 3A 92 M169 3ABT1 92 M169 3R 92 M169 3R 92 M169 3RBT1 92 M169 3RBT2 92 M169 3RBT2 92 B169 18 180 169A 59 V169KA 59 V169KA 59 V169R 59 M169R 59 M169R 59 M170A 59	
168 R 58 M168 R 58 V168 R 58 168 R-MV 58 M168 R-MV 58 V168 XA 58 168 XA-MV 58 V168 XR 58 168 XR-MV 58 M169-3A 92 M169-3ABT1 92 M169-3R 92 M169A 59 V169KA 59 V169KB 59 M169R 59 M170A 59	
M168 R 58 V168 R 58 168 R-MV 58 M168 R-MV 58 V168 XA 58 168 XA-MV 58 V168 XR 58 168 XR-MV 58 M169-3A 92 M169-3ABT1 92 M169-3R 92 V169-3R 92 V169-3R 92 V169-3R 92 M169-3RBT1 92 M169-3RBT2 92 B169-3RBT2 92 B169-3RBT3 92 V169-3R 59 V169K 59 V169K 59 V169K 59 M169R 59 M170A 59	
V168 R 58 168 R-MV 58 M168 R-MV 58 V168 XA 58 168 XA-MV 58 V168 XR 58 M169-3A 92 M169-3A 92 M169-3BBT1 92 V169-3R 92 V169-3R 92 V169-3R 92 M169-3RBT1 92 M169-3RBT2 92 M169-3RBT2 92 M169A 59 V169KA 59 V169KA 59 V169R 59 M169R 59 M170A 59	
168 R-MV 58 M168 R-MV 58 V168 XA 58 168 XA-MV 58 V168 XR 58 168 XR-MV 58 M169-3A 92 M169-3ABT1 92 M169-3R 92 V169-3R 92 V169-3R 92 M169-3RBT1 92 M169-3RBT2 92 B169-18 180 169A 59 V169KA 59 V169KA 59 V169R 59 M169R 59 M170A 59	
V168 XA 58 168 XA-MV 58 V168 XR 58 168 XR-MV 58 M169 3A 92 M169 3R 92 M169 3R 92 V169 3R 92 M169 3RBT1 92 M169 3RBT2 92 M169 3RBT2 92 B169 18 180 169A 59 V169KA 59 V169KA 59 V169R 59 M169R 59 M170A 59	
168 XA-MV 58 V168 XR 58 168 XR-MV 58 M169-3A 92 M169-3ABT1 92 M169-3R 92 V169-3R 92 V169-3R 92 M169-3RBT1 92 M169-3RBT2 92 B169-3RBT2 92 M169-3RBT2 92 M169A 59 V169KA 59 V169KA 59 V169R 59 M169R 59 M170A 59	
V168 XR 58 168 XR-MV 58 M169-3A 92 M169-3ABT1 92 169-3R 92 M169-3R 92 V169-3R 92 M169-3RBT1 92 M169-3RBT2 92 B169-3BBT3 92 M169-3BBT4 92 M169-3BBT5 92 M169-3BBT6 59 V169-3B 59 V169-3B 59 V169-3B 59 M169-3B 59 M169-3B 59 M169-3B 59 M170-3B 59	
168 XR-MV 58 M169-3A 92 M169-3ABT1 92 169-3R 92 M169-3R 92 V169-3R 92 W169-3RBT1 92 M169-3RBT2 92 B169-18 180 169A 59 V169KA 59 V169KA 59 V169R 59 M169R 59 M170A 59	
M169-3ABT1 92 169-3R 92 M169-3R 92 V169-3R 92 M169-3RBT1 92 M169-3RBT2 92 B169-18 180 169A 59 V169KA 59 V169KA 59 V169BR 59 M169R 59 M169R 59 M170A 59	168 XR-MV58
169-3R 92 M169-3R 92 V169-3R 92 M169-3RBT1 92 M169-3RBT2 92 B169-18 180 169A 59 V169KA 59 V169KB 59 V169B 59 M169B 59 M169B 59 M170A 59	
M169-3R 92 V169-3R 92 M169-3RBT1 92 M169-3RBT2 92 B169-18 180 169A 59 M169A 59 V169KA 59 V169FR 59 M169R 59 M170A 59	
V169-3R 92 M169-3RBT1 92 M169-3RBT2 92 B169-18 18 169A 59 V169KA 59 V169KA 59 V169BR 59 M169R 59 M170A 59	169-3R92
M169-3RBT2 92 B169-18 180 169A 59 M169A 59 V169KA 59 V169FR 59 M169R 59 M170A 59	169-3R92
B169-18. 180 169A 59 M169A 59 V169KA 59 V169KR 59 M169R 59 M170A 59	
169A 59 M169A 59 V169KA 59 V169BR 59 169B 59 M169B 59 M170A 59	
V169KA 59 V169KR 59 169R 59 M169R 59 M170A 59	
V169KR 59 169R 59 M169R 59 M170A 59	169 A59
169 R 59 M169 R 59 M170 A 59	
M <mark>169</mark> R	
	169 R59
V <u>170</u> A59 M <u>170</u> A-BT159	
M170R59	
V <u>170</u> R59	170R59
M <u>170</u> R-BT159	
M <u>171</u> A72 V171A72	
M <mark>171</mark> A-BT272	171 A-BT272
M <u>171</u> A-P72	171 A-P72
M <u>171</u> C 104	
V <u>171</u> C 104 M171C-BT2 104	
171 KA72	171 KA72
171 KC 104	171 KC 104
171 KC-BT2 104	
171KR72 M171R72	
V171R72	
M <u>171</u> R-BT272	
	171 R-BT2

N / -	171W-MV-BT2104
	173A62
_	1 73 A
	173A-AMP
	1 73 R
_	1 73 R62
	173R-AMP62
	1 75 A
-	1 75 A62
	1 75 FA62
	1 75 FR62
1	1 75 R62
M1	I 75 R62
B ₁	176 -09180
B <u>1</u>	<u>176</u> -09X180
	<u>176</u> -10181
B <u>1</u>	<u>176</u> -10181
	<u>176-</u> 11182
	<u>176</u> -12182
-	<u>176</u> -13181
_	<u>176</u> -13181
	<u>176</u> -14182
	176 -15182
	<u>176</u> -16182
	<u>176</u> -17182
	<u>176</u> -19182
_	176-092181
	176-092181
	100
	<u>176</u> -093181 <u>176</u> -491202
	176 -491202
	176 -492202
	176 -494202
	176 -496202
_	1 76 A72
	1 76 A-AMP72
	1 76 A-BT272
_	1 76 BKA72
	1 76 BKR72
	1 76 KA72
	1 76 KA-ABS72
	1 76 KA-AMP72
1	1 76 KR72
	1 76 KR-AMP72
M ₁	<u>176</u> R72
	1 76 R-AMP72
	1 76 R-BT272
	176 RGB76
	177-3R92
	<u>177</u> -3R92
	<u>177</u> -10180
	<u>177</u> -18180
	<u>177</u> -182181
IVI]	1 <u>77</u> A
IVI_	177A-AMP73
	177 A-B1273 177 CA-BT273
M	177 CR-BT273
	1 77 R73
M	177R-AMP73
	177R-BT273
	178 -10182
	178 -10182
_	1 78 A60
_	178 A60
1	1 78 A-MV60
M1	178 A-MV60
	178 A-MVC60
	178 CA-BT260
	178 CR-BT260
_	1 78 R60
	1 78 R60
	178R-MV60
	178R-MV60
	178W-MV104
	178W-MV104
	178 XA 60
	178 XA-MV
V]	1 78 XR60

M179A	76
<u>179</u> R	
M <u>179</u> R	76
V <u>180</u> A	60
V180R	
M <u>181</u> A	73
M181 A-BT2	73
V <u>181</u> A-BT2	73
M <u>181</u> A-MV	73
M <u>181</u> A-MV-BT2	73
<u>181</u> KA	
<u>181</u> KA-BT2	
<u>181</u> KA-MV	
<u>181</u> KR	
181 KR-BT2	73
181 KR-MV	/3
M <u>181</u> R M181R-BT2	
V <u>181</u> R-BT2	
M181R-MV	
M <u>181</u> R-MV-BT2	73
<u>186</u> -3R	/ C
M186-3R	
B <u>186</u> -10	183
B <u>186</u> -13	183
M <u>186</u> A	74
M <u>186</u> A-BT2	74
186CTP-BT3	. 102
M186CTP-BT3	. 102
186KA	
186KR	74
M186R	74
M186R-BT2	74
M <u>186</u> W-BT2	. 104
<u>187</u> A	61
M <u>187</u> A	
M <u>187</u> A-BT2	61
<u>187</u> A-MV	
M <u>187</u> A-MV	
<u>187</u> R	
M <u>187</u> R	
M <u>187</u> R-BT2	61
187R-MV	
M <u>187</u> R-MV	
<u>188</u> A	
M <u>188</u> A	61
V <u>188</u> A	61
<u>188</u> R	
M <u>188</u> R	
V <u>188</u> R	
189 FA	
M <u>189</u> FA	63
M189FA-AMP	oo
M189FA-CLP	
189FR	
M <u>189</u> FR	63
M <u>189</u> FR-AMP	63
M189FR-CLP	63
M189FR-CLP	
M189FR-CLP 190FA M190FA	
M189FR-CLP 190FA M190FA M190FA-AMP	63
M189FR-CLP 190FA M190FA M190FA-AMP M190FA-CLP	63 63
M189FR-CLP	63 63
M189FR-CLP	63 63 63
M189FR-CLP	63 63 63 63
M189FR-CLP	63 63 63 63
M189FR-CLP	63 63 63 63 63
M189FR-CLP	63 63 63 63 63 92
M189FR-CLP	63 63 63 63 92 92
M189FR-CLP	63 63 63 63 92 92 70
M189FR-CLP	63 63 63 63 92 92 70
M189FR-CLP	63 63 63 63 92 92 70 70
M189FR-CLP	63 63 63 63 92 92 70 70 202 202
M189FR-CLP	63 63 63 63 92 92 70 70 202 202 64
M189FR-CLP	63 63 63 63 92 92 70 70 202 202 64 64
M189FR-CLP	63 63 63 63 92 70 202 202 202 64 64
M189FR-CLP	63 63 63 63 92 70 70 202 202 64 64 64
M189FR-CLP	63 63 63 63 92 92 70 202 202 64 64 64

1.44	192R		_
IVI	<u>192</u> H	•••	04
	1 92 SA		
M <u>1</u>	I <u>92</u> SR		64
	l 93 -492	. 2	202
B1	l 93 -492	. 2	202
1	1 93 A		65
M1	1 93 A		65
M	193 A-MV	•••	6
IVI	193FA	•••	00
	193 FA	•	00
M1	1 <u>93</u> FA	•••	65
M ₁	193 FCA		65
M ₁	193 FCR		65
1	193 FR		65
M1	193 FR		6.5
1	193R		6
144	193R	•••	61
IVI	190 D MV	• • •	00
M	193R-MV		6
M ₁	193SA		65
M ₁	193 SCR		65
M1	193SR		65
	194A		
	194A		
	194FA	•••	ot
M ₁	194FA		ю
	194FR		66
	<u>194</u> FR		
	194R		66
	194R		
1	1 <u>95</u> A		6
N/I	195 A	•••	6.
MA	195 A-MV	•••	6-
	195FA		
	<u>195</u> FA		
	195FR		67
M1	195FR		67
1	1 95 R		67
	195R		
	195R-MV		
	196A		
M	1 <u>96</u> A		68
NA-	196 ABS	•••	60
	196KA		
	<u>196</u> KR		
	<u>196</u> R		
M ₁	<u>196</u> R		68
	1 97 A		68
M1	1 97 A		68
M1	197 A-AMP		68
	197FA		
M1	197 FA-AMP		68
	197FR		
IVI_	197 FR-AMP	•••	bò
M <u>1</u>	1 <u>97</u> G-AMP		68
1	<u>197</u> KA		68
	197KFA		68
	197KFR		68
1	197KR		68
1	1 97 R	ĺ	68
	1 97 R		
	197R-AMP		
IVI	100 A	•••	00
	<u>198</u> A		08
M1	198A		68
	198 ABS		
V1	198KA		69
V1	198KR		69
1	198R		69
M1	198R		60
	199A		
	199 A-AMP		
IVI_	199FA	•••	0
M1	199 FA-AMP		08
M ₁	199FR		69
M ₁	199 FR-AMP		69
1	199KA		69
1	199KFA		69
	199KFR		
1	199KR		60
M	199R	•	60
	1 99 R-AMP		
IVI	203A		70
140	203A		7/
IVI	203A	٠	00

HTED

NEW PART NUMBERS HIG	SHI IGH	1
M203C1	-	
V203C1		
203R		
M <u>203</u> R		
<u>203</u> W1		
M <u>203</u> W1		
V <u>203</u> W 1 M215A		
V215A		
M215R		
V <u>215</u> R		
M <u>233</u> A		
M <u>233</u> CA		
M <u>233</u> CR M233FA		
M233FCA		
M <u>233</u> FCR		
M <u>233</u> FR		
M <u>233</u> R		
M <u>250</u> W-BT21 M 253 A		
M 253 A M 253 R		
253SA-11		
253 SA-21		
253 SW-1 1		
253 SW-21		
M <u>271</u> A		
M271A-AMP M271A-BT3		
271KA		
271KA-BT3		
271 KR		
271 KR-BT3		
M <u>271</u> R		
M271 R-AMP		
M <u>271</u> R-BT3 M 272 A		
272KA		
M274A		
274KA		
<u>274</u> KR		
M <u>274</u> R		
M <u>277</u> K M <u>277</u> K-BT2		
M277KL		
M <u>277</u> KL-BT2	71	
M <u>286</u> A		
M <u>286</u> A-BT3		
286KA 286KA-BT3		
000I/D	74	
286KR-BT3		
M <u>286</u> R		
M <u>286</u> R-BT3		
<u>290</u> -091		
290-0911 2901		
M290 1		
V2901		
290B-P1	105	
M <u>290</u> B-P1		
290 C 1		
M <u>290</u> C 1 V <u>290</u> C 1		
290C-AMP1	105	
M290 C-AMP 1		
290C-BT2 1	105	
M290 C-BT21	105	
M <u>290</u> C-MFP 1		
290 C-MV		
290C-SM1		
M290 C-SM 1	105	
290C-SM-BT21	05	
M290C-SM-BT21	105	
M290 C-SM-PKD 1	105	
290-BT21		
M <u>290</u> -BT21 290-MV1		
M290-MV	05	
M291 C-AMP 1	107	
M <mark>291</mark> C-BT21	107 I	

IDLX
D IN YELLOW
M <u>291</u> C-BT236 107 291 KC-BT2 107
M <u>296</u> C107
M <u>296</u> C-PKD107
M <u>296</u> XC 107 V <u>296</u> XC 107
298C107
M <mark>298</mark> C107
V <u>298</u> C 107
M <u>298</u> C-BT2 107 306 -25A
306-25C252
306-25R252
306A
306R21
V <u>306</u> R21
308-15BLK252 308-15R252
308L22, 52
308L-PKD22, 52
308R22, 52 308R-PKD22, 52
309AA52
309R22
310-15A252 313-221
M313-221
V <u>313</u> -221
313-2RA51
V <u>313</u> -2RA51 <u>313</u> -15A252
313-15BLK252
313-15R252
313AA 51 V313AA 51
313R51
V <u>313</u> R51
V <u>316</u> MA146 V 316 MR146
318L17
318L-AMP 17
<u>318</u> L-P17 318 R17
318R-AMP17
318R-P17
319AA 43 319R 17
M <u>320</u> A
M <u>321</u> A43
V <u>327</u> AA 42 V 327 L 42
V <u>327</u> E
334-15A253
B <u>334</u> -15A
B 334 -15B253
334-15R253
B <u>334</u> -15R
M <u>335</u> -2-BT252
<u>337</u> -253
V <u>338</u> -2
B338-15A253
338-15R253
B <u>338</u> -15R253 V 339 A42
339A-BT242
M <u>339</u> R17
V <u>339</u> R 17, 42 M339R-DEU 17
343-25A253
343-24150
343 A 50 M343 A 50
344-49203
344 A 53
M <u>350</u> A 46 350A-P 46
<u>350</u> A-P46 M <u>350</u> A-P46
M <u>350</u> A-PKD246

350AF	46
M <u>350</u> AF	46
<u>351</u> A	
M <u>351</u> A	
V <u>351</u> A	
351AF	
352A	
M352A	
V <u>352</u> A	50
M <u>352</u> KA	
M <u>353</u> A	
M <u>353</u> R	
M355A	
M <u>355</u> AF	
356A	
M <u>356</u> A	47
356 AF	
M <u>356</u> AF	
	14 14
	114
M358-2	114
358-31	114
	114
	114
	14 14
	114
	114
	115
M <u>359</u> -1	115
	115
	115
	l 15 l 15
	115
	183
M359-1-BT21	115
	115
	115
	l 15
	113
	113
<u>362</u> -1	113
	113
	113
<u></u>	113
	113
	113
M363-1	113
	113
	113
	113 113
	113
	113
	113
	113
	113
	113
	l 16 l 16
	116
	116
	116
	117
	117
P <u>373</u>	210
375-15C2	
	117
	253
	120
	117
	17 17

M**382**C120

V<u>382</u>S120

_	<u>33</u> -25A	
	<u>83</u> -25C 84-15A	
	34 -15C	
	<u>84</u>	
	<u>84</u> S	
	<u>85</u> S 85S	
	38-09X	
	38 -09X	
	<u>88</u> A	
	88A 88C	
M38		
	38C	
_	<u>88</u> R 88R	
	88WB	
	88WB	
	88WB	
_	<u>89</u> -15C 89S	
	39S	
	90S	
	<u>90</u> S	
	<u>91</u> -25 91	
	91C	. 121
	92-25C	
M39 M39	93C 94C	
M39		
	97C	
	97C	
M39	98-BT2 98-BT2	. 118 . 118
	99-BT2	
	<u>00</u>	
	<u>00</u> 08	
	08	
V -T(JO	. 134
41	10-15A	. 253
4	<u>10</u> -15A <u>10</u> -15B	. 253 . 253
4 ⁻ 4 ⁻	10-15A	. 253 . 253 . 253
4° 4° 84° V4°	1 <u>0</u> -15A 1 <u>0</u> -15B 1 <u>0</u> -15R 1 <u>0</u> -15R	. 253 . 253 . 253 . 253 . 253
41 41 841 V41 41	1 <u>0</u> -15A 1 <u>0</u> -15B 1 <u>0</u> -15R 1 <u>0</u> -15R 1 <u>0</u> -15R	. 253 . 253 . 253 . 253 . 253 . 100
41 41 841 V41 41	10-15A	. 253 . 253 . 253 . 253 . 253 . 100 . 253
4: 4: 84: V4: 4: 4: 4:	10-15A	. 253 . 253 . 253 . 253 . 253 . 100 . 253 . 203 . 100
4: 4: 84: V4: 4: 4: 4: 4: P4:	10-15A	. 253 . 253 . 253 . 253 . 253 . 100 . 253 . 100 . 210
4: 4: 84: V4: 4: 4: 4: P4: M4:	10-15A	. 253 . 253 . 253 . 253 . 253 . 100 . 253 . 100 . 210 . 100
4: 4: 84: V4: 4: 4: 4: P4: M4: M4:	10-15A	. 253 . 253 . 253 . 253 . 253 . 100 . 253 . 100 . 210 . 100
41 41 841 V41 41 41 41 M41 M41 M41	10-15A	. 253 . 253 . 253 . 253 . 253 . 100 . 253 . 203 . 100 . 210 . 100 . 100
4: 4: 84: V4: 4: 4: 4: 4: M4: M4: M4: 4: 4: 4: M4: M	10-15A	. 253 . 253 . 253 . 253 . 253 . 253 . 203 . 100 . 253 . 100
4: 4: 84: V4: 4: 4: 4: 4: M4: M4: M4: M4: M4: M4:	10-15A	. 253 . 253 . 253 . 253 . 253 . 253 . 203 . 203 . 100 . 210 . 100
### ##################################	10-15A 10-15B 10-15B 10-15B 10-15B 10-15B 10-25B 11-07 11-24 11-24 11-24 11-24 11-25 11-25 11-27 11-27 11-24 11-24 11-24 11-25 11-25 11-27 11-27 11-28 11-29 11-30 11	. 253 . 253 . 253 . 253 . 253 . 100 . 253 . 203 . 100 100 100
### ##################################	10-15A 10-15B 10-15B 10-15B 10-15B 10-15B 10-21 10-21 10-25B 11-07 11-24 11-07 11-24 11-07 11-24 11-07 11-30 11	. 253 . 253 . 253 . 253 . 253 . 100 . 253 . 203 . 100 100 100
### ##################################	10-15A 10-15B 10-15B 10-15B 10-15B 10-15B 10-25B 11-07 11-24 11-24 11-24 11-24 11-25 11-25 11-27 11-24 11-27 11-24 11-24 11-24 11-24 11-25 11-25 11-26 11-36 11	. 253 . 253 . 253 . 253 . 253 . 253 . 203 . 203 . 100 . 100 100
4 4 4 4 4 4 4 4 4 4	10-15A	. 253 . 253 . 253 . 253 . 253 . 100 . 253 . 100 . 210 . 100 . 100
Here to the second seco	10-15A	. 253 . 253 . 253 . 253 . 253 . 100 . 253 . 100 . 210 . 100 . 100
### ##################################	10-15A	. 253 . 253 . 253 . 253 . 253 . 253 . 203 . 100 210 100
A	10-15A	. 253 . 253 . 253 . 253 . 253 . 253 . 203 . 210 . 100 . 100 22 22 22
A	10-15A	. 253 . 253 . 253 . 253 . 253 . 253 . 203 . 210 . 210
44 44 44 44 44 44 44 4	10-15A	. 253 . 253 . 253 . 253 . 253 . 253 . 203 . 100 . 100 . 100
4	10-15A	. 253 . 253 . 253 . 253 . 253 . 253 . 100 . 210 . 100
4 4 4 4 4 4 4 4 4 4	10-15A	. 253 . 253 . 253 . 253 . 253 . 253 . 203 . 100 . 210 . 100 . 100
44 44 44 44 44 44 44 4	10-15A	. 253 . 253 . 253 . 253 . 253 . 253 . 203 . 100 . 210 . 100
44 44 44 44 44 44 44 4	10-15A	. 253 . 253 . 253 . 253 . 253 . 203 . 210 . 210 . 100
Head	10-15A	. 253 . 253 . 253 . 253 . 253 . 203 . 100 . 210
### ##################################	10-15A	. 253 . 253 . 253 . 253 . 253 . 253 . 203 . 100 . 210 . 100
4 4 4 4 4 4 4 4 4 4	10-15A	. 253 . 253 . 253 . 253 . 253 . 253 . 203 . 100 . 210 . 100
4 4 4 4 4 4 4 4 4 4	10-15A	. 253 . 253 . 253 . 253 . 253 . 203 . 210 . 210 . 100
Head	10-15A	. 253 . 253 . 253 . 253 . 253 . 203 . 100 . 210

B <u>417</u>	<u>7</u> -492	204
	7 -493 7 -493	
	7 -496	
	<u>7</u> -496 7 KR	
V417	7KTA	38
	<u>7</u> R 7R-P	
M417	7TA-P	38
	<u>8</u> -10 8 KR	
V418	BKTA	38
	<u>8</u> R 8 R-4	
M418	8R-4	15
	<u>8</u> R-P 8 TA-P	
418	B WTA	41
	<u>9</u> -25A 9- 25R	
M419	9	26
	<u>0</u> -15 0- 15	
	0KR	
	<u>0</u> QA-P <u>1</u> -09	
	<u>1</u> -18 1-18	
	<u>1</u> -18 <u>1</u> -49	
	1-49	
	<u>1</u> -491 <u>1</u> -491	
	<u>1</u> -491RS <u>1</u> -491Y	
421	<u>1</u> A	49
	<u>1</u> A 1HR	
421	1KA	49
	<u>1</u> KA 1KR	
M421	1KR	23
	<u>1</u> KR 1R	
	IR	
	<u>1</u> R <u>3</u> -11	
	<u>3</u> -11	
	<u>3</u> A-4 <u>3</u> A-4	
	<u>3</u> KR 3QA-P	
423	3R-4	15
	<u>3</u> R-4 3W-4	
M423	3W-4	119
	<u>3</u> XR-4 4- 09	
M424	4R	24
	<u>5</u> 5 	
425	5S	24
	<u>5</u> S22, 23, 24,	
426	<u>6</u> -09	185
	<u>6</u> -10 6- 11	
	<u>6</u> -18	
	<u>6</u> -18 <u>6</u> A	
	<u>6</u> A 6KA	
426	6KR	25
	<u>6</u> KR 6KR	
426	6R	25
	<u>6</u> R 6R	
426	<u>6</u> WTA	50
	<u>8</u> -09 <u>8</u> -09	
	8 -09	

PART NUMBER INDEX

NEW PART NUMBERS HIGHLIGHTED IN YELLOW

NEW PART	NUMBERS	HIGHLIGH
<u>428</u>		26
	9	
	9	
	9	
	91 91	
	91	
	92	
	A D	
	7 R	
	5	
	P	
	X	
	X	
	9	
B <mark>440</mark> -0	9	191
	9	
	5 5	
1 110		
	51R	
	5	
	8	
	8	
	4 R	
M 452		29
M <mark>456</mark> -3	P	30
V <u>456</u> L.		30
	3P	
	5	

D IN YELLOW	
V457	30
M <u>457</u> L	
V <u>457</u> L	
B <u>457</u> L-15	
<u>459</u> -1 459	
B 460 A	
B 460 R	
461 B	
<u>461</u> B-48	
<u>461</u> R 461R-48	
463-1	
464-1	
464 -2	230
<u>465</u> -1	
<u>465</u> -2	
<u>465</u> -3 465-4	
465-4K	
<u>465</u> -5	230
<u>465</u> K	
467-1	
467-4K 468-1C	
469-1	
<u>469</u> -3	
<u>469</u>	
470-1	
B <u>472</u> A V 472 A	
B 472 R	
V <u>472</u> R	
B <u>474</u> A	
B <u>474</u> R	
B <u>475</u> A V475A	
B475R	
V <u>475</u> R	
476A	
B <u>476</u> A	
476R	
477 A	
B <u>477</u> A	
<u>477</u> R	
B <u>477</u> R B 479 A	
B <u>479</u> R	
B <u>480</u> A	
V <u>480</u> A	
B <u>480</u> R V 480 R	
481 A	
B <u>481</u> A	236
481 R	
B <u>481</u> R B 483 A	
V 483 A	
B 483 R	
V <u>483</u> R	
B <u>484</u> A	
B <u>484</u> R B 486 W	
B 487 A	
V 487 A	
B <u>487</u> R	
V <u>487</u> R	
489A	
489R	
B <u>489</u> R	
490 A	
B <u>490</u> A	
490R	
491 A	
B <u>491</u> A	233
491 R	
B <u>491</u> R B 492 A	233

	!
V 493 KA	232
	232
	216
	216
	134
V502HT	
M <u>503</u> HF	134
V <u>503</u> HF	
V <u>503</u> HT V504HF	
	135
	136
	135
	135 135
	135
M <u>507</u> S.	135
	135
	135 188
	2221
B <u>511</u> -72	2221
	136
)137
)215
	216
	137 2137
	137
	136
	32 32
	32
	33
	248
	195
	195 139
	138
	195
	138
	195
	195
<u>571</u> 572	195 195
	195 196
V <u>573</u>	196
	196
	196 196
	196
	196
	138 '249
	138
	242
	240 240
	240
605	242
	240 240
	240)241
609	244
	245
	245 245
	245
	242
	241 241
	241
655X.	241

667 X243

700-15C	
100	121
701 -83	158
701 -491	209
701C	
M <u>701</u> C	
V <u>701</u> C	122
701C-ECE-LHT	158
V <u>701</u> KC-2	122
702C	
V <u>702</u> C	
703C	122
V703C	122
705C	
	-
V <u>705</u> C	
<u>711</u>	
V <u>711</u>	123
717A	
717C	
<u>717</u> R	
<u>740</u> -09	
740 A	146
740R	146
744A	
745A	
<u>751</u> -24K	
<u>751</u> A	
752A	157
752MA	
755-15A	
<u>756</u> -15A	
<u>756</u> -15B	
756-15R	254
756-21	148
756- 23	
756A	
<u>756</u> A24	
<u>756</u> MA	148
756R24	148
760-25A	254
760-25C	
<u>700</u> -230	
700 4	
<u>760</u> A	
<u>760</u> A <u>760</u> MA	
	156
760MA 761A	156 156
761 A 761 MA	156 156 156
760 MA	156 156 156 149
760MA 761A 761MA 762A	156 156 156 149 148
760MA	156 156 156 149 148 150
760MA 761A 761MA 762A	156 156 156 149 148 150
760MA	156 156 156 149 148 150
760MA	156 156 156 149 148 150
760MA	156 156 156 149 148 150 152 150 152
760MA	156 156 156 149 148 150 152 150 152
760MA	156 156 156 149 148 150 152 150 152 153
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 766-25A 150, V768A 769-1A	156 156 156 149 148 150 152 150 152 153 153
760MA	156 156 156 149 148 150 152 150 152 153 153
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 766-25A 150, V768A 769-1A 769-1C	156 156 156 149 148 150 152 153 153 153 153
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 766-25A V768A 769-1A 769-1B 769-1C 769-1HA	156 156 156 149 148 150 152 153 153 153 153
760MA 761A 761MA 762A 763A 764A-2 V764MA 766-25A V768A 769-1A 769-1B 769-1C 769-1HA 769-1R	156 156 156 149 148 150 152 153 153 153 153 153
760MA 761A 761MA 762A 763A 764A-2 V764MA 766-25A 150, V768A 769-1A 769-1C 769-1HA 769-2MA	156 156 156 149 148 150 152 153 153 153 153 153 153
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 766-25A 769-1A 769-1B 769-1C 769-1HA 769-1B 769-1C 769-1B	156 156 156 149 148 150 152 153 153 153 153 154 254
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 766-25A 150, V768A 769-1A 769-1B 769-1C 769-1HA 769-1B 769-1C 769-1HA 769-2MA 769-25A 769-25B	156 156 156 149 148 150 152 153 153 153 153 153 154 254 254
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 766-25A 150, V768A 769-1A 769-1B 769-1R 769-1R 769-1R 769-25A 769-25B 769-25B	156 156 156 149 148 150 152 153 153 153 153 153 154 254 254 254
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 766-25A 150, V768A 769-1A 769-1B 769-1R 769-1R 769-1R 769-25A 769-25B 769-25B	156 156 156 149 148 150 152 153 153 153 153 153 154 254 254 254
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 766-25A 769-1B 769-1C 769-1HA 769-2MA 769-25B 769-25B 769-25B 769-25B	156 156 156 149 148 150 152 153 153 153 153 153 153 154 254 254 254 255
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 766-25A	156 156 149 148 150 152 153 153 153 153 153 153 154 254 254 254 255 254
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 769-1A 769-1B 769-1C 769-1H 769-25A 769-25B 769-25C 769-25H 769-25R 769-25R 769-3	156 156 149 148 150 152 153 153 153 153 153 153 153 254 254 254 254 255 254 153
760MA 761A 761MA 762A 763A 764A-2 V764MA 769-1A 769-1B 769-1C 769-1HA 769-1B 769-1B 769-1C 769-1B 769-1B 769-1B 769-1B 769-1B 769-1B 769-1B 769-1B 769-1B 769-25A 769-25B 769-25B 769-25B 769-25B 769-25B	156 156 149 148 150 152 153 153 153 153 153 153 254 254 254 255 254 153 153
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 769-1A 769-1B 769-1C 769-1HA 769-25A 769-25B 769-25C 769-25H 769-25R 769-25R 769-25R 769B 769B 769C	156 156 149 148 150 152 153 153 153 153 153 153 154 254 254 254 255 254 153 153
760MA 761A 761MA 762A 763A 764A-2 V764MA 769-1A 769-1B 769-1C 769-1HA 769-1B 769-1B 769-1C 769-1B 769-1B 769-1B 769-1B 769-1B 769-1B 769-1B 769-1B 769-1B 769-25A 769-25B 769-25B 769-25B 769-25B 769-25B	156 156 149 148 150 152 153 153 153 153 153 153 154 254 254 254 255 254 153 153
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 769-1A 769-1B 769-1C 769-1HA 769-25A 769-25B 769-25C 769-25H 769-25R 769-25R 769-25R 769B 769B 769C	156 156 149 148 150 152 153 153 153 153 153 153 154 254 254 254 255 153 153 153 153 154 254 254 255 153 153 153 153 154 254 254 255 155 255 255 255 255 255 255 255 255
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 766-25A 769-1A 769-1B 769-1B 769-25A 769-25B	156 156 149 148 150 152 153 153 153 153 153 153 154 254 254 254 255 153 153 153 153 153 153 153 153 153 1
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 766-25A 769-1A 769-1B 769-1B 769-25A 769-25B 769A 769B 769B	156 156 149 148 150 152 153 153 153 153 153 153 154 254 254 255 153 153 153 153 153 153 153 153 153 1
760MA 761A 761MA 762A 763A 764A-2 V764MA 769-1A 769-1B 769-1C 769-1HA 769-25A 769-25B 769-25C 769-25HA 769-25R 771-15A	1566 1566 1499 1488 1500 1522 1533 1533 1533 1533 1534 2544 2544 2554 2554 1533 1533 1533 1533 1533 1533 1533 1
760MA 761A 761MA 762A 763A 764A-2 V764MA 769-1A 769-1A 769-1B 769-1C 769-1HA 769-1B 769-25A 769-25B 769-25B 769-25C 769-25HA 769-25H 769-25A 769-25B 769-25C 769-25HA 769-25A 769-25B 769-25A 769-25B 769-25A 769-25B 769-25A 769-25B 769-25A 769-25B 769-25A 769-25B 779-25A 779-25B	156 156 156 149 148 150 152 153 153 153 153 153 154 254 254 255 255 153 153 153 153 153 153 153 153 153 1
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 769-1A 769-1B 769-1C 769-1HA 769-25A 769-25B 771-15A 771-15B V771A	1566 1566 1499 1488 1500 1522 1533 1533 1533 1533 1533 1534 2544 2554 2554 2554 1533 1533 1533 1533 1533 1533 1533 1
760MA 761A 761MA 762A 763A 764A-2 V764MA 769-1A 769-1A 769-1B 769-1C 769-1HA 769-1B 769-25A 769-25B 769-25B 769-25C 769-25HA 769-25H 769-25A 769-25B 769-25C 769-25HA 769-25A 769-25B 769-25A 769-25B 769-25A 769-25B 769-25A 769-25B 769-25A 769-25B 769-25A 769-25B 779-25A 779-25B	1566 1566 1499 1488 1500 1522 1533 1533 1533 1533 1533 1534 2544 2554 2554 2554 1533 1533 1533 1533 1533 1533 1533 1
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 766-25A 150, V768A 769-1A 769-1B 769-1C 769-1HA 769-25A 769-25B 769-25B 769-25C 769-25B 769-25C 769-25B 769-25C 769-25B 769-25C 769-25B 769-25C 769-25B 769-25C 779-25B 769-25B	156 156 156 149 148 150 152 153 153 153 153 153 153 153 153 153 153
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 766-25A 769-1A 769-1B 769-1B 769-1B 769-25A 769-25B 769-25B 769-25B 769-25B 769-25B 769-25B 769-25B 769-25B 769-1 76	156 156 156 149 148 150 152 153 153 153 153 153 153 153 153 153 153
760MA 761A 761MA 762A 763A 764A-2 V764MA 769-1A 769-1A 769-1B 769-1C 769-1HA 769-25A 769-25A 769-25C 769-25HA 769-25R 769-25R 769-25R 769-25R 769-25R 769-25R 769-25R 771-15B V771A V771B V772A V773A 774-15A	156 156 156 149 148 150 152 153 153 153 153 153 153 153 153 153 153
760MA 761A 761MA 762A 763A 764A-2 V764MA 769-1A 769-1B 769-1C 769-1HA 769-25A 769-25B 769-25C 769-25H 769-25R 771-15B V771A V771B V772A V773A 774-15B	156 156 156 149 148 150 152 153 153 153 153 153 153 153 153 153 153
760MA 761A 761MA 762A 763A 764A-2 V764MA 769-1A 769-1A 769-1HA 769-1B 769-1C 769-1HA 769-25A 769-25B 769-25B 769-25H 769-25H 769-25H 769-15H 771-15H	156 156 156 149 148 150 152 153 153 153 153 153 153 153 153 153 255 254 254 254 254 255 147 146 147 146 147 147 146 147 147 148 148 148 149 149 149 149 149 149 149 149 149 149
760MA 761A 761MA 762A 763A 764A-2 V764MA 769-1A 769-1A 769-1HA 769-25A 769-25B 771-15A 771-15B V771A V771B V771A V771B V772A V773A 774-15B 774-15B 774-15B 774-15B V774A	156 156 156 148 150 152 153 153 153 153 153 153 153 153 153 153
760MA 761A 761MA 762A 763A 764A-2 V764MA 769-1A 769-1A 769-1HA 769-1B 769-1C 769-1HA 769-25A 769-25B 769-25B 769-25H 769-25H 769-25H 769-15H 771-15H	156 156 156 148 150 152 153 153 153 153 153 153 153 153 153 153
760MA 761A 761MA 762A 763A 764A 764A-2 V764MA 766-25A 150, V768A 769-1A 769-1B 769-1C 769-1HA 769-25A 769-25B 769-25B 769-25C 769-25B 769-25C 769-25B 769-25C 769-17 769-18 769-17 771-15B	156 156 156 148 150 152 153 153 153 153 153 153 153 153 153 153
760MA 761A 761MA 762A 763A 764A-2 V764MA 769-1A 769-1A 769-1HA 769-25A 769-25B 771-15A 771-15B V771A V771B V771A V771B V772A V773A 774-15B 774-15B 774-15B 774-15B V774A	1566 1566 1566 1499 1488 1500 1522 1533 1533 1533 1533 1533 1533 1533

<u>780</u> V780	
7 <u>81</u>	
V <u>781</u>	
782	
<u>782</u> -BT2	
V <u>783</u>	
<u>784</u> 784-C	
785	
786 -97	
786 -102	198
<u>787</u> A	
<u>788</u> A	
<u>789</u> A 789MA	
789R	
790A	
790B	155
<u>790</u> C	
790R	
<u>791</u> -25A 791A	
791MA	
792C	
<u>793</u> A	
<u>794</u> -09	
<u>797</u> A 798A	
799A	
800W-9	
M800W-9	124
800WF-9	
M <u>800</u> WF-9	
<u>805</u>	
810	242
814R	
M <u>814</u> R	
<u>816</u> R	
M <u>816</u> R	
<u>817</u> -09 B 817 -09	
817 -10	
B 817 -10	
<u>817</u> -48	204
B <u>817</u> -48	204
817-49 B817-49	
B 817 -49L	
B <u>817</u> -49S	
<u>817</u> -49Y	
B <u>817</u> -481	
B <u>817</u> -482	
B <u>817</u> -491 B <u>817</u> -492	205
817 -497	
817 -4996	
<u>817</u> -49288	
<u>817</u> A-36	38
1101=1 00	
M <u>817</u> A-36	
817A-7	
817A-7 M <u>817</u> A-7	
817A-7	35
817A-7 M817A-7 817A-9 M817A-9 817C-7	94
817A-7 M817A-7 817A-9 M817A-9 817C-7 M817C-7	94 94
817A-7 M817A-7 817A-9 M817A-9 817C-7 M817C-7	94 94 95
817A-7 M817A-7 817A-9 M817A-9 817C-7 M817C-7 817C-9 M817C-9	94 95 95
817A-7 M817A-7 817A-9 M817A-9 817C-7 M817C-7 M817C-9 M817C-9 M817C-9 M817CR-2 M817CR-2	94 95 95 13
817A-7 M817A-7 817A-9 M817A-9 817C-7 M817C-7 M817C-9 M817C-9 M817C-9 M817CR-2 M817CR-2 M817CR-2	94 95 95 13 13
817A-7 M817A-7 817A-9 M817A-9 817C-7 M817C-7 817C-9 M817C-9 817CR-2 M817CR-2 M817CR-3 817CR-3	94 95 95 13 13
817A-7 M817A-7 817A-9 M817A-9 817C-7 M817C-7 817C-9 M817C-9 817CR-2 M817CR-2 M817CR-3 M817CR-36	94 95 95 13 13 14
817A-7 M817A-7 817A-9 M817A-9 817C-7 M817C-7 817C-9 M817C-9 M817CR-2 M817CR-2 M817CR-3 M817CR-36 M817CR-36	9 ² 9 ⁵ 95 13 13 14 14
817A-7 M817A-7 817A-9 M817A-9 817C-7 M817C-7 817C-9 M817C-9 817CR-2 M817CR-2 M817CR-3 M817CR-36	9 ² 9 ⁵ 95 13 13 14 14 3 ²
817A-7 M817A-7 817A-9 M817A-9 817C-7 M817C-7 817C-9 M817C-9 M817C-9 M817CR-2 M817CR-2 M817CR-36 M817CR-36 817KA-7 817KA-9 817KC-9	94 95 95 13 14 14 34 35 95
817A-7 M817A-7 817A-9 M817A-9 817C-7 M817C-7 M817C-9 M817C-9 M817C-9 817CR-2 M817CR-2 M817CR-36 M817CR-36 M817CR-36 M817CR-36 W817CR-36 W817CR-36 W817CR-36 W817CR-36	94 95 95 13 14 14 14 34 94 95
817A-7 M817A-7 817A-9 M817A-9 817C-7 M817C-7 817C-9 M817C-9 M817C-9 M817CR-2 M817CR-2 M817CR-36 M817CR-36 817KA-7 817KA-9 817KC-9	94 95 95 13 14 14 34 94 95

817KR-9.....5

ITEC

NEW PART NUMBERS	HIGHLIGH
<u>817</u> R-36	8
M <u>817</u> R-36 817R-7	
M <u>817</u> R-7	4
817R-9 M817R-9	
817SA-1	142
817SA-2 817SA-9	
M <u>817</u> SA-9	
817SR-9 817SW-9	-
817TA-2C	
M <u>817</u> TA-2C 817W-9	
M <u>817</u> W-9	
817YA 818A-36	
M <u>818</u> A-36	
<u>818</u> A-7 M <u>818</u> A-7	
818 A-9	
M <u>818</u> A-9	
<u>818</u> C-7 M <u>818</u> C-7	
818C-9	
M <u>818</u> C-9 818CR-2	
M818CR-2	-
818CR-36 M818CR-36	
818KA-7	
<u>818</u> KA-9 818KC-7	
818 KC-9	95
<u>818</u> KR-7 818KR-9	
818R-36	8
M <u>818</u> R-36 818R-7	
M <u>818</u> R-7	4
V <u>818</u> R-7 818R-9	
M <u>818</u> R-9	5
818SA-1 818SA-2	
818SA-9	140
M <u>818</u> SA-9 818SR-9	
818 SW-9	140
<u>818</u> TA-2C M <u>818</u> TA-2C	40
<u>818</u> W-9	124
M <u>818</u> W-9 <u>818</u> WTA	
<u>818</u> YA	41
820 -09 B 820 -09	
820 -10	187
B <u>820</u> -10 820	
820 A-10	37
M <u>820</u> A-10 820 A-22	
M <mark>820</mark> A-22	39
<u>820</u> A-7 M820A-7	
820C-10	97
M <u>820</u> C-10 <u>820</u> C-7	97 96
M <u>820</u> C-7	96
<u>820</u> KA-10 <u>820</u> KA-7	
820KC-10	97
820KC-7 820KR-10	
820 KR-7	6
820KSA 820QA	
820 R-10	7
M <u>820</u> R-10	7

	NIVELLOW	
	N YELLOW	
M	820R-22 820R-7	
М	<u>820</u> R-7	
	820 SA-1 1	42
		40
M		40
		42
		40
M		40
	<u></u>	42 40
	821 2	
	821 A-10	37
	821A-10	
	821A-22 821A-22	
	821A-22	
	821 A-7	36
M	821 A-7	
М	821 C-10 821 C-10	
. v I	821C-7	
M	821 C-7	96
1/	821KA-10 821KA-22	
٧	821KA-22 821KA-7	
٧	821 KA-7	36
	821 KC-10	
۱/	821 KC-7 821 KC-7	
٧	821 KR-10	
	821 KR-22	9
	821 KR-7	
٧	821 KR-7 821 R-10	
M	821 R-10	
	821 R-22	
	821 R-22 821 R-22	
٧	821R-7	
	821R-7	
M	821 SA-10 1 822 A-10	
М	822A-10	
	822 A-22	39
M	822A-22	
М	822 A-7 822 A-7	
	822C-10	
M		97
	822C-7 822C-7	
ıvl	822KA-10	
	822KA-7	36
٧	822KA-7	
	822 KC-10 822 KC-7	
٧	822 KC-7	96
	822 KR-10	
\/	822KR-7 822KR-7	
٧	822R-10	
	822R-10	7
	822R-22	9
IVI	822 R-22 822 R-7	
M	822R-7	6
	823 A-10	37
	823 A-10 823 A-22	
	823 A-22	
	823 A-7	36
M	823 A-7	36
IVI	823 ATL-10 823 C-10	97
	823C-10	97
	823 C-7	
	823CTI-7	96

823HSA-1 142 **823**HSA-2 142

	KA-10	
	KA-7	
	<c-10 <c-7< td=""><td></td></c-7<></c-10 	
	KR-10	
	KR-7	
	QA	
	QCA	
	R-10 R-10	
	R-22	
	R-22	
	R-7	
	R-7 RTL-10	_
	RTL-7	
	RTL-7	
	SA-1	142
	SA-10 SA-2	140
	SR-10	140
823	SW-10	
	4-7	
	4-7 4-9	
	4-9	
824	4-MV	. 40
	4-MV	
8240 M8240	C-7 C-7	
8240		
M <mark>824</mark> 0	C-9	. 95
8240		. 98
	C-MV KA-7	
	<Α-7<	
824	<a-9< td=""><td>. 35</td></a-9<>	. 35
	(C-7	
V <u>824</u> r	С-7	94
8241	(C-9	
	(C-9 (R-7	. 95
824 V824	KR-7 KR-7	4 4
824 V824 824	<r-7 <r-7 <r-9< td=""><td> 95 4 4</td></r-9<></r-7 </r-7 	95 4 4
824 V824 824 824	KR-7 KR-7 KR-9 R	4 4 5
824 V824 824 824 M824	<r-7 <r-7 <r-9< td=""><td> 95 4 5 11</td></r-9<></r-7 </r-7 	95 4 5 11
824F V824F 824F M824F M824F M824F	KR-7 KR-7 KR-9 R <	4 5 11 11
824F V824F 824F 824F M824F 824F M824F 824F	KR-7 KR-7 KR-9 R R R-7 R-7 R-9	95 4 5 11 4 4
824F V824F 824F 824F M824F 824F M824F M824F	(R-7(R-7(R-9	95 4 5 11 4 4 5
824F V824F 824F 824F M824F 824F M824F 824F M824F	KR-7 KR-7 KR-9 R R R-7 R-7 R-9	95 4 5 11 4 5 5
824F V824F 824F M824F 824F M824F 824F M824F 824F M824F 824F	KR-7 KR-9 R-9 R-1 R-1 R-7 R-7 R-9 R-9 R-MV R-MV R-MV R-MV	95 4 5 11 4 5 5 5
824F V824F 824F M824F 824F M824F 824F M824F 824F M824F 826F M826F	KR-7	95 4 5 11 4 5 5 5 11 34
824F V824F 824F M824F 824F M824F 824F M824F 824F M824F 826F M826F 826F	KR-7 KR-9 	95 4 5 11 4 5 5 5 11 34 34
824 V824 824 824 M824 824 M824 824 M824 824 M824 826 M826 826 M826 826	KR-7. KR-7. KR-9. R-7. R-7. R-7. R-7. R-9. R-9. R-9. R-9. R-MV. R-MV. A-7. A-7. A-9. A-9. A-9. A-9. A-9. A-MV.	95 4 5 11 4 5 5 5 34 34 35
824F V824F 824F 824F 824F 824F 824F 824F M824F 824F M826F 826F M826F 826F M826F	KR-7. KR-7. KR-9. R-7. R-7. R-7. R-7. R-9. R-9. R-9. R-9. R-MV. A-7. A-7. A-9. A-9. A-MV. A-MV.	95 4 5 11 4 5 5 11 34 34 35 35
824F V824F 824F 824F 824F M824F 824F M824F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F	KR-7 KR-7 KR-9 R-9 R-7 R-7 R-9 R-9 R-MV A-7 A-7 A-9 A-9 A-9 A-9 A-MW A	95 4 5 11 4 5 5 11 34 34 35 35 40
824F V824F 824F 824F 824F 824F M824F 824F M824F 8266 M8266 8266 M8266 M8266 M8266 M8266 M8266 M8266 M8266 M8266 M8266	KR-7 KR-7 KR-9 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1	95 4 5 11 11 5 5 11 34 35 35 40 40 94
824F V824F 824F 824F 824F 824F 824F 824F 824F	KR-7 KR-7 KR-9 R-9 R-1 R-7 R-7 R-9 R-9 R-9 R-9 R-9 R-MV R-MV A-7 A-7 A-9 A-9 A-MV A-MV A-MV C-7 C-7 C-7	95 4 5 11 4 5 11 34 35 35 40 94 94 95
824F V824F 824F 824F 824F 824F 824F 824F 824F	KR-7. KR-7. KR-9. R-1. R-2. R-3. R-3. R-3. R-4. R-9. R-1. R-1. R-1. R-1. R-1. R-1. R-1. R-1	95 4 5 11 4 5 5 11 34 35 35 40 94 94 95 95
824F V824F 824F 824F M824F 824F M824F 824F M824F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F 826F M826F 826F 826F 826F 826F 826F 826F 826F	KR-7. KR-7. KR-9. R. R. R. R. R. R-7. R-9. R-9. R-9. R-MV. R-7. A-7. A-7. A-9. A-9. A-MV. C-7. C-9. C-9. C-9. C-9. C-MV.	95 4 5 11 4 5 11 34 35 35 40 94 94 95 995 998
824F V824F 824F M824F 824F M824F 824F M824F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F 826F 826F 826F 826F 826F 826F	KR-7. KR-7. KR-9. R-1. R-2. R-3. R-3. R-3. R-4. R-9. R-1. R-1. R-1. R-1. R-1. R-1. R-1. R-1	95 4 5 11 4 5 5 11 34 34 35 40 94 94 95 98 98 98
824F V824F 824F 824F 824F 824F 824F 824F 826F 826F 826F 826F 826F 826F 826F 826	KR-7 KR-7 KR-9 R-9 R-7 R-7 R-7 R-9 R-9 R-9 R-9 R-9 R-MV A-7 A-7 A-9 A-MV A-MV C-7 C-9 C-9 C-MV C-MV KA-7 KA-7 KA-9 KA-7 KA-7 KA-9 KA-7 KA-7 KA-9 KA-7 KA-9 KA-7 KA-9 KA-7 KA-9 KA-7 KA-9 KA-7 KA-9 KA-7 KA-7 KA-9 KA-7 KA-9 KA-7 KA-9 KA-7 KA-9	95 4 5 11 4 5 11 34 35 340 94 94 95 99 99 99 99 93 93
824F V824F 824F 824F M824F 824F M824F 826F 826F M826F 826F M826F 826F M826F 826F 826F 826F 826F 826F 826F 826F	KR-7 KR-7 KR-9 R-9 R-9 R-7 R-7 R-9 R-9 R-9 R-9 R-9 R-9 R-9 R-MW R-4-7 A-7 A-9 A-MW R-7 C-7 C-7 C-9 C-9 C-9 C-MW CA-7 KA-7 KA-9 KG-7	95 4 5 11 4 5 11 34 35 34 35 94 99 99 99 99 99 99
824F V824F 824F M824F 824F M824F 824F M824F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F 826F 826F 826F 826F 826F 826F	(R-7 (R-7 (R-9 R-7 R-7 R-7 R-7 R-7 R-9 R-1-MV A-7 A-7 A-7 A-7 A-9 A-MV C-7 C-7 C-7 C-9 C-9 C-9 C-MV (A-7 (A-7 (A-7 (A-7 (A-7 (A-7 (A-7 (A-7	95 4 5 11 11 4 5 11 34 35 35 40 94 94 95 94 94 95 94 94 95 94 94 95 94 94 994 95 94 94 95 994 9
824F V824F 824F M824F 824F M824F 824F M824F 826F M826F 826F M826F 826F M826F 826F W826F 826F W826F 826F W826F 826F W826F 826F 826F 826F 826F 826F 826F 826F	KR-7 KR-7 KR-9 R-9 R-9 R-7 R-7 R-9 R-9 R-9 R-9 R-9 R-9 R-9 R-MW R-4-7 A-7 A-9 A-MW R-7 C-7 C-7 C-9 C-9 C-9 C-MW CA-7 KA-7 KA-9 KG-7	95 4 5 11 11 4 5 11 34 35 35 94 94 95 95 94 95 94 95 94 95 94 95 95
824F V824F 824F 824F 824F 824F 824F 824F 826F 826F 826F 826F 826F 826F 826F 826	KR-7 KR-7 KR-9	9545111451134359495949594959495
824 V824 824 824 824 824 824 824 824	(R-7 (R-7 (R-9 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1	9545111114511343435949495989898989495
824 V824 824 824 M824 824 M824 826 M826 826 M826 826 M826 826 W826 826 826 W826 826 826 W826 826 826 826 826 826 826 826	KR-7 KR-7 KR-9 R-9 R-1 R-7 R-9 R-7 R-7 R-9 R-7 R-9 R-9 R-MV A-7 A-7 A-7 A-9 A-9 A-MV C-7 C-7 C-7 C-9 C-MV KA-7 KA-7 KA-9 C-7 C-7 C-9 C-W KA-7 KA-9 KA-9 KA-9 KA-9 KA-9 KA-9 KA-9 KA-9	954511451134343435949495949594959495949591
824F V824F 824F 824F 824F 824F 824F 824F 826F 826F 826F 826F 826F 826F 826F 826	KR-7 KR-7 KR-9 R-9 R-1 R-7 R-7 R-9 R-9 R-9 R-9 R-9 R-9 R-9 R-MV R-7 A-7 A-9 A-9 A-9 A-9 A-MV C-7 C-7 C-9 C-9 C-MV C-7 C-7 C-9 C-9 C-MV C-7 KA-7 KA-7 KA-9 KA-7 KA-7 KA-9 KA-7 KA-7 KA-9 R-7 KR-7 KR-7 KR-7 R-8 R-1 R-1 R-1 R-1	954511113435353594959898989898989891919191
824F V824F 824F 824F 824F 824F 824F 824F 824F 826F	KR-7 KR-7 KR-9 R-9 R-1 R-7 R-7 R-9 R-7 R-9 R-9 R-9 R-7 R-9 R-7 R-9 R-7 R-9 R-7 R-9 R-7 KA-7 A-9 A-9 A-9 A-9 A-9 C-7 C-7 C-9 C-9 C-9 C-MV CA-7 KA-7 KA-9 KA-7 KA-9 KA-7 KA-9 KA-7 KA-9 R-7 KA-9 R-7 KA-7 KA-9 R-7 R-7 R-7 R-7 R-7 R-7	95451111343594959894959495949594949594949594
824k V824k 824k 824k 824k 824k 824k 824k 824k	(R-7 (R-7 (R-7 (R-9 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1 -1	9545111114511113453540949594959495949511111111
824F V824F 824F M824F 824F M824F 824F M824F 826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M826F 826F M82	(R-7 (R-7 (R-9 	95451111343540959495949591959195

	12
M827R	12
M <mark>829</mark> C-7	
829R-7	
M <u>829</u> R-7	
<u>830</u> 2	
832 2	43
B 835 2	44
836 2	
840	
M <u>840</u>	
V <u>840</u>	
<u>840</u> L	18
M840L	18
V 840 L	18
844 -25218, 2	
844 -25318, 2	
844	
M <u>844</u>	
V <u>844</u>	18
844L	18
M844L	18
	18
M844-BT3	
	19
V <u>845</u>	
<u>845</u> L	19
V845L	19
	89
	89
	09 88
	88
	89
850-092V 1	89
	89
	89
	67
	67
	67
	67
0000	00
	68
850 C-199, 1	68
850C-199, 1 P850C-199, 1	68 68
850C-1	68
850C-1	68 68
850C-1	68 68 68
850C-1 99, 1 P850C-1 99, 1 850C-1P 99, 1 850C-AMP 99, 1 850F-SW 1	68 68 68 68
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 HC-1 99, 1	68 68 68 68 67
850 99, 1 P850 99, 1 850 -1 99, 1 850 850 -AMP 99, 1 850 850 F-SW 1 850 850 HC-1 99, 1 850 850 HC-1 99, 1 1 850 HC-1 90, 1 1 850 HC-1 90, 1 1 850 HC-1 90, 1 1 90, 1 1 90, 1 1 90, 1 1 90, 1 1 90, 1 1 90, 1 1 90, 1 1 90, 1 1 90, 1 1 90, 1 1 90, 1 1 90, 1 1 90, 1 1 90, 1 1 90, 1 1	68 68 68 68 67 68
850 99, 1 P850 99, 1 850 -1 99, 1 850 850 -AMP 99, 1 850 850 -FSW 1 850 850 16, 1 850 16, 1 850 16, 1 850 16, 1	68 68 68 68 67 68 67
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 HC-1 99, 1 850 R 16, 1 850 R-1 16, 1 P850 R-1 16, 1	68 68 68 68 67 68 67 67
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 HC-1 99, 1 850 R 16, 1 850 R-1 16, 1 P850 R-1 16, 1 850 R-1P 16, 1	68 68 68 67 67 67 67
850 99, 1 P850 99, 1 850 -1P	68 68 68 68 67 68 67 67 67
850 99, 1 P850 99, 1 850 -1 850 -1 850 -1 850 -5 850 -8 850 1 850 1 850 1 850 1 850 1 850 1 850 1 850 1 850 3 850 1 850 3 850 3 850 3	68 68 68 68 67 68 67 67 67 41
850 99, 1 P850 99, 1 850 -1P	68 68 68 68 67 68 67 67 67 41 41
850 99, 1 P850 99, 1 850 -1 850 -1 850 -AMP 850 -AMP 850 -1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 1 850 1 850 1 851 1 851 1 851 1 851 1 851 1	68 68 68 68 68 67 66 67 67 67 41 41 68 68
850 99, 1 P850 99, 1 850 -1 99, 1 850 850 -AMP 99, 1 850 850 -FSW 1 850 16, 1 99, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 1 850 1 850 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1	68 68 68 68 67 68 67 67 67 41 41 68 68
850 99, 1 P850 99, 1 850 -1 850 -1 850 -1 850 -1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 1 850 1 850 1 851 1 851 1 851 1 851 1 851 1 851 1	68 68 68 68 68 67 67 67 67 41 41 68 68 68
850 99, 1 P850 99, 1 850 -1 99, 1 850 850 -AMP 99, 1 850 850 -FSW 1 850 16, 1 99, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 1 850 1 850 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1 851 1	68 68 68 68 68 67 67 67 67 41 41 68 68 68
850 99, 1 P850 99, 1 850 -1 850 -1 850 -1 850 -1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 1 850 1 850 1 851 1 851 1 851 1 851 1 851 1 851 1	68 68 68 68 68 67 67 67 67 67 41 41 68 68 68 68 68
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 HC-1 99, 1 850 R-1 16, 1 850 R-1 16, 1 850 R-1 16, 1 850 SA 1 850 SA 1 850 SA 1 851 A-R 1 851 A-R-SW 1 851 A-R-SW 1 851 F-C-SW 1 856 M856	68 68 68 68 68 67 66 67 67 67 67 68 68 68 68 68 68 19
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 HC-1 99, 1 850 R-1 16, 1 850 R-1 16, 1 850 R-1 16, 1 850 SA 1 850 SA 1 850 SA-AMP 1 851 A-R 1 851 A-R-SW 1 851 F-C-SW 1 856 M856 V856	68 68 68 68 68 67 67 67 67 41 41 68 68 68 68 68 19
850 99, 1 P850 99, 1 850 99, 1 850 99, 1 850 7 850 99, 1 850 99, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 1 850 1 850 1 851 1 851 1 851 1 851 1 856 1 W856 1 8	68 68 68 68 67 67 67 67 67 41 41 68 68 68 68 68 19 19
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 HC-1 99, 1 850 HC-1 99, 1 850 HC-1 16, 1 850 R-1 16, 1 850 R-1P 16, 1 850 SA-AMP 1 850 SA-AMP 1 851 A-R-SW 1 851 A-R-SW 1 851 F-C-SW 1 856 M856 W856 856 L M856 L M856 L	68 68 68 68 68 67 67 67 67 41 41 68 68 68 68 68 19 19
850 99, 1 P850 99, 1 850 -1 99, 1 99, 1 850 -1 850 -SW 99, 1 850 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 851 16, 1 851 1 851 1 851 1 851 1 856 1 856 1 856 1 856 1 856 1 856 1 856 1 856 1 856 1 856 1 856 1 856 1 856	68 68 68 68 68 67 66 67 67 67 41 41 68 68 68 68 68 19 19 19
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 HC-1 99, 1 850 R-1 16, 1 850 R-1 16, 1 850 R-1 16, 1 850 SA 1 850 SA 1 851 A-R 1 851 A-R-SW 1 851 A-R-SW 1 855 C-SW 1 856 C-W856 W856 W856 L W856 L W856 L 860 SA-1 1	68 68 68 68 68 67 66 67 67 67 41 41 68 68 68 68 68 68 19 19 19 19 44
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 HC-1 99, 1 850 R-1 16, 1 850 R-1 16, 1 850 R-1 16, 1 850 SA 1 850 SA 1 851 A-R 1 851 A-R 1 851 A-R-SW 1 851 F-C-SW 1 856 W856 W856 W856 W856 W856 W856 W856 860 SA-1 1 860 SA-2 1	68 68 68 68 67 66 67 67 67 67 67 68 68 68 68 68 19 19 19 19 44 44
850 99, 1 P850 99, 1 850 -1P 850 -1P 850 -FSW 1 850 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 1A 16, 1 850 850 1A 1 850 1 851 1 851 1 851 1 851 1 851 1 851 1 855 1 855 1 855 1 855 1 855 1 855 1 855 1 855 1 855 1 855 1 855 1 855	68 68 68 68 67 66 67 67 67 67 67 41 41 41 41 41 41 41 41 41
850 99, 1 P850 99, 1 850 -1P 99, 1 850 850 -RMP 99, 1 850 850 F-SW 1 850 16, 1 850 850 16, 1 850 16, 1 850 8-1 16, 1 850 850 8-1 16, 1 850 850 8-1 1 851 851 R-R-SW 1 851 851 R-R-SW 1 855 W856 W856 W856 W856 W856 W856 856 856 860 SA-1 1 860 SA-2 1 860 SA-2 1 860 SA-4 1	68 68 68 68 66 67 67 67 67 64 41 41 68 68 68 68 68 68 19 19 44 44 44 44
850 99, 1 P850 99, 1 850 -1P 99, 1 850 850 -FSW 1 850 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 10, 1 850 10, 1 850 10, 1 850 10, 1 850 10, 1 851 10, 1 851 10, 1 851 10, 1 851 10, 1 851 10, 1 851 10, 1 851 10, 1 851 10, 1 851 10, 1 851 10, 1 851 10, 1 851 10, 1 851 10, 1 851 10, 1 851 10, 1 852	68 68 68 68 67 66 67 67 67 67 67 41 41 41 41 41 41 41 41 41
850 99, 1 P850 99, 1 850 -1 850 -1 850 -5 850 -8 850 1 850 16 850 16 850 16 850 16 850 16 850 16 850 1 850 8 1 851 1 851 1 851 1 851 1 851 2 1 856 856 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 </th <th>68 68 68 68 66 67 67 67 67 64 41 41 68 68 68 68 68 68 19 19 44 44 44 44</th>	68 68 68 68 66 67 67 67 67 64 41 41 68 68 68 68 68 68 19 19 44 44 44 44
850 99, 1 P850 99, 1 850 -1 850 -1 850 -5 850 -8 850 1 850 16 850 16 850 16 850 16 850 16 850 16 850 1 850 8 1 851 1 851 1 851 1 851 1 851 2 1 856 856 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 </th <th>68 68 68 68 66 67 67 67 67 41 41 68 68 68 68 68 19 119 119 44 44 44 44 44 44 44</th>	68 68 68 68 66 67 67 67 67 41 41 68 68 68 68 68 19 119 119 44 44 44 44 44 44 44
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 F-SW 1 850 R-1 16, 1 850 R-1 16, 1 850 R-1P 16, 1 850 SA 1 850 SA-MP 1 851 A-R 1 851 A-R-SW 1 851 A-R-SW 1 855 C-SW 1 856 C-W856 1 856 C-W856 1 860 SA-1 1 860 SA-2 1 860 SA-3 1 860 SA-4 1 861 SA-2 1 861 SA-2 1 861 SA-3 1	68 68 68 668 667 667 667 667 668 668 668
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 F-SW 1 850 R-1 16, 1 850 R-1 16, 1 850 SA 1 850 SA-MP 1 851 A-R 1 851 A-R-SW 1 851 F-C-SW 1 856 B 1 856 C 1 856 C 1 860 SA-1 1 860 SA-2 1 860 SA-3 1 860 SA-4 1 860 SA-1 1 860 SA-2 1 860 SA-1 1 860 SA-2 1 860 SA-1 1 860 SA-2 1 860 SA-3 1 860 SA-1 1 860 SA-1 1 860 SA-1 1 860 SA-1 1 861 SA-1 <t< th=""><th>68 68 68 68 68 67 67 67 67 67 41 41 68 68 68 68 68 68 68 69 119 119 119 144 444 445 445 445 445</th></t<>	68 68 68 68 68 67 67 67 67 67 41 41 68 68 68 68 68 68 68 69 119 119 119 144 444 445 445 445 445
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 HC-1 99, 1 850 R-1 16, 1 850 R-1 16, 1 850 SA-1 16, 1 850 SA-1P 16, 1 850 SA-MP 1 851 A-R 1 851 A-R-SW 1 851 F-C-SW 1 856 M856 V856 856 L M856 L V856 L 860 SA-1 1 860 SA-2 1 860 SA-3 1 861 SA-1 1 861 SA-2 1 861 SA-3 1 861 SA-4 1 866 486 2	68 68 68 68 68 67 67 67 67 67 41 41 68 68 68 68 68 69 119 119 119 144 44 44 44 44 44 44 44 44 44 45 45 66 66 66 66 66 66 66 66 66 66 66 66 66
850 99, 1 P850 99, 1 850 -1 850 -1 850 -AMP 99, 1 850 850 -SW 1 850 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 850 16, 1 851 16, 1 851 16, 1 851 16, 1 851 16, 1 851 16, 1 851 16, 1 851 16, 1 851 1 851 1 851 1 851 1 856 1 856 1 856 1 856 1 856 1	68 68 68 68 66 66 66 67 67 67 67 41 41 68 68 68 68 68 68 19 19 19 19 19 19 19 19 19 19 19 19 19
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 F-SW 1 850 R 16, 1 850 R-1 16, 1 850 R-1 16, 1 850 R-1 16, 1 850 SA-AMP 1 851 A-R 1 851 A-R-SW 1 851 A-R-SW 1 851 A-R-SW 1 856 B-SS6 1 W856 SS6 1 W856 SS6 1 W856 SS6 1 W856 SS6 1 W856 SS7 1 860 SA-2 1 860 SA-3 1 861 SA-1 1 861 SA-2 1 861 SA-3 1 861 SA-4 1 861 SA-4 1 861 SA-4 1 861 SA-3 1 861 SA-4 1 861 S	68 68 68 68 66 66 66 67 66 67 66 67 67 41 41 68 68 68 68 68 69 19 19 19 19 19 19 19 19 19 19 19 19 19
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 F-SW 1 850 R-1 16, 1 850 R-1 16, 1 850 R-1P 16, 1 850 SA 1 850 SA-AMP 1 851 A-R 1 851 A-R-SW 1 851 F-C-SW 1 855 F-C-SW 1 856 L 1 W856 L 1 W856 L 2 860 SA-1 1 860 SA-2 1 860 SA-3 1 861 SA-2 1 861 SA-2 1 861 SA-3 1 865 SA-3 1 866 SA-4 1 866 SA-3 1 866 SA-4 1 866 SA-4 1 866 SA-3 1 866 SA-4 1 866 SA-1	68 68 68 668 667 667 667 667 667 667 667
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 F-SW 1 850 R-1 16, 1 850 R-1 16, 1 850 SA-1 16, 1 850 SA-1 1 850 SA-MP 1 851 A-R 1 851 A-R-SW 1 851 F-C-SW 1 856 M856 V856 856 L V856 L 860 SA-2 1 860 SA-2 1 860 SA-3 1 861 SA-2 1 861 SA-2 1 865 SA-1 1 866 SA-1 1 866 SA-1 1 866 SA-1 1 866 SA-1 1	68 68 68 668 667 667 667 667 667 667 668 668
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 F-SW 1 850 F-SW 16, 1 850 R-1 16, 1 850 R-1 16, 1 850 SA 1 850 SA 1 851 R-R 1 851 A-R 1 851 A-R-SW 1 851 F-C-SW 1 856 W856 W856 856 L 860 SA-1 1 860 SA-2 1 860 SA-3 1 861 SA-2 1 861 SA-3 1 865 SA-4 1 866 SA-1 1	68 68 68 66 66 66 66 67 66 67 66 67 67 67 67 67
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 HC-1 99, 1 850 R 16, 1 850 R-1 16, 1 850 R-1 16, 1 850 R-1 16, 1 850 SA 1 850 SA-AMP 1 851 A-R 1 851 A-R-SW 1 851 A-R-SW 1 856 M856 V856 856 L M856 V856 L 860 SA-1 860 SA-2 1 860 SA-3 1 861 SA-1 1 861 SA-2 1 861 SA-3 1 865 SA-4 1 866 FSA-1 1 866 SA-1 1 866 SA-2 1 866 SA-2 1	68 68 68 668 667 667 667 667 667 667 668 668
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 HC-1 99, 1 850 R 16, 1 850 R-1 16, 1 850 R-1 16, 1 850 R-1 16, 1 850 SA-AMP 1 851 A-R 1 851 A-R 1 851 A-R-SW 1 856 W56 1 856 W856 1 860 SA-1 1 860 SA-2 1 860 SA-2 1 860 SA-3 1 861 SA-2 1 861 SA-3 1 861 SA-4 1 861 SA-4 1 866 SA-2 1 866 SA-1 1 866 SA-1 1 866 SA-1 1 866 SA-2 1 866 SA-2 1 866 SA-2 1 866 SA-2	68 68 68 66 66 66 66 67 66 67 66 67 67 67 67 67
850 C-1 99, 1 P850 C-1 99, 1 850 C-1P 99, 1 850 C-AMP 99, 1 850 F-SW 1 850 HC-1 99, 1 850 R 16, 1 850 R-1 16, 1 850 R-1 16, 1 850 R-1 16, 1 850 SA-AMP 1 851 A-R 1 851 A-R 1 851 A-R-SW 1 856 M856 V856 W856 L 1 W856 L 860 SA-2 1 860 SA-2 1 860 SA-3 1 861 SA-2 1 861 SA-3 1 861 SA-4 1 866 SA-2 1 866 SA-1 1 866 SA-2 1	68 68 68 66 66 66 66 67 66 67 67 67 61 61 61 61 61 61 61 61 61 61 61 61 61

867SA-1......144

M867SA-1	44
	44
M <u>867</u> SA-2	44
867SA-3	44
867SA-4	44
869R	
M869R	
	119
M870W	119
M870W-BT2	19
	119
M <u>872</u> W	
M <u>872</u> W-BT2	119
M880-7	
M 880 -7P	
880 -492	
B 880 -492	205
B 880 -4912	205
B 880 -4962	
<u>880</u> K-7	
<u>880</u> K-7-MV	10
M880-7-MV	10
M <mark>880</mark> -PL3	
M881-7	
M <u>881</u> -7P	
<u>881</u> K-7	10
881 K-7-MV	
M881-7-MV	
M <u>882</u> -7	
M <u>882</u> -7P	
882 K-7	10
882 K-7-MV	10
M <u>882</u> -7-MV	
M <u>883</u> -7	10
M883-7P	10
883K-7	10
883K-7-MV	
003 K-7-WV	10
M <u>883</u> -7-MV	
<u>901</u> -MV1	24
V901-MV 1	24
903-MV	25
	25
	25
	25
904-MV-BT21	25
	26
	26
V(905 M)/	
	26
	26
M <u>905</u> -MV-BT2	26
	26
MODE MV	26
V <u>906</u> -MV1	26
	26
M906-MV-BT2	26
	27
	27
	27
	27
	27
	28
	28
	28
	28
	28
	28
	27
	27
	27
912-MV1	29
	29
	29
	29
	29
V913-MV1	29
	30
	30
	30
	30
	30
	30
920B-MV	
320 D-IVI V	U

REFLECT

TECH

PART NUMBER INDEX

NEW PART NUMBERS HIGH	ILIGH1
<u>921</u> -MV	
V <u>921</u> -MV 921-MV-BT2	
928-MV	
930-MV	
931-MV V932-MV	
V <u>932</u> -WV	
V <u>934</u> -MV	133
V <u>941</u> V944	
V <u>947</u>	
V <u>955</u>	
1197SA 1200-09H	
1200-09X	
B <u>1200</u> -09X	
P <u>1200</u> A	
<u>1200</u> A-AMP	169
1200 C	169
P <u>1200</u> C	
1200R	169
P <u>1200</u> R	
<u>1200</u> R-AMP <u>1203</u> A	
P <u>1203</u> A	169
1203A-PKD 1203C	
P <u>1203</u> C	
1203 C-PKD	169
<u>1203</u> R P <u>1203</u> R	
1203R-PKD	
1217 A-9	
1217A-R	
1217C-9	
1217F-9	
<u>1217</u> F-C 1217G-R	
1217KA-9	161
<u>1217</u> KC-9 1217KR-9	
1217R-9	
1218 A-9	
<u>1218</u> A-R 1218A-R-SW	
1218C-9	
	162
<u>1218</u> F-C 1218KA-9	
1218KC-9	
<u>1218</u> KR-9	
<u>1218</u> R-9 1220A-10	
1220 C-10	165
<u>1220</u> KA-10 <u>1220</u> KC-10	
1220 KC-10 1220 KR-10	165
1220R-10	165
<u>1223</u> A-10 1223A-4	
1223A-4 1223A-R-MV	
1223 C-10	
1223KA-10 1223KC-10	
1223 KR-10	165
<u>1223</u> R-10 1223R-4	
1223 H-4 1268 A-MTC	
1268 A-MV	170
P <u>1268</u> A-MV	
P1268 A-MVC	170
1268 A-MVC-BT2	170
1268R-MV	
1268R-MVC	170
P <u>1268</u> R-MVC	
1200 VV-IVI V	170

IN YELLOW	
P <u>1268</u> W-MV.	170
	238
	238
	238 238
1288	
1288A	
1288B	
	159
<u>1288</u> F	
<u>1288</u> R 1288TA	
1290-09	
1290-24	
<u>2217</u> A-R	164
2217F-C	
2218A-R 2218F-C	
2219A-R	
2219F-C	
B 2268 -18	
2268A-R-M\	<i>/</i> 170
P2268A-R-M\	/ 170
2268A-R-M\	
2290A-R-IVIV	
M <u>2290</u> A-R	160
2291 A-R	
M <u>2291</u> A-R	
2291 F-C	
M2291F-C	214
M2548A	
V <u>2548</u> A	91
M <u>2548</u> R	
	91
	255 255
	91
	91
<u>2578</u> -1	215
	215
2593 2594	174 174
	88
2636R	88
	214
V <u>2730</u>	
	211 211
	211
\(\alpha = 0.00	211
	238
	238
	50 194
	143
P4153SA	143
4154SA	143
	143
	143
	3143
4156SA	143
P <u>4156</u> SA	143
	3 143
	60 60
	58
4484R-1	58
	34
	76
	195 214
	214
B <u>5400</u> B	214
	214
	214
	211 211
	211
	211

5407 S211	PMV1545KT
B <u>5410</u> 212	PMV <u>1546</u> KT
V <u>5410</u> 212	PMV <u>1560</u> KT
V <u>5411</u> 212	PMV <u>1560</u> PT
V <u>5413</u> 212	PMV <u>1560</u> QT
<u>5414</u> 212	PMV <u>1575</u> PT
V <u>5414</u> 212	PMV <u>1585</u> KT
<u>5415</u> 213	PMV <u>1700</u> KT
V <u>5415</u> 213	PMV <u>1700</u> PT
V <u>5416</u> 213	PMV <u>1700</u> QT
V <u>5417</u> 213	PMV <u>1705</u> KT
B <u>5425</u> Y214	PMV <u>1725</u> KT
V <u>5425</u> Y214	PMV <u>1749</u> KT
PM <u>5564</u> PT 220	PMV <u>1755</u> KT
<u>5600</u> -1215	PMV <u>1755</u> QT
P <u>5600</u> -1215	PMV <u>1800</u> KT
<u>5600</u> 215	PMV <u>1800</u> PT
P <u>5600</u> 215	PMV <u>1800</u> QT
<u>5601</u> 215	PMV <u>1804</u> KT
<u>5602</u> 215	PMV <u>1805</u> KT
<u>5603</u> 215	PMV <u>1805</u> QT
V <u>7005</u> 192	PMV <u>1806</u> KT
7005 S 193	PMV <u>1806</u> QT
B 7005 S193	PMV <u>1808</u> KT
V <u>7007</u> 192	PMV1808QT
7007 S 193	PMV <u>1809</u> KT
B 7007 S 193	PMV <u>1825</u> KT
V 7009 192	PMV1855KT
7009 S 193	PMV1855PT
B 7009 S 193	PMV1855QT
V 7009 S 193	PMV1856KT
V 7011 192	PMV1856QT
7011 S 193	PMV1858KT
B 7011 S 193	PMV1858QT
7012 193	PMV1864KT
7013 193	PMV1864PT
V 25900 -09191	PMV1865KT
V 25911 -25255	PMV1865PT
V 25911 31	PMV1865QT
V25912-25255	PMV1900KT
V 25912 31	PMV <u>1900</u> PT
V <u>25913</u> -25255	PMV <u>1900</u> QT
V <u>25913</u> 31	PMV <u>1905</u> KT
V <u>25914</u> -25255	PMV <u>1905</u> QT
V <u>25914</u> 31	PMV <u>1906</u> KT
V <u>25921</u> -25255	PMV <u>1906</u> PT
V <u>25921</u> 31	PMV <u>1908</u> KT
V <u>25922</u> -25255	PMV <u>1908</u> PT
V <u>25922</u> 31	PMV <u>1909</u> KT
V <u>25923</u> -25255	PMV <u>1909</u> PT
V <u>25923</u> 31	PMV <u>1909</u> QT
V <u>25924</u> -25255	PMV <u>1913</u> QT
V <u>25924</u> 31	PMV <u>1955</u> KT
<u>95010-</u> 1246	PMV <u>1955</u> QT
<u>95011</u> -1246	PMV <u>1956</u> QT
<u>95020</u> -1246	PMV <u>2250</u> GT
<u>95021</u> -1246	PMV <u>2250</u> PT
<u>95023</u> -1247	PMV <u>2260</u> GT
<u>95051</u> -1247	PMV2260PT
<u>95083</u> -1246	PMV <u>2270</u> GT
<u>95087</u> -1246	PMV <u>2270</u> PT
95093-1247	PMV <u>3157</u> QT
MV <u>0002</u> -T221	PMV4008KT
MV <u>0099</u> PT227	PMV <u>4050</u> KT
MV <mark>0300</mark> T227	PMV <u>4138</u> KT
MV <u>0690</u> PT227	PMV <u>4238</u> KT
MV <u>0840</u> PT222 MV 0905 PT222	PMV <u>4239</u> KT PMV4339KT
MV0906PT222	PMV <u>4339</u> KT
	PMV <u>4439</u> KT PMV 4539 KT
MV <u>0950</u> PT222 MV 096 1PT222	
	PMV <u>5140</u> PT
MV <u>0963</u> PT222 MV 0967 PT222	PMV <u>5141</u> PT
MV <u>0967</u> PT222 MV 0969 PT222	PMV <u>5142</u> PT PMV5143PT
MV1100KT222	PMV <u>5143</u> PT PMV 5501 PT
MV1100PT222	PMV5503PT
MV1200KT222	PMV5504PT
MV1200PT222	PMV <u>5509</u> PT
	DIA (5540 DT

<u>5407</u> S211	PMV <u>1545</u> KT222
B <u>5410</u> 212	PMV <u>1546</u> KT222
V <u>5410</u> 212	PMV <u>1560</u> KT222
V <u>5411</u> 212 V 5413 212	PMV <u>1560</u> PT222 PMV1560QT222
5414212	PMV1575PT227
V 5414 212	PMV 1585 KT221
<u>5415</u> 213	PMV <u>1700</u> KT223
V <u>5415</u> 213	PMV <u>1700</u> PT223
V <u>5416</u> 213	PMV <u>1700</u> QT223
V <u>5417</u> 213 B 5425 Y214	PMV <u>1705</u> KT223 PMV1725KT23
V 5425 Y214	PMV 1749 KT223
PM5564PT220	PMV1755KT223
<u>5600</u> -1215	PMV <u>1755</u> QT223
P <u>5600</u> -1215	PMV <u>1800</u> KT223
<u>5600</u> 215	PMV <u>1800</u> PT223
P <u>5600</u> 215 5601 215	PMV <u>1800</u> QT223 PMV1804KT23
5602 215	PMV 1805 KT223
5603 215	PMV1805QT223
V <u>7005</u> 192	PMV <u>1806</u> KT223
7005S193	PMV <u>1806</u> QT223
B <u>7005</u> S193	PMV <u>1808</u> KT223
V <u>7007</u> 192 7007 S193	PMV <u>1808</u> QT223 PMV1809KT23
B 7007 S 193	PMV1825KT224
V 7009 192	PMV 1855 KT224
7009S193	PMV <u>1855</u> PT224
B <u>7009</u> S193	PMV <u>1855</u> QT224
V <u>7009</u> S 193 V 7011 192	PMV <u>1856</u> KT224
7011S193	PMV <u>1856</u> QT224 PMV1858KT224
B 7011 S 193	PMV1858QT224
7012 193	PMV <u>1864</u> KT224
<u>7013</u> 193	PMV <u>1864</u> PT224
V <u>25900</u> -09191	PMV <u>1865</u> KT224
V <u>25911</u> -25255 V 25911 31	PMV <u>1865</u> PT224 PMV1865QT224
V 25912- 25255	PMV1900KT224
V 25912 31	PMV <u>1900</u> PT224
V <u>25913</u> -25255	PMV <u>1900</u> QT224
V <u>25913</u> 31	PMV <u>1905</u> KT224
V <u>25914</u> -25255 V 25914 31	PMV <u>1905</u> QT224 PMV1906KT224
V 25921 -25255	PMV1906PT224
V <u>25921</u> 31	PMV <u>1908</u> KT224
V <u>25922</u> -25255	PMV <u>1908</u> PT224
V <u>25922</u> 31	PMV <u>1909</u> KT224
V <u>25923</u> -25255 V 25923 31	PMV <u>1909</u> PT224 PMV1909QT224
V 25924 -25255	PMV1913QT224
V <mark>25924</mark> 31	PMV <u>1955</u> KT225
<u>95010</u> -1246	PMV <u>1955</u> QT225
95011-1246	PMV <u>1956</u> QT225 PMV 2250 GT225
<u>95020</u> -1246 <u>95021</u> -1246	PMV 2250 G1225 PMV 2250 PT225
95023 -1247	PMV 2260 GT225
<u>95051</u> -1247	PMV 2260 PT225
<u>95083</u> -1246	PMV 2270 GT225
<u>95087</u> -1246 <u>95093</u> -1247	PMV <u>2270</u> PT225 PMV3157QT25
PMV 0002 -T221	PMV4008KT225
PMV 0099 PT227	PMV 4050 KT225
PMV <u>0300</u> T227	PMV <u>4138</u> KT225
PMV <u>0690</u> PT227	PMV <u>4238</u> KT225
PMV <u>0840</u> PT222	PMV <u>4239</u> KT225 PMV 4339 KT225
PMV <u>0905</u> PT222 PMV 0906 PT222	PMV4439KT225
PMV 0950 PT222	PMV4539KT225
PMV <u>0961</u> PT222	PMV <u>5140</u> PT226
PMV <u>0963</u> PT222	PMV <u>5141</u> PT226
PMV <u>0967</u> PT222	PMV <u>5142</u> PT226
PMV <u>0969</u> PT222 PMV1100KT22	PMV <u>5143</u> PT226 PMV 5501 PT216
PMV1100PT222	PMV 5503 PT217
PMV <u>1200</u> KT222	PMV <u>5504</u> PT217
PMV1200PT222	PMV <u>5509</u> PT217
PMV <u>1268</u> KT223	PMV <u>5510</u> PT217
PMV <u>1300</u> KT 223 PMV1300PT	PMV <u>5511</u> PT217 PMV5512PT217
PMV 1544 KT223	PMV 5512 P1217

PMV <u>5522</u> PT PMV <u>5525</u> PT	217
PMV <u>5525</u> PT	220
PMV <u>5530</u> PT	220
PMV <u>5536</u> PT	218
PMV5537PT	
PMV <u>5540</u> PT	218
PMV5543PT	
PMV <u>5540</u> PT PMV <u>5543</u> PT PMV <u>5544</u> PT	218
PMV 5545 PT	218
PMV <u>5546</u> PT	218
PMV <u>5560</u> PT	
PMV <u>5561</u> PT	
PMV <u>5562</u> PT	
PMV <u>5563</u> PT	219
PMV <u>5564</u> PT	
PMV <u>5570</u> PT	220
PMV <u>5571</u> PT PMV <u>5572</u> PT	219
PMV <u>5572</u> PT PMV 5576 PT	219
PMV <u>5577</u> PT	
PMV5579PT	217
PMV <u>5580</u> PT	
PMV <u>5583</u> PT	
PMV <u>5584</u> PT	
PMV <u>5587</u> PT	
PMV6110PT	221
PMV 7029 PT	221
PMV 7064 PT	226
PM\/7066PT	226
PMV 7067 PT	226
PMV <u>7074</u> PT	226
PMV <u>7076</u> PT	226
PMV <u>7077</u> PT	226
PMV <u>7120</u> QT	226
PMV <mark>8221</mark> PT	226
PMV <u>8226</u> PT	
PMV <u>81101</u> PT	226
PMV <u>81103</u> PT PMV <u>81121</u> PT	220
PMV <u>81123</u> PT	220
PMV <u>81141</u> PT	
PMV <u>81142</u> PT	226
PMV <u>81143</u> PT	226
PMV 81145 PT	226
PMV <mark>81147</mark> PT	
PMV <u>81161</u> PT	226
PMV <u>81162</u> PT	226
PMV <u>81163</u> PT PMV <u>81164</u> PT	
PMV <u>81164</u> PT	
PMV <u>81165</u> PT	
PMV <u>81166</u> PT	226
PMV <u>81181</u> PT	226
MIVIN <u>81183</u> P1	226
PMV <u>81181</u> PT PMV <u>81183</u> PT PMV <u>81187</u> PT M-CM-0714-Z	250
M-CM-1018-Z	250
M-ECK-T	227
M-ICM-0919-Z	259

SPOTLIGHT

DEFENDER HARNESS/LIGHTING SYSTEM

Modular harness technology that corrosion can't touch!



Its advanced technology is unlike any standard harness system ever built.

Peterson's **DEFENDER**® is the world's most advanced vehicle harness/lighting system. Proven *over 4 billion* rugged miles by major fleets, our modular DEFENDER is still performing like new—virtually maintenance-free!

That's why Peterson is proud to back DEFENDER with an iron-clad warranty against defects and corrosion for a **full 10 years**. And why we're confident it's the corrosion-proof harness/lighting solution that OEs and fleets have been waiting for.

HIGH TECH CONQUERS CORROSION

The chemical cocktails lurking on today's roads eat trailers and electric systems alive. In fact, corrosion is the trucking industry's #1 cause of electrical system failures, costing billions in repairs and equipment downtime.

So Peterson and our Maxi-Seal division committed to build not just a superior harness/lighting system, but to create a real solution to profit-killing corrosion—the DEFENDER®.

BUILT TO LAST—GUARANTEED

Other harnesses may claim rugged reliability, but the Defender system has logged over four billion real-world test miles to prove it. In all those miles, the system's fail rate is less than 1%!

If you're a fleet manager, think what a corrosion-proof Defender system on your trailers could save in maintenance and repair costs... equipment down time... and FMCSA citations for lighting outages.

In fact, just one less trip to the repair shop will pay the difference in the price of Defender versus a standard harness system.

Why fight today's costly corrosion problems with yesterday's harness technology? Now you can win that war with the Defender Harness System. Proudly made in the USA—and only from Peterson.




- Modular Design
- Heavy Duty Terminals
- Improved Bullets
- Dual Isolated Grounding
- Advanced Silicone Seals
- Integrated Moisture Barrier™
- Improved Breakout Design
- Patented Hard-Shell J560s
- Sealed Ring Terminals

SPOTLIGHT

PULSE INTELLIGENT TRAILER SYSTEM

Smart CAN-Bus technology for fleet trailers.

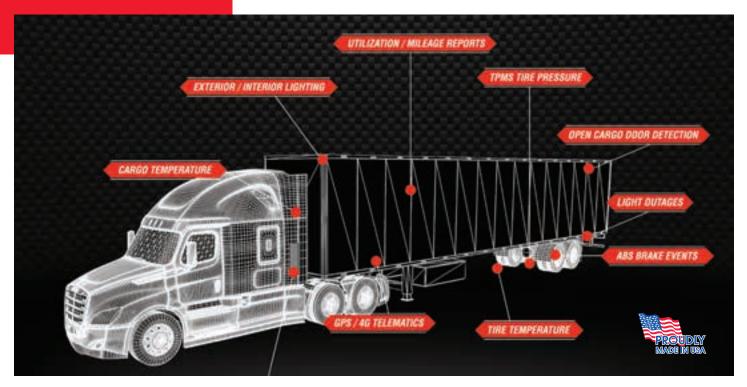

Peterson thinks it's time that fleet trailers got as smart as today's high-tech trucks, and is proud to introduce its patented **PetersonPULSE**^m intelligent trailer system.

PULSE is the unique trailer solution that brings CAN-Bus technology and telematic capability to trailers. Engineered specifically for fleet trailers, **PULSE** not only controls and detects real-time status of vital trailer system — lights, ABS brakes, tire pressure, cargo temperature, and more — but also alerts drivers and fleet managers via Bluetooth and cellular communications.

"PULSE brings trailers up to speed with today's smartest trucks," said Peterson's VP of Engineering, Cory Adams. "By signaling trailer issues as they happen, PULSE enhances the safety of driver and cargo, and helps avoid road incidents, CSA violations, and costly fines."

Peterson developed *PULSE* in partnership with industry leaders in TPMS/ABS and telematic technology. The system features Peterson's LumenX LED lighting package and the harness-building expertise of the company's Maxi-Seal division.

PetersonPULSE is engineered to CAN-Bus specifications, with high-speed, twisted-pair communication wires and sensors installed throughout the trailer. All components are fully sealed, vibration tested, and built for long life.

Compared to the heavy, multi-wire cabling of traditional harnesses, *PULSE* twisted-pair cabling is lighter weight, flexible, and installation friendly.

The **PULSE** cabling links front and rear control modules, system sensors, and communication components—just like computers in a network. "It's like an

information super highway," Adams said. "Whether a trailer is parked or underway, **PULSE** enables real-time monitoring of all trailer systems — anytime, anywhere. There's even a backup battery to power the system whether or not the trailer is connected to the tractor."

With a mobile device, a driver can do pre-trip walk-around inspections to check for issues with any trailer system — a "Know Before You Go" safeguard. On the road, **PULSE's** trailer intelligence detects any issues and sends alerts via Bluetooth to the driver's smart phone or tablet. Alerts can also be sent to fleet managers via a cellular network.

"PetersonPULSE makes fleet trailers as smart—and safe—as today's new trucks," Adams said.

PetersonPULSE is all USA-made and ready to go today, only from Peterson.







PM CORPORATE TIMELINE

- **1945 Wilbur Peterson sets up shop at 14th & Chestnut in Kansas City.** Early products include "Big Pete" tire pumps for Western Auto's famous Western Flyer bikes. In response to growing demand for aftermarket vehicle lighting, Peterson manufactures our first taillights.
- **1956 Don Armacost Sr. buys Peterson Manufacturing**; annual sales are \$750,000.
- **1960** The growing company moves to a **35,000-sq.-foot**. facility.
- 1961 Peterson innovation makes industry news with the **VIBAR® socket** first to protect fragile lights from vehicle vibration.
- 1968 We welcome Anderson Marine and Mission Plastics to the corporate family.
- 1970 Rapid growth dictates another relocation to our current site in **Grandview**, **Missouri**.
- 1974 The first of several **major plant expansions** boosts our warehousing capacity for finished goods.
- 1991 Further expansion increases our production capacity and makes room for **Mission Plastics North**. We acquire **Transworld Products** to meet the growing global demand.
- 1995 Peterson leads the industry in earning ISO 9001/QS-9000 registration. We introduce our first Piranha®-style LED light and launch a 39-LED round S/T/T with innovative lens optics.
- The efficiencies of our vertically integrated corporate campus are enhanced significantly with the addition of **Vector Tool & Engineering**. World-class design technology and mold-building expertise are now part of the family. This same year, Peterson partners with Alloyd in launching an automated blister packaging system.
- 2003 A 60,000-sq.-ft. warehouse addition ensures our ability to maintain an **industry-leading 98% fill rate** on orders. We launch our multi-function Strobe & Turn LED for the refuse industry another lighting first.
- 2005 Our custom wiring harness subsidiary, **Maxi-Seal**, moves into a state-of-the-art 65,000-sq.-ft. addition.
- 2006 High demand for our lights and growth in Peterson subsidiaries prompt expansions that bring our 44-acre Grandview campus to over 670,000-sq. feet under roof.
- 2007 Peterson receives Caterpillar's Silver Award, becoming the first lighting supplier ever to earn such an award.
- 2009 Global expansion marks our year as **Peterson Europe** adds over two dozen countries to our list of international trade partners. They join Australia, Canada, Mexico, New Zealand and South Africa in handling our ECE product line.
- **2010** Peterson's subsidiary, Maxi-Seal, launches the **Defender® System** in the truck-trailer industry specifically designed for fleet dry van, reefer, flatbeds, tankers, and grain trailers.
- **2011** Peterson continues automation and equipment expansion with the purchase of SMT technology, allowing us to populate our own LED boards. **Mission Plastics** introduces an industry first with insert molding technology.
- We introduce our **LumenX® LED** line, including S/T/T lights, turn signals, and backup lights. LumenX® are brighter than standard LEDs, and brighter is safer!
- **2013** Grandview's "Quiet Giant" is now a **quarter-billion-dollar corporation of 11 companies** and more than 3,000 people working in global transportation-related industries.
- 2014 Peterson launches our first LED headlight, a 7" round, Par56 unit which earns a HDT Top 20 products award.
- 2015 The Defender® System surpasses 4 billion miles of over-the-road performance virtually maintenance-free.
- **2017** Peterson continues manufacturing excellence with the upgraded **ISO9001:2015** certification.
- **2018** We launch our intelligent traler system, **Peterson** *PULSE*® at the 2018 TMC Show in Atlanta; it's named to HDT's Top 20 new products list.