

MOBILE LINK X2

SOURCE UNITS

SOURCE UNITS




MHL MobileLink X2 mobile device integration enables complete control of your smartphones and tablets. Conveiently launch any application, post social media updates, or play your own videos and all other content on your mobile device. Your smart device display is mirrored to the head units larger LCD screen, and all commands are sent via Bluetooth 3.0 connection. MHL MobileLink X2 ensures safe, hands-free operation of your smart device without the distractions of locating & handling the device. MHL MobileLink X2 integration cables are available for select Android enabled devices.

Bluetooth V3.0 with Enhanced Data Rate increases traditional data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.





*MHL



MHL MobileLink Interface Cables

HDM-i4 ~ iPhone4, iPhone4S, iPad2, & iPad3

HDM-A2 ~ Galaxy 2 & Select 5-Pin Android Devices

HDM-A3 ~ Galaxy 3, 4, & Select 11-PIN Android Devices

5ft interface cable unlocks 1080p video and audio playback from MHL enabled appropriate micro connector for your mobile device. Farenheit MobileLink MHL interface cables also charge your mobile device. Available for select iOS and Android devices.



PD-62H2B

2-DIN DVD, CD/MP3, AM/FM Receiver w/ 6.2" LCD, Bluetooth, & MHL MobileLink X2

2-DIN Multimedia Receiver w/ 6.2" LCD & MHL MobileLink X2 Complete Integration of Select Android Enabled Devices (requires MHL MobileLink accessory cable, sold separate) Bluetooth V3.0 Hands-Free Calling from Enabled Phone A2DP Wireless MP3 Audio Playback from Enabled Devices Built-in Microphone & External Microphone Included Accepts Farenheit OEM & Steering Wheel Control Interface Advanced FM/AM Tuner with RDBS Receiver Playback from DVD & CD of MP3 & MP4 Playback from 64GB SD/USB of MP3 & MP4 ID3 MP3 Tag Reading for Track & Artist Information AUX Audio Input for Personal Media Devices Front & Rear Pre-Amp Audio Outputs Variable Subwoofer Pre-Amp Output Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 300w 4ch. MOSFET Speaker Outputs Multi-Region FM Frequency Stepping 800x480 Widescreen Resolution 400NIT LED Backlight



















PD-72H2B

1-DIN DVD, CD/MP3, AM/FM Receiver w/ Motorized 7" LCD, Bluetooth, & MHL MobileLink X2

1-DIN Multimedia Receiver w/ 7" LCD & MHL MobileLink X2 Complete Integration of Select Android Enabled Devices (requires MHL MobileLink accessory cable, sold separate) Bluetooth V3.0 Hands-Free Calling from Enabled Phone A2DP Wireless MP3 Audio Playback from Enabled Devices Built-in Microphone & External Microphone Included Accepts Farenheit OEM & Steering Wheel Control Interface Advanced FM/AM Tuner with RDBS Receiver Playback from DVD & CD of MP3 & MP4 Playback from 64GB SD/USB of MP3 & MP4 ID3 MP3 Tag Reading for Track & Artist Information AUX Audio Input for Personal Media Devices Front & Rear Pre-Amp Audio Outputs Variable Subwoofer Pre-Amp Output Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 300w 4ch. MOSFET Speaker Outputs Multi-Region FM Frequency Stepping 800x480 Widescreen Resolution 400NIT LED Backlight

























SOURCE UNITS



MHL MobileLink X1 opens mirroring of smartphones and tablets to enabled in-car entertainment systems. Share with other passengers your own movies, social networking content, internet videos, or anything else your mobile device displays. Easily follow your smartphone's navigation commands on the larger head unit LCD instead of the smaller smart phone display. MHL MobileLink X1 replicates the image of your smart device onto the LCD screen of several in-car entertianment products, including select MobileLink X1 source units, headrests, and overhead displays. MHL MobileLink integration cables are available for select Android and iOS smart devices.

Bluetooth V3.0 with Enhanced Data Rate increases traditional data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.











Digital Signal Processing features include a digital 4-band equalizer with 7dB boost or cut, custom presets & factory presets. Additional DSP functions include variable subwoofer level control with lowpass crossover, loudness adjustment, & sound staging controls.





Customizing options include several preloaded background images & color changing graphic user interface. Select models include variable color front panel illumination. Choose a specific color to match your interior lighting scheme or random color change for a full color spectrum effect.







Play audio, video, and picture files through MobileLink X1 from a 32GB SD card, USB flash drive, or any DVD/R and CD/R. Supports MP3, WAV, MP4, and more.







MHL MobileLink Interface Cables

HDM-i4 ~ iPhone4, iPhone4S, iPad2, & iPad3

HDM-A2 ~ Galaxy 2 & Select 5-Pin Android Devices

HDM-A3 ~ Galaxy 3, 4, & Select 11-PIN Android Devices

5ft interface cable unlocks 1080p video and audio playback from MHL enabled appropriate micro connector for your mobile device. Farenheit MobileLink MHL interface cables also charge your mobile device. Available for select iOS and Android devices.



PD-624HB

2-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver, w/ 6.2" LCD, Bluetooth, & MHL MobileLink X1





PD-724HB





SOURCE UNITS









2-DIN Multimedia Receiver w/ 6.2" LCD & MHL MobileLink X1 On-Screen Mirroring of Select Android Smart Devices Bluetooth V3.0 Hands-Free Calling from Enabled Phone

A2DP Wireless MP3 Audio Playback from Enabled Devices

Accepts Farenheit OEM & Steering Wheel Control Interface

Advanced FM/AM Tuner with RDBS Receiver

Playback from 32GB SD/USB of MP3 & MP4

ID3 MP3 Tag Reading for Track & Information

AUX Audio Input for Personal Media Devices

RCA A/V Input for Auxiliary Sources

Front & Rear Pre-Amp Audio Outputs

Variable Subwoofer Pre-Amp Output

Video Output for Auxiliary Devices

Rear View Camera Input w/ Trigger

300w 4ch. MOSFET Speaker Outputs

Multi-Region FM Frequency Stepping

800x480 Widescreen Resolution

400NIT LED Backlight

4-Band Audio Equalizer w/ User Presets

Variable Subwoofer Low Pass Crossover

Playback from DVD & CD of MP3 & MP4

Custom Backgrounds & RGB Color Changing GUI & Front Panel



1-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver, w/ Motorized 7" LCD, Bluetooth, & MHL MobileLink X1

1-DIN Multimedia Receiver w/ Motorized 7" LCD & MobileLink X1 On-Screen Mirroring of Select Android Smart Devices Bluetooth V3.0 Hands-Free Calling from Enabled Phone A2DP Wireless MP3 Audio Playback from Enabled Devices Accepts Farenheit OEM & Steering Wheel Control Interface Custom Backgrounds & RGB Color Changing GUI & Front Panel Advanced FM/AM Tuner with RDBS Receiver Playback from DVD & CD of MP3 & MP4 Playback from 64GB SD/USB of MP3 & MP4 ID3 MP3 Tag Reading for Track & Information AUX Audio Input for Personal Media Devices RCA A/V Input for Auxiliary Sources 4-Band Audio Equalizer w/ User Presets Front & Rear Pre-Amp Audio Outputs Variable Subwoofer Pre-Amp Output Variable Subwoofer Low Pass Crossover Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 300w 4ch. MOSFET Speaker Outputs Multi-Region FM Frequency Stepping 800x480 Widescreen Resolution 400NIT LED Backlight



























1-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver w/ Detachable 7" LCD, Bluetooth, & MHL MobileLink X1

1-DIN Multimedia Receiver w/ 7" LCD & MHL MobileLink X1 On-Screen Mirroring of Select Android Smart Devices Bluetooth V3.0 Hands-Free Calling from Enabled Phone A2DP Wireless MP3 Audio Playback from Enabled Devices Accepts Farenheit OEM & Steering Wheel Control Interface Custom Backgrounds & RGB Color Changing GUI & Front Panel Advanced FM/AM Tuner with RDBS Receiver Playback from DVD & CD of MP3 & MP4 Playback from 64GB SD/USB of MP3 & MP4 ID3 MP3 Tag Reading for Track & Artist Information AUX Audio Input for Personal Media Devices RCA A/V Input for Auxiliary Sources 4-Band Audio Equalizer w/ User Presets Front & Rear Pre-Amp Audio Outputs Variable Subwoofer Pre-Amp Output Variable Subwoofer Low Pass Crossover Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 300w 4ch. MOSFET Speaker Outputs Multi-Region FM Frequency Stepping 800x480 Widescreen Resolution 400NIT LED Backlight





















PD-454B

1-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver w/ Detachable 4.5" LCD & Bluetooth

1-DIN Multimedia Receiver w/ Detachable 4.5" LCD Bluetooth V3.0 Hands-Free Calling from Enabled Phone A2DP Wireless MP3 Audio Playback from Enabled Devices Accepts Farenheit OEM & Steering Wheel Control Interface Custom Backgrounds & RGB Color Changing User Interface Advanced FM/AM Tuner with RDBS Receiver Playback from DVD & CD of MP3 & MP4 Playback from 64GB SD/USB of MP3 & MP4 ID3 MP3 Tag Reading for Track & Information AUX Audio Input for Personal Media Devices 4-Band Audio Equalizer w/ User Presets Front & Rear Pre-Amp Audio Outputs Variable Subwoofer Pre-Amp Output Variable Subwoofer Low Pass Crossover Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 300w 4ch. MOSFET Speaker Outputs Multi-Region FM Frequency Stepping 800x480 Widescreen Resolution 400NIT LED Backlight









×MHL





MHL MobileLink Interface Cables

HDM-i4 ~ iPhone4. iPhone4S. iPad2. & iPad3

HDM-A2 ~ Galaxy 2 & Select 5-Pin Android Devices

HDM-A3 ~ Galaxy 3, 4, & Select 11-PIN Android Devices

5ft interface cable unlocks 1080p video and audio playback from MHL enabled appropriate micro connector for your mobile device. Farenheit MobileLink MHL interface cables also charge your mobile device. Available for select iOS and Android devices.





Power Acoustik INGENIX powered source units use a proprietary engine featuring 700 MHz CPU processor & WIN CE 5.0 operating system. Commonly found in compact netbooks, such lightning fast function processing has not been possible in an aftermarket automotive multimedia system, until now. INGENIX programming brings unique feature applications to your fingertips.



INCERTIX

Go ahead, take a second look....

The primary menu of the INGENIX source units has an appeal that you might expect only from a computer. The LED back light Full HD quality 800x480 screen resolution yields a crisp image. Drag any mode application icon from the slide menu at the bottom of the screen and drop it onto the desktop as a shortcut. Utilize the drop down widget menu for quick settings access. The main menu background and brightness settings can be set to change automatically at night. There's even a scrolling marquee banner displaying your short message.



Picture-in-Picture

INGENIX is the first to bring the Picture-in-Picture function into the car. PIP allows uninterrupted video playback while simultaneously viewing the GPS navigation map in real time, as it happens. The picture can be re-sized and positioned to 3 different



Full iPod Control Integration (requires IP-5C cable)

Scroll through your iPhone, iPod Touch, Classic, or Nano to find your favorite tracks. Search options include by Album, Artist, Genre, Playlist, or entire track list. Jump through lists by first alpha character scrolling



All Ingenix powered source units come standard with GPS turn-by-turn navigation for USA & Canada (other countries available). Set your destination and enjoy textto-speech directions with lane guidance. Additional features include favorites list, programmable home destination, destination fuel estimates, multi-lingual, multigender voices, speed limit warnings, and more. Maps and POI data by TomTom.



Pair your Bluetooth enabled cell phone, Smartphone, iPhone, or iPod Touch for wireless MP3 payback. Use the touch screen controls for basic operations.

Streaming Bluetooth Music (A2DP)



32GB SDHC & USB 2.0 Reader

Playback MP3, WAV, FLAC, & AC3 audio files, or MP4. WMV. & XviD video files from up to a 32GB SDHC card or USB 2.0 mass storage device. Artwork transfers from enabled device, if available. INGENIX units will read files from a USB powered portable hard drive, up to 250GB capacity.



Bluetooth V2.1 with Enhanced Data Rate increases data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.


ADDITIONAL FEATURES

Dual Zone for Rear Seat or Overhead Entertainment Adjustable Video Output Screen Ratio & Image Positioning Utility Application w/ Memo Pad, Calculator, Calendar, Car Maintenance, Texas Hold 'em Poker, & World Clock 4V Front, Rear & Subwoofer Pre-amp Output Front Panel 3.5mm AUX A/V Input A/V Input from Auxiliary Source Rear View Camera RCA Input w/ Trigger JPG, BMP, & GIF Photo Browser **Upload Custom Screen Savers** . Remote Control Sold Separately Digital & Analog TV Tuners Available NTSC/PAL Video Playback 50W x 4 MOSFET Speaker Outputs 400NIT Panel Brightness Accepts Axxess Steering Wheel Interface JPG, BMP, & GIF Photo Browser **Upload Custom Screen Savers** Remote Control Sold Separately Digital & Analog TV Tuners Available NTSC/PAL Video Playback 50W x 4 MOSFET Speaker Outputs

PNX-761

2-Din INGENIX GPS Navigation Source Unit w/ 7" LCD Touch Screen

Motorized 7" LCD Touch Screen w/ Angle Adjustment Turn-By-Turn GPS Navigation Powered by TomTom Accepts Farenheit OEM & Steering Wheel Control Module Bluetooth V2.1+EDR Calling from Enabled Phone A2DP MP3 Audio Playback from Enabled Device Complete iPod Integration with Accessory IP-5C Playback from DVDR/RW or CDR/RW of MP3 & MP4More Playback From 32GB SD Card or USB of MP3 & MP4More AUX A/V Input for Personal Media Devices ID3 Tag Reading for Track & Artist Information Front, Rear, & Subwoofer 4V Pre-Amp Outputs Variable Subwoofer Pre-Amp Output Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 7-Band Custom Digital Signal Processor **□**iPod **□**iPhone Multi-Region FM Frequency Stepping 52wx4 MOSFET Speaker Outputs TOMTOM 800x480 Widescreen Resolution 400 NIT LED Backlight Brightness

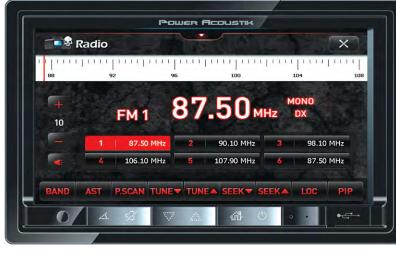



INGENIX









PNX-721

1-Din INGENIX GPS Navigation Source Unit w/ Detachable 7" LCD Touch Screen

Motorized 7" LCD Touch Screen w/ Angle Adjustment Theft Deterrent Detachable Faceplate w/ Carry Case Turn-By-Turn GPS Navigation Powered by TomTom Accepts Farenheit OEM & Steering Wheel Control Module Bluetooth V2.1+EDR Calling from Enabled Phone A2DP MP3 Audio Playback from Enabled Device Complete iPod Integration with Accessory IP-5C Playback from DVDR/RW or CDR/RW of MP3 & MP4More Playback From 32GB SD Card or USB of MP3 & MP4More AUX A/V Input for Personal Media Devices ID3 Tag Reading for Track & Artist Information Front, Rear, & Subwoofer 4V Pre-Amp Outputs Variable Subwoofer Pre-Amp Output **□**iPod **□**iPhone

Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 7-Band Custom Digital Signal Processor Multi-Region FM Frequency Stepping 52wx4 MOSFET Speaker Outputs 800x480 Widescreen Resolution 400 NIT LED Backlight Brightness





TOMTOM











IP-5C

Full Control iPod Cable for INGENIX Source Units

Full Control & Charging of iPod Classic, iPhone, Nano, & iTouch Scroll by Artists, Albums, Genres, or Playlists Video Playback from Classic & iTouch Compatible with all Ingenix Powered Source Units Only





400NIT Panel Brightness



Mobile 8 AVN models feature GPS turn-by turn navigation for USA, Canada, & Mexico. Set your destination and follow the commands by text-tospeech directions, including lane guidance. Additional features include favorites list, programmable home destination, destination fuel estimates, multi-lingual, multi-gender voices, speed limit warnings, and more.

Bluetooth V3.0 with Enhanced Data Rate increases traditional data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback.





Show Map

Digital Signal Processing features include a digital 10-band equalizer with 14dB boost or cut, custom presets, & factory presets. Additional DSP functions include variable subwoofer level control, reverb optimization, loudness adjustment, & sound staging controls.





Find

More...

Edit Route

← Back

Overview

Select

Cancel Route



PDN-626B

2-DIN GPS Navigation, DVD, CD/MP3, AM/FM Receiver w/ Bluetooth & 6.2" LCD

2-DIN Multimedia Receiver w/ GPS Navigation & 6.2" LCD Turn-by-Turn GPS Navigation of USA, Canada, & Mexico 12 Million Points of Interest Database Included Bluetooth V3.0 Hands-Free Calling from Enabled Phone A2DP Wireless MP3 Audio Playback from Enabled Device Built-in Microphone & External Microphone Included Accepts Farenheit OEM & Steering Wheel Control Interface Advanced FM/AM Tuner with RDBS Playback from DVD & CD of MP3 & MP4 Playback from 64GB SD/USB of MP3 & MP4 ID3 MP3 Tag Reading for Track & Artist Information AUX Audio Input for Personal Media Devices 10-Band Audio Equalizer w/ User Presets Front & Rear Pre-Amp Audio Outputs Variable Subwoofer Pre-Amp Output Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 300w 4ch. MOSFET Speaker Outputs Custom Backgrounds & Screen Savers Multi-Region FM Frequency Stepping 800x480 Widescreen Resolution 400NIT LED Backlight















PDN-726B

1-DIN GPS Navigation, DVD, CD/MP3, AM/FM Receiver w/ Bluetooth & 7" LCD

1-DIN Multimedia Receiver w/ GPS Navigation & 7" LCD Turn-by-Turn GPS Navigation of USA, Canada, & Mexico 12 Million Points of Interest Database Included Bluetooth V3.0 Hands-Free Calling from Enabled Phone A2DP Wireless MP3 Audio Playback from Enabled Device Built-in Microphone & External Microphone Included Accepts Farenheit OEM & Steering Wheel Control Interface Advanced FM/AM Tuner with RDBS Receiver Playback from DVD & CD of MP3 & MP4 Playback from 64GB SD/USB of MP3 & MP4 ID3 MP3 Tag Reading for Track & Artist Information AUX Audio Input for Personal Media Devices 10-Band Audio Equalizer w/ User Presets Front & Rear Pre-Amp Audio Outputs Variable Subwoofer Pre-Amp Output Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 300w 4ch. MOSFET Speaker Outputs Custom Backgrounds & Screen Savers Multi-Region FM Frequency Stepping 800x480 Widescreen Resolution 400NIT LED Backlight





















MOBILE 8 MOBILE 8

SOURCE UNITS







Hands-Free & Media Playback w/ Bluetooth V2.0

Safely make and receive hands-free phone calls, scroll contacts lists, and stream MP3's via A2DP from your enabled Smartphone. Most Bluetooth enabled Smartphones seamlessly pair with Moble 8, without surfing through multiple settings menus or entering random passcodes.



Play audio, video, and picture files through Mobile 8 from DVD, CD, or 32GB SD/USB flash drive. Supports MP3 & WAV audio files & MP4 video files, and JPG pictures.

SD USB Disc Bluetooth











PD-103B

1-DIN Multimedia Source Unit w/ Detachable 10.3" LCD Touch Screen

Motorized 10.3" LCD Touchscreen w/ Angle Adjustment Theft Deterrent Detachable Faceplate w/ Carry Case Standard & Extended Installation Sleeve & Trim Ring Included iGlass Low Glare Anti-Reflection LCD Touch Screen Technology Accepts Farenheit OEM & Steering Wheel Control Interface Bluetooth V2.0 Hands Free Calling From Enabled Devices A2DP Wireless MP3 Audio Playback From Enabled Devices Playback from DVD & CD of MP3 & MP4 Playback from 32GB SD/USB of MP3 & MP4 ID3 MP3 Tag Reading for Track & Artist Information AUX A/V Input for Personal Media Devices 90° Angle USB & AUX A/V Input Cable Included Front & Rear Pre-Amp Audio Outputs Variable Subwoofer Pre-Amp Output Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 52w x 4 MOSFET Speaker Outputs Custom & Preset Equalizer Settings Multi-Region FM Frequency Stepping 1,024x600 High Definition Widescreen Resolution 400 NIT Energy Efficient LED Display Backlight

PD-930B

1-DIN Multimedia Source Unit w/ Detachable 9.3" LCD Touch Screen

Motorized 9.3" LCD Touchscreen w/ Angle Adjustment Theft Deterrent Detachable Faceplate w/ Carry Case Standard & Extended Installation Sleeve & Trim Ring Included iGlass Low Glare Anti-Reflection LCD Touch Screen Technology Accepts Farenheit OEM & Steering Wheel Control Interface Bluetooth V2.0 Hands Free Calling From Enabled Devices A2DP Wireless MP3 Audio Playback From Enabled Devices Playback from DVD & CD of MP3 & MP4 Playback from 32GB SD/USB of MP3 & MP4 ID3 MP3 Tag Reading for Track & Artist Information AUX A/V Input for Personal Media Devices 90° Angle USB & AUX A/V Input Cable Included Front & Rear Pre-Amp Audio Outputs Variable Subwoofer Pre-Amp Output Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 52w x 4 MOSFET Speaker Outputs Custom & Preset Equalizer Settings Multi-Region FM Frequency Stepping 800x480 High Definition Widescreen Resolution 400 NIT Energy Efficient LED Display Backlight



SOURCE UNITS













PD-712T (w/ Analog TV Tuner)

PD-712B (w/ Bluetooth V2.0) PD-712BT (w/ Bluetooth V2.0 & Analog TV Tuner)

1-DIN Mobile 8 Multimedia Source Unit w/ Motorized Detachable 7" LCD Touch Screen











Motorized 7" LCD Touch Screen w/ Angle Adjustment Theft Deterrent Detachable Faceplate w/ Carry Case Standard & Extended Install Sleeve and Trim Ring Included Accepts Farenheit OEM & Steering Wheel Control Interface Bluetooth V2.0 Hands Free Calling From Enabled Devices A2DP Wireless MP3 Audio Playback From Enabled Devices Smart Control for Mobile Device Integration (701 & 701T only) Playback from DVD & CD of MP3 & MP4 Playback from 32GB SD/USB of MP3 & MP4 ID3 MP3 Tag Reading for Track & Artist Information AUX A/V Input for Personal Media Devices 90° Angle USB & AUX A/V Input Cable Included Front & Rear Pre-Amp Audio Outputs Variable Subwoofer Pre-Amp Output Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 52w x 4 MOSFET Speaker Outputs Custom & Preset Equalizer Settings Multi-Region FM Frequency Stepping 800x480 Widescreen Resolution 400 NIT Energy Efficient LED Display Backlight



PD-650

PD-650B (w/ Bluetooth V2.0)

2-DIN Multimedia Source Unit w/ Motorized 6.5" LCD Touch Screen

2-DIN Multimedia Receiver w/ Motorized 6.5" LCD Touch Screen Accepts Farenheit OEM & Steering Wheel Control Interface Bluetooth V2.0 Hands Free Calling From Enabled Devices A2DP Wireless MP3 Audio Playback From Enabled Devices Playback from DVD & CD of MP3 & MP4 Playback from 32GB SD/USB of MP3 & MP4 ID3 MP3 Tag Reading for Track & Artist Information AUX A/V Input for Personal Media Devices Dual Zone for Rear Seat or Overhead Entertainment Front & Rear Pre-Amp Audio Outputs Fixed 80Hz Subwoofer Output Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 52w x 4 MOSFET Speaker Outputs Custom & Preset Equalizer Settings Multi-Region FM Frequency Stepping 480x243 Widescreen Resolution 400 NIT LED Brightness













SOURCE UNITS

PD-651

PD-651B (w/ Bluetooth V2.0)

2-DIN Multimedia Source Unit w/ 6.5" LCD Touch Screen

2-DIN Multimedia Receiver w/ 6.5" LCD Touch Screen Accepts Farenheit OEM & Steering Wheel Control Interface Bluetooth V2.0 Hands Free Calling From Enabled Devices A2DP Wireless MP3 Audio Playback From Enabled Devices Playback from DVD & CD of MP3 & MP4 Playback from 32GB SD/USB of MP3 & MP4 ID3 MP3 Tag Reading for Track & Artist Information AUX A/V Input for Personal Media Devices Dual Zone for Rear Seat or Overhead Entertainment Front & Rear Pre-Amp Audio Outputs Fixed 80Hz Subwoofer Output Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 52w x 4 MOSFET Speaker Outputs Custom & Preset Equalizer Settings Multi-Region FM Frequency Stepping 480x243 Widescreen Resolution 400 NIT LED Brightness















PD-342

PD-342B (w/Bluetooth V2.0)

2-DIN DVD, CD/MP3, USB/SD, AM/FM Receiver w/ Bluetooth & 3.4" LCD

2-DIN Multimedia Receiver w/ High Definition 3.4" LCD Accepts Farenheit OEM & Steering Wheel Control Interface Bluetooth V2.0 Hands Free Calling From Enabled Devices A2DP Wireless MP3 Audio Playback From Enabled Devices Playback from DVD & CD of MP3 & MP4 Playback from 32GB SD/USB of MP3 & MP4 ID3 MP3 Tag Reading for Track & Artist Information AUX A/V Input for Personal Media Devices Front & Rear Pre-Amp Audio Outputs Variable Subwoofer Pre-Amp Output Video Output for Auxiliary Devices 300w 4ch. MOSFET Speaker Outputs Custom & Preset Equalizer Settings Multi-Region FM Frequency Stepping 480x240 Widescreen Resolution 400 NIT LED Brightness















PTID-8920

PTID-8920B (w/Bluetooth V2.0)

PTID-8920T (w/ Analog TV Tuner)

PTID-8920BT (w/ Bluetooth V2.0 & Analog TV Tuner) 1-DIN Multimedia Source Unit w/7" Flip-Up LCD Touch Screen



1-DIN Multimedia Receiver w/ Motorized 7"LCD Touch Screen Theft Deterrent Detachable Faceplate w/ Carry Case Accepts Farenheit OEM & Steering Wheel Control Interface Bluetooth V2.0 Hands Free Calling From Enabled Devices A2DP Wireless MP3 Audio Playback From Enabled Devices Playback from DVD & CD of MP3 & MP4 Playback from 32GB SD/USB of MP3 & MP4 ID3 MP3 Tag Reading for Track & Artist Information AUX A/V Input for Personal Media Devices Programable Open or Closed Positioning After Use Front & Rear Pre-Amp Audio Outputs Fixed 80Hz Subwoofer Output Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 52w x 4 MOSFET Speaker Outputs Custom & Preset Equalizer Settings Multi-Region FM Frequency Stepping 480x272 Widescreen Resolution 400 NIT LED Brightness











SOURCE UNITS

PD-710

PD-710B (w/ Bluetooth V2.0)

1-DIN Multimedia Source Unit w/ Detachable 7" LCD Touch Screen



1-DIN Multimedia Receiver w/ 7" LCD Touch Screen Theft Deterrent Detachable Faceplate w/ Carry Case Standard & Extended Installation Sleeve and Trim Ring Included Bluetooth V2.0 Hands Free Calling From Enabled Devices A2DP Wireless MP3 Audio Playback From Enabled Devices Playback from DVD & CD of MP3 & MP4 Playback from 32GB SD/USB of MP3 & MP4 ID3 MP3 Tag Reading for Track & Artist Information AUX A/V Input for Personal Media Devices Front & Rear Pre-Amp Audio Outputs Fixed 80Hz Subwoofer Output Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 52w x 4 MOSFET Speaker Outputs Custom & Preset Equalizer Settings Multi-Region FM Frequency Stepping 480x243 Widescreen Resolution 400 NIT Energy Efficient LED Display Backlight









PD-344T (w/ Analog TV Tuner) **PD-344**

PD-344BT (Bluetooth V2.0 & Analog TV Tuner)

1-DIN A/V Source Unit w/ Detachable 3.4" LCD

PD-344B (w/ Bluetooth V2.0)

1-DIN Multimedia Receiver w/ High Definition 3.4" LCD Display Theft Deterrent Detachable Faceplate w/ Carry Case Bluetooth V2.0 Hands Free Calling From Enabled Devices A2DP Wireless MP3 Audio Playback From Enabled Devices Playback from DVD & CD of MP3 & MP4 Playback from 32GB SD/USB of MP3 & MP4 MP3 ID3 Tag Reading of MP3 Files AUX A/V Input for Personal Media Devices Dual Zone for Rear Seat or Overhead Entertainment Front & Rear Pre-Amp Audio Outputs Video Output for Auxiliary Devices Rear View Camera Input w/ Trigger 52w x 4 MOSFET Speaker Outputs Custom & Preset Equalizer Settings Multi-Region FM Frequency Stepping 720x420 high Definition Widescreen Resolution 400 NIT Energy Efficient LED Display Backlight











PADVD-390

1-DIN DVD Player w/32GB SD/USB Playback

Playback from DVDR/RW of MP4 & Playback from 32GB USB of MP4, & In-Dash, Floor, & Vertical Mounting Brackets Included DIN Size Trim Ring For In-Dash Mounting Included Flash Memory for Last Position Recall Remote Control & IR Repeater Included OSD On Screen Display Digital Anti-shock

A/V Pre-amp Outputs, 2V Dimensions: 6.4" x 6.2" x 2"







PCD-42

PCD-42B (w/ Bluetooth V2.0)

2-DIN CD/MP3, AM/FM Receiver w/ 32GB USB Playback



CD/MP3, AM/FM & USB Receiver Bluetooth V2.0 Hands Free Calling from Enabled Phone A2DP MP3 Audio Playback from Enabled Device Playback from 32GB USB of MP3 & WMA Playback from CD, CDR, CDRW of MP3 & WMA Aux Audio Input for Personal Media Devices Front & Rear Pre-Amp Output 52w x 4 MOSFET Speaker Outputs Custom & Pre-Set Equalizer Settings Audio Staging Controls 12/24 Hour Digital Clock Remote Control Included





Bluetooth V2.0 Hands Free Calling from Enabled Phone

A2DP MP3 Audio Playback from Enabled Device Playback from 32GB USB of MP3 & WMA Playback from CD, CDR, CDRW of MP3 & WMA

Aux Audio Input for Personal Media Devices

CD/MP3, AM/FM & USB Receiver Theft Deterrent Detachable Faceplate

Front & Rear Pre-Amp Output 52w x 4 MOSFET Speaker Outputs

Custom & Pre-Set Equalizer Settings





PCD-41

PCD-41B (w/ Bluetooth V2.0)

1-DIN CD/MP3 Player w/32GB USB Playback



PCD-4165

PCD-4165B (w/ Bluetooth V2.0)

1-DIN CD Player w/ Pair of 6.5" Speakers & Extra Tweeters



Remote Control Included Faceplate Carry Case Included

Audio Staging Controls

12/24 Hour Digital Clock







CD/MP3, AM/FM & USB Receiver Theft Deterrent Detachable Faceplate Bluetooth V2.0 Hands Free Calling from Enabled Phone A2DP MP3 Audio Playback from Enabled Device Playback from 32GB USB of MP3 & WMA Playback from CD, CDR, CDRW of MP3 & WMA Aux Audio Input for Personal Media Devices Front & Rear Pre-Amp Output 52w x 4 MOSFET Speaker Outputs Custom & Pre-Set Equalizer Settings Audio Staging Controls 12/24 Hour Digital Clock NEW Remote Control Included



Tweeters Included









PDR-654 PDR-654B (w/ Bluetooth V2.0) NEW 2-DIN Digital Media Receiver w/ 6.5" LCD Touch Screen

2-DIN Digital Media Receiver w/ 6.5" LCD Touch Screen Bluetooth V2.0 Hands Free Calling from Enabled Phone A2DP MP3 Audio Playback from Enabled Device Playback from 32GB SD/USB of MP3 & MP4 720p HD Video Playback of MP4, , AVI & More Audio Playback of MP3, AAC, AC3, & WMA Picture Viewer of JPEG, PNG & GIF ID3 Tag Reading for Track & Artist Information AUX A/V Input for Personal Media Devices 18 FM / 12 AM Station Memory 52w x 4 MOSFET Powered Speaker Level Outputs Front & Rear Pre-Amp Audio Outputs Fixed 80Hz Subwoofer Output Custom Audio Staging & EQ Controls Multi-Region FM/AM Frequency Stepping 400x240 HD Resolution w/ 400cd/m2 Brightness 4" Mounting Depth













PDR-780 PDR-780B (w/ Bluetooth V2.0) NEW 1-DIN Digital Media Receiver w/ 7" LCD Touch Screen

1-DIN Digital Media Receiver w/ Motorized 7" LCD Touch Screen Theft Deterrent Detachable Faceplate w/ Protective Carry Case Bluetooth V2.0 Hands Free Calling from Enabled Phone A2DP MP3 Audio Playback from Enabled Device Accepts Farenheit OEM & Steering Wheel Control Interface Playback from 32GB SD/USB of MP3 & MP4 720p HD Video Playback of MP4, AVI & More Audio Playback of MP3, AAC, AC3, & WMA Picture Viewer of JPEG, PNG & GIF ID3 Tag Reading for Track & Artist Information AUX Audio Input for Personal Media Devices 18 FM / 12 AM Station Memory 52w x 4 MOSFET Powered Speaker Level Outputs Front & Rear Pre-Amp Audio Outputs Fixed 80Hz Subwoofer Output Video Output for Auxiliary Devices (PDR-780T only) Rear View Camera Input w/ Trigger (PDR-780T only) Custom Audio Staging & EQ Controls Multi-Region FM/AM Frequency Stepping 800x480 HD Resolution w/ 400cd/m2 Brightness













PDR-340B (w/ Bluetooth V2.0) NEW

1-DIN Digital Media Receiver w/ Detachable 3.4" LCD Screen












1-DIN Digital Media Receiver w/ High Definition 3.4" LCD Display Theft Deterrent Detachable Flip-Down Front Faceplate Bluetooth V2.0 Hands Free Calling from Enabled Phone A2DP MP3 Audio Playback from Enabled Device Playback from up to 32GB SD/USB of 720P MP4, AVI, & more Audio Playback of MP3, AAC, AC3, & WMA Picture Viewer of JPEG, PNG & GIF ID3 Tag Reading for Track & Artist Information AUX Audio Input for Personal Media Devices 18 FM / 12 AM Station Memory 52w x 4 MOSFET Powered Speaker Level Outputs 1 Set of Low-Level RCA Audio Outputs Video Output for Auxiliary Devices (PDR-340T only) Rear View Camera Input w/ Trigger (PDR-340T only) Custom Audio Staging & EQ Controls Multi-Region FM/AM Frequency Stepping 720x420 HD Resolution w/ 400cd/m2 Brightness 4" Mounting Depth



1-DIN Digital Media Receiver w/ 32GB SD/USB Playback & AM/FM Receiver



Detachable Theft Deterrent Front Panel Faceplate Bluetooth V2.0 Hands Free Calling from Enabled Phone A2DP MP3 Audio Playback from Enabled Device Playback from 32GB SD & USB of MP3, WAV, WMA Front Panel 3.5mm AUX Audio Input 2-Channel 2V Pre-Amp RCA Audio Outputs 52wx4 MOSFET Powered Speaker Level Outputs 18FM/12AM Station Memory Custom & Preset EQ Settings Audio Staging Controls Remote Control Included











PL-10A

1-DIN Digital Media Receiver w/ 32GB SD/USB Playback & AM/FM Receiver



Detachable Theft Deterrent Front Panel Faceplate Playback from 32GB SD & USB of MP3, WAV, WMA Front Panel 3.5mm AUX Audio Input 2-Channel 2V Pre-Amp RCA Audio Outputs 52wx4 MOSFET Powered Speaker Level Outputs 18FM/12AM Station Memory Custom & Preset EQ Settings Audio Staging Controls Remote Control Included











ENTERTAINMENT

PMD-143H

Ceiling Mount DVD Entertainment System w/ High Definition 14.3" LCD & MHL MobileLink Input

Interchangeable Color Skins (beige, black, grey) Car-Spec DVD Drive for Extreme Temperature Exposure MHL MobileLink Input for Smart Device Connectivity Playback from DVDR/RW of 720p MP4 Playback from 32GB SD Card or USB of 720p MP4 Flash Memory for Last Position Recall Single Channel Wireless IR Transmitter (use HP-10S, HP-11S) 8-ch FM Stereo Transmitter for OEM Integration RCA A/V Input for Auxiliary Sources RCA A/V Output for Multiple Component Integration

Triggered Bright White LED Dome Light

NTSC / PAL Auto Selection 1,366 x 768 16:9 Widescreen Resolution 400 NIT Screen Brightness













⊹MHL



POWER FICOUSTIK

O = KEE 222 100 >00 | MI | =

MHL MobileLink Interface Cables

HDM-i4 ~ iPhone4, iPhone4S, iPad2, & iPad3

HDM-A2 ~ Galaxy 2 & Select 5-Pin Android Devices

HDM-A3 ~ Galaxy 3, 4, & Select 11-PIN Andriod Devices

5ft interface cable unlocks 1080p video and audio playback from MHL enabled appropriate micro connector for your mobile device. Farenheit MobileLink MHL interface cables also charge your mobile device. Available for select iOS and Android devices.




PMD-112CMX

Ceiling Mount DVD Entertainment System w/ 11.2" LCD

Interchangeable Color Skins (beige, black, grey) Color Matched Trim Rings for Sculptured Ceilings Included 45°/45° Swivel Screen for Angled Viewing Car-Spec DVS DVD Drive for Extreme Temperature Exposure Playback from DVDR/RW of 720p MP4 Playback from 32GB SD Card or USB of 720p MP4 Flash Memory for Last Position Recall Single Channel Wireless IR Transmitter (use HP-10S, HP-11S) 8-ch FM Stereo Transmitter for OEM Integration] A/V Input for Auxiliary Sources Rear Panel RCA A/V Input for Game Console A/V Output for Multiple Component Integration Rear Panel Play/Pause Control

Triggered Bright White LED Dome Light Full Function Remote Control Included NTSC / PAL Auto Selection 800 x 480 16:9 Widescreen Resolution















PMD-104X

Ceiling Mount DVD Entertainment System w/ 10.3" LCD

10.3" High Resolution LCD Screen 1.024 x 600 16:9 Widescreen Resolution Interchangeable Color Skins (beige, black, grey) Automotive-Spec DVD Transport for Extreme Conditions Playback from DVDR/RW of MP4 & AVI Playback from 32GB SD/MMC or USB of 1080p MP4, AVI, or RCA A/V Input from Auxiliary Sources Rear Panel RCA A/V Input from Game Console Pre-Amp Audio Outputs Single Channel Wireless IR Transmitter (use HP-10S or HP-11S) 330 Ch. FM Stereo Transmitter for OEM Integration Full Function Remote Control Included NTSC / PAL Auto Selection 400 NIT Screen Brightness













PMD-102X

Ceiling Mount DVD Entertainment System w/ 10.2" LCD

Interchangeable Color Skins (beige, black, grey) 45°/270° Swivel Screen for Angled Viewing Playback from DVDR/RW of 720p MP4 Playback from 32GB USB of 720p MP4 Flash Memory for Last Position Recall FM Stereo Transmitter for OEM Integration Single Channel Wireless IR Transmitter (use HP-10S, HP-11S) A/V Output for Multiple Component Integration A/V Inputs for Auxiliary Sources Rear Panel RCA A/V Input for Game Console Rear Panel Play/Pause Control Triggered Bright White LED Dome Light Full Function Remote Control Included NTSC / PAL Auto Selection 1,024x600 16:9 Widescreen Resolution 400 NIT Screen Brightness













PT-110CM

Ceiling Mount 11.2" LCD Monitor

Interchangeable Color Skins (beige, black, grey) Color Matched Trim Rings for Sculptured Ceilings Included 900/900 Swivel Screen for Angeled Viewing Single Channel Wireless IR Transmitter (use HP-10S, HP-11S) A/V Input for Auxiliary Sources Triggered Bright White LED Dome Light NTSC / PAL Auto Selection 800 x 480 16:9 Widescreen Resolution 400 NIT Screen Brightness





Dimensions: 14.5"w x 12.5"d x 2.5"h





HEADREST

HEADREST

PHDM-103

1080p Digital Media Headrest Preloaded w/ 10.3" LCD & MHL MobileLink Input

10.3" High Resolution LCD Screen 1,024 x 600 16:9 Widescreen Resolution Forward / Backwards Tilting Headrest MHL MobileLink Input for Smart Device Connectivity 3 Changeable Color Skins Included (grey, beige, black) 32GB USB Readers for 1080p MP4 & AVI Playback Dual Channel Wireless IR Transmitter (use HP-12S) FM Stereo Transmitter for OEM Integration 2 RCA A/V Input for Auxiliary Source RCA Audio Outputs Hardwired Headphone Output Full Function Remote Control Included 3/8" Locking Pole w/ 1/2" & 9/16" Adapters 4.75" ~ 8.25" Pole Width Adjustment NTSC / PAL Auto Selection Dimensions: 11.75"w x 8.25"h x 4.75"d















MHL MobileLink Interface Cables

HDM-i4 ~ iPhone4, iPhone4S, iPad2, & iPad3

HDM-A2 ~ Galaxy 2 & Select 5-Pin Android Devices

HDM-A3 ~ Galaxy 3, 4, & Select 11-PIN Android Devices





5ft interface cable unlocks 1080p video and audio playback from MHL enabled appropriate micro connector for your mobile device. Farenheit MobileLink MHL interface cables also charge your mobile device. Available for select iOS and Android devices.

GRIP-H

Headrest Mounting Bracket for Mobile Devices





HDVD-71HD

Universal Replacement Headrest Preloaded w/ DVD Player, 7" LCD, & MHL MobileLink

H-71HD

Universal Replacement Headrest Preloaded w/ 7" LCD & MHL MobileLink

Forward/Backwards Tilting Headrest w/ 7" LCD & DVD MobileLink Input for Mobile Device Screen Mirroring 2A Charging of Applicable Mobile Devices by USB (requires MobileLink interface cable, sold separate) Changeable Black, Beige, & Grey Colors Included Playback from DVD or DVD-R of 720p MP4 (HDVD-71HD) Playback from USB of 720p MP4 Video Files (HDVD-71HD) Dual Channel Wireless IR Transmitter (requires HP-12S) FM Stereo Transmitter for OEM Integration RCA A/V Input for Auxiliary Source or Opposite Headrest RCA A/V Output to Opposite Headrest 3.5mm Aux Audio/Video Input on Front Panel 3.5mm Headphone Output on Front Panel 3/8" Locking Pole w/ 1/2" & 9/16" Adapters 4.375" ~ 8.25" Pole Width Adjustment Automatic NTSC & PAL Video Playback 800 x 480 16:9 Widescreen Resolution 400 NIT Screen Brightness Dimensions: 10"w x 7"h x 5.50"d













MHL MobileLink Interface Cables

HDM-i4 ~ iPhone4, iPhone4S, iPad2, & iPad3

HDM-A2 ~ Galaxy 2 & Select 5-Pin Android Devices

HDM-A3 ~ Galaxy 3, 4, & Select 11-PIN Android Devices

5ft interface cable unlocks 1080p video and audio playback from MHL enabled appropriate micro connector for your mobile device. Farenheit MobileLink MHL interface cables also charge your mobile device. Available for select iOS and Android devices.



GRIP-H

Headrest Mounting Bracket for Mobile Devices



HDVD-9GR - Grey

800 x 480 16:9 Widescreen Resolution

400 NIT Screen Brightness

Dimensions: 12"w x 9"h x 5"d

HDVD-9GRDK - Dark Grey

HDVD-9BG - Beige HDVD-9BK - Black

1 Pair Universal Replacement Headrests Pre-Loaded w/ 9" LCD Touch Screen, DVD Player, & Headphones

Forward/Backwards Tilting Headrest w/ Swivel LCD Screen Side Slot-Loading DVD Player In Each Headrest Playback from DVDR/RW of 720p MP4 Playback from 32GB SD Card or USB of 720p MP4 Independent 900Mhz. RF 2-ch. Headphone Transmitter 2 RF 2-ch. Padded Headphones Included FM Stereo Transmitter for OEM Integration RCA A/V Output for Auxiliary Source or Opposite Headrest Selectable DVD Mode or A/V Input from Opposite Headrest AUX A/V Input for Game Console or Media Devices Hardwired Headphone Output Independent Remote Controls 7/16" Locking Pole w/ 5/8" Adapters 4" ~ 8" Pole Width Adjustment



















Universal Replacement Headrest w/ DVD Player & 9" LCD

HDVD-71CC

Universal Replacement Headrest w/ DVD Player & 7" LCD

H-91CC

Universal Replacement Headrest w/9" LCD

H-71CC

Universal Replacement Headrest w/ 7" LCD

Forward/Backwards Tilting Headrest
3 Changeable Color Skins Included (grey, beige, black)
Playback from DVDR/RW of 720p MP4 (HDVD only)
Playback from 32GB SD Card or USB of MP4 (HDVD only)
Pural Changel Wireless IR Transmitter (use HP-12S)

Dual Channel Wireless IR Transmitter (use HP-12S)
FM Stereo Transmitter for OEM Integration (HDVD only)
AUX A/V Input for Game Console or Personal Media Devices
RCA A/V Input for Auxiliary Source or Opposite Headrest
RCA A/V Output to Auxiliary Source or Opposite Headrest
Hardwired Headphone Output

3/8" Locking Pole w/ 1/2" & 9/16" Adapters 4.75" ~ 8.25" Pole Width Adjustment NTSC / PAL Auto Selection 800 x 480 16:9 Widescreen Resolution

400 NIT Screen Brightness Dimensions: 11.5"w x 8.5"h x 6"d (91CC) Dimensions: 10"w x 7"h x 5.5"d (71CC)















ENTERTAINMENT

ACCESSORIES

PHAD-7

Universal Headrest Mount DVD Player w/ 7" LCD

Bracket Mount DVD Player Solution for Vehicles w/ Active Headrest Front Loading DVD Player for DVD/RW 720P Playback 32GB USB & SD Card Readers for MP4 Playback Dual Channel Wireless IR Transmitter (use HP-12S) FM Stereo Transmitter for Easy OEM Integration AUX A/V Input for Game Console or Personal Media Devices RCA A/V Input for Auxiliary Source or Opposite Headrest RCA A/V Output to Auxiliary Source or Opposite Headrest 3.5mm Hardwired Headphone Output Jack

3 Changeable Colors Skins Included (grey, beige, & black) 4.75"-8.25' Pole Width Adjustment

Various Pole Diameter Adapters Included NTSC / PAL Auto Selection 800 x 480 16:9 Widescreen Resolution 400 NIT Screen Brightness















POWER FICOUSTIK

PT-712IRA

7" Dual Channel IR Headrest Monitor

Two Auxiliary A/V Input Dual Channel IR Transmitter Wired Headphone Output Low Refection TFT-LCD Monitor Ultra Bright LED Backlighting Selectable Aspect Modes

Preset/Manual Image Control Dimmer Control Remote Control NTSC/PAL Selection 480 x 234 (16:9) Image Resolution Cutout Dimensions: 7"w x 4.75"h x .75"d



PT-700MHR

7" LCD Headrest Monitor

7" Amorphous Active Matrix TFT/LCD Monitor Ultra Bright LED Backlighting Ignition Power On/Off Optional Single Video Input Selectable Aspect Modes Preset/Manual Image Control NTSC/PAL Selection

Sculptured Trim Ring Included Remote Control Included 480 x 234 (16:9) Image Resolution 400NIT Panel Brightness Cutout Dimension: 7"w x 4.5"h x 1"d



AirCast

Wireless MobileLink Receiver

Wirelessly Stream Video & Content From Your Smart Device Compatible w/ DLNA, Miracast, and AllShare Smart Devices Connect to any Headrest, Overhead, or Source Unit w/ Mobile Link Input Streams Full 1080P Video, including MP4, AVI, WMV, MKV, MOV, & More

Universal Application w/ Most LCD TVs at Home or Office.



HP-10S Single 1ch. IR Headphone

EVA hard carrying case included Foldable Ear Pads for Compact Storage On/Off Switch Saves Battery Life Auto Power Off Function Auto Mute Function Variable Volume Control ALC Auto Level Control



HP-11S Single 1ch. IR Headphone HP-22IRT Pair 1ch. IR Headphones and Transmitter

Ear Pads Fold Flat for Seat Pocket Storage Adjustable Headphone Straps EVA hard Carry Case Included MP-3 Player Input Via 3.5mm Jack On/Off Switch Saves Battery Life Auto Power Off Function Auto Mute Function Variable Volume Control ALC Auto Level Control

HP-12S Single 2ch. IR Headphone

Adjustable Headphone Straps Channel Selectable From Each Headphone Ear Pads Fold Flat for Seat Pocket Storage EVA hard Carry Case Included MP-3 Player Input Via 3.5mm Jack On/Off Switch Saves Battery Life Auto Power Off Function Auto Mute Function Variable Volume Control ALC Auto Level Control

WLHP-100 Single 1ch. IR Headphone WLHP-200 Single 2ch. IR Headphone

Adjustable Headphone Straps Single Channel UHF IR Receiver ON/OFF Switch Saves Battery Life Variable Volume Control ALC Auto Level Control Auto Off and Auto Mute



HP-900S Single 2ch. RF 900MHz Headphone HP-902RFT Pair 2ch. RF 900MHz Headphones & Transmitter

Dual Stereo Audio Inputs Channel Selectable From Each Headphone 100ft. Operational Distance Adjustable Headphone Straps Ear Pads Fold Flat for Seat Pocket Storage EVA hard Carry Case Included MP-3 Player Input Via 3.5mm Jack On/Off Switch Saves Battery Life Auto Power Off Function Auto Mute Function Variable Volume Control ALC Auto Level Control

LP-2CSB

License Plate Frame w/ Night Vision Camera, Back-Up Sensors, On-Screen Distance Gauge, & Proximity Alerts

U.S. Patent #7,106,183 B2 3 Object Sensors w/ Proximity Alert 1/4" CCD Color Camera 0.5 LUX Low Light Lens Waterproof Camera Housing Waterproof External Wire Connections Vertically Pivoting Camera Housing 7' Effective Viewing Distance Inconspicuous Speaker for Alerts 8 IR LEDs for Night Viewing

On-Screen Distance Gauge 130° Capture Angle RCA Video Output Cast Steel Alloy Frame Reversed Image 640 x 480 Resolution





L-3CSB

License Plate Mount Night Vision Camera w/ Back-Up Sensors, On-Screen Distance Gauge, & Proximity Alerts

U.S. Patent #7,106,183 B2 2 Object Sensors w/ Proximity Alert 1/4" CCD Color Camera 0.5 LUX Low Light Lens Waterproof Camera Housing Waterproof Wire Connections

Vertically Pivoting Camera Housing 7' Effective Viewing Distance Inconspicuous Speaker for Alerts 130° Capture Angle 8 IR LEDs for Night Viewing On-Screen Distance Gauge



LP-1CA

Chrome License Plate Frame with Camera

Chrome Finish on ABS License Plate Frame Vertically Pivoting Camera Housing On-Screen Distance Gauge 1/4" CCD Wide View

Color Camera 0.1 LUX Low Light Lens 163° Capture Angle RCA Video Output Reversed Image 648 x 488 Resolution



CAM-4LF

Black Chrome License Plate Frame with Camera

Zinz Alloy Metal License Plate Frame Vertically Pivoting Camera Housing On-Screen Distance Gauge 1/4" CCD Wide View Color Camera 0.1 LUX Low Light Lens 163º Capture Angle RCA Video Output Reversed Image 648 x 488 Resolution



CAM-3L

Black Chrome License Plate Trim with Camera

Zinz Alloy Metal License Plate Trim Vertically Pivoting Camera Housing On-Screen Distance Gauge 1/4" CCD Wide View Color Camera 0.1 LUX Low Light Lens

163° Capture Angle RCA Video Output Reversed Image 648 x 488 Resolution







CAM-2

1" Surface Mount Rear View Camera

Vertically Pivoting Mounting Bracket Waterproof Zinc Camera Housing On-Screen Distance Gauge 1/4" CCD Color Camera 0.1 Lux Low Light Lens 163° Capture Angle RCA Video Outputs Reversed Image 648 x 488 Resolution

On-Screen Distance Gauge 1/4" CCD Color Camera 0.1 Lux Low Light Lens 163° Capture Angle RCA Video Outputs Reversed Image 648 x 488 Resolution

CAM-1

1" Under Trunk Lid Rear View Camera



CCD-4XS

1" Surface Mount Rear View Camera

Waterproof Camera Housing On-Screen Distance Gauge 1/4" CCD Color Camera 0.1 Lux Low Light Lens 163° Capture Angle RCA Video Outputs Reversed Image 648 x 488 Resolution



CCD-6XS

Water-Proof Surface Mount Rear View Camera

1/3" CCD GHigh Definition Color Camera by PixelPlus IP67 Waterproof Nickel Plated Zinc Alloy Housing Threaded Mounting System for Easy DIY Installation Vertical Image Inversion for Front/Rear Application Optional On-Screen Distance Gauges Rear View Image Pre-Reversed RCA Video Output 163° Viewing Angle 0.1 LUX Low Light Lens 682x496 Resolution



CCD-1

Water-Proof Surface Mount Rear View Camera

Vertically Pivoting Stand for Angled Installation Waterproof Camera Housing 8 IR LEDs for Night Viewing 1/3" Sharp CCD Color Camera 0.1 LUX Low Light Lens RCA Video Output Reversed Image 512 x 582 Resolution



EFM-02

PLL FM Modulator

PLL Phase Lock Loop Tuner Outputs Frequency Settings Via Slide Switch Ground Loop Isolator Circuit Shielded Metal Housing For Noise Rejection



VB-1

One In & Four Output Video Signal Booster

Four Individual Output Trimmer Gain Controls Shielded Metal Housing For Noise Rejection 4 Video Output Gain control



AFTERMARKET OFM INTEGRATION

OEM in-vehicle technologies have advanced significantly in recent years. As more vehicles land on showroom floors with advanced network systems, the ability to integrate aftermarket source units has become essential. Power Acoustik is excited to partner with Farenheit and introduce its series of aftermarket OEM integration modules & universal steering wheel control interfaces. Communication, safety, and convenience features that otherwise would be lost are retained while enjoying added aftermarket entertainment. All modules are pre-fitted with Soundstream source unit and vehicle make/model specific wire harnesses, creating plug-n-play installation for all Ingenix, Inteq, Mobile 8. & other multimedia receivers.



DRC-1	Universal Steering Wheel Control Interface For Select GM, Chrysler, Ford & Toyota Vehicles
GM-2	Select 2000-2009 General Motors Vehicles W/ Class 2 Data System
GM-2DRC	Select 2000-2009 General Motors Vehicles W/ Class 2 Data System & Steering Wheel Control
GM-2OS	Select 2000-2009 General Motors Vehicles W/ Class 2 Data System & Onstar
GM-11	Select 2005-2009 General Motors Vehicles W/ Lan 11-Bit Data System
GM-110S	Select 2005-2009 General Motors Vehicles W/Lan 11-Bit Data System & Onstar
GM-29	Select 2006-2013 General Motors Vehicles W/Lan 29-Bit Data System
GM-29OS	Select 2006-2013 General Motors Vehicles W/Lan 29-Bit Data System & Onstar
CH-1	Select 2007-2013 Chrysler, Dodge, & Jeep Vehicles W/ Premium Entertainment System
TOY-1	Select 2004-2011 Toyota & Lexus Vehicles W/ Premium Entertainment System
VW-1	Select 2002-2013 Volkswagen Vehicles W/ Premium Entertinament System



New to the BAMF family are these diamonds-inthe-rough, using the latest and greatest in full range class D technology. Previously considered only for subwoofer amplifiers, class D topology proves itself a contender for full range sound. Class D full range advantages start with stable high power capability in small compact, install-me-anywhere footprint. 90%+ efficient power supplies and optimized output devices mean less heat build-up and fatigue after extended playtime. Primiarly SMD circuit boards using low tollerance parts keeps unwanted harmonic distortion at bay. Available configurations include 4ch, 5ch, and high power monoblock.



Increased Efficiency Full Range Class D Technology

Interchangeable Top Panel for Unique Installation

High Efficiency Class D Full Range Amplifiers
Hybrid Aluminum Alloy Heatsink for Optimum Dissipation
2-ohm Stereo & 4-ohm Bridged Full Range Operation
1-ohm Stable Monoblock Operation for MAX Power
MOSFET Power Supply w/ Audiophile Grade IR™ Transistors
Military Grade SMT PCB Maintains Dynamic Performance
Direct Short, Thermal, & Overload Circuits Protect Amplifier
Easy DIY Install Single Sided Terminals & Controls

Angled Wire Terminals Secure Wire Connections
Interchangeable Top Panel for Unique Installation
Chassis Integrated Aluminum Mounting Points
Variable 12dB High Pass, Low Pass, & Subsonic Crossovers
200mV-7.5V Low Level RCA Inputs
18dB Bass Boost Increases Low Octave Harmonics
180° Phase Shift Improves Low Octave Dynamics (monoblock)
Dash Mount Gain Control Module Included (select models)

Class A/B	Max Power	RMS Power	RMS Power	RMS Power	Dimensions	Gain Control
Full Range	(watts)	4Ω Bridged, 14.4V	2Ω, 14.4V	4Ω, 14.4V	(2"h x 7"w)	Included
BAMF1600/4D	1,600w	2 x 340	4 x 170	4 x 125	11"	-
BAMF2600/4D	2,600w	2 x 600	4 x 300	4x200	11"	-
BAMF4500/5D	BAMF4500/5D 4,500w		4 x 300 + 1 x 650	4 x 200 + 1 x 425	12.75	Included
BAMF2600/1D	2,600w	1 x 1,400 1Ω	1 x 1,100	1 x 900	11"	Included



All MOSFET Class D Monoblock Amplifiers

Cast Aluminum Alloy Heatsink for Optimum Dissipation
1-ohm Stable Monoblock Operation

Strap 2 Like-Models Together for Double Power!

MOSFET Power Supply & Audio Output Transistors

Strap 2 Like-Models Together for Double Power!
MOSFET Power Supply & Audio Output Transistors
Direct Short, Thermal, & Overload Circuits Protect Ampllifier
Easy DIY Install Single Sided Terminals & Controls

Chassis Integrated Aluminum Mounting Points
Variable 12dB Low Pass Crossover
Variable 12dB Subsonic Crossover Protects Subwoofer
200mV-6.0V Low Level RCA Inputs
12dB/18dB Bass Boost Increases Low Octave Harmonics
180° Phase Shift Improves Low Frequency Dynamics
Dash Mount Gain Control Module Included

Class D	Max Power	RMS Power	RMS Power	RMS Power	Dimensions	Gain Control
Monoblock	(watts)	1Ω, 14.4V	2Ω, 14.4V	4Ω, 14.4V	(2.125"h x 8.25"w)	Included
BAMF2000/1D	2,000	1,200	900	600	11.375"	Included
BAMF4000/1D	4,000	2,200	1,700	1,200	13.75"	Included
BAMF5500/1D	5,500	3,200	2,500	1,700	16.875"	Included

30 / 31



AMPLIFIERS

We're in a time where small is "in". Smaller, more economic vehicles are more and more desirable. But that doesn't mean you have to sacrifice big power for your system. Razor amplifiers pack huge power into small chassis thanks to efficient Full-Range Class D topology and SMT circuitry. Complimented with every possible preamp adjustment, the Razor amplifiers leave nothing to be desired...

New additions for 2015 include a 3,000w 4ch model, and a 1-ohm stable 3,500w monoblock...



Installs in Virtually ANY Location!

90% Efficient Full Range Class D Technology

Compact 4.75" Chassis Design for Installation Versatility
MOSFET Power Supply w/ Audiophile Grade IR™ Transistors
Military Grade SMT PCB Maintains Dynamic Performance
2-ohm Stereo & 4-ohm Bridged Full Range Operation
2-ohm Minimum Impedance Stablity (monoblocks)
Direct Short, Thermal, & Overload Circuits Protect Ampllifier

200mv-6V Low Level RCA Inputs
High Level Input w/ Signal Sense Auto Turn-on
Variable 12dB High Pass & Low Pass Crossovers
10-50Hz Variable 12dB Subsonic Crossover Protects Subwoofers
12dB Bass Boost Increases Low Octave Harmonics (monoblocks)
Dash Mount Gain Control Module Included (select models)

	RAZOR	Max Power	RMS Power	RMS Power	RMS Power	Dimensions	Gain Control
	CLASS D	(watts)	4Ω Bridged, 14.4V	2Ω, 14.4V	4Ω, 14.4V	(4.75"w x 1.625"h)	Included
	RZ2-1300D	1,300	1 x 540	2 x 270	2 x 185	5.5"	Included
	RZ4-1200D	1,200	2 x 300	4 x 150	4 x 100	9"	-
	RZ4-2000D	2,000	2 x 500	4 x 250	4 x 190	11"	-
1	RZ4-3000D	3,000	2 x 750	4 x 375	4 x 285	12.25"	-
w	RZ5-2500D	2,100	300 x 2 + 600 x 1	150 x 4 + 600 x 1	100 x 4 + 400 x 1	12.25	Included
	RZ1-1500D	1,500	-	1 x 900	1 x 600	10"	Included
	RZ1-2300D	2,300	-	1 x 1,400	1 x 900	11"	Included
	RZ1-3500D	3,500	1 x 2,100	1 x 1,400	1 x 900	12.25"	Included

Don't let these little monsters fool you. The latest and greatest of class D full range technology allows us to pack 10lbs of KICK YOUR ASS in less than 2lb chassis. Once regarded as "dirty power", class Ds stable performance, thanks to high power capability, maximum efficiencies, and low tollerance components, rivals traditional full range applications. Minimal power requirements, ultra micro footprint, unbelieveable sound quality, and easy install make Crypt amplifiers great for any car, motorcycle, boat, or off-road vehicle...

AMPLIFIERS



Hybrid Aluminum Alloy Heatsink for Optimum Dissipation
2-ohm Stereo & 4-ohm Bridged Full Range Operation
2-ohm Minimum Impedance Monoblock Operation
MOSFET Power Supply w/ Audiophile Grade IR™ Transistors
Military Grade SMT PCB Maintains Dynamic Performance
Direct Short, Thermal, & Overload Circuits Protect Ampllifier
200mV-12V High Level or Low Level RCA Input

Quick Disconnect RCA/High Level Wire Harness
Quick Disconnect Power and Speaker Output Harness
Variable 12dB High Pass, Low Pass, & Subsonic Crossovers
12dB Bass Boost Increases Low Octave Harmonics (monoblock)
Dash Mount Gain Control Module Included (select models)

CRYPT	CRYPT Max Power RMS Power CLASS D (watts) 4Ω Bridged, 14.4V		Max Power RMS Power RMS Power RMS Power		Dimensions	Remote Gain
CLASS D			2Ω, 14.4V	4Ω, 14.4V	(3"w x 1.5"h)	Control
CA4-1600D	1,600	2 x 400	4 x 200	4 x 130	6"	-
CA1-1200D	1,200	-	1 x 550	1 x 350	6"	Included

When something works so well, outperforms the competition, and has done this for 12 years, you don't mess with it! All ya gotta do is just make it look awesome again for current times. What else can we say? Gothic amps are stickin' and kickin'!



Class A/B Full Range & Class D Monoblock Amplifiers 2-ohm Stereo & 4-ohm Bridged Full Range Operation 2-Ohm Stable Class A/B Monoblock Operation 1-ohm Stable Class D Monoblock Operation Strap 2 Like-Monoblocks Together for Double Power! Military Grade PCB w/ PWM MOSFET Power Supply Direct Short, Thermal, & Overload Circuits Protect Amplifier High Level Input w/ Signal Sense Auto Turn-on 200mV-6V Low Level RCA Inputs Pre-Amp Low-Level Outputs (select models) Variable 12dB High Pass, Low Pass, & Subsonic Crossovers 12dB/18dB Bass Boost Increases Low Octave Harmonics 180° Phase Shift Improves Low Frequency Dynamics Dash Mount Gain Control Module Included (select models)

Class A/B	Max Power	RMS Power	RMS Power	RMS Power	Dimensions	Remote Gain
Full Range	(watts)	4Ω Bridged, 14.4V	2Ω, 14.4V	4Ω, 14.4V	(9.75"w x 2.5"h)	Included
GT2-1300	1,300	1 x 520	2 x 260	2 x 200	11.75"	Included
GT2-1800	1,800	1 x 720	2 x 360	2 x 280	13.7"	Included
GT4-400	400	2 x 90	4 x 40	4 x 30	4.75"	-
GT4-900	900	2 x 190	4 x 95	4 x 75	9"	-
GT4-1200	1,200	2 x 250	4 x 125	4 x 100	11.5"	-
GT4-2600	2,600	2 x 550	2 x 275	4 x 215	15.75"	-
GT5-2500	2,500	2 x 250, 1 x 600	4 x 125, 1 x 600	4 x 100, 1 x 480	15.75"	Included

Class D	Max Power	RMS Power	RMS Power RMS Power R		Dimensions	Remote Gain	
Monoblock	(watts)	1Ω, 14.4	2Ω, 14.4V	4Ω, 14.4V	(9.75"w x 2.5"h)	Included	
GT1-1000 (A/B)	1,000	-	470	375	9"	Included	
GT1-2400D	2,400	1,500	1,150	900	10.75"	Included	
GT1-4500D	4,500	2,700	2,200	1,700	14.75"	Included	
GT1-6000D	6,000	3,700	3,000	2,300	17.5"	Included	



Class D full range amplifier technology continues to improve, yielding bigger punch in smaller packages. Blade amplifiers are an exension of that growing trend. These compact die cast chassis hold inside a painstakenly engineered amplifier capable of delivering crushing power. Challenge Blade amplifers against traditional class A/B surfboards and you'll feel the difference...



90%+ Efficient Class D Full Range

ONLY 5" x 8"!

Install-Me-Anywhere Micro Footprint Compact 5" Chassis Design for Installation Versatility
Hybrid Aluminum Alloy Diecast Heatsink for Optimum Dissipation
MOSFET Power Supply w/ Audiophile Grade IRTM Transistors
Military Grade SMT PCB Maintains Dynamic Performance
2-ohm Stereo & 4-ohm Bridged Full Range Operation
2-Ohm Stable Class A/B Monoblock Operation
Direct Short, Thermal, & Overload Circuits Protect Ampllifier
200mv-6V Low Level RCA Inputs
12dB High Pass or Low Pass Crossovers
Quick Disconnect Speaker Output Harness
8g Power/ Ground Wire Terminals
Dash Mount Gain Control Module Included (BLADE1-1200D)

BLADE	Max Power	RMS Power	RMS Power	RMS Power	Dimensions	Remote Gain
Amplifiers	(watts)	4Ω Bridged, 14.4V	2Ω, 14.4V	4Ω, 14.4V	(5"w x 2"h)	Included
BLADE4-1200D	1,200w	2 x 300	4 x 150	4 x 100	8"	-
BLADE1-1200D	1,200w	-	1 x 600	1 x 400	8"	Included

 $4 \longrightarrow 35$

AMPLIFIERS

All new for 2015, Reaper amps offer you great performance bang for your buck, without sacrificing the features you expect. 4ch class A/B models feature complete variable 12dB crossover sections including 12dB bass boost, and are 2-ohm stereo / 4-ohm bridged stable. Class D monoblock models include 12dB variable bass boost, subsonic crossover, 180° phase control, and a dash mount remote control.



Class A/B Full Range & Class D Monoblock Amplifiers
2-ohm Stereo & 4-ohm Bridged Full Range Operation
2-Ohm Stable Class A/B Monoblock Operation
1-ohm Stable Class D Monoblock Operation
Military Grade PCB w/ PWM MOSFET Power Supply
Direct Short, Thermal, & Overload Circuits Protect Amplifier

200mV-6V Low Level RCA Inputs
Pre-Amp Low-Level Outputs (mono models)
Variable 12dB High Pass, Low Pass, & Subsonic Crossovers
12dB/18dB Bass Boost Increases Low Octave Harmonics
180° Phase Shift Improves Low Frequency Dynamics
Dash Mount Gain Control Module Included (select models)

Reaper Amps	Max Power	RMS Power	RMS Power	RMS Power	Dimensions	Remote Gain
	(watts)	4Ω Bridged, 14.4V	2Ω, 14.4V	4Ω, 14.4V	(9.50"w x 2.5"h)	Included
R4-1000	1,000	2 x 220	4 x 110	4 x 85	11.00"	-
R4-2000	2,000	2 x 420	4 x 210	4 x 116	13.75"	-
R1-2000D	2,000	-	1 x 750	1 x 500	13.00"	Included
R1-4000D	4,000	1 x 2,000 (1Ω)	1 x 1,500	1 x 1,200	11.25"	Included

MOFO X subwoofers are refined and increase efficiency dramatically! MOFO-X subs use a composite sandwich cone with a polypropylene surface for durability and Spruce pulp backing for smooth low bass. Like the original MOFOs, the new models still use an aluminum dustcap that couples to the voice coil former and extends over the cone. Why? The fins brace the cone and eliminate cone flex during high excursion. And since they are aluminum and couple to the voice coil, they act as a heatsink or heat extractor. Using the latest materials, the new MOFO subs yield superior performance. Cast aluminum baskets? Of course! Increased bottom octave output? You Bet! Louder that the original design? Duh!!

Overcompensating Motor Sturcture for Increased Magnetic Strength
12mm T-Yoke & Top Plate Improve Low Frequency Dynamics
Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up
Die Cast Aluminum Heatsink Dust Cap Absorbs Voice Coil Heat
Aluminum Dust Cap Fins Dissipate Heat & Strengthen Cone
Non-Magnetic Non-Resonate Die-Cast Aluminum Frame
2.5" 4-Layer Voice Coil w/ Large Gauge Wire Increases Power Handling
High-Temperature Tollerance Adhesives Resist Thermal Failure
Nickel Plated 8ga Spring-Loaed Compression Wire Terminals
Non-Transfer Spruce Pulp Cone w/ UV & Chemical Protection
High Density Polyether Foam Surround w/ UV & Chemical Protection
Dual Poly-Cotton Suspension Dampen Violent Accelerations
Stitched Voice Coil Leads Prevent Potential Damage
1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included



GUBNOOFER

Pre-Assembeld Re-cone Kit Available



MOFO	Max Power	RMS Power	Efficiency	Voice Coil	Motor	Mounting	Optimum Sealed	Optimum Ported
Subwoofers	Handling	Handling	(1w/1m)	Configuration	Volume	Depth	Enclosure ft ³	Enclosure ft ³
MOFO-122X	2,700	1,500	85.37	2.50" Dual 2Ω	373oz.	6.875"	1.00	2.00
MOFO-124X	2,700	1,500	85.40	2.50" Dual 4Ω	373oz.	6.875"	1.00	2.00
MOFO-152X	3,000	1,700	86.90	2.50" Dual 2Ω	373oz.	8.125"	2.00	4.00
MOFO-154X	3,000	1,700	86.97	2.50" Dual 4Ω	373oz.	8.125"	2.00	4.00

 \sim 37



Overcompensating Motor Sturcture for Increased Magnetic Strength 12mm T-Yoke & Top Plate Improve Low Frequency Dynamics Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up Non-Magnetic Non-Resonate Die-Cast Aluminum Frame 3" 4-Layer Voice Coil w/ Direct Connect Wire Increases Power Handling High-Temperature Tollerance Adhesives Resist Thermal Failure

Non-Transfer Spruce Pulp Cone w/ UV & Chemical Protection Sitched and Glued Surround/Cone Joints for Strongest Bonding Extended Excursion Polyether Foam Surround w/ UV Protection Dual Poly-Cotton Suspension Dampen Violent Accelerations Stitched Voice Coil Leads Prevent Potential Damage 1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included

BAMF	Max Power	RMS Power	Efficiency	Voice Coil	Motor	Mounting	Optimum Sealed	Optimum Ported
Subwoofers	Handling	Handling	(1w/1m)	Configuration	Volume	Depth	Enclosure ft ³	Enclosure ft ³
BAMF-122	3,500w	1,750w	81.30	3" Dual 2Ω	204oz.	6.00"	1.50	2.50
BAMF*152	3,800w	1,900w	83.60	3" Dual 2Ω	254oz.	6.50"	2.50	3.50



Twisted & Woven Flax Fiber Cone

All Gothic woofers use torsion twisted Flax fibers woven together for ultimate strength and less elasticity. A heavy soaking in epoxy combined with the sonic qualities of pulp paper, Flax proves itself

Extended Excursion NBR Surround

A strong and flexible heat resistant compound, nitrile butadiene rubber is used widely in automotive applications. Gothic woofers utalize an extended excursion NBR surround for it's strength and flexible properities during extreme movement.

Back Plate & T-Yoke Venting

Heat build-up is a leading cause of catastrophic woofer failure. Venting built into the T-Yoke, back plate, and voice coil extract and dissapate heat, ensuring Gothic woofers keep their cool.

Overcast Stitched Cone Assembly

Surrounds of Gothic woofers are double overcast stitched directly to the Flax cone surface. In addition to superior adhesives, overcast stitching improves the conventional bond between cone and

100% OFC 4-Layer Voice Coil

Gothic woofers use generous 1.50" long, 2.5" diameter 100% OFC Copper voice coils. A vented Aluminum former extract and dissapate any heat build-up, resulting in improved power handling.

Gothic	Max Power	RMS Power	Efficiency	Voice Coil	Motor	Mounting	Optimum Sealed	Optimum Ported
Subwoofers	Handling	Handling	(1w/1m)	Configuration	Volume	Depth	Enclosure ft ³	Enclosure ft ³
GW3-10	2,200	1,000	81.30	2.50" Dual 2Ω	204oz.	6.00"	1.00	1.50
GW3-12	2,500	1,200	83.60	2.50" Dual 2Ω	254oz.	6.50"	1.50	2.25
GW3-15	3,000	1,400	84.00	2.50" Dual 2Ω	254oz.	7.50"	2.75	3.25

GUBMOOPER



GUBWOOFER

Injection Molded Polypropylene Cone Overcast Stitched Cone Assembly Closed Cell Polyurthane Foam Surround 100% OFC 4-Layer Voice Coil Back Plate & T-Yoke Venting Embossed Dust Cap



Crypt	Max Power	RMS Power	Efficiency	Voice Coil	Motor	Mounting	Optimum Sealed	Optimum Ported
Subwoofers	Handling	Handling	(1w/1m)	Configuration	Volume	Depth	Enclosure ft ³	Enclosure ft ³
CW2-104	1,800	720	88.40	2.00" Dual 4Ω	162oz.	5.875"	1.00	1.50
CW2-124	2,000	850	89.90	2.00" Dual 4Ω	190oz	6.375"	1.25	1.75
CW2-154	2,200	1,000	88.90	2.00" Dual 4Ω	190oz	7.25"	2.50	3.00



Reaper Max Power RMS Power Efficiency Voice Coil Motor Mounting							Optimum Sealed	Optimum Ported		
Subwoofers	Handling	Handling	(1w/1m)	Configuration	Volume	Depth	Enclosure ft ³	Enclosure ft ³		
RW1-8	600	240	89.50	2.00" Single 4Ω	86oz.	4.25"	050	1.00		
RW1-10	900	360	87.30	2.00" Single 4Ω	104oz.	4.875"	1.00	1.50		
RW1-12	1,200	500	89.20	2.00" Single 4Ω	127oz.	5.75"	1.25	1.75		
RW1-12D4	1.200	500	89.20	2.00" Dual 4Q	12707.	5.75"	1.25	1.75		

An addition to the THIN family, this shallow mount 12" subwoofer yields the performance of most conventional 12" subwoofers, but needs only 3" for mounting. Consider THIN-124 optimum for pre-fab under seat and behind rear seat shallow enclosures.

Spruce Paper Cone for Dynamic, Natural Sound Quality Semi-Circular Frame Venting Maintains Thermal Control Internal Motor Assembly Reduces Mounting Depth 3" Mounting Depth to Install in Any Vehicle Type

2" 4-ohm DVC for Multiple Woofer Application



THIN-124	Max Power	RMS Power	Efficiency	Voice Coil	Motor	Mounting	Optimum Sealed	Optimum Ported
Subwoofer	Handling	Handling	(1w/1m)	Configuration	Volume	Depth	Enclosure ft ³	Enclosure ft ³
THIN-124	2,000	850	86dB	2.00" Dual 4Ω	104oz.	3.00"	1.00	2.00



THIN-120BXA Preloaded Enclosure

Pre-loaded Enclosure w/ 12" Subwoofer 4 Ohm Impedance 650W Power Handling Carpeted Black w/ Embroidered Accents 29.75" x 14.5" h x 5.75"/2.25"d

N

40 \checkmark 41

THIN

ENCLOSURES

GOTHIC SPEAKERS

Many vehicles do not have tons of space available for a big, bulky enclosure. Some vehicle, like some crew-cab trucks, have no space for a subwoofer. Until now... The THIN-13 is now the shallowest woofer on the market! Coming in at a mere 2" of depth, they will fit behind rear crew-cab truck seats, under many front seats, or even in a friggin' door with some custom fabrication! While other "shallow mount" subwoofers are available, they typically require traditional airspace. The THIN-13 is 13.25" in diameter and not only does it play in enclosures as small as .5 cubic foot well (typical for most 8"-10" woofers), but it reproduces lower frequency response than most 12" woofers in much larger enclosures. No more whining about not having a subwoofer available that will fit in virtually every vehicle! THIN-13 has you covered...









THIN-13BX Preloaded Enclosure

13" THIN Shallow Mount Subwoofer Enclosure

700w MAX Power Handling

4-Ohm Impedance

.6 cubic foot Preloaded Enclosure

Carpeted Grey w/ Embroidered Accents

30" I x 14.5" h x 5.25"/2.25" d

THIN-8A Preloaded Enclosure

Pre-loaded Active Enclosure w/ 8" Subwoofer 500w MAX Monoblock Amplifier Built-In Cast Aluminum Chassis Hi-Speaker Level Inputs 200mV-6V Low Level RCA Input Variable 2dB Low Pass Crossover 180° Phase Inversion Switch Dash Mount Gain Control Included 3"h x 9.5"w x 13.5"L







High Efficiency PP Coated Paper Cone 1" Kapton Voice Coil Reinforced Cloth Surround 1" Swivel Dome Tweeter Flush or Surface Mounting 12dB In-Line Crossover Included PTC Tweeter Protection

ACOUSTIN





Gothic	Size &	MAX	Magnet	Frequency	Efficiency	Mounting
Speakers	Туре	Power	Volume (oz)	Response	(1w/1m dB)	Depth
GF-60C	6.5" Component	350w	13oz.	75-20kHz	91dB	2.125"
GF-693	6"x9" 3-way	500w	22oz.	65-20kHz	93dB	2.875"
GF-653	6.5" 3-way	350w	13oz.	75*20kHz	91dB	2.125"

2" Paper Cone Midrange

Balanced Dome Tweeter

SPEAKERS

RC-60C

6.5" Component System

250W Max Power Handling 4-Ohm System Impedance Polypropylene Injection Come NBR Rubber Surround 1" Voice Coil on Aluminum Former Quick Disconnect Terminals Conex Spider Suspension 1" Flush Mount Dome Tweeter Passive Crossover Included Speaker Grill Included Freq-Response: 70-20kHz Sensitivity: 92dB Mounting Depth: 2.5"





Vacuum Form Polypropylene Cone NBR Rubber Surround 1" Voice Coil on Aluminum Former 4-ohm System Impedance Quick Disconnect Terminals 2" Mylar Midrange (RF-693) 1" Mylar Tweeter



RF-652





502	
-----	--

Reape	er Size &	MAX	Magnet	Frequency	Efficiency	Mounting
Speake	ers Type	Power	Volume (oz)	Response	(1w/1m dB)	Depth
RC-60C	6.5" Component	250w	6.50 oz.	65-20kHz	88dB	1.75"
RF-693	6"x9" 3-way	330w	24.3 oz	45-20kHz	88dB	3.25"
RF-573	5" x 7" 3-way	200w	6.50 oz	65-20kHz	87dB	1.75"
RF-652	6.5" 2-way	190w	6.50 oz	65-20kHz	88dB	1.75"
RF-502	5.25" 2-way	160w	4.25 oz	80-20kHz	86dB	2.125"
RF-402	4" 2-way	140w	4.00 oz	100-20kHz	86dB	1.75"

NB-1 2-Way Mount Tweeter 200 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet Polypropylene Diaphragm 100 Watts R.M.S. Freq. Resp. 5kHz to 25KHz Imp. 4 Ohm Surface/Angle Mount SPL 97 dB Built in Crossover





NB-2 3-Way Mount Tweeter 200 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet Polypropylene Diaphragm 100 Watts R.M.S. Freq. Resp. 5kHz to 25Khz Imp. 4 Ohm Surface/Angle Mount/Flush Mount SPL 97 dB Built in Crossover





NB-4 4-Way Mount Tweeter 250 Watts



Niobium Rare Earth Ferroelectric Transducer Magnet Swivel/Surface/Angle Mount/Flush Mount Polypropylene Diaphragm Built in Crossover Freq. Resp. 5kHz to 25Khz Imp. 4 Ohm SPL 97 dB



AUDIO

NX-5 Bullet Tweeter 200 Watts MAX

1" Horn Loaded Bullet tweeter Machined Aluminum Chassis Titanium Dome Diaphragm 1" High Temperature Voice Coil Acrylic Phase Plug High Strength Neodymium Magnet Freq. Resp 3kHz–20kHz Impedance: 3 ohm Efficiency: 109dB Sold in pairs



XPS-104 4" Midrange

300 watts max .75" Voice Coil Freq. Resp. 450 Hz. to 10kHz. 15 oz. Magnet Imp. 4 Ohm SPL 92 dB Mounting Depth: 1.75" Sold Individually



PRO Audio Midrange Speakers



MID-80







Size &	MAX	Impedance	Frequency	Efficiency	Mounting
Type	Power		Response	(1w/1m dB)	Depth
6.5"	170w	4Ω	150-10kHz	96dB	2.75"
6.5"	300w	4Ω	150-15kHz	96dB	2.75"
8"	200w	4Ω	120-8kHz	97dB	3.25"
8"	350w	4Ω	1202-8kHz	98dB	3.25"
	Type 6.5" 6.5" 8"	Type Power 6.5" 170w 6.5" 300w 8" 200w	Type Power 6.5" 170w 4Ω 6.5" 300w 4Ω 8" 200w 4Ω	Type Power Response 6.5" 170w 4Ω 150-10kHz 6.5" 300w 4Ω 150-15kHz 8" 200w 4Ω 120-8kHz	Type Power Response (1w/1m dB) 6.5" 170w $4Ω$ 150-10kHz 96dB 6.5" 300w $4Ω$ 150-15kHz 96dB 8" 200w $4Ω$ 120-8kHz 97dB

PWM-70 7-Band 1/2 DIN Equalizer


2 Selectable Balanced Inputs
Selectable Input Sensitivity
7 bands +/- 18dB Parametric Equalizer
Independent Volume & Fader Control
Independent Subwoofer Output and Level Control
Selectable Subwoofer Low-Pass Crossover
8V MAX Front, Rear, & Subwoofer Outputs
Low Noise BI-FET Op-Amp for Minimum Distortion
20dB Headroom, 30V Bipolar Power Supply
Blue LED Backlighting
S/N Ratio 110dB @1V
THD:0.05%

PWM-20 4-Band 1/2 DIN Equalizer

2 Selectable Balanced Inputs
Variable Stereo Input Sensitivity
4 Variable Frequency Bands +/- 18dB Parametric Equalizer
Independent Volume & Fader Control
Independent Subwoofer Output and Level Control
Variable Subwoofer Low-Pass Crossover
8V MAX Front, Rear, & Subwoofer Outputs
Low Noise BI-FET Op-Amp for Minimum Distortion
20dB Headroom, 30V Bipolar Power Supply
Blue LED Backlighting
Quick Disconnect Wire Harness
S/N Ratio 115dB @1V
THD:0.05%



2 Selectable Balanced Inputs
Variable Stereo Input Sensitivity
4 bands +/- 18dB Parametric Equalizer
Independent Volume & Fader Control
Independent Subwoofer Output and Level Control
Variable Subwoofer Low-Pass Crossover
7V MAX Front, Rear, & Subwoofer Outputs
Low Noise BI-FET Op-Amp for Minimum Distortion
20dB Headroom, 30V Bipolar Power Supply
Selectable Green/Amber Illumination
Quick Disconnect Wire Harness
Under Dash Mounting Hardware Included
S/N Ratio 110dB @5V
THD:0.05%





2 Selectable Balanced Inputs & Front Panel AUX Input 4 bands +/- 18dB Parametric Equalizer Independent Volume & Fader Control Independent Subwoofer Output and Level Control Variable Subwoofer Low-Pass Crossover 7V MAX Front, Rear, & Subwoofer Outputs Blue LED Backlighting Quick Disconnect Wire Harness S/N Ratio 80dB @5V THD:0.05%

PROCESSORS

PROCESSORS

BASSBOX-8

Chrome Finish w/ Illuminated Badge PWM High Head Room Power Supply 27-63Hz Parametric Bass Boost Variable Bandwidth Adjustment Max Output Level: 13.5 volt Dash Mount Remote Control LED MAX Bass Indicators 35-80Hz Variable Subsonic Filter Balanced RCA Inputs Selectable Input Ground Sources Selectable Grounding Isolation Frequency Response: 10~100kHz THD: 0.003% S/N Ratio: 130dB



BASSBOX-6

PWM High Head Room Power Supply 27-63Hz Parametric Bass Boost Variable Bandwidth Adjustment Max Output Level: 13.5 volt Dash Mount Remote Control LED MAX Bass Indicators Selectable Subsonic Filter Balanced RCA Inputs Selectable Input Ground Sources Selectable Grounding Isolation Frequency Response: 10~100kHz THD: 0.003% S/N Ratio: 130dB Input Noise Rejection: 60 dB





BASS-10C Bass Maximizer

PWM High Head Room Power Supply 27-63Hz Parametric Bass Boost Variable Bandwidth Adjustment Max Output Level: 13.5 volt Dash Mount Remote Control LED MAX Bass Indicators Selectable Subsonic Filter Balanced RCA Inputs Selectable Input Ground Sources Selectable Grounding Isolation Frequency Response: 10~100kHz S/N Ratio: 130dB Input Noise Rejection: 60 dB



Chrome Finish w/ Illuminated Badge PWM High Head Room Power Supply 27-63Hz Parametric Bass Boost Variable Bandwidth Adjustment Max Output Level: 13.5 volt Dash Mount Remote Control LED MAX Bass Indicators 35-80Hz Variable Subsonic Filter Balanced RCA Inputs Selectable Input Ground Sources Selectable Grounding Isolation Frequency Response: 10~100kHz THD: 0.003% S/N Ratio: 130dB



C-30XR 3-Way 12dB Electronic Crossover

6-Channel Low-Level Input 6-Channel Low-Level Output w/ 5V Gain 2/4 Channel Input Selection Independent Front/Rear High Pass Independent Subwoofer Low Pass Stereo or Mono Subwoofer Output Selection 180° Phase Switch Variable Frequency & Gain Bass Boost Dash Mount Remote Subwoofer Gain Module S/N Ratio: 95dB Channel Separation: 60dB

AUTOMOTIVE

ACCESSORIES

ACCESSORIES

PC1.5F 1.5 Farad Power Capacitor

> Terminal Post for Ring Terminal Digital Voltage Meter Translucent Mounting Brackets Brushed Aluminum Finish



PCX-3F 3 Farad Power Capacitor PCX-5F 5 Farad Power Capacitor

12-16 DC Volts Operation Terminal Post for Ring Terminal Digital Voltage Meter Polarity & Voltage Protection Protection Alert Indicator LED Accent Lighting
Satin Finish w/ Chrome Accents



PC2.0F 2 Farad Power Capacitor



PCX-30F 30 Farad Hybrid Power Capacitor

12-16 DC Volts Operation Internally Stacked Carbon-Foil Capacitors Direct Connect 0 ga. Terminals & 4 ga. Reducers Digital Voltage Meter Polarity & Voltage Protection Protection Alert Indicator LED Accent Lighting





AMPLIFIER WIRE KITS

AKIT-O Og Amplifier Wire Kit w/ 150A ANL Fuse

AKIT-2 2ga Amplifier Wire Kit w/ 100A Maxi Fuse

AKIT-4 4ga Amplifier Wire Kit w/ 60A Maxi Fuse

AKIT-8 8ga Amplifier Wire Kit w/ 60A Maxi Fuse

Each Wire Kit Includes:

17ft Matte Blue Power Wire 3ft Matte Clear Ground Wire 30ft 12ga Matte Blue/Clear Speaker Wire 17ft. Blue/Clear Twisted Pair RCA & Remote Wire Complete Installation Accessories



WINDOW FILM TINT

Automotive and Commercial Application Window Tint

Our window film uses impregnated color chips and twin UV inhibitors in the initial manufacturing process. This insures maximum benefit for your interior. Traditional manufacturing process uses clear chips and adds dyes, pigments, or sprayon colors, and a UV inhibitor in the adhesive.

Additional Benefits

Color-stable film that never bubbles, peels, or turns purple over time

Malleable for seamless attachment to curved surfaces

American made adhesives for impervious seal and undistorted views

Reduces heat, glare and overall energy costs when used in home or auto Eliminate harmful UV by 99% to protect interior materials in home or auto

Lifetime Warranty with Everlast Series, Made in U.S.A.

4-Year Prorated Warranty with Elite Series

Available in 20", 24", 36", 40" Width, all in 100ft. length

Everlast Series Available in 60" Width

Everlast Series

EV-05 6% VLT EV-15 16% VLT EV-20 21% VLT EV-35 35% VLT

EV-50 51% VLT

Elite Series

LT-05 6% VLT LT-20 22% VLT LT-35 33% VLT LT-50 51% VLT



XENON BULBS SUPERWHITE BULBS



















H11







9006

9007

12V 100/80W

H13/9008

880

ALL MODELS COME IN PAIRS

WAKE TOWER SPEAKERS

AUDIO

MCD-41B (w/ Bluetooth V2.0) 1-DIN Marine CD Player w/32GB USB Playback













CD/MP3, AM/FM & USB Receiver
Conformal Coated PCB and Faceplate
Theft Deterrent Detachable Faceplate
Bluetooth V2.0 Hands Free Calling from Smart Phone
A2DP MP3 Audio Playback from Enabled Device
Playback from 32GB USB of MP3 & WMA
Playback from CD, CDR, CDRW of MP3 & WMA
Aux Audio Input for Personal Media Devices
Front & Rear Pre-Amp Output
52w x 4 MOSFET Speaker Outputs
Custom & Pre-Set Equalizer Settings
Audio Staging Controls
12/24 Hour Digital Clock
Remote Control Included
Faceplate Carry Case Included



RAZOR

NEW

Compact 4.75" Chassis Design for Installation Versatility
Splash Resistant Conformal Coated Circuit Boards
MOSFET Power Supply w/ Audiophile Grade IRTM Transistors
Military Grade SMT PCB Maintains Dynamic Performance
2-ohm Stereo & 4-ohm Bridged Full Range Operation
2-Ohm Stable Class A/B Monoblock Operation
1-ohm Stable Class Design of Circuits Protect Applification


1-ohm Stable Class D Monoblock Operation
Direct Short, Thermal, & Overload Circuits Protect Ampllifier
200mv-6V Low Level RCA Inputs

High Level Input w/ Signal Sense Auto Turn-on Variable 12dB High Pass & Low Pass Crossovers 10-50Hz Variable 12dB Subsonic Crossover Protect

10-50Hz Variable 12dB Subsonic Crossover Protects Subwoofers 12dB Bass Boost Increases Low Octave Harmonics (monoblocks) Dash Mount Gain Control Module Included (select models)

		100	93 w
3	3		

POWER FICOUSTIK





Wake Tower	Size &	MAX	RMS	Frequency	Efficiency	Overall Size
Speakers	Color	Power	Power	Response	(1w/1m dB)	(HxWxL)
MWT-65W	6.5" White	500w	250w	40-20kHz	90dB	8.5" x 8.5" x 9"
MWT-65T	6.5" Titanium	500w	250w	40-20kHz	90dB	8.5" x 8.5" x 9"
MWT-80W	8" White	750w	375w	30-20kHz	91dB	10" x 10" x 9.5"
MWT-80T	8" Titanium	750w	375w	30-20kHz	91dB	10" x 10" x 9.5"

 \sim 53

100% Waterproof Sealed Back Speaker Frame

Injection Molded Polypropylene speaker cone

Stainless Steel Mounting Hardware Included

Rubber Surround & Tweeter Pole Gasket

1" Titanium Dome Tweeter

Quick Disconnect Terminals

4-ohm System Impedance

White and Titanium Grils Included

Meets ROHS and CE Certifications

AUDIO

MARINE WATERPROOF SPEAKERS

AUDIO

Marine Grade Waterproof 6.5" Coaxial Speaker High Density ABS Construction w/ UV Coating

Marine	MAX	RMS	Frequency	Efficiency	Overall Size
Speakers	Power	Power	Response	(1w/1m dB)	(WxHxL)
MF-65WT	300w	150w	60-20kHz	91dB	7.5" x 7.5" x 2.5"

MARINE WATERPROOF SUBWOOFERS



Marine	MAX	RMS	Frequency	Efficiency	Overall Size
Subwoofer	Power	Power	Response	(1w/1m dB)	(WxHxL)
MW-10WT	600w	300w	30-4kHz	91dB	10.5" x 10.5" x 6"

