



EDGE SHALLOW SUBWOOFER



EDGE Shallow Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft ³	Optimum Ported Enclosure ft ³
EW-104S	1,400	700	81.30	2.00" 4Q	60oz.	2.50"	0.75	-
EW-124S	1,200	600	83.60	2.00" 4Q	60oz.	2.50"	1.00	-

Amplifier Wire Kits

- AK-0** 0g Amplifier Wire Kit w/ 200A ANL Fuse
- AK-4** 4ga Amplifier Wire Kit w/ 120A MANL Fuse
- AK-8** 8ga Amplifier Wire Kit w/ 80A MANL Fuse

Each Wire Kit Includes:

- 17ft Power Wire w/ Ring Terminal
- 3ft Ground Wire w/ Ring Terminal
- 17ft Twisted Pair RCA Interconnect
- 17ft Remote Turn-on Wire
- 25ft 16g Split Speaker Wire
- Full Size MANL Fuse Holder
- ANL or MANL Fuse Included
- Assorted Installation Accessories



BASS-15C Bass Maximizer

- PWM High Head Room Power Supply
- 27-63Hz Parametric Bass Boost
- Variable Bandwidth Adjustment
- Max Output Level: 13.5 volt
- Dash Mount Remote Control
- LED MAX Bass Indicators
- Selectable Subsonic Filter
- Balanced RCA Inputs
- Selectable Input Ground Sources
- Selectable Grounding Isolation
- Frequency Response: 10-100kHz
- THD: 0.003%
- S/N Ratio: 130dB
- Input Noise Rejection: 60 dB



MCD-51B (w/ Bluetooth V2.0)
1-DIN Marine CD Player w/32GB USB Playback



- USB
- Bluetooth
- AUX INPUT
- X300 WATT 4CH. AMPLIFIER

CD/MP3, AM/FM & USB Receiver
Conformal Coated PCB and Faceplate
Theft Deterrent Detachable Faceplate
Bluetooth V2.0 Hands Free Calling from Smart Phone
A2DP MP3 Audio Playback from Enabled Device
Playback from 32GB USB of MP3 & WMA
Playback from CD, CDR, CDRW of MP3 & WMA
Aux Audio Input for Personal Media Devices
Front & Rear Pre-Amp Output
52w x 4 MOSFET Speaker Outputs
Custom & Pre-Set Equalizer Settings
Audio Staging Controls
12/24 Hour Digital Clock
Remote Control Included
Faceplate Carry Case Included

ATV-6 All-Terrain Vehicle Audio System

Rugged All Element Ready ABS Construction
400w MAX Power Class A/B Audio Amplifier
Conformal Coated PCB and Waterproof Connections
Handlebar Mount Remote Control w/ AUX Input Included
Marine Grade Waterproof 6.5" Coaxial Speaker
1" Extended Frequency Range Titanium Dome Tweeter
RGB LED Light Rings Built-in, Remote Control Included
Bluetooth V3.0 MP3 Audio Streaming from Mobile Phone
3.5mm Aux Audio Input for Personal Media Devices
Heavy Duty Mounting Hardware Included


- Bluetooth
- AUX INPUT
- RGB LED lighting system



POWER ACOUSTIK® NEW FOR 2017

PD-1032B
ISO 2-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 10.3" Touchscreen LCD

- Bluetooth
- USB
- X300 WATT 4CH. AMPLIFIER
- DVD
- AUX INPUT
- TOUCH SCREEN

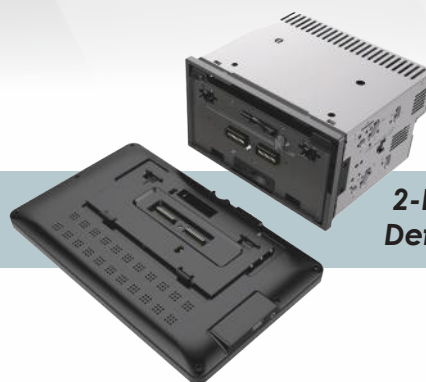

2-DIN with 10.3" Detachable LCD!

PD-621XB - SiriusXM Tuner Ready + Standards
ISO 2-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 6.2" Touchscreen LCD



- SiriusXM READY
- DVD
- Bluetooth
- AUX INPUT
- TOUCH SCREEN
- USB
- X300 WATT 4CH. AMPLIFIER

- SiriusXM READY
- Bluetooth
- USB
- X300 WATT 4CH. AMPLIFIER
- DVD
- AUX INPUT
- TOUCH SCREEN



2-DIN with 6.2" Detachable LCD!

ISO 2-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 6.2" Touchscreen LCD

- Bluetooth
- USB
- X300 WATT 4CH. AMPLIFIER
- DVD
- AUX INPUT
- TOUCH SCREEN



Standard Features - PD-623B

- Bluetooth
- USB
- X300 WATT 4CH. AMPLIFIER
- DVD
- AUX INPUT
- TOUCH SCREEN



Standard Features - PD-348B
1-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth Connectivity, & Detachable 3.4" LCD

SiriusXM Tuner Ready + Standards - PD-625XB

Standard Features - PD-625B




iGo GPS Navigation + Android PhoneLink + Standards - **PDN-721HB**
 SiriusXM Tuner Ready + Standards - **PD-721XB**
 Standard Features - **PD-721B**
 ISO 1-DIN DVD, CD/MP3, AM/FM Receiver w/
 Bluetooth 4.0 Connectivity, & 7" Touchscreen LCD



HDVD-94T - Universal Replacement Headrest w/ DVD Player & 9" Touchscreen LCD
HDVD-94 - Universal Replacement Headrest w/ DVD Player & 9" LCD
H-94 - Universal Replacement Headrest w/ 9" LCD



PHD-101
 Universal Headrest Mount DVD Player w/ 10.3" LCD

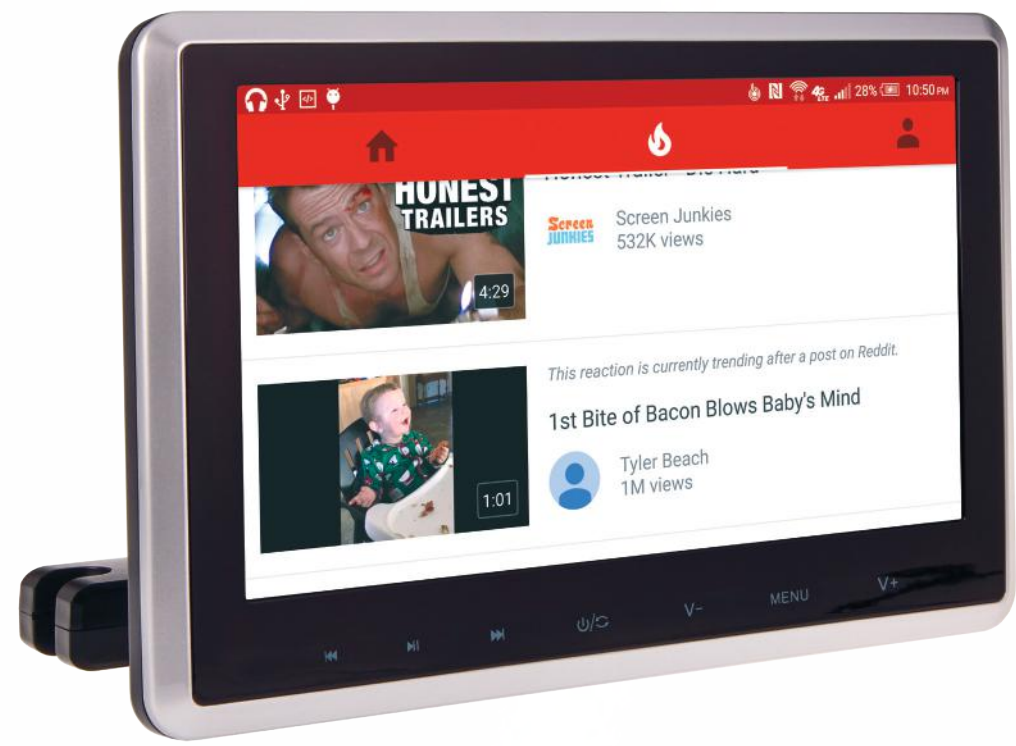

HDM-A3 - MHL MobileLink Smartphone Mirroring Interface Cable for Select Android Devices
HDM-i4 - MHL MobileLink Smartphone Mirroring Interface Cable For Select iOS Devices
 5ft interface cable unlocks 1080p video and audio playback from enabled mobile devices. Each interface cable features the appropriate micro connector for your mobile device. Power Acoustik MobileLink Interface cables also charge your mobile device. Available for select Android and iOS devices.



HIR-1W - Single 1ch. IR Headphone - White
HIR-1B - Single 1ch. IR Headphone - Black
HIR-2W - Single 2ch. IR Headphone - White
HIR-2B - Single 2ch. IR Headphone - Black

Single 1ch or 2ch Infrared Headphone
 Available in Graphite Black or Snow White
 Independently Swiveling Ear Cup
 Ear Cup Fold Flat for Convenient Storage
 Soft Comfortable Faux Leather Ear Pad
 Adjustable Headband w/ Silicone Headliner
 Built-in Momentary Mute Switch
 25ft Maximum Operational Range
 Auto Off Timer Increases Battery Life
 40mm Mylar Extended Frequency Driver
 Variable Volume Level Control
 Soft Touch Cinch Carry Bag Included
 Requires 2 AAA Batteries (included)
 Ch. 1: L 2.3mHz, R 2.8mHz
 Ch. 2: L 3.2mHz, R 3.8mHz



Caliber

AMPLIFIER



Class A/B Full Range & Class D Monoblock Amplifiers
 2-ohm Stereo & 4-ohm Bridged Full Range Operation
 1-ohm Stable Monoblock Operation for MAX Power
 Bridge 2 Monoblocks Together for Double Power!
 Military Grade PCB w/ PWM MOSFET Power Supply
 Direct Short, Thermal, & Overload Circuit Protection
 High/Speaker Level & Low Level/RCA Input
 200mV-6V Low Level RCA Input
 Pre-Amp Low-Level RCA Outputs (select models)
 4g Power Wire & 8g Speaker Wire Outputs
 Variable 12dB High & Low Pass Crossovers
 12dB Bass Boost Increases Low Octave Harmonics
 180° Phase Shift Improves Low Octave Dynamics (monoblock)
 Dash Mount Remote Control Included (select models)

CALIBER AMPLIFIERS	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (9.50w x 2" h)	Gain Control Included
CB4-1200	1,200	2 x 300	4 x 150	4 x 120	13"	-
CB4-1800	1,800	2 x 450	4 x 225	4 x 180	15.25"	-
CB1-2500D	2,500	1 x 1,250 (1Ω)	1 x 850	1 x 500	12"	Included
CB1-4500D	4,500	1 x 2,200 (1Ω)	1 x 1,500	1 x 900	13.25"	Included
CB1-8000D	8,000	1 x 4,000 (1Ω)	1 x 2,500	1 x 1,500	18"	Included

MOFO

SUBWOOFER



MOFO Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft³	Optimum Ported Enclosure ft³
MOFO-104X	2,400	1,200	83.48	2.50" Dual 4Ω	288oz.	6.125"	0.75	1.25
MOFO-102X	2,400	1,200	83.62	2.50" Dual 2Ω	288oz.	6.125"	0.75	1.25

BAMF

SUBWOOFER



BAMF Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft³	Optimum Ported Enclosure ft³
BAMF-104	3,200w	1,600w	83.50	3" Dual 4Ω	272oz.	6.00"	0.75	1.25
BAMF-102	3,200w	1,600w	83.80	3" Dual 2Ω	272oz.	6.00"	0.75	1.25
BAMF-124	3,500w	1,750w	84.60	3" Dual 4Ω	272oz.	6.75"	1.00	2.00
BAMF-154	3,800w	1,900w	86.40	3" Dual 4Ω	272oz.	8.00"	2.00	4.00

MOFO

SUBWOOFER Type S



MOFO Gothic Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft³	Optimum Ported Enclosure ft³
MOFOS-10D4	2,200	1,100	82.60	2.50" Dual 4Ω	204oz.	6.00"	0.75	1.75
MOFOS-10D2	2,200	1,100	83.00	2.50" Dual 2Ω	204oz.	6.00"	0.75	1.75
MOFOS-12D4	2,500	1,200	86.50	2.50" Dual 4Ω	254oz.	6.50"	1.25	2.50
MOFOS-12D2	2,500	1,200	86.40	2.50" Dual 2Ω	254oz.	7.50"	1.25	2.50