

POWER ACUSTIK®



SUBWOOFERS

AMPLIFIERS

SPEAKERS

MARINE AUDIO

SOURCE UNITS


CAR PLAY SOURCE UNITS

CP-650

2-DIN Digital Media Car Stereo w/ Apple CarPlay, Bluetooth Connectivity, & 6.5" LCD



NEW FOR
2018

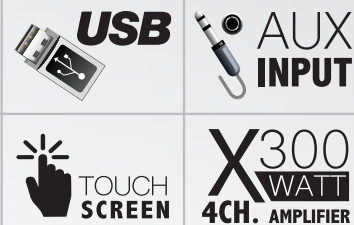

CarPlay is a smarter, safer way to use your iPhone in the car. CarPlay takes the things you want to do with your iPhone while driving and puts them right on your car stereo display. You can get directions, make calls, send and receive messages, and listen to music, all in a way that allows you to stay focused on the road. Just connect your iPhone and go. CarPlay supports other apps on your iPhone — like your favorite audio, messaging, and voice apps. You can personalize your experience by rearranging exactly how your apps appear in CarPlay through settings on your iPhone.

Siri Hands-Free

CarPlay features Siri voice control and is specially designed for driving scenarios. CarPlay also works with your car's controls — knobs, buttons, touchpad, or touchscreen. And the apps themselves have been reimagined for the car, so you can use them while your eyes and hands stay where they belong. Make calls, return missed calls, and listen to voicemail. Siri can help you do all of these things. All you have to do is ask.

Maps

The power and simplicity of Apple Maps is now available on your dashboard. CarPlay can predict where you most likely want to go using addresses from your email, texts, contacts, and calendars. You can also search along your route for nearby gas stations, restaurants, coffee shops, and more. Or just use your voice: "Siri, where's the closest EV charging station?" And CarPlay doesn't just guide you, it helps get you there safely by advising which lane to be in to make a turn, and showing the speed limit.

Music

Access all of your content from iTunes, your Apple Music membership, and additional audio apps using CarPlay's built-in controls. Search by artist, album, or song. See what's playing and what's up next. You can ask Siri to play your favorite song or be your personal DJ.

Messages

Reading and writing is now listening and dictating. Siri can send, read, and reply to your text messages for you, so you never have to look at your iPhone while driving. Just say: "Siri, tell Blair I'll be there in 20 minutes," and it's done. CarPlay plays audio messages too, so you can hear from people in their own voices.

CarPlay is compatible with these iPhone models:

iPhone 7, iPhone 7 Plus, iPhone SE, iPhone 5s
 iPhone 6s, iPhone 6s Plus, iPhone 5c, iPhone 5
 iPhone 6, iPhone 6 Plus

General Functions

- ISO 2-DIN Chassis, Universal Mounting Sleeve Included
- 6.5" 800*480 WVGA 16:9 Aspect Ratio Widescreen LCD
- SmartSense Glass Panel w/ Capacitive Sensing Touchscreen
- 7-Color RGB LED Front Panel Illumination
- Apple CarPlay with Siri Eyes Free Built-In
- Bluetooth V4.0+EDR Hands-Free Operation of Enabled Phones
- USB 2.0 for Playback of Common Audio & Video Files
- 2A 5V Adaptive Fast Charge of Mobile Devices via USB
- Advanced FM/AM Tuner with RDS Display
- Accepts OEM Steering Wheel Control Interfaces
- Rear View Back-up Camera Input w/ Trigger
- 14-Band Digital Audio EQ & Surround Sound Effect
- Wireless Remote Control Included
- 300w 4ch. MOSFET Speaker Output

Bluetooth Connectivity



- Bluetooth Protocol V4.2 + EDR, 2.1 Mbit/s DTR
- Hands Free Profile (HFP) V1.7 Sends & Receives Calls
- Phone Book Access Profile (PBA) Displays Contact Information
- A/V Remote Control Profile (AVRCP) V1.4 Controls Media Playback
- Advanced Audio Distribution Profile (A2DP) Streams Audio Content
- External Wired Microphone Included

USB Playback

- Playback of MP3 & WMA Audio Files from 64GB USB 2.0
- Playback of AVI, MP4, & H264 Video Files from 64GB USB 2.0
- View JPEG, GIF, PNG, and BMP Image Files from 64GB USB 2.0
- ID3 MP3 Tag Reading for Track & Artist Information

Audio/Video Configurations

- 3.5mm AUX Audio Input for Personal Media Devices
- Rear Audio/Video Input for Personal Media Devices
- Front & Rear RCA Pre-Amp Audio Outputs, 4V
- Subwoofer RCA Pre-Amp Audio Output, 4V
- Video RCA Output to Auxiliary Devices

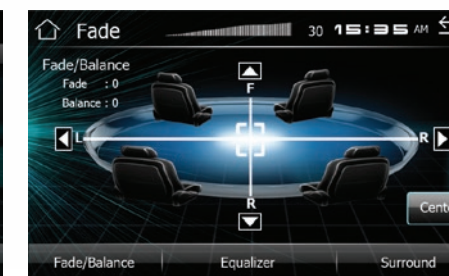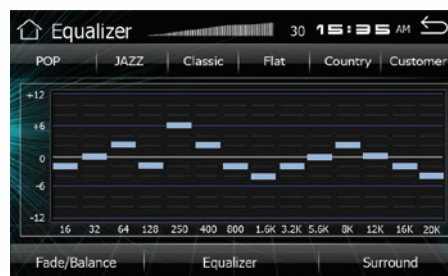




INCITE SOURCE UNITS



Incite operating systems use an advanced microprocessors and central processing unit bringing lightning fast reaction time into automotive multimedia entertainment systems. Premium Incite units feature built-in advanced GPS Navigation with Android PhoneLink 2-way MHL complete smart phone integration, or Sirius/XM satellite radio ready interface. Standards for all Incite models include Bluetooth V3.0 for hands-free calling, Adaptive Fast Charging of enabled mobile devices, and more. Select Incite units add multi-color illumination or an advanced audio staging equalizer. Available models include 2-DIN with 6.2" LCD touchscreen, 1-DIN with 7" LCD touchscreen, 1-DIN with 3.4" LCD, and even a 2-DIN with 10.3" LCD touchscreen!



Premium Incite Source Units feature GPS turn-by-turn navigation for all 50 United States, powered by iGo Primo. Set your destination to one of nearly 17 million available points of interest, or your own unique location. Follow the on-screen directions or audible text-to-speech commands, including lane departure guidance. Additional features include favorites list, programmable home destination, destination fuel estimates, multi-lingual, multi-gender voices, speed limit warnings, and more!

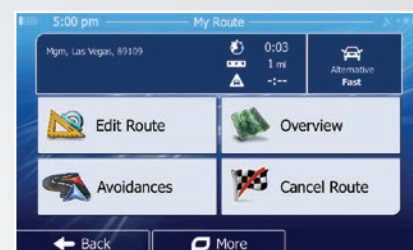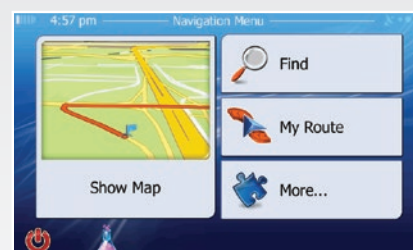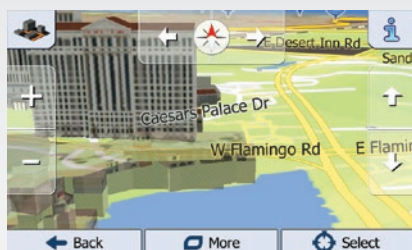

GPS Navigation models include Android PhoneLink mobile device integration, enabling complete control of your Android smartphones and tablets. Conveniently launch any application, post social media updates, or play your own videos and all other content on your mobile device. Your smart device display is mirrored to the head units larger LCD screen via USB, and all commands are sent via Bluetooth 3.0 connection. Android PhoneLink ensures safe, hands-free operation of your smart device without the distractions of locating & handling a device.




Everything, Everywhere
In addition to Incite's great features, select models include interface for SiriusXM's satellite radio tuner SXV300 (sold separately). Welcome to commercial-free music from every genre, live play-by-play sports, the biggest news and talk, and the hottest entertainment at your fingertips, 24/7.

Enjoy over 140 channels, including commercial-free music plus the best sports, news, talk, comedy and entertainment. SiriusXM signal coverage spans over 3.7 million square miles, coast to coast. No longer will you worry about losing radio reception...



Bluetooth V3.0 Hands-Free Calling

Bluetooth V3.0 with Enhanced Data Rate increases traditional data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.



Adaptive Fast Charging

We demand top performance of our mobile devices to meet our social media and content streaming needs. To keep up with rapidly changing design trends, our mobile devices tend to rely on limited energy capacity, utilizing every efficiency to prolong the charge of the battery. Incite source units feature USB Adaptive Fast Charge technology, reducing necessary down time to get you moving again. AFC has the potential to recharge enabled mobile device batteries from zero to up to 50% in about 30 minutes. (USB cable not included)

INCITE SOURCE UNITS

PD-1032B

ISO 2-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & Detachable 10.3" Touchscreen LCD



2-DIN with 10.3" Detachable LCD!

DVD



AUX INPUT

Bluetooth



X300 WATT 4CH. AMPLIFIER

PD-1032B Standard Features:

- ISO 2-DIN Chassis, Universal Mounting Sleeve Included
- 10.3" 800*480 16:9 Aspect Ratio Widescreen LCD
- Detachable Faceplate, Padded Carry Case Included
- SmartSense Glass Panel Touch Screen Technology
- Bluetooth V4.0 Hands-Free Calling from Enabled Phone
- A2DP Wireless MP3 Audio Playback from Enabled Device
- Built-in Microphone & External Microphone Included
- Accepts OEM Steering Wheel Control Interfaces
- Playback from DVD & CD of MP3, MP4 & Other Video
- Playback from 64GB USB of MP3, MP4 & Other Video

- 2A 5V Adaptive Fast Charge of Mobile Devices
- ID3 MP3 Tag Reading for Track & Artist Information
- 3.5mm AUX Audio Input for Personal Media Devices
- Rear Audio/Video Input for Personal Media Devices
- Front & Rear RCA Pre-Amp Audio Outputs
- Subwoofer RCA Pre-Amp Audio Output
- Video Output for Auxiliary Devices
- Rear View Camera Input w/ Trigger
- 300w 4ch. MOSFET Speaker Outputs
- Multi-Region FM Frequency Stepping
- Remote Control Included

INCITE SOURCE UNITS

PDN-621HB - Includes iGo GPS Navigation & Android PhoneLink

PD-621XB - Includes SiriusXM Tuner Interface

ISO 2-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 6.2" Touchscreen LCD



Control Your SiriusXM Tuner From The Touch Screen Display! Enjoy Over 140 Channels, Including Commercial-Free Music Plus The Best Sports, News, Talk, Comedy And Entertainment

DVD

USB

AUX INPUT

TOUCH SCREEN

X300 WATT 4CH. AMPLIFIER

621Series Standard Features:

ISO 2-DIN Chassis, Universal Mounting Sleeve Included
6.2" 800*480 16:9 Aspect Ratio Widescreen LCD
Bluetooth V4.0 Hands-Free Calling from Enabled Phone
A2DP Wireless MP3 Audio Playback from Enabled Device
Built-in Microphone & External Microphone Included
Accepts OEM Steering Wheel Control Interfaces
Playback from DVD & CD of MP3, MP4 & Other Video
Playback from 64GB USB of MP3, MP4 & Other Video
2A 5V Adaptive Fast Charge of Mobile Devices

ID3 MP3 Tag Reading for Track & Artist Information
3.5mm AUX Audio Input for Personal Media Devices
Rear Audio/Video Input for Personal Media Devices
Front & Rear RCA Pre-Amp Audio Outputs
Subwoofer RCA Pre-Amp Audio Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
300w 4ch. MOSFET Speaker Outputs
Multi-Region FM Frequency Stepping
Remote Control Included

INCITE SOURCE UNITS

Includes SiriusXM Tuner Interface - PD-625XB

Standard Features - PD-625B

ISO 2-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & Detachable 6.2" Touchscreen LCD



Control Your SiriusXM Tuner From The Touch Screen Display! Enjoy Over 140 Channels, Including Commercial-Free Music Plus The Best Sports, News, Talk, Comedy And Entertainment

DVD

USB

AUX INPUT

Bluetooth

TOUCH SCREEN

X300 WATT 4CH. AMPLIFIER



2-DIN with 6.2" Detachable LCD!

625 Series Standard Features:

ISO 2-DIN Chassis, Universal Mounting Sleeve Included
6.2" 800*480 16:9 Aspect Ratio Widescreen LCD
Detachable Faceplate, Padded Carry Case Included
Bluetooth V4.0 Hands-Free Calling from Enabled Phone
A2DP Wireless MP3 Audio Playback from Enabled Device
Built-in Front Panel Bluetooth Microphone
Accepts OEM Steering Wheel Control Interfaces
Playback from DVD & CD of MP3, MP4 & Other Video
Playback from 64GB USB of MP3, MP4 & Other Video
2A 5V Adaptive Fast Charge of Mobile Devices

ID3 MP3 Tag Reading for Track & Artist Information
3.5mm AUX Audio Input for Personal Media Devices
Rear Audio/Video Input for Personal Media Devices
Front & Rear RCA Pre-Amp Audio Outputs
Subwoofer RCA Pre-Amp Audio Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
300w 4ch. MOSFET Speaker Outputs
Multi-Region FM Frequency Stepping
Remote Control Included

INCITE SOURCE UNITS

PDN-721HB - Includes iGo GPS Navigation & Android PhoneLink

PD-721B - Standard Features

ISO 1-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 7" Touchscreen LCD



DVD



X300 WATT 4CH. AMPLIFIER

721 Series Standard Features:

ISO 1-DIN Chassis, Universal Mounting Sleeve Included
7" 800*480 16:9 Aspect Ratio Widescreen LCD
Detachable Front Panel, Padded Carry Case Included
SmartSense Glass Panel Touch Screen Technology
Bluetooth V4.0 Hands-Free Calling from Enabled Phone
A2DP Wireless MP3 Audio Playback from Enabled Device
Built-in Front Panel Bluetooth Microphone
Accepts OEM Steering Wheel Control Interfaces
Playback from DVD & CD of MP3, MP4 & Other Video
Playback from 64GB USB of MP3, MP4 & Other Video

2A 5V Adaptive Fast Charge of Mobile Devices
ID3 MP3 Tag Reading for Track & Artist Information
3.5mm AUX Audio Input for Personal Media Devices
Rear Audio/Video Input for Personal Media Devices
Front & Rear RCA Pre-Amp Audio Outputs
Subwoofer RCA Pre-Amp Audio Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
300w 4ch. MOSFET Speaker Outputs
Multi-Region FM Frequency Stepping
Remote Control Included


INCITE SOURCE UNITS

NEW FOR
2018

Includes iGo GPS Navigation - PDN-623B

Standard Features - PD-623B

ISO 2-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth 4.0 Connectivity, & 6.2" Touchscreen LCD

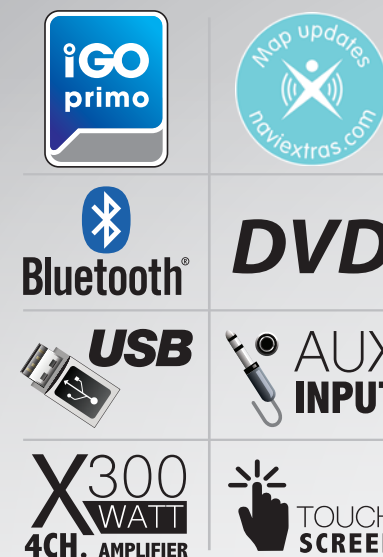

623B Series Standard Features:

ISO 2-DIN Chassis, Universal Mounting Sleeve Included
6.2" 800*480 16:9 Aspect Ratio Widescreen LCD
Bluetooth V4.0 Hands-Free Calling from Enabled Phone
A2DP Wireless MP3 Audio Playback from Enabled Device
Built-in Front Panel Bluetooth Microphone
Accepts OEM Steering Wheel Control Interfaces
Playback from DVD & CD of MP3, MP4 & Other Video
Playback from 64GB USB of MP3, MP4 & Other Video
ID3 MP3 Tag Reading for Track & Artist Information

3.5mm AUX Audio Input for Personal Media Devices
Rear Audio/Video Input for Personal Media Devices
Front & Rear RCA Pre-Amp Audio Outputs
Subwoofer RCA Pre-Amp Audio Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
300w 4ch. MOSFET Speaker Outputs
Multi-Region FM Frequency Stepping
Remote Control Included



PD-348B

1-DIN DVD, CD/MP3, AM/FM Receiver w/ Bluetooth Connectivity, & Detachable 3.4" LCD

PD-348B Standard Features:

ISO 1-DIN Chassis, Universal Mounting Sleeve Included
3.2" 720*420 16:9 Aspect Ratio Widescreen LCD
Bluetooth V4.0 Hands-Free Calling from Enabled Phone
A2DP Wireless MP3 Audio Playback from Enabled Device
Built-in Front Panel Bluetooth Microphone
Accepts OEM Steering Wheel Control Interfaces
Playback from DVD & CD of MP3, MP4 & Other Video
Playback from 64GB USB of MP3, MP4 & Other Video
ID3 MP3 Tag Reading for Track & Artist Information

3.5mm AUX Audio Input for Personal Media Devices
Rear Audio/Video Input for Personal Media Devices
Front & Rear RCA Pre-Amp Audio Outputs
Subwoofer RCA Pre-Amp Audio Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
300w 4ch. MOSFET Speaker Outputs
Multi-Region FM Frequency Stepping
Remote Control Included

MULTIMEDIA SOURCE UNITS

PD-624B
2-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver, w/ 6.2" LCD, & Bluetooth



	DVD
	AUX INPUT
X300 WATT 4CH. AMPLIFIER	



MULTIMEDIA SOURCE UNITS

PD-454B
1-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver w/ Detachable 4.5" LCD & Bluetooth



	DVD
	AUX INPUT
X300 WATT 4CH. AMPLIFIER	



PD-724B
1-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver, w/ Motorized 7" LCD, & Bluetooth



	DVD
	AUX INPUT
X300 WATT 4CH. AMPLIFIER	



ADDITIONAL SERIES DETAILS:
Bluetooth V4.0 Hands Free Calling
A2DP Wireless MP3 Audio Playback
Accepts OEM Steering Wheel Control Interface
Playback from DVD & CD of MP3 & MP4
Playback from 32GB SD/USB of MP3 & MP4
ID3 MP3 Tag Reading for Track & Artist Info
AUX AV Input for Personal Media Devices
Front & Rear Pre-Amp Audio Outputs

PTID-8920B
1-DIN Multimedia Source Unit w/ 7" Flip-Up LCD Touch Screen w/ Bluetooth



Subwoofer Pre-Amp Audio Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
300w 4ch. MOSFET Speaker Outputs
Custom & Preset Equalizer Settings
Multi-Region FM Frequency Stepping
800x480 Widescreen Resolution
400 NIT LED Brightness

MULTIMEDIA SOURCE UNITS

PD-710B (w/ Bluetooth V2.0)
1-DIN Multimedia Source Unit w/ Detachable 7" LCD Touch Screen



-  **Bluetooth**
-  **DVD**
-  **USB**
-  **AUX INPUT**
-  **X300 WATT 4CH. AMPLIFIER**
-  **TOUCH SCREEN**

PD-651B
2-DIN Multimedia Source Unit w/ 6.5" LCD Touch Screen w/ Bluetooth



-  **Bluetooth**
- DVD**
-  **USB**
-  **AUX INPUT**
-  **X300 WATT 4CH. AMPLIFIER**
-  **TOUCH SCREEN**

ADDITIONAL SERIES DETAILS:
Bluetooth V4.0 Hands Free Calling from Enabled Phone
A2DP Wireless MP3 Audio Playback from Enabled Phone
Accepts OEM Steering Wheel Control Interface
Playback from DVD & CD of MP3 & MP4
Playback from 32GB SD/USB of MP3 & MP4
ID3 MP3 Tag Reading for Track & Artist Info
AUX A/V Input for Personal Media Devices
Front & Rear Pre-Amp Audio Outputs

Subwoofer Pre-Amp Audio Output
Video Output for Auxiliary Devices
Rear View Camera Input w/ Trigger
300w 4ch. MOSFET Speaker Outputs
Custom & Preset Equalizer Settings
Multi-Region FM Frequency Stepping
800x480 Widescreen Resolution
400 NIT LED Brightness

CD & DIGITAL AUDIO SOURCE UNITS


2-DIN CD/MP3 Head Unit w/ Bluetooth - PCD-52B 2-DIN Digital Media Player w/ Bluetooth - PL-52B

-  **Bluetooth**
-  **CHANGEABLE ILLUMINATION**
-  **USB**
-  **SD HC**
-  **AUX INPUT**
-  **X300 WATT 4CH. AMPLIFIER**







1-DIN CD/MP3 Head Unit w/ Bluetooth - PCD-51B 1-DIN Digital Media Player w/ Bluetooth - PL-51B



-  **Bluetooth**
-  **USB**
-  **AUX INPUT**
-  **X300 WATT 4CH. AMPLIFIER**

1-DIN CD/MP3 Head Unit w/ Bluetooth - PCD-81B 1-DIN Digital Media Player w/ Bluetooth - PL-81B
1-DIN Digital Media Player w/ Bluetooth (fixed faceplate) - PL-81BP



- NEW FOR 2018**
-  **Bluetooth**
 -  **USB**
 -  **AUX INPUT**
 -  **X300 WATT 4CH. AMPLIFIER**

ADDITIONAL SERIES DETAILS:
Bluetooth V4.0 Hands Free Calling from Enabled Phone
A2DP MP3 Audio Playback from Enabled Phone
Playback from 32GB USB of MP3 & WMA
Playback from CD of MP3 & WMA (PCD models only)
AUX Audio Input for Personal Media Devices
Front & Rear Pre-Amp Output

300w 4ch MOSFET Speaker Outputs
Custom & Pre-Set Equalizer Settings
Audio Staging Controls
12/24 Hour Digital Clock
Remote Control Included
Theft Deterrent Detachable Faceplate (1-din only)
Faceplate Carry Case Included (1-din only)

OVERHEAD ENTERTAINMENT

PMD-143H

Ceiling Mount DVD Entertainment System w/
High Definition 14.3" LCD & MHL MobileLink Input

**MobileLink Mirrors the Image of Your Smartphone
Or Tablet To The Ceiling Monitor via MHL HDMI
Interface Cable (sold separate).**

Interchangeable Color Skins (beige, black, grey)
Car-Spec DVD Drive for Extreme Temperature Exposure
MHL MobileLink Input for Smart Device Connectivity
Playback from DVDR/RW of 720p MP4
Playback from 32GB SD Card or USB of 720p MP4
Flash Memory for Last Position Recall
Single Channel Wireless IR Transmitter (use HP-11S)
8-ch FM Stereo Transmitter for OEM Integration
RCA A/V Input for Auxiliary Sources
RCA A/V Output for Multiple Component Integration
Triggered Bright White LED Dome Light
NTSC / PAL Auto Selection
1,366 x 768 16:9 Widescreen Resolution
400 NIT Screen Brightness
Dimensions: 16" w x 7.5" d x 2.5" h



PMD-130H

Ceiling Mount DVD Entertainment System w/
13" LCD, MHL MobileLink Input, & LED Accents

**MobileLink Mirrors the Image of Your Smartphone
Or Tablet To The Ceiling Monitor via MHL HDMI
Interface Cable (sold separate).**

Interchangeable Color Skins (beige, black, grey)
Car-Spec DVD Drive for Extreme Temperature Exposure
90°/180° Swivel Screen for Angled Viewing
MHL MobileLink Input for Smart Device Connectivity
Playback from DVDR/RW of 720p MP4
Playback from 32GB SD Card or USB of 720p MP4
Dual Channel Wireless IR Transmitter (use HP-12S)
8-ch FM Stereo Transmitter for OEM Integration
RCA & 3.5MM A/V Input for Auxiliary Sources
RCA A/V Output for Multiple Component Integration
Triggered Bright White LED Dome Light
6-Color RGB LED Accent Lighting
NTSC / PAL Auto Selection
1,366 x 768 16:9 Widescreen Resolution
400 NIT Screen Brightness
Dimensions: 16.5" w x 13.25" d x 2.25" h

**NEW FOR
2018**



OVERHEAD ENTERTAINMENT

PMD-112 - w/ DVD

PT-110CM - A/V Only

Ceiling Mount Entertainment System w/ 11.2" LCD

Interchangeable Color Skins (beige, black, grey)
45°/45° Swivel Screen for Angled Viewing
Car-Spec DVS DVD Drive for Extreme Temperature Exposure
Playback from DVDR/RW of 720p MP4
Playback from 32GB SD Card or USB of 720p MP4
Flash Memory for Last Position Recall
Single Channel Wireless IR Transmitter (use HP-11S)
8-ch FM Stereo Transmitter for OEM Integration
A/V Input for Auxiliary Sources
Rear Panel RCA A/V Input for Game Console
A/V Output for Multiple Component Integration
Rear Panel Play/Pause Control
Triggered Bright White LED Dome Light
Full Function Remote Control Included
NTSC / PAL Auto Selection
800 x 480 16:9 Widescreen Resolution
400 NIT Screen Brightness
Dimensions: 14" w x 12.5" d x 2.5" h



PMD-102X

Ceiling Mount DVD Entertainment System w/ 10.2" LCD

Interchangeable Color Skins (beige, black, grey)
45°/270° Swivel Screen for Angled Viewing
Playback from DVDR/RW of 720p MP4
Playback from 32GB USB of 720p MP4
Flash Memory for Last Position Recall
FM Stereo Transmitter for OEM Integration
Single Channel Wireless IR Transmitter (use HP-11S)
A/V Output for Multiple Component Integration
A/V Inputs for Auxiliary Sources
Rear Panel RCA A/V Input for Game Console
Rear Panel Play/Pause Control
Triggered Bright White LED Dome Light
Full Function Remote Control Included
NTSC / PAL Auto Selection
1,024x600 16:9 Widescreen Resolution
400 NIT Screen Brightness
Dimensions: 11.5" w x 11" d x 2.5" h



PMD-103X

Ceiling Mount DVD Entertainment System w/ 10.3" LCD


Interchangeable Color Skins (beige, black, grey)
Car-Spec DVD Drive for Extreme Temperature Exposure
MHL MobileLink Input for Smart Device Connectivity
Playback from DVDR/RW of 720p MP4 & Other Video Formats
Playback from 32GB SD/USB of 720p MP4 & Other Video Formats
Dual Channel Wireless IR Transmitter (use HP-11S)
8-ch FM Stereo Transmitter for OEM Integration
RCA & 3.5MM A/V Input for Auxiliary Sources
RCA A/V Output for Multiple Component Integration
Triggered Bright White LED Dome Light
NTSC / PAL Auto Selection
800 x 480 16:9 Widescreen Resolution
400 NIT Screen Brightness
Dimensions: 11" w x 9.75" d x 2.5" h

**NEW FOR
2018**



REAR SEAT ENTERTAINMENT

- HDVD-91CC** Universal Replacement Headrest w/ DVD Player & 9" LCD
- HDVD-71CC** Universal Replacement Headrest w/ DVD Player & 7" LCD
- H-91CC** Universal Replacement Headrest w/ 9" LCD
- H-71CC** Universal Replacement Headrest w/ 7" LCD

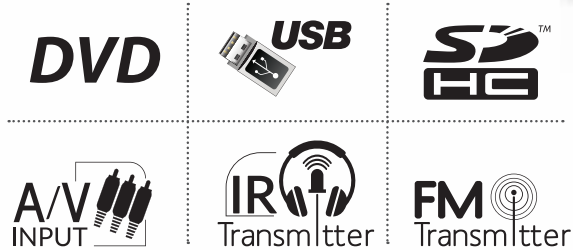

ADDITIONAL SERIES DETAILS:
 Forward/Backwards Tilting Headrest
 3 Changeable Color Skins Included (grey, beige, black)
 Playback from DVDR/RW of 720p MP4 (HDVD only)
 Playback from 32GB SD Card or USB of MP4 (HDVD only)
 Dual Channel Wireless IR Transmitter (use HP-12S)
 FM Stereo Transmitter for OEM Integration (HDVD only)
 AUX A/V Input for Game Console or Personal Media Devices
 RCA A/V Input for Auxiliary Source or Opposite Headrest

RCA A/V Output to Auxiliary Source or Opposite Headrest
 Hardwired Headphone Output
 3/8" Locking Pole w/ 1/2" & 9/16" Adapters
 4.75" ~ 8.25" Pole Width Adjustment
 NTSC / PAL Auto Selection
 800 x 480 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 11.5" w x 8.5" h x 6" d (91CC)
 Dimensions: 10" w x 7" h x 5.5" d (71CC)

REAR SEAT ENTERTAINMENT

- HDVD-94T** - Universal Replacement Headrest w/ DVD Player & 9" Touchscreen LCD
- HDVD-94** - Universal Replacement Headrest w/ DVD Player & 9" LCD
- H-94** - Universal Replacement Headrest w/ 9" LCD


ADDITIONAL SERIES DETAILS:
 Forward/Backwards Tilting Headrest w/ 9" Touchscreen LCD
 3 Changeable Color Skins Included (grey, beige, black)
 Playback from DVDR/RW of 720p MP4 (HDVD only)
 Playback from 32GB SD Card or USB of MP4 (HDVD only)
 Dual Channel Wireless IR Transmitter (use HP-12S)
 FM Stereo Transmitter for OEM Integration (HDVD only)
 AUX A/V Input for Game Console or Personal Media Devices
 RCA A/V Input for Auxiliary Source or Opposite Headrest
 Hardwired Headphone Output
 3/8" Locking Pole w/ 1/2" & 9/16" Adapters
 4.75" ~ 8.25" Pole Width Adjustment
 NTSC / PAL Auto Selection
 800 x 480 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 11.5" w x 8.5" h x 5" d



- H-78CC** Universal Replacement Headrest w/ 7" LCD

Forward/Backwards Tilting Headrest
 3 Changeable Color Skins Included (grey, beige, black)
 Dual Channel Wireless IR Transmitter (use HP-12S)
 RCA A/V Input for Auxiliary Source or Opposite Headrest
 RCA Video Input for Second Source Playback
 3/8" Locking Pole with 9/16" Adapter
 4.75" ~ 7.50" Pole Width Adjustment
 NTSC / PAL Auto Selection
 800 x 480 16:9 Widescreen Resolution
 400 NIT Screen Brightness
 Dimensions: 10.25" w x 7.5" h x 5.25" d

NEW FOR 2018



REAR SEAT ENTERTAINMENT

PHD-101

Universal Headrest Mount DVD Player w/ 10.1" LCD



Bracket Mount DVD Player Solution for Vehicles w/ Active Headrest
Rear Loading DVD Player for DVD/RW 720P Playback
MHL MobileLink Input for Smart Device Connectivity
32GB USB & SD Card Readers for MP4 Playback
Single Channel Wireless IR Transmitter (use HP-11S)
FM Stereo Transmitter for Easy OEM Integration
AUX AV Input for Game Console or Personal Media Devices

RCA A/V Input for Auxiliary Source or Opposite Headrest
RCA A/V Output to Auxiliary Source or Opposite Headrest
3.5mm Hardwired Headphone Output Jack
4.75"-8.25" Pole Width Adjustment
NTSC / PAL Auto Selection
800 x 480 16:9 Widescreen Resolution
400 NIT Screen Brightness

PT-700MHR

7" LCD Headrest Monitor

7" Amorphous Active Matrix TFT/LCD Monitor
Ultra Bright LED Backlighting
Ignition Power On/Off Optional
Single Video Input
Selectable Aspect Modes
Preset/Manual Image Control
NTSC/PAL Selection
Sculptured Trim Ring Included
Remote Control Included
480 x 234 (16:9) Image Resolution
400NIT Panel Brightness
Cutout Dimension: 7" w x 4.5" h x 1" d



WIRELESS HEADPHONES

HP-11S Single 1ch. IR Headphone

HP-22IRT Pair 1ch. IR Headphones and Transmitter

Ear Pads Fold Flat for Seat Pocket Storage
Adjustable Headphone Straps
EVA hard Carry Case Included
MP-3 Player Input Via 3.5mm Jack
On/Off Switch Saves Battery Life
Auto Power Off Function
Auto Mute Function
Variable Volume Control
ALC Auto Level Control



HP-12S Single 2ch. IR Headphone

Adjustable Headphone Straps
Channel Selectable From Each Headphone
Ear Pads Fold Flat for Seat Pocket Storage
EVA hard Carry Case Included
MP-3 Player Input Via 3.5mm Jack
On/Off Switch Saves Battery Life
Auto Power Off Function
Auto Mute Function
Variable Volume Control
ALC Auto Level Control



WLHP-100 Single 1ch. IR Headphone

WLHP-200 Single 2ch. IR Headphone

Adjustable Headphone Straps
Single Channel UHF IR Receiver
ON/OFF Switch Saves Battery Life
Variable Volume Control
ALC Auto Level Control
Auto Off and Auto Mute



HP-900S Single 2ch. 900MHz Headphone

HP-902RFT Pair 2ch. 900MHz Headphones & Transmitter

Dual Stereo Audio Inputs
Channel Selectable From Each Headphone
100ft. Operational Distance
Adjustable Headphone Straps
Ear Pads Fold Flat for Seat Pocket Storage
EVA hard Carry Case Included
MP-3 Player Input Via 3.5mm Jack
On/Off Switch Saves Battery Life
Auto Power Off Function
Auto Mute Function
Variable Volume Control
ALC Auto Level Control



VB-1

One In & Four Output Video Signal Booster

Four Individual Output Trimmer Gain Controls
Shielded Metal Housing For Noise Rejection
4 Video Output Gain control



PADVD-390

1-DIN DVD Player w/32GB SD/USB Playback

Playback from DVDR/RW of MP4 &
Playback from 32GB USB of MP4, &
In-Dash, Floor, & Vertical Mounting Brackets Included
DIN Size Trim Ring For In-Dash Mounting Included
Flash Memory for Last Position Recall
Remote Control & IR Repeater Included
OSD On Screen Display
Digital Anti-shock
A/V Pre-amp Outputs, 2V
Dimensions: 6.4" x 6.2" x 2"



DRIVER AWARENESS

LP-4CS REAR VIEW EYES

License Plate Frame w/ Night Vision Camera, Back-Up Sensors, On-Screen Distance Gauge, & Proximity Alerts



Back-up Camera

The 1/4" CCD color camera of Rear View Eyes offers a glimpse into the estimated 260 square feet of blind spot behind your vehicle, reducing it by up to 90%. Eight built-in infra-red night vision LEDs shed artificial light onto the surroundings, even in the darkest driving conditions. Simply connect the camera's output to most aftermarket car stereos with an LCD, or a dash mounted monitor via RCA connector. An on-screen distance guide gives the estimated distance to an object or driving space visible in the camera image.

Object Proximity Sensors

Three built-in ultra-sonic proximity sensors always monitor how close you are to objects. Strategically aimed, the proximity sensors offer nearly 180° of observation. An on-screen distance indicator & optional speaker giving audible alert tones indicate how close the vehicle is to approaching objects.

Additional Details

Fits All USA Auto License Plates
IP67 Waterproof Housing
7ft. Effective Viewing Distance
Zinc Alloy Metal Frame

20° ~ 120° Operating Temp.
130° Video Capture Angle
Matte Black Powder Coat Finish
Optional Auto Turn-on
56*504 Video Capture Resolution

Rear View Eyes offers some of the most advanced safety features available today. These features are designed to reduce the risk of a backover incident, however, ultimate responsibility of safe driving remains on the vehicle driver.

BUC-1

Flush Or Surface Mount Back-Up Camera

BUC-2

License Plate Mount Back-up Camera

Advanced 1/4" 720P CMOS Color Camera
On-screen Color Coded Distance Gauge
Imaged Reversed to Driver's Orientation
0.01 LUX Low Light Sensitivity Improves Poor Visibility
RCA Output to Connect to Car Stereo or LCD Monitor
IP65 Waterproof Construction & Cable Connections
20ft Installation Cable Included for Any Vehicle Application
Dedicated Trigger Can Activate Camera When In Reverse Gear
Surface & Flush Mounting Hardware Included (BUC-1)
Hole Saw Included For Easy Flush Mount Installation (BUC-1)
Adjustable Mounting Bracket Fits Behind License Plate (BUC-2)
170° Capture Angle with 648 x 488 Image Resolution



Back-up Cameras Reduce Likelihood of Back-over Incidents by up to 50%!

DRIVER AWARENESS

DVALT

Distracted Driver Assistant System w/ Lane Departure & Forward Collision Warning

Driving distracted is the greatest behind the wheel safety concern. Whether it's our first-time drivers, parents reaching their golden years, or even you yourself, everyone needs a little reassurance. The #1 cause of traffic accidents is not driving under the influence, or even speeding. 90% of all traffic accidents are caused by distracted driving. Reducing these statistics is the primary reason why Drive Alert was developed. Drive Alert is perfect for anyone spending long hours behind the wheel, drives professionally, and any of us who are susceptible to distracted driving.

Drive Alert improves responsible driving by alerting the driver in two ways:

Lane Departure Warning System (LDWS)

Drive Alerts LDW system uses an advanced camera sensor algorithm to detect lane markings and warn the driver when merging out of the traffic lane. Regardless if the merge was intended, Drive Alert is always watching.

Forward Collision Warning System (FCWS)

Drive Alert's FCW system calculates the time to impact of an object in front of the vehicle, considering the traveling speed. If the calculated time to impact is less than the stopping capability of the vehicle, Drive Alert will warn the driver in attempt to prevent the collision.

NEW FOR 2018



LDW & FCW system sensors always watching the road, alerting you of trouble ahead



Improve driver awareness, reduce the #1 cause of traffic accidents

Black Box Audio & Video Recording

In the event of an incident, Drive Alert's built-in black box feature records video of the vehicle surroundings, as well as voice recording of the vehicle interior. In the event of a collision, Drive Alert's built-in G-force shock sensor flags and isolates these recordings for quick recall. Thanks to a built-in battery, Drive Alert's G-force sensor will activate recording even if the vehicle is not running.

Drive Alert offers some of the most advanced safety features available today. These features are designed to reduce the risk of being involved in an accident, however, ultimate responsibility of safe driving remains on the driver of the vehicle.

BAMF AMPLIFIERS



Class A/B Full Range & Class D Monoblock Amplifiers
 2-ohm Stereo & 4-ohm Bridged Full Range Operation
 1-ohm Stable Monoblock Operation for MAX Power
 Bridge 2 Monoblocks Together for Double Power!
 Die-Cast Aluminum Alloy Heatsink for Optimum Dissipation
 MOSFET Power Supply w/ Audiophile Grade IRTM Transistors
 Military Grade SMT PCB Maintains Dynamic Performance
 Direct Short, Thermal, & Overload Circuits Protect Amplifier
 Easy DIY Install Single Sided Terminals & Controls
 Angled Wire Terminals Secure Wire Connections
 Chassis Integrated Aluminum Mounting Points
 Variable 12dB High Pass, Low Pass, & Subsonic Crossovers
 200mV-6V Low Level RCA Inputs
 4g Power Wire & 8g Speaker Wire Outputs
 12dB Bass Boost Increases Low Octave Harmonics
 180° Phase Shift Improves Low Octave Dynamics (monoblock)
 Dash Mount Gain Control Module Included (select models)


BAMF Amplifiers	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (2.25"h x 8.5"w)	Gain Control Included
BAMF4-1200	1,200w	2 x 300	4 x 150	4 x 75	11.25"	-
BAMF4-1800	1,800w	2 x 450	4 x 225	4 x 110	13.25"	-
BAMF5-2500	2,500w	2 x 200+ 1 x 850 (2Ω)	4 x 100+ 1 x 850	4 x 50+ 1 x 425	17"	Included
BAMF1-3000D	3,000w	1 x 1,500 (1Ω)	1 x 1,000	1 x 700	11.25"	Included
BAMF1-5000D	5,000w	1 x 2,500 (1Ω)	1 x 1,700	1 x 1,100	13.25"	Included
BAMF1-8000D	8,000w	1 x 4,000 (1Ω)	1 x 2,700	1 x 1,800	17"	Included



Dash Mount Gain Control Included

AMPLIFIERS EDGE

Edge amplifiers are the next step in performance and value. Taking advantage of our tried and true class A/B full range and improved efficiency class d monoblock platforms, Edge amplifiers continue down the road of reliability and longevity you know well. Satin silver chassis, engraving, and accents teetering on the edges bring a high end appeal to traditional performance.

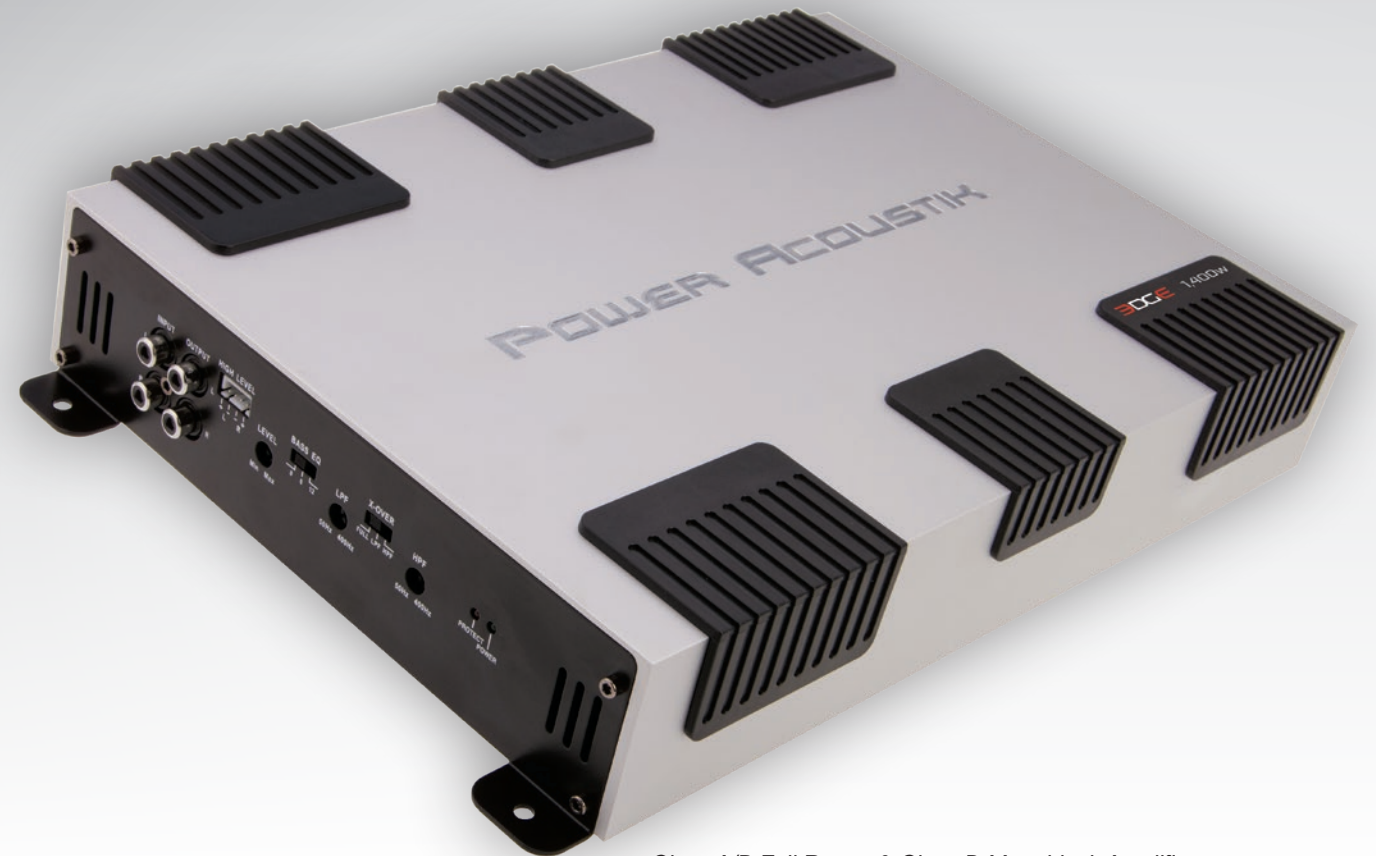

Class A/B Full Range & Class D Monoblock Amplifiers
 2-ohm Stereo & 4-ohm Bridged Full Range Operation
 1-ohm Stable Monoblock Operation for MAX Power
 Bridge 2 Monoblocks Together for Double Power!
 Military Grade PCB w/ PWM MOSFET Power Supply
 Direct Short, Thermal, & Overload Circuit Protection
 High/Speaker Level & Low Level/RCA Input
 200mV-6V Low Level RCA Input
 Pre-Amp Low-Level RCA Outputs (select models)
 4g Power Wire & 8g Speaker Wire Outputs
 Variable 12dB High & Low Pass Crossovers
 12dB Bass Boost Increases Low Octave Harmonics
 180° Phase Shift Improves Low Octave Dynamics (monoblock)
 Dash Mount Remote Control Included (select models)



Dash Mount Gain Control Included

Edge Amplifiers	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (2.25"h x 9"w)	Gain Control Included
EG2-1400	1,400w	1 x 700	2 x 350	2 x 175	12.75"	-
EG4-1000	1,000w	2 x 250	4 x 125	4 x 65	10.25"	-
EG4-1500	1,500w	2 x 370	4 x 185	4 x 95	12.75"	-
EG1-2500D	2,500w	1,250 x 1 (1Ω)	800 x 1	400 x 1	10"	Included
EG1-4500D	4,500w	2,250 x 1 (1Ω)	1,500 x 1	750 x 1	13"	Included
EG1-7000D	7,000w	3,500 x 1 (1Ω)	2,300 x 1	1,100 x 1	16.25"	Included
EG1-10000D	10,000w	5,000 x 1 (0.5Ω)	3,300 x 1 (1Ω)	1,600 x 1 (2Ω)	20.50"	Included

RAZOR AMPLIFIERS

We're in a time where small is "in". Smaller, more economic vehicles are more and more desirable. But that doesn't mean you have to sacrifice big power for your system. Razor amplifiers pack huge power into small chassis thanks to efficient Full-Range Class D topology and SMT circuitry. Complimented with every possible preamp adjustment, the Razor amplifiers leave nothing to be desired...



Installs in Virtually ANY Location!
90% Efficient Full Range Class D Technology

- Compact 4.75" Chassis Design for Installation Versatility
- MOSFET Power Supply w/ Audiophile Grade IR™ Transistors
- Military Grade SMT PCB Maintains Dynamic Performance
- 2-ohm Stereo & 4-ohm Bridged Full Range Operation
- 2-ohm Minimum Impedance Stability (monoblocks)
- Direct Short, Thermal, & Overload Circuits Protect Amplifier
- 200mv-6V Low Level RCA Inputs
- High Level Input w/ Signal Sense Auto Turn-on
- Variable 12dB High Pass & Low Pass Crossovers
- 10-50Hz Variable 12dB Subsonic Crossover Protects Subwoofers
- 12dB Bass Boost Increases Low Octave Harmonics (monoblocks)
- Dash Mount Gain Control Module Included (select models)



Dash Mount Gain Control Included

Razor Amplifiers	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (4.75" w x 1.625" h)	Gain Control Included
RZ4-1200D	1,200	2 x 300	4 x 150	4 x 100	9"	-
RZ4-2000D	2,000	2 x 500	4 x 250	4 x 190	11"	-
RZ4-3000D	3,000	2 x 750	4 x 375	4 x 285	12.25"	-
RZ5-2500D	2,500	300 x 2 + 600 x 1	150 x 4 + 600 x 1	100 x 4 + 400 x 1	12.25"	Included
RZ1-1500D	1,500	-	1 x 900	1 x 600	10"	Included
RZ1-2300D	2,300	-	1 x 1,400	1 x 900	11"	Included
RZ1-3500D	3,500	1 x 2,100 (1Ω)	1 x 1,400	1 x 900	12.25"	Included

AMPLIFIERS CALIBER



- Class A/B Full Range & Class D Monoblock Amplifiers
- 2-ohm Stereo & 4-ohm Bridged Full Range Operation
- 1-ohm Stable Monoblock Operation for MAX Power Bridge 2 Monoblocks Together for Double Power!
- Military Grade PCB w/ PWM MOSFET Power Supply
- Direct Short, Thermal, & Overload Circuit Protection
- High/Speaker Level & Low Level/RCA Input
- 200mV-6V Low Level RCA Input
- Pre-Amp Low-Level RCA Outputs (select models)
- 4g Power Wire & 8g Speaker Wire Outputs
- Variable 12dB High & Low Pass Crossovers
- 12dB Bass Boost Increases Low Octave Harmonics
- 180° Phase Shift Improves Low Octave Dynamics (monoblock)
- Dash Mount Remote Control Included (select models)




Dash Mount Gain Control Included

Caliber Amplifiers	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (9.50w x 2" h)	Gain Control Included
CB4-1200	1,200	2 x 300	4 x 150	4 x 120	13"	-
CB4-1800	1,800	2 x 450	4 x 225	4 x 180	15.25"	-
CB1-2500D	2,500	1 x 1,250 (1Ω)	1 x 850	1 x 500	12"	Included
CB1-4500D	4,500	1 x 2,200 (1Ω)	1 x 1,500	1 x 900	13.25"	Included
CB1-8000D	8,000	1 x 4,000 (1Ω)	1 x 2,500	1 x 1,500	18"	Included

MOFO SUBWOOFER

MOFO X subwoofers are refined and increase efficiency dramatically! MOFO-X subs use a composite sandwich cone with a polypropylene surface for durability and Spruce pulp backing for smooth low bass. Like the original MOFOs, the new models still use an aluminum dustcap that couples to the voice coil former and extends over the cone. Why? The fins brace the cone and eliminate cone flex during high excursion. And since they are aluminum and couple to the voice coil, they act as a heatsink or heat extractor. Using the latest materials, the new MOFO subs yield superior performance. Cast aluminum baskets? Of course! Increased bottom octave output? You Bet! Louder than the original design? Duh!!

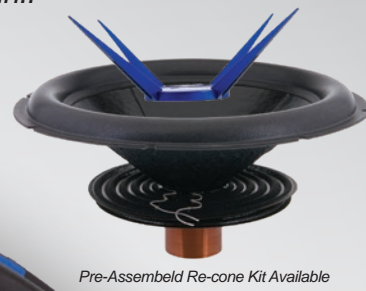

Pre-Assembled Re-cone Kit Available

Overcompensating Motor Structure for Increased Magnetic Strength
 12mm T-Yoke & Top Plate Improve Low Frequency Dynamics
 Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up
 Die Cast Aluminum Heatsink Dust Cap Absorbs Voice Coil Heat
 Aluminum Dust Cap Fins Dissipate Heat & Strengthen Cone
 Non-Magnetic Non-Resonate Die-Cast Aluminum Frame
 2.5" 4-Layer Voice Coil w/ Large Gauge Wire Increases Power

High-Temperature Tolerance Adhesives Resist Thermal Failure
 Nickel Plated 8ga Spring-Loaded Compression Wire Terminals
 Non-Transfer Spruce Pulp Cone w/ UV & Chemical Protection
 High Density Polyether Foam Surround w/ UV & Chemical Protection
 Dual Poly-Cotton Suspension Dampen Violent Accelerations
 Stitched Voice Coil Leads Prevent Potential Damage
 1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included

MOFO Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure	Optimum Ported Enclosure
MOFO-104X	2,400w	1,200w	83.48dB	2.50" Dual 4Ω	288oz.	6.125"	0.75ft³	1.25ft³
MOFO-102X			83.62dB	2.50" Dual 2Ω				
MOFO-124X	2,700w	1,500w	85.40dB	2.50" Dual 4Ω	373oz.	6.875"	1.00ft³	2.00ft³
MOFO-122X			85.37dB	2.50" Dual 2Ω				
MOFO-154X	3,000w	1,700w	86.97dB	2.50" Dual 4Ω	373oz.	8.125"	2.00ft³	4.00ft³
MOFO-152X			86.90dB	2.50" Dual 2Ω				

BAMF SUBWOOFER

BAMF subwoofers are the newest secret weapon for you bass BURP fanatics! These beasts are engineered for the most extreme conditions. Massive 3" 4-layer voice coils built on an aluminum former can take the heat. Freakishly oversized motor structures provide more magnetic inertia than is ever necessary for a woofer. Spruce tree pulp cones, high density extended excursion foam surround, and hybrid suspension dampers work together to contain the momentum to a shattering roar...



Pre-Assembled Re-cone Kit Available

Overcompensating Motor Structure for Increased Magnetic Strength
 12mm T-Yoke & Top Plate Improve Low Frequency Dynamics
 Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up
 Non-Magnetic Non-Resonate Die-Cast Aluminum Frame
 3" 4-Layer Voice Coil w/ Direct Connect Wire Increases Power Handling
 High-Temperature Tolerance Adhesives Resist Thermal Failure

Non-Transfer Spruce Pulp Cone w/ UV & Chemical Protection
 Stitched and Glued Surround/Cone Joints for Strongest Bonding
 Extended Excursion Polyether Foam Surround w/ UV Protection
 Dual Poly-Cotton Suspension Dampen Violent Accelerations
 Stitched Voice Coil Leads Prevent Potential Damage
 1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included

BAMF Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure	Optimum Ported Enclosure
BAMF-104	3,200w	1,600w	83.50dB	3" Dual 4Ω	272oz.	6.00"	0.75ft³	1.25ft³
BAMF-102			83.80dB	3" Dual 2Ω				
BAMF-124	3,500w	1,750w	84.60dB	3" Dual 4Ω	272oz.	6.75"	1.00ft³	2.00ft³
BAMF-122			85.00dB	3" Dual 2Ω				
BAMF-154	3,800w	1,900w	86.40dB	3" Dual 4Ω	272oz.	8.00"	2.00ft³	4.00ft³
BAMF-152			86.10dB	3" Dual 2Ω				

MOFO TYPE S SUBWOOFER

MOFO Type S subwoofers are engineered to offer all the reliable performance qualities you expect of the original MOFO. Of course a new generation MOFO wouldn't be without including the proven benefits and characteristics of the original; aluminum alloy voice coil heatsink dust cap, 2.5" dual voice coil, dual damper suspension, high density reinforced paper cone, etc. Everything you expect from MOFO. What makes Type S MOFO different than the original? One of the two mods to Type S should be easy to spot. Type S uses formed steel framework, while the original uses a more expensive aluminum frame to support its overcompensating motor structure. The second mod to Type S is a motor structure that's been optimized for an efficient use of its magnetic strength. Strategically targeting all the motor structures power gives Type S MOFO the dynamic sound & performance qualities of its big brother, without the need of unnecessarily massive magnets. These improvements to MOFO Type S reduces material cost while maintaining the design & performance characteristics you want of the original.



Overcompensating Motor Structure for Increased Magnetic Strength
 10 mm T-Yoke & Top Plate Improve Low Frequency Dynamics
 Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up
 Die Cast Aluminum Heatsink Dust Cap Absorbs Voice Coil Heat
 Aluminum Dust Cap Fins Dissipate Heat & Strengthen Cone
 2.5" 4-Layer Voice Coil w/ Large Gauge Wire Increases Power
 High-Temperature Tolerance Adhesives Resist Thermal Failure

Nickel Plated 8ga Spring-Loaded Compression Wire Terminals
 Non-Transfer Spruce Pulp Cone w/ UV & Chemical Protection
 High Density Polyether Foam Surround w/ UV & Chemical Protection
 Dual Poly-Cotton Suspension Dampen Violent Accelerations
 Stitched Voice Coil Leads Prevent Potential Damage
 1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included

MOFO Type S Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure	Optimum Ported Enclosure
MOFOS-10D4	2,200w	1,100w	82.60dB	2.50" Dual 4Ω	204oz.	6.00"	0.75ft ³	1.75ft ³
MOFOS-10D2			83.00dB	2.50" Dual 2Ω				
MOFOS-12D4	2,500w	1,200w	86.50dB	2.50" Dual 4Ω	254oz.	7.50"	1.25ft ³	2.50ft ³
MOFOS-12D2			86.40dB	2.50" Dual 2Ω				



GOTHIC SUBWOOFER

Overcompensating Motor Structure for Increased Magnetic Strength
 10mm T-Yoke & Top Plate Improve Low Frequency Dynamics
 Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up
 2.50" 4-Layer Voice Coil w/ Nickel Plated 8ga Spring-Loaded Terminals
 High-Temperature Tolerance Adhesives Resist Thermal Failure
 Composite Spruce Pulp Cone w/ Twisted Woven Flax Fiber
 Stitched and Glued Surround/Cone Joints for Strongest Bonding
 Extended Excursion NBR Rubber Surround w/ UV Protection
 Poly-Cotton Suspension Dampen Violent Accelerations
 Stitched Voice Coil Leads Prevent Potential Damage
 1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included

Gothic Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure	Optimum Ported Enclosure
GW3-10	2,200w	1,000w	81.30dB	2.50" Dual 2Ω	204oz.	6.00"	1.00ft ³	1.50ft ³
GW3-12	2,500w	1,200w	83.60dB		254oz.	6.50"	1.50ft ³	2.25ft ³



EDGE SHALLOW SUBWOOFER



EDGE Shallow Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure	Optimum Ported Enclosure
EW-104S	1,200w	600w	81.30	2.00" 4Ω	60oz.	2.50"	0.75ft ³	-
EW-124S	1,400w	700w	83.60				1.00ft ³	-

NEW FOR 2018

EDGE SPEAKERS

EF-60C 6.5" Component System

500w Max Power Handling
Improved Efficiency Diaphragm & Magnet Structure
Carbon Fiber Injection Molded Polypropylene Cone
Treated Woven Cloth Surround
1" Voice Coil on Aluminum Former
4-ohm System Impedance
Quick Disconnect Terminals
1" Flush Mount Dome Tweeter
Passive Crossover Included
Speaker Grill Included
Freq-Response: 70-20kHz
Sensitivity: 93dB
Mounting Depth: 2.5"



EF-694



EF-653



EF-52



EF-42



EF-573

Edge Speakers	Size & Type	MAX Power	Frequency Response	Efficiency (1w/1m dB)	Mounting Depth
EF-60C	6.5" Component	500w	65-20kHz	92dB	1.75"
EF-694	6"x9" 4-way	800w	45-20kHz	93dB	3.25"
EF-573	5" x 7" 3-way	500w	65-20kHz	92dB	1.75"
EF-653	6.5" 3-way	400w	65-20kHz	92dB	1.75"
EF-52	5.25" 2-way	300w	80-20kHz	90dB	2.125"
EF-42	4" 2-way	250w	100-20kHz	90dB	1.75"

Improved Efficiency Diaphragm & Magnet Structure
Carbon Fiber Injection Molded Polypropylene Cone
Treated Woven Cloth Surround
1" Voice Coil on Aluminum Former
4-ohm System Impedance
Quick Disconnect Terminals
2" Balanced Dome Mylar Midrange (EF-694)
1" Balanced Dome Mylar Tweeter
1/2" Dome Super Tweeter (select models)

TWEETERS

NB-1 2-Way Mount Tweeter 200 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet
Polypropylene Diaphragm
100 Watts R.M.S.
Freq. Resp. 5kHz to 25KHz
Imp. 4 Ohm
Surface/Angle Mount
SPL 97 dB
Built in Crossover



NB-2 3-Way Mount Tweeter 200 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet
Polypropylene Diaphragm
100 Watts R.M.S.
Freq. Resp. 5kHz to 25KHz
Imp. 4 Ohm
Surface/Angle Mount/Flush Mount
SPL 97 dB
Built in Crossover



NB-4 4-Way Mount Tweeter 250 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet
Swivel/Surface/Angle Mount/Flush Mount
Polypropylene Diaphragm
Built in Crossover
Freq. Resp. 5kHz to 25KHz
Imp. 4 Ohm
SPL 97 dB



PROFESSIONAL AUDIO

NX-5

Bullet Tweeter 200 watts MAX

1" Horn Loaded Bullet tweeter
Machined Aluminum Chassis
Titanium Dome Diaphragm
1" High Temperature Voice Coil
Acrylic Phase Plug
High Strength Neodymium Magnet
Freq. Resp 3kHz-20kHz
Impedance: 3 ohm
Efficiency: 109dB
Sold in pairs



XPS-104 4" Sealed-back Midrange

300 watts max
.75" Voice Coil
Freq. Resp. 450 Hz. to 10kHz.
15 oz. Magnet
Imp. 4 Ohm
SPL 92 dB
Mounting Depth: 1.75"
Sold Individually



MID-65 6.5" Midrange

25" High Temperature Voice Coil
Heavy Gauge Stamped Steel Basket
High Strength Magnet
Freq. Resp 150Hz - 15kHz
Impedance: 4 ohm
Efficiency: 96dB
MAX Power Handling: 300W
RMS Power Handling: 150w
Mounting Depth: 2.75"
Sold Individually



INSTALLATION ACCESSORIES

- 0g Amplifier Wire Kit w/ 200A ANL Fuse - AK-0
- 4ga Amplifier Wire Kit w/ 120A MANL Fuse - AK-4
- 8ga Amplifier Wire Kit w/ 80A MANL Fuse - AK-8



Each Wire Kit Includes:

- 17ft Power Wire w/ Ring Terminal
- 3ft Ground Wire w/ Ring Terminal
- 17ft Twisted Pair RCA Interconnect
- 17ft Remote Turn-on Wire
- 25ft 16g Split Speaker Wire
- Full Size MANL Fuse Holder
- ANL or MANL Fuse Included
- Assorted Installation Accessories

CAPACITORS


PC1.5F 1.5 Farad Power Capacitor

Terminal Post for Ring Terminal
Digital Voltage Meter
Translucent Mounting Brackets
Brushed Aluminum Finish



PCX-5F 5 Farad Power Capacitor

12-16 DC Volts Operation
Satin Finish w/ Chrome Accents
Terminal Post for Ring Terminal
Polarity & Voltage Protection
Protection Alert Indicator
Digital Voltage Meter
LED Accent Lighting

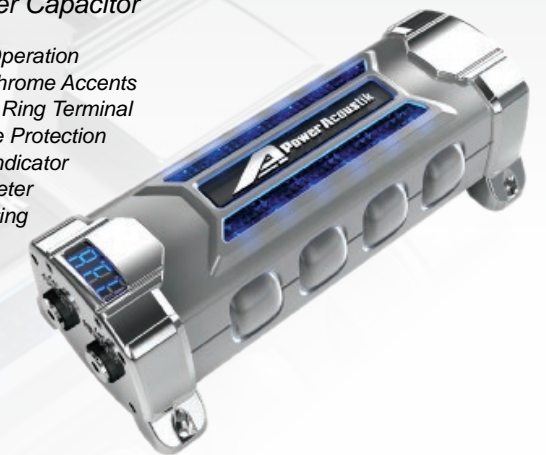

PCX-30F 30 Farad Hybrid Power Capacitor

12-16 DC Volts Operation
Internally Stacked Carbon-Foil Capacitors
Direct Connect 0 ga. Terminals & 4 ga. Reducers
Digital Voltage Meter
Polarity & Voltage Protection
Protection Alert Indicator
LED Accent Lighting
Satin Finish w/ Chrome Accents



BASS PROCESSORS

BASS-15C Bass Maximizer

PWM High Head Room Power Supply
27-63Hz Parametric Bass Boost
Variable Bandwidth Adjustment
Max Output Level: 13.5 volt
Dash Mount Remote Control
LED MAX Bass Indicators
Selectable Subsonic Filter
Balanced RCA Inputs
Selectable Input Ground Sources
Selectable Grounding Isolation
Frequency Response: 10~100kHz
THD: 0.003%
S/N Ratio: 130dB
Input Noise Rejection: 60 dB



BASS-12C Bass Maximizer

Chrome Finish w/ Illuminated Badge
PWM High Head Room Power Supply
27-63Hz Parametric Bass Boost
Variable Bandwidth Adjustment
Max Output Level: 13.5 volt
Dash Mount Remote Control
LED MAX Bass Indicators
35-80Hz Variable Subsonic Filter
Balanced RCA Inputs
Selectable Input Ground Sources
Selectable Grounding Isolation
Frequency Response: 10~100kHz
THD: 0.003%
S/N Ratio: 130dB



BASS-10C Bass Maximizer

PWM High Head Room Power Supply
27-63Hz Parametric Bass Boost
Variable Bandwidth Adjustment
Max Output Level: 13.5 volt
Dash Mount Remote Control
LED MAX Bass Indicators
Selectable Subsonic Filter
Balanced RCA Inputs
Selectable Input Ground Sources
Selectable Grounding Isolation
Frequency Response: 10~100kHz
THD: 0.003%
S/N Ratio: 130dB
Input Noise Rejection: 60 dB



EQUALIZERS

PWM-20 4-Band 1/2 DIN Equalizer

2 Selectable Balanced Inputs
Variable Stereo Input Sensitivity
4 Variable Frequency Bands +/- 18dB Parametric Equalizer
Independent Volume & Fader Control
Independent Subwoofer Output and Level Control
Variable Subwoofer Low-Pass Crossover
8V MAX Front, Rear, & Subwoofer Outputs
Low Noise BI-FET Op-Amp for Minimum Distortion
20dB Headroom, 30V Bipolar Power Supply
Blue LED Backlighting
Quick Disconnect Wire Harness
S/N Ratio 115dB @1V
THD:0.05%



PWM-19 4-Band 1/2 DIN Equalizer

2 Selectable Balanced Inputs
Variable Stereo Input Sensitivity
4 bands +/- 18dB Parametric Equalizer
Independent Volume & Fader Control
Independent Subwoofer Output and Level Control
Variable Subwoofer Low-Pass Crossover
7V MAX Front, Rear, & Subwoofer Outputs
Low Noise BI-FET Op-Amp for Minimum Distortion
20dB Headroom, 30V Bipolar Power Supply
Selectable Green/Amber Illumination
Quick Disconnect Wire Harness
Under Dash Mounting Hardware Included
S/N Ratio 110dB @5V
THD:0.05%



PWM-16 4-Band 1/2 DIN Equalizer

2 Selectable Balanced Inputs & Front Panel AUX Input
4 bands +/- 18dB Parametric Equalizer
Independent Volume & Fader Control
Independent Subwoofer Output and Level Control
Variable Subwoofer Low-Pass Crossover
7V MAX Front, Rear, & Subwoofer Outputs
Blue LED Backlighting
Quick Disconnect Wire Harness
S/N Ratio 80dB @5V
THD:0.05%



MARINE AUDIO

MCD-51B (w/ Bluetooth V2.0)
1-DIN Marine CD Player w/32GB USB Playback



CD/MP3, AM/FM & USB Receiver
Conformal Coated PCB and Faceplate
Theft Deterrent Detachable Faceplate
Bluetooth V2.0 Hands Free Calling from Smart Phone
A2DP MP3 Audio Playback from Enabled Device
Playback from 32GB USB of MP3 & WMA
Playback from CD, CDR, CDRW of MP3 & WMA
Aux Audio Input for Personal Media Devices
Front & Rear Pre-Amp Output
52w x 4 MOSFET Speaker Outputs
Custom & Pre-Set Equalizer Settings
Audio Staging Controls
12/24 Hour Digital Clock
Remote Control Included
Faceplate Carry Case Included


RAZOR MARINE AMPLIFIERS

Compact 4.75" Chassis Design for Installation Versatility
Splash Resistant Conformal Coated Circuit Boards
MOSFET Power Supply w/ Audiophile Grade IR™ Transistors
Military Grade SMT PCB Maintains Dynamic Performance
2-ohm Stereo & 4-ohm Bridged Full Range Operation
2-Ohm Stable Class A/B Monoblock Operation
1-ohm Stable Class D Monoblock Operation
Direct Short, Thermal, & Overload Circuits Protect Amplifier
200mv-6V Low Level RCA Inputs
High Level Input w/ Signal Sense Auto Turn-on
Variable 12dB High Pass & Low Pass Crossovers
10-50Hz Variable 12dB Subsonic Crossover Protects Subwoofers
12dB Bass Boost Increases Low Octave Harmonics (monoblocks)
Dash Mount Gain Control Module Included (select models)



RAZOR CLASS D	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (4.75" w x 1.625" h)	Gain Control
MA4-3000D	3,000	2 x 750	4 x 375	4 x 285	12.25"	-
MA5-2500D	2,500	300 x 2 + 600 x 1	150 x 4 + 600 x 1	100 x 4 + 400 x 1	12.25"	Included
MA1-2300D	2,300	-	1 x 1,400	1 x 900	11"	Included
MA1-3500D	3,500	1 x 2,100	1 x 1,400	1 x 900	12.25"	Included

QB-6 All-Terrain Vehicle Audio System

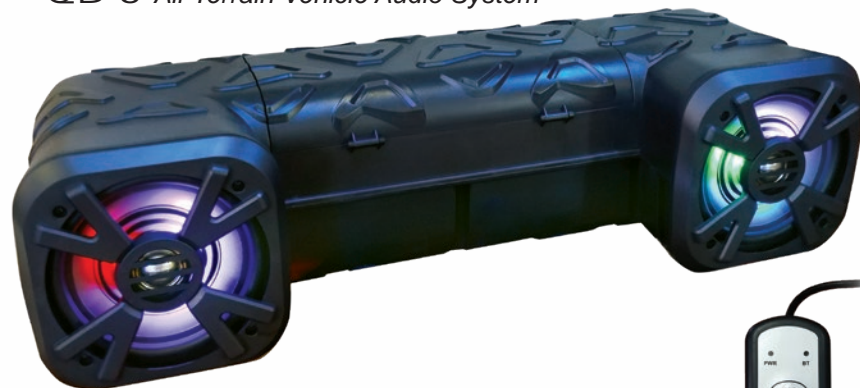

Rugged All-Element Ready ABS Construction
400w MAX Power Class A/B Audio Amplifier
Conformal Coated PCB and Waterproof Connections
Handlebar Mount Remote Control w/ AUX Input Included
Marine Grade Waterproof 6.5" Coaxial Speaker
1" Extended Frequency Range Titanium Dome Tweeter
Auto-Changing RGB LED Lighting Built-in
Bluetooth V3.0 MP3 Audio Streaming from Mobile Phone
3.5mm Aux Audio Input for Personal Media Devices
Heavy Duty Mounting Hardware

NEW FOR 2018

MARINE AUDIO

WAKETOWER SPEAKERS



100% Waterproof Enclosure and Speaker System
High Density ABS Construction w/ UV Coating
Steel Reinforced Bracket Fits Most Towers
Braided Stainless Steel Safety Cable Included
Stainless Steel Mounting Hardware Included
Polypropylene Cone and Titanium Tweeter
Quick Disconnect Compression Terminals
Meets ROHS and CE Certifications
4-ohm System Impedance

Wake Tower Speakers	Size & Color	MAX Power	RMS Power	Frequency Response	Efficiency (1w/1m dB)	Overall Size (HxWxL)
MWT-65W	6.5" White	500w	250w	40-20kHz	90dB	8.5" x 8.5" x 9"
MWT-65T	6.5" Titanium					
MWT-80W	8" White	750w	375w	30-20kHz	91dB	10" x 10" x 9.5"
MWT-80T	8" Titanium					

WATERPROOF SPEAKER & SUBWOOFER

Marine Grade Waterproof 6.5" Coaxial Speaker
High Density ABS Construction w/ UV Coating
100% Waterproof Sealed Back Speaker Frame
Stainless Steel Mounting Hardware Included
IMPP Polypropylene Cone & Rubber Surround
Rubber Surround & Tweeter Pole Gasket
1" Titanium Dome Tweeter
White and Titanium Grills Included
Quick Disconnect Terminals
Meets ROHS and CE Certifications
4-ohm System Impedance



Marine Speakers	Size & Type	MAX Power	RMS Power	Frequency Response	Efficiency (1w/1m dB)	Overall Size (WxHxL)
MF-65WT	6.5" Coaxial	300w	150w	60-20kHz	91dB	7.5" x 7.5" x 2.5"
MW-10WT	10" Subwoofer	600w	300w	30-4kHz	91dB	10.5" x 10.5" x 6"

CD/MP3 & SPEAKER COMBO PACK



NEW FOR 2018

MCD1-265
1-DIN Marine CD/MP3, AM/FM Receiver, w/ SD/USB, & Bluetooth & 1 Pair of Marine Grade 6.5" Coaxial Speakers



Fahrenheit

4,000K color temperature simulates brilliant white daytime sunlight characteristics

Active COB LED matrix engineered using industry-leading optical illumination analysis software

360° rotational adjustment & length regulator to focus light beam for optimal light dissipation

Superconductive ceramic circuit panel and magnesium alloy chassis resist heat build-up

Built-in Can-Bus/ECM control interfaces automatically program to any vehicle configuration

OEM standard electrical connectors & chassis bracket configurations ensure exact vehicle fitment



OPT-H1



OPT-H3



OPT-H4



OPT-880



OPT-H7



OPT-H8 / OPT-H9
OPT-H11



OPT-H13



OPT-9005 / OPT-9006

3,000 lumen emitting diode capable of generating up to 3X the light of typical halogen headlamp.

5,000hr/3-5 years expected lifetime, surpassing 2-3 year lifespan of typical halogen headlamp



OPT-9004 / OPT-9007

LED HIGH PERFORMANCE HEADLIGHTS

SELECT



4,000 lumen emitting diode capable of generating up to 4X the light of typical halogen headlamp

5,000hr/3-5 years expected lifetime, surpassing 2-3 year lifespan of typical halogen headlamp

4,000K color temperature simulates brilliant white daytime sunlight characteristics

Active COB LED matrix engineered using industry-leading optical illumination analysis software

Superconductive ceramic circuit panel and aluminum alloy chassis resist heat build-up

OEM standard electrical connectors & chassis bracket configurations ensure exact vehicle fitment

External Can-Bus/ECM control interfaces automatically program to any vehicle configuration



SEL-H1



SEL-H3



SEL-H4



SEL-H7



SEL-H8 / SEL-H9
SEL-H11



SEL-H13



SEL-880



SEL-9005 / SEL-9006



SEL-9004 / SEL-9007

OPTIMUM