



**2015**

**AUTOMOTIVE  
GUIDE**

**Vision**  
Global Lighting Systems



# VISION X LIGHTING

TESTED AND PROVEN IN THE TOUGHEST CONDITIONS



## CONTENTS

<b>LED</b>		<b>HID</b>		<b>ACCENT LIGHTING</b>	
Lights	6-11	Lights	26	LED Accent	32-35
Pods	12-15				
Light Bars	16-21	<b>HALOGEN</b>		<b>Accessories</b>	
Vehicle Specific Kits	22-25	Lights	27	Mounting	36-37
Headlight	28	Headlight	29-30	Battery Packs	37
		Fog Lights	31	Covers	38-39

## ABOUT VISION X

Vision X Lighting, located in Seattle, Washington, was established in 1997 with the mission to design, manufacture, and deliver the ultimate lighting solutions. Since that time, Vision X has created one of the largest premium lighting offerings in the world with hundreds of products for numerous applications. Today, Vision X Lighting is trusted by the military, border patrol, and even NASA on vehicles that cannot work with second best. Vision X Lighting's leadership in lighting technology has landed them on the Inc. 500|5000 list for two consecutive years, ranking 563rd in 2013 with a 799% growth rate in 3 years, 10th overall in manufacturing, and as the fastest growing manufacturing company in Washington. Vision X Lighting's commitment to its customers, dealers and product is unsurpassed.





# VISION X LIGHTING

## LED, HID, AND HALOGEN TECHNOLOGIES

Vision X is leading the way in the development of revolutionary lighting solutions for automotive and offroad applications. Constantly innovating new technologies, like the new single-source LED Light Cannons, Vision X strives to design, manufacture, and deliver the ultimate lighting solutions.



### LED LIGHTING

Vision X LED Lighting runs at a 6000K temperature for intense, bright white light for increased visibility and safety. LED technology has many advantages including low power consumption, no voltage spike at start-up, 50,000 hour lifespan and increased durability with the absence of a bulb. Vision X offers LED Lights, Pods and Bars.




### HID LIGHTING

Vision X HID Lighting runs at a 5000K temperature for a super white beam color. HID lights require a bulb, starter and ballast to operate. The ballast takes the standard 12V input power and increases this to the 32,000V the bulb operates at and the starter is used to ignite the bulb. HID's primary advantage over halogen is higher output per watt.




### HALOGEN LIGHTING

Vision X offers a number of different Halogen Lighting options. The Tungsten-Halogen Series uses an oversized globe and specially engineered filament to enhance light output. Also offered are D-Series Headlight replacement bulbs which increase visibility on the road with super white light output.

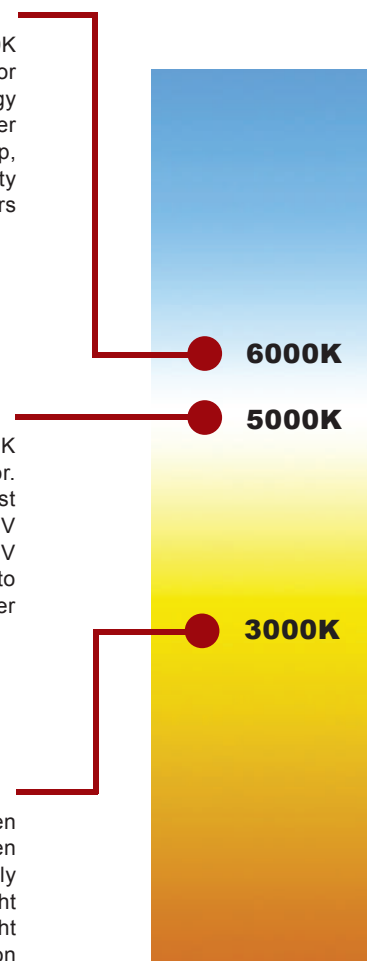


### BEAM PATTERNS

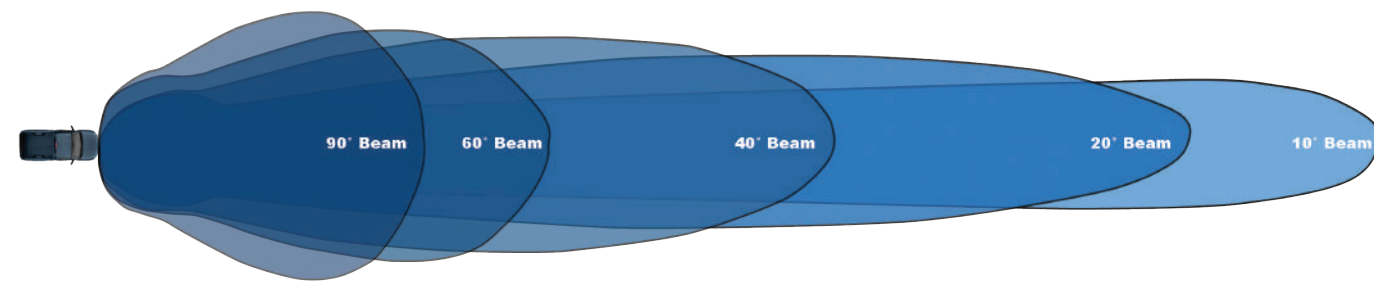


#### 10°/20° Narrow Beam

The spot beam pattern is used primarily as a driving light. The narrow beam creates a focal point accompanied by a "halo effect" which adds peripheral lighting. Best for high speed travel requiring distance.




#### 40° Wide Beam

The wide beam pattern is the intermediate beam well suited as a multi-purpose light. This beam pattern is recommended as a driving beam at lower speeds when you need more peripheral lighting.



#### 60°/90° Extra Wide Beam

The extra wide beam pattern is typically used as backup and area lighting and for slow-speed applications. Please note that 60°/90° beam is not listed on each product page, but is available in most products.



#### 30°/65° Elliptical Beam

The elliptical beam is a specialty beam pattern that is designed for driving with oncoming traffic. The beam itself is 30° tall and 65° wide, good for all speeds. Available only on select product models.

### LIGHTING DEFINITIONS

#### Lumen



Lumens measure the output of a light at the source. **Raw Lumens** account for the rated output of the LED by the LED manufacturer. By contrast, the **Effective Lumens** rating accounts for thermal, optical, and circuitry losses which reduce total output.

#### Lux

Lux measures the amount of light per square meter. Unlike lumens which measures light at the source, lux is measured at a specific point. This helps better determine whether those effective lumens are lighting up the environment with the necessary light.

#### Measuring Lux

On Vision X lux charts, the different colors within a light's beam on the lux chart correlates to a different lux level at that distance from the source, according to the colors shown.

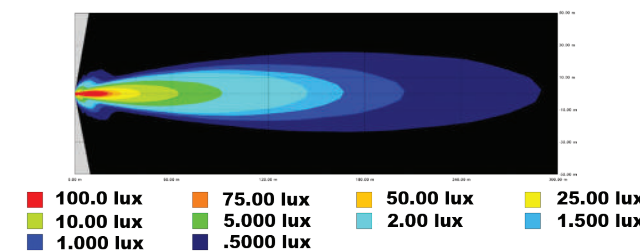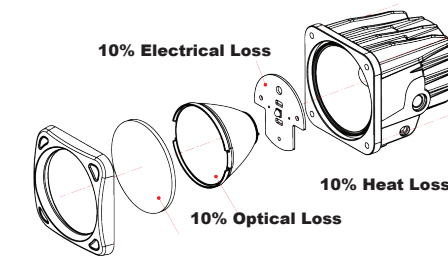





**LONG RANGE LED CANNON**  
 EXTENDED WARRANTY



**8.7"**  
**3280'** Usable Light  
 90 Watt LED

**6.7"**  
**2500'** Usable Light  
 50 Watt LED

**4.5"**  
**1000'** Usable Light  
 25 Watt LED

**LED LIGHT CANNONS**  
**KEY FEATURES**

- Snap On Covers Change Beam Patterns
- 10° Beam Provides Superior Distance
- 25/50/90 Watt Luminus Premium LED
- Ultra Lightweight Hybrid Construction
- Ideal for Bumper or A Pillar Mounting
- Single Bolt Mounting



**CANNON KITS:**  
 (2) 10° NARROW BEAM LED LIGHT CANNONS WITH WIRING HARNESS




See Page 38-39 for Full Lineup of Light Cannon Covers

**LIGHT MODELS**


ITEM #	PART #	# OF LIGHTS	WEIGHT	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
CTL-CPZ110	9150970	1	2.02 lb	2,500 lm	1,750 lm	9-32V	25	2.08A
CTL-CPZ110KIT	9151069	2	4.04 lb	5,000 lm	3,500 lm	9-32V	25	4.17A
CTL-CPZ610	9888538	1	5.51 lb	3,200 lm	2,240 lm	9-32V	50	4.17A
CTL-CPZ610KIT	9888545	2	11.02 lb	6,400 lm	4,480 lm	9-32V	50	8.34A
CTL-CPZ810	9890852	1	10.36 lb	5,800 lm	4,060 lm	9-32V	90	7.5A
CTL-CPZ810KIT	9890074	2	20.72 lb	11,600 lm	8,120 lm	9-32V	90	15A

**ISOLUX CHARTS**


**4.5" Light Cannon 10° Beam**

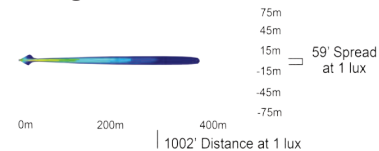

**6.7" Light Cannon 10° Beam**

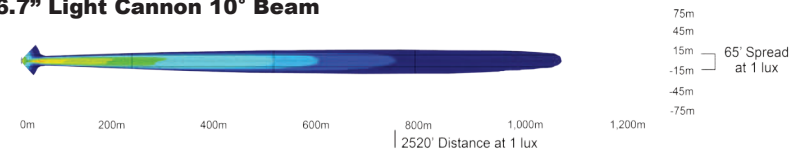

**8.7" Light Cannon 10° Beam**

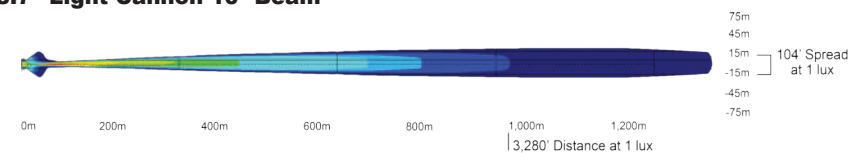

**SNAP ON COVERS**

The new Light Cannon Series LED lights are completely customizable with the line of snap-on filters to quickly swap beam patterns for changing conditions on or off the road. Spot, Euro, Flood, Wide Flood and Elliptical cover filters are available in multiple colors make the Light Cannon 20 lights in 1.

**20 LIGHTS IN 1**



SNAP ON BEAM COVERS








**RED COVERS**  
 Red Covers cut through dust in the air by reducing the glare of blue light waves back at the driver



**BLUE COVERS**  
 Blue Covers increase beam distance when used on snow-covered roads by reflecting the blue light off the snow to extend the beam



**YELLOW COVERS**  
 Yellow Covers effectively penetrate fog by eliminating blue light waves which glare back at the driver

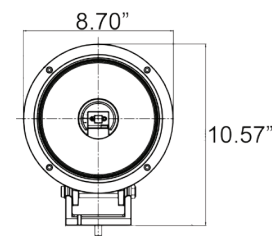





**TRUSTED BY MULTI-TIME OFF-ROAD CHAMPIONS**

**WILSON MOTORSPORTS**






CTL-TPX1810 Shown

**6.7" FORM FACTOR  
 HID REPLACEMENT**

EXTENDED WARRANTY

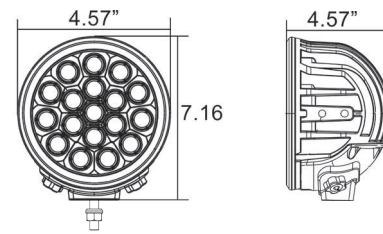


**OE FOG LAMP LED  
 REPLACEMENTS**

EXTENDED WARRANTY



XIL-UMX4460 Shown

XIL-UMX4010 Shown

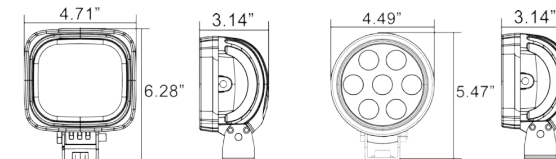


**UTILITY MARKET**

**KEY FEATURES**


- 5 Watt Xtreme LED Driven to 90% Efficiency
- Integrated Electronic Thermal Management
- OE Mounts Available for Vehicle Specific
- Convection Vertical Heat Sink
- Die-Cast Aluminum Housing
- Polycarbonate Lens

**ISOLUX CHARTS**

10° Beam

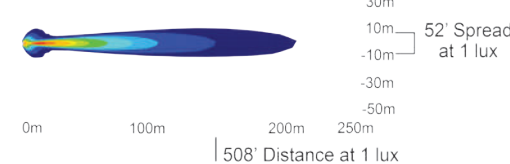

40° Beam

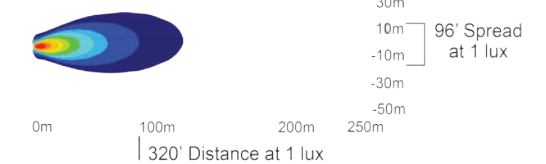

**TRANSPORTER**


**KEY FEATURES**

- 9, 12 and 18 LED Configurations Available
- Protective & Colored PC Covers Available
- Great Distance With Smooth Pattern
- Extruded 6061 Aluminum Housing
- Advanced Heat Sink Design
- Dimming Capability




**ISOLUX CHARTS**

18 LED 10° Beam

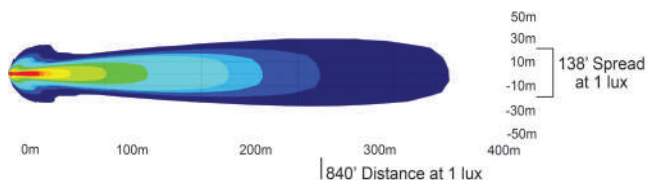

18 LED 40° Beam

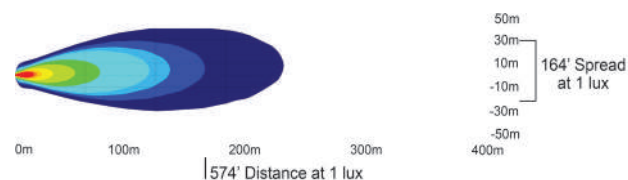

**LIGHT MODELS**

ITEM #	PART #	BEAM	LEDS	WEIGHT	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
CTL-TPX910	9110110	10°	9	5.95 lb	4,437 lm	2,840 lm	11-65V	45	3.75A
CTL-TPX940	9110295	40°	9	5.95 lb	4,437 lm	2,840 lm	11-65V	45	3.75A
CTL-TPX1210	9110561	10°	12	5.95 lb	5,916 lm	4,085 lm	11-65V	60	5A
CTL-TPX1240	9110745	40°	12	5.95 lb	5,916 lm	4,085 lm	11-65V	60	5A
CTL-TPX1810	9111018	10°	18	6.17 lb	8,874 lm	5,299 lm	11-65V	90	7.5A
CTL-TPX1840	9111193	40°	18	6.17 lb	8,874 lm	5,299 lm	11-65V	90	7.5A

**SCALE UP**

How much light do you need? The Transporter Series provides 3 LED configurations to match your application all within the same 6.7" housing. The Transporter Series matches the spread and distance of a similar form factor HID light with intense light output. Great distance with a smooth beam pattern from a LED is here, what are you waiting for?



**LIGHT MODELS**

ITEM #	PART #	BEAM	SHAPE	WEIGHT	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-UMX4010	4004719	10°	Round	2.65 lb	3,451 lm	2,202lm	11-65V	70	3.8A
XIL-UMX4040	9118215	40°	Round	2.65 lb	3,451 lm	2,202lm	11-65V	70	3.8A
XIL-UMX4060	9118307	60°	Round	2.65 lb	3,451 lm	2,202lm	11-65V	70	3.8A
XIL-UMX4410	4004726	10°	Square	2.43 lb	3,451 lm	2,202lm	11-65V	70	3.8A
XIL-UMX4440	9118390	40°	Square	2.43 lb	3,451 lm	2,202lm	11-65V	70	3.8A
XIL-UMX4460	9118482	60°	Square	2.43 lb	3,451 lm	2,202lm	11-65V	70	3.8A

**DURALUX**


**KEY FEATURES**

- 5 Watt Xtreme LED Driven to 90% Efficiency
- DURA-440 Available With E Mark Approval
- Reduced Wear On Associated Parts
- Die-Cast Aluminum Housing
- Polycarbonate Lens



DURA-660 Shown

DURA-460 Shown

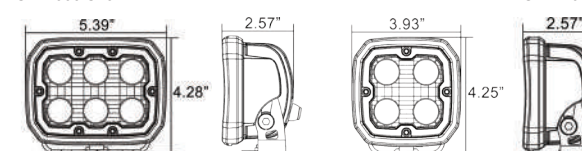

**LIGHT MODELS**

ITEM #	PART #	BEAM	# OF LIGHTS	LEDS	WEIGHT	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
DURA-410	9891132	10°	1	4	1.50 lb	1,972 lm	1,380 lm	11-65V	20	1.67A
DURA-410KIT	9891187		2	8	3.00 lb	3,944 lm	2,760 lm		40	3.34A
DURA-440	9141619	40°	1	4	1.50 lb	1,972 lm	1,380 lm	11-65V	20	1.67A
DURA-460	9141527	60°	1	4	1.50 lb	1,972 lm	1,380 lm	11-65V	20	1.67A
DURA-610	9891125	10°	1	6	2.10 lb	2,958 lm	2,071 lm	11-65V	30	2.5A
DURA-640	9888378	40°	1	6	2.10 lb	2,958 lm	2,071 lm	11-65V	30	2.5A
DURA-660	9888385	60°	1	6	2.10 lb	2,958 lm	2,071 lm	11-65V	30	2.5A





**ULTIMATE DISTANCE  
 POD LIGHTING**  
 EXTENDED WARRANTY

**OPTIMUS DUAL**  
 11X MORE DISTANCE  
 THAN A HEADLIGHT

**OPTIMUS SINGLE**  
 7X MORE DISTANCE  
 THAN A HEADLIGHT

**OPTIMUS ROUND**  
 7X MORE DISTANCE  
 THAN A HEADLIGHT



Optimus Round Covers Available  
 Check out page 38-39

**OPTIMUS**

**KEY FEATURES**

- Integrated Electronic Thermal Management
- 10 Watt LED Produces Powerful Distance
- Perfect for Fog Light Replacement
- Extruded 6061 Aluminum Housing
- Advanced Heat Sink Design
- Dimming Capability

**VEHICLE SPECIFIC**


**Fog Light Replacement**

With 7 times the distance of a standard headlight, the Optimus Single Rounds and Square models are perfect fog light replacements. Brackets and mounts are available for many popular makes and models.


See Pages 22-25 for Vehicle Specific Brackets



**OPTIMUS KITS:**  
 (2) 10° NARROW BEAM  
 OPTIMUS, WIRING  
 HARNESS

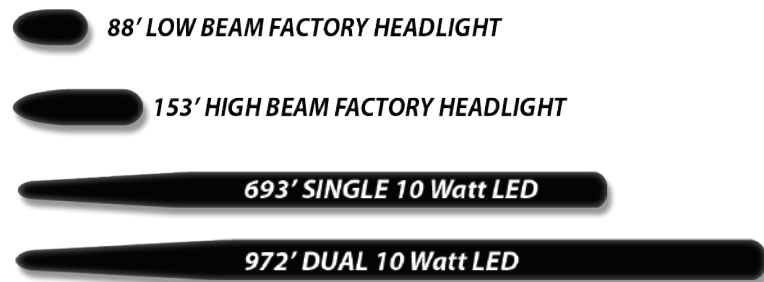


**ISOLUX CHARTS**

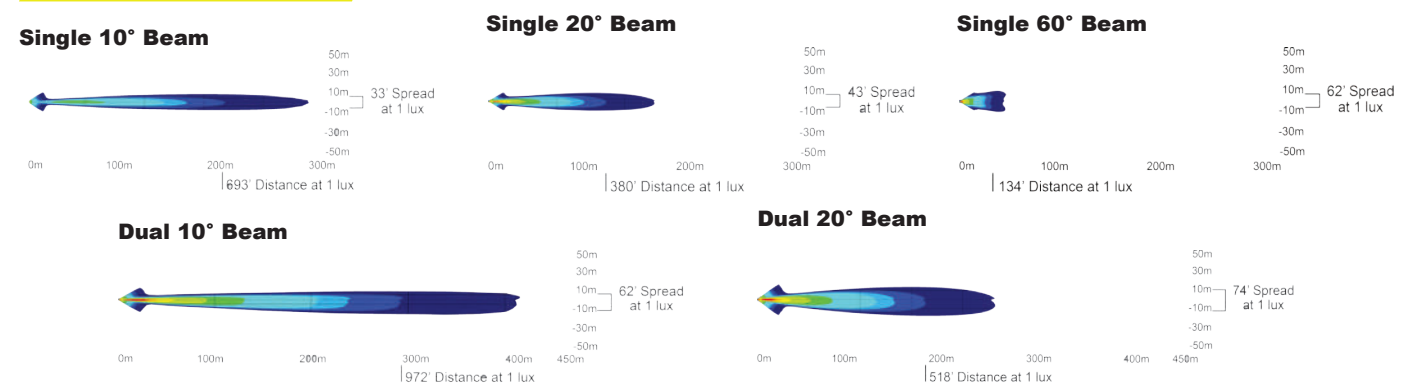

**LIGHT MODELS**

ITEM #	PART #	BEAM	QTY	SHAPE	HOUSING	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-OP210	9124605	10°	1	Square	Black	1,720 lm	1,204 lm	12-32V	20	1.67A
XIL-OP210C	9124698	10°	1	Square	Chrome	1,720 lm	1,204 lm	12-32V	20	1.67A
XIL-OP210W	9124964	10°	1	Square	White	1,720 lm	1,204 lm	12-32V	20	1.67A
XIL-OP210KIT	9125053	10°	2	Square	Black	3,440 lm	2,408 lm	12-32V	40	3.34A
XIL-OP220	9139548	20°	1	Square	Black	1,720 lm	1,204 lm	12-32V	20	1.67A
XIL-OP220C	9166636	20°	1	Square	Chrome	1,720 lm	1,204 lm	12-32V	20	1.67A
XIL-OP220W	9139630	20°	1	Square	White	1,720 lm	1,204 lm	12-32V	20	1.67A
XIL-OP220KIT	9137834	20°	2	Square	Black	3,440 lm	2,408 lm	12-32V	40	3.34A
XIL-OP260	9136660	60°	1	Square	Black	1,720 lm	1,204 lm	12-32V	20	1.67A
XIL-OP260C	9159348	60°	1	Square	Chrome	1,720 lm	1,204 lm	12-32V	20	1.67A
XIL-OP260W	9139722	60°	1	Square	White	1,720 lm	1,204 lm	12-32V	20	1.67A
XIL-OP260KIT	9137742	60°	2	Square	Black	3,440 lm	2,408 lm	12-32V	40	3.34A
XIL-OP110	9123882	10°	1	Square	Black	860 lm	602 lm	12-32V	10	0.83A
XIL-OP110C	9124247	10°	1	Square	Chrome	860 lm	602 lm	12-32V	10	0.83A
XIL-OP110W	9124513	10°	1	Square	White	860 lm	602 lm	12-32V	10	0.83A
XIL-OP110KIT	9124421	10°	2	Square	Black	1,720 lm	1,204 lm	12-32V	20	1.67A
XIL-OP120	9130002	20°	1	Square	Black	860 lm	602 lm	12-32V	10	0.83A
XIL-OP120C	9139098	20°	1	Square	Chrome	860 lm	602 lm	12-32V	10	0.83A
XIL-OP120W	9139005	20°	1	Square	White	860 lm	602 lm	12-32V	10	0.83A
XIL-OP120KIT	9138015	20°	2	Square	Black	1,720 lm	1,204 lm	12-32V	20	1.67A
XIL-OP160	9124063	60°	1	Square	Black	860 lm	602 lm	12-32V	10	0.83A
XIL-OP160C	9139272	60°	1	Square	Chrome	860 lm	602 lm	12-32V	10	0.83A
XIL-OP160W	9139364	60°	1	Square	White	860 lm	602 lm	12-32V	10	0.83A
XIL-OP160KIT	9137926	60°	2	Square	Black	1,720 lm	1,204 lm	12-32V	20	1.67A
XIL-OPR110	9140896	10°	1	Round	Black	860 lm	602 lm	12-32V	10	0.83A
XIL-OPR110C	9149080	10°	1	Round	Chrome	860 lm	602 lm	12-32V	10	0.83A
XIL-OPR110W	9149172	10°	1	Round	White	860 lm	602 lm	12-32V	10	0.83A
XIL-OPR110KIT	9141251	10°	2	Round	Black	1,720 lm	1,204 lm	12-32V	20	1.67A
XIL-OPR120	9141077	20°	1	Round	Black	860 lm	602 lm	12-32V	10	0.83A
XIL-OPR120C	9149264	20°	1	Round	Chrome	860 lm	602 lm	12-32V	10	0.83A
XIL-OPR120W	9149356	20°	1	Round	White	860 lm	602 lm	12-32V	10	0.83A
XIL-OPR120KIT	9141343	20°	2	Round	Black	1,720 lm	1,204 lm	12-32V	20	1.67A
XIL-OPR160	9141169	60°	1	Round	Black	860 lm	602 lm	12-32V	10	0.83A
XIL-OPR160C	9149448	60°	1	Round	Chrome	860 lm	602 lm	12-32V	10	0.83A
XIL-OPR160W	9149530	60°	1	Round	White	860 lm	602 lm	12-32V	10	0.83A
XIL-OPR160KIT	9141435	60°	2	Round	Black	1,720 lm	1,204 lm	12-32V	20	1.67A

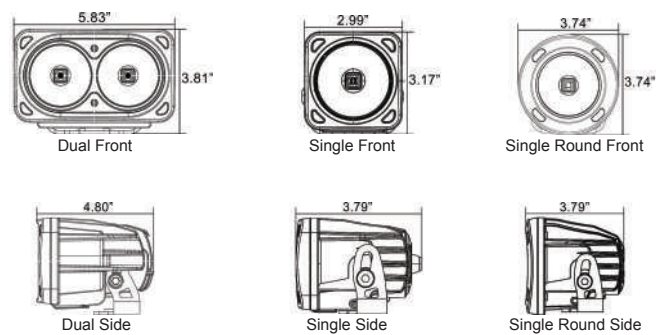





## SOLSTICE SOLO

### KEY FEATURES

- Combine Multiple Lights Together With Omni-Link
- Less Than 1 Amp Power Consumption
- As Much Light As A Car Headlight
- Adjustable Mounting Bracket
- Polycarbonate Lens



Flush Mount Available  
**XIL-SFLUSH**



## COMPACT HOUSING POD LIGHTING

EXTENDED WARRANTY





XIL-S1110 Shown

## SOLSTICE PRIME SOLO

### KEY FEATURES

- Integrated Electronic Thermal Management
- Next Gen LED Driven To 90% Efficiency
- Radial Fins Optimize Heat Dissipation
- Die-Cast 6061 Aluminum Housing
- Polycarbonate Lens
- Dimming Capability





XIL-SP110 Shown

## MINI SOLO

### KEY FEATURES


- Highest Light Output Per Cubic Inch On The Market
- Available Omni-Link Connects 3 Pods Together
- Radial Fins Optimize Heat Dissipation
- Weatherproof Deutsch Connector
- Die-Cast Aluminum Housing
- Polycarbonate Lens




XIL-MX110 Shown

## ISOLUX CHARTS


### 10° Narrow Beam Solstice Prime

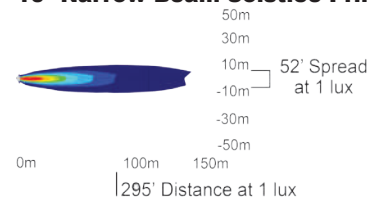


### 10° Narrow Beam Solo

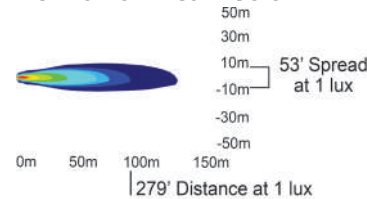


### 10° Narrow Beam Mini Solo




### 30° Wide Beam Solstice Prime

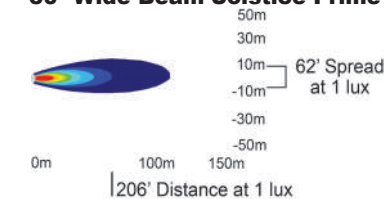


### 20° Narrow Beam Solo

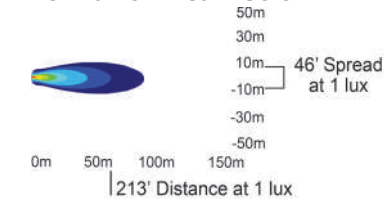


### 40° Narrow Beam Mini Solo

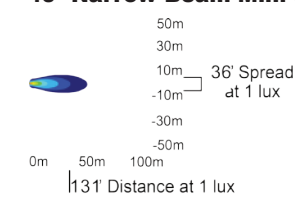


### 30/65° Elliptical Beam Solstice Prime

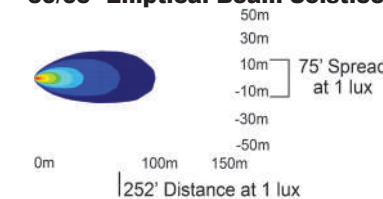

### 40° Medium Beam Solo

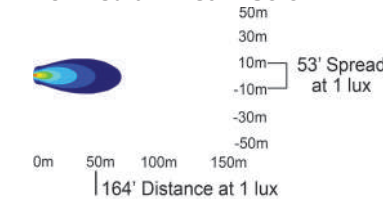


### 60° Medium Beam Mini Solo

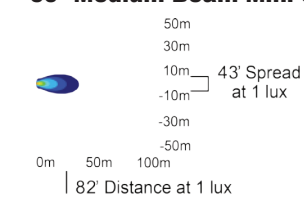

## LIGHT MODELS

ITEM #	PART #	BEAM	SHAPE	HOUSING	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-S1110	9888156	10°	Square	Black	860 lm	602 lm	9-48V	10	0.83A
XIL-S1110W	9888194	10°	Square	White	860 lm	602 lm	9-48V	10	0.83A
XIL-S1130	9888163	30°	Square	Black	860 lm	602 lm	9-48V	10	0.83A
XIL-S1130W	9888200	30°	Square	White	860 lm	602 lm	9-48V	10	0.83A
XIL-S1160	9888170	60°	Square	Black	860 lm	602 lm	9-48V	10	0.83A
XIL-S1160W	9888217	60°	Square	White	860 lm	602 lm	9-48V	10	0.83A
XIL-S11e3065	9888187	30°/65°	Square	Black	860 lm	602 lm	9-48V	10	0.83A
XIL-S11e3065W	9888224	30°/65°	Square	White	860 lm	602 lm	9-48V	10	0.83A
XIL-SP110	4008830	10°	Round	Black	860 lm	602 lm	9-48V	10	0.83A
XIL-SP110W	4008847	10°	Round	White	860 lm	602 lm	9-48V	10	0.83A
XIL-SP120	4009882	20°	Round	Black	860 lm	602 lm	9-48V	10	0.83A
XIL-SP120W	4008854	20°	Round	White	860 lm	602 lm	9-48V	10	0.83A
XIL-SP140	4009899	40°	Round	Black	860 lm	602 lm	9-48V	10	0.83A
XIL-SP140W	4008861	40°	Round	White	860 lm	602 lm	9-48V	10	0.83A
XIL-MX110	9113531	10°	Round	Black	493 lm	365 lm	9-48V	5	0.42A
XIL-MX140	9113715	20°	Round	Black	493 lm	365 lm	9-48V	5	0.42A
XIL-MX160	9113807	60°	Round	Black	493 lm	365 lm	9-48V	5	0.42A

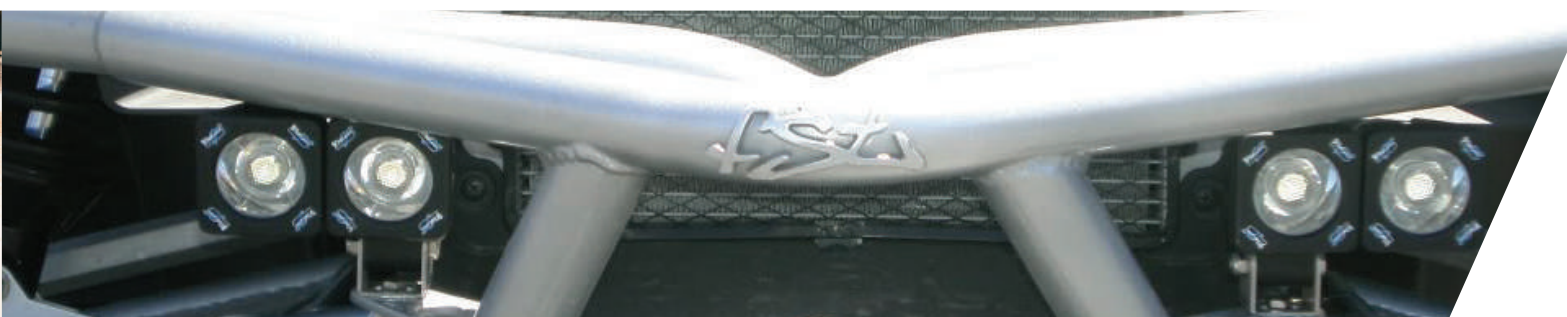





**VISION X LED LIGHT BARS**


**POWERFUL DISTANCE**






12" XIL-PX1810 Shown

**BRIGHTEST LED BAR ON THE MARKET**  
 EXTENDED WARRANTY

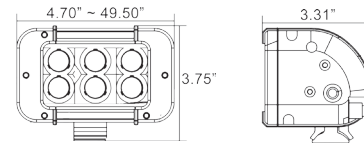

**IRIS REFLECTORS FOR ULTIMATE DISTANCE**  
 EXTENDED WARRANTY

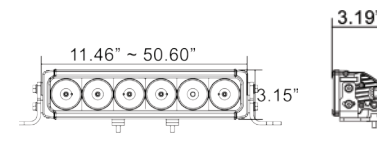

12" XPI-6 Shown

**END CAP MOUNTS AVAILABLE  
 SEE PAGE 36**



**XMITTER PRIME XTREME**

**KEY FEATURES**

- 5 Watt LED for Powerful Distance and Output
- Integrated Electronic Thermal Management
- Billet Clamp Tube Frame Mounts Available
- Extruded 6061 Aluminum Housing
- Advanced Heat Sink Design
- Dimming Capability




**XPI**

**KEY FEATURES**


- 5 Watt LED for Ultimate Distance and Output
- IRIS Reflector for Further Beam Penetration
- Dual Mounting: Bottom Feet or End Mount
- New Lifespan-Boosting Heat Sink Design

**ISOLUX CHARTS**


10° Beam

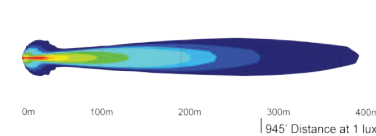


40° Beam

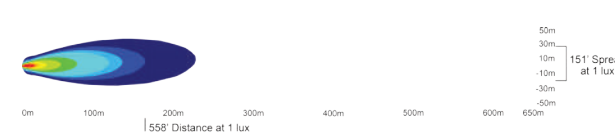

12" XPI-6 Straight Beam

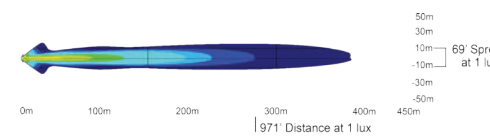

29" XPI-15M Tilted Beam

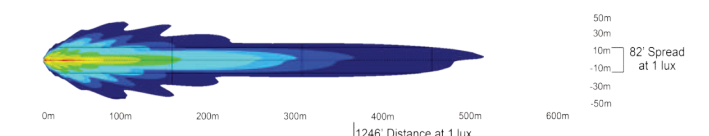

**LIGHT MODELS**

ITEM #	PART #	BEAM	LEDS	LENGTH	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-PX610	9117409	10°	6	4.70"	2,958 lm	2,070 lm	9-32V DC	30	2.5A
XIL-PX640	9117492	40°	6	4.70"	2,958 lm	2,070 lm	9-32V DC	30	2.5A
XIL-PX1210	9115603	10°	12	7.90"	5,916 lm	4,141 lm	9-32V DC	60	5A
XIL-PX1240	9115696	40°	12	7.90"	5,916 lm	4,141 lm	9-32V DC	60	5A
XIL-PX1810	9115788	10°	18	11.10"	8,874 lm	6,211 lm	9-32V DC	90	7.5A
XIL-PX1840	9115870	40°	18	11.10"	8,874 lm	6,211 lm	9-32V DC	90	7.5A
XIL-PX3010	9116860	10°	30	17.50"	14,790 lm	10,353 lm	9-32V DC	150	12.5A
XIL-PX3040	9116952	40°	30	17.50"	14,790 lm	10,353 lm	9-32V DC	150	12.5A
XIL-PX3610	9117041	10°	36	20.60"	17,748 lm	12,423 lm	9-32V DC	180	15A
XIL-PX3640	9117133	40°	36	20.60"	17,748 lm	12,423 lm	9-32V DC	180	15A
XIL-PX5410	9117225	10°	54	30.20"	26,622 lm	18,635 lm	9-32V DC	270	22.5A
XIL-PX5440	9117317	40°	54	30.20"	26,622 lm	18,635 lm	9-32V DC	270	22.5A
XIL-PX7210	9117584	10°	72	39.80"	35,496 lm	24,847 lm	9-32V DC	360	30A
XIL-PX7240	9117676	40°	72	39.80"	35,496 lm	24,847 lm	9-32V DC	360	30A
XIL-PX9010	9887036	10°	90	49.37"	44,370 lm	31,059 lm	9-32V DC	450	37.5A
XIL-PX9040	9887043	40°	90	49.37"	44,370 lm	31,059 lm	9-32V DC	450	37.5A

\*Amber LED Models Also Available

**LIGHT MODELS**


ITEM #	PART #	BEAM	LEDS	LENGTH	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XPI-6	9889399	Straight	6	11.50"	3,168 lm	2,218 lm	11-32V	60	2.5A
XPI-12M	9889405	Tilted LEDs	12	24.00"	6,336 lm	4,436 lm	11-32V	120	5A
XPI-15M	9889443	Tilted LEDs	15	29.40"	7,920 lm	5,545 lm	11-32V	150	6.25A
XPI-18M	9889412	Tilted LEDs	18	34.70"	9,504 lm	6,654 lm	11-32V	180	7.5A
XPI-21M	9890500	Tilted LEDs	21	40.00"	11,088 lm	7,762 lm	11-32V	210	8.75A
XPI-24M	9889429	Tilted LEDs	24	45.30"	12,672 lm	8,872 lm	11-32V	240	10A
XPI-27M	9889436	Tilted LEDs	27	50.60"	14,256 lm	9,981 lm	11-32V	270	11.25A






12" XIL-LPX910 Shown

**LOW PROFILE FORM  
 XTREME OUTPUT**  
 EXTENDED WARRANTY



**END CAP MOUNTS AVAILABLE  
 SEE PAGE 36**

**THE ORIGINAL LED BAR  
 TRUSTED EVERYWHERE**  
 EXTENDED WARRANTY



**END CAP MOUNTS AVAILABLE  
 SEE PAGE 36**



12" XIL-200 Shown

**XMITTER LOW PRO**

**KEY FEATURES**

- 5 Watt LED for Powerful Distance and Output
- Integrated Electronic Thermal Management
- Billet Clamp Tube Frame Mounts Available
- Extruded 6061 Aluminum Housing
- Advanced Heat Sink Design
- Dimming Capability




**XMITTER**

**KEY FEATURES**


- Available In Infrared, Amber, Red, Green and Blue
- Billet Clamp Tube Frame Mounts Available
- 3 Watt LED For Precise Beam Patterns
- Extruded 6061 Aluminum Housing
- Advanced Heat Sink Design
- Patented Mounting System

**ISOLUX CHARTS**


**10° Beam**

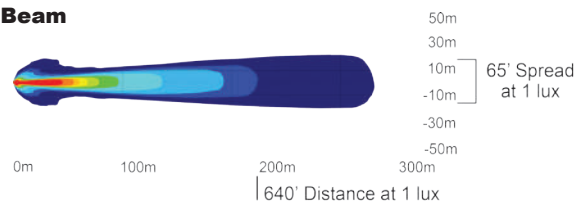


**40° Beam**

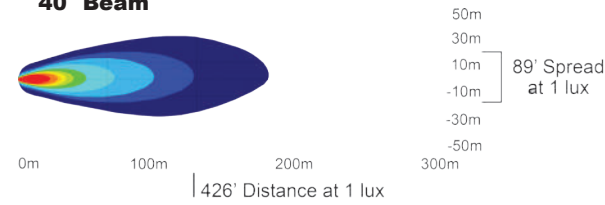

**Euro Beam**

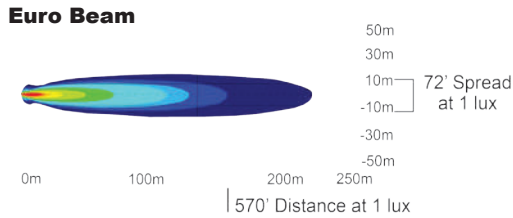

**Flood Beam**

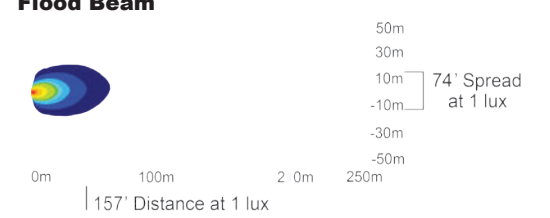

**LIGHT MODELS**

ITEM #	PART #	BEAM	LEDS	LENGTH	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-LPX310	4000759	10°	3	4.65"	1,479 lm	1,035 lm	9-32V	15	1.25A
XIL-LPX340	4000766	40°	3	4.65"	1,479 lm	1,035 lm	9-32V	15	1.25A
XIL-LPX610	9118758	10°	6	8.43"	2,958 lm	2,070 lm	9-32V	30	2.5A
XIL-LPX640	9120737	40°	6	8.43"	2,958 lm	2,070 lm	9-32V	30	2.5A
XIL-LPX910	4000773	10°	9	12.21"	4,437 lm	3,105 lm	9-32V	45	3.75A
XIL-LPX940	4000780	40°	9	12.21"	4,437 lm	3,105 lm	9-32V	45	3.75A
XIL-LPX1510	9114613	10°	15	19.77"	7,395 lm	5,176 lm	9-32V	75	6.25A
XIL-LPX1540	9114705	40°	15	19.77"	7,395 lm	5,176 lm	9-32V	75	6.25A
XIL-LPX2410	9121901	10°	24	31.11"	11,332 lm	8,282 lm	9-32V	120	10A
XIL-LPX2440	9132884	40°	24	31.11"	11,332 lm	8,282 lm	9-32V	120	10A
XIL-LPX2710	9114972	10°	27	34.89"	13,311 lm	9,317 lm	9-32V	135	11.25A
XIL-LPX2740	9115061	40°	27	34.89"	13,311 lm	9,317 lm	9-32V	135	11.25A
XIL-LPX3310	9115153	10°	33	42.44"	16,269 lm	11,388 lm	9-32V	165	13.75A
XIL-LPX3340	9115245	40°	33	42.44"	16,269 lm	11,388 lm	9-32V	165	13.75A
XIL-LPX3910	9128115	10°	39	50.00"	19,227 lm	13,459 lm	9-32V	195	16.25A
XIL-LPX3940	9132976	40°	39	50.00"	19,227 lm	13,459 lm	9-32V	195	16.25A

\*Amber LED Models Also Available

**LIGHT MODELS**

ITEM #	PART #	BEAM	LEDS	LENGTH	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-40	4006270	Euro	4	4.00"	720 lm	396 lm	9-42V	12	1A
XIL-41	4007529	Flood	4	4.00"	720 lm	396 lm	9-42V	12	1A
XIL-80	4006287	Euro	8	5.80"	1,440 lm	792 lm	9-42V	24	2A
XIL-81	4007581	Flood	8	5.80"	1,440 lm	792 lm	9-42V	24	2A
XIL-120	4006294	Euro	12	7.80"	2,160 lm	1,188 lm	9-42V	36	3A
XIL-121	4007369	Flood	12	7.80"	2,160 lm	1,188 lm	9-42V	36	3A
XIL-200	4006300	Euro	20	11.80"	3,600 lm	1,980 lm	9-42V	60	5A
XIL-201	4007468	Flood	20	11.80"	3,600 lm	1,980 lm	9-42V	60	5A
XIL-320	4006317	Euro	32	17.60"	5,760 lm	3,168 lm	9-42V	96	8A
XIL-321	4007482	Flood	32	17.60"	5,760 lm	3,168 lm	9-42V	96	8A
XIL-400	4006324	Euro	40	21.70"	7,200 lm	3,960 lm	9-42V	120	10A
XIL-401	4007505	Flood	40	21.70"	7,200 lm	3,960 lm	9-42V	120	10A
XIL-600	4006331	Euro	60	31.80"	10,800 lm	5,940 lm	9-42V	180	15A
XIL-601	4007543	Flood	60	31.80"	10,800 lm	5,940 lm	9-42V	180	15A
XIL-800	4006348	Euro	80	41.80"	14,400 lm	7,920 lm	9-42V	240	20A
XIL-801	4007567	Flood	80	41.80"	14,400 lm	7,920 lm	9-42V	240	20A
XIL-1000	4006355	Euro	100	51.80"	18,000 lm	9,900 lm	9-42V	300	25A
XIL-1001	4007345	Flood	100	51.80"	18,000 lm	9,900 lm	9-42V	300	25A





## JEEP JK KITS

### KEY FEATURES

- Easy No Drill Installation
- Increased Light Output
- Low Power Draw

**LED HEADLIGHT REPLACEMENT**  
 SEE DETAILS ON PAGE 28



### FOG LIGHT REPLACEMENT

- Kits Available With Lights, Mounts and Wiring
- Up to 7X Brighter than a Car Headlight
- Fits Directly into Factory Bumper



XIL-OE1012JKV2OPR Shown



### WINDSHIELD MOUNT

- Mount LED Light Bars Up to 52" Length
- Updated Design Without Crossbar
- No Drilling Necessary



XIL-OEW0713JKV2 Shown



### HOOD MOUNT

- Fits a 20" LED Light Bar
- Mounts Without Drilling
- Add Up to 17,748 Lumens



XIL-OEH0713PX36 Shown



### A PILLAR MOUNT

- Perfect for Optimus or Cannon Lighting
- A Pillar Lighting No-Drill Bracket
- Add Up to 5,000 Lumens



XIL-OEA0713JKCPZ1 Shown

### KIT MODELS

ITEM #	PART #	INCLUDES	MOUNTING LOCATION	RAW LUMENS	EFFECTIVE LUMENS	WEIGHT	AMP DRAW
XIL-OE0709JKV2	9145662	Brackets*, Plug & Play Connectors	07-09 Fog Light	-	-	4.06 lb	-
XIL-OE1012JKV2	9154664	Brackets*, Plug & Play Connectors	10-13 Fog Light	-	-	4.06 lb	-
XIL-OE0709JKV2OPR	9145754	Brackets, (2) XIL-OPR110, Plug & Play Connectors	07-09 Fog Light	3,440 lm	2,408 lm	7.12 lb	3.34A
XIL-OE1012JKV2OPR	9154756	Brackets, (2) XIL-OPR110, Plug & Play Connectors	10-13 Fog Light	3,440 lm	2,408 lm	7.12 lb	3.34A
XIL-OE13JKX	9891064	Brackets*, Plug & Play Connectors	13-14 Fog Light**	-	-	1.00 lb	-
XIL-OEW0713JKV2	9888422	Brackets*	07-14 Windshield	-	-	-	-
XIL-OEH0713	9890975	Brackets*	07-14 Hood Mount	-	-	3.00 lb	-
XIL-OEH0713PX36	9891002	Brackets, (1) XIL-PX3610, Harness	07-14 Hood Mount	17,748 lm	12,423 lm	13.50 lb	15A
XIL-OEH0713XPI12	9891019	Brackets, (1) XPI-12M	07-14 Hood Mount	6,336 lm	4,436 lm	12.00 lb	6.25A
XIL-OEA0713JK	9888392	Brackets*	07-14 A Pillar	-	-	1.40 lb	-
XIL-OEA0713JKOP1	9888408	Brackets, (2) XIL-OP110, Harness	07-14 A Pillar	3,440 lm	2,408 lm	4.46 lb	3.34A
XIL-OEA0713JKCPZ1	9888415	Brackets, (2) CTL-CPZ110, Harness	07-14 A Pillar	5,000 lm	3,500 lm	5.44 lb	4.16A

\* Lights Sold Separately  
 \*\* Fits 2013 Rubicon, Wrangler X & 10 Anniversary Edition

## FORD RAPTOR KITS

### KEY FEATURES

- Easy Factory Direct Installation
- Increased Light Output
- Low Power Draw



### FOG LIGHT REPLACEMENT

- Kits Available With Lights, Mounts and Wiring
- Available for 2010-2014 Raptor Models
- 7X More Distance than a Car Headlight
- Direct Fit into Factory Opening



**CHECK OUT MORE ON THE OPTIMUS LED ON PAGE 12-13**



XIL-OE10FR0P Shown

### BUMPER MOUNT

- Kits Available With Lights, Mounts and Harness
- Available for 2010-2014 Ford Raptor Models
- Add 17,748 Lumens With the XIL-PX3610
- Fits Directly into Factory Bumper



XIL-OEB10FRX3610 Shown

**CHECK OUT MORE ON THE XMITTER PRIME XTREME LED BAR ON PAGE 18**

### KIT MODELS

ITEM #	PART #	INCLUDES	MOUNTING LOCATION	RAW LUMENS	EFFECTIVE LUMENS	WEIGHT	AMP DRAW
XIL-OE10FR	9160870	Bracket*, Factory Integration Harness	10-14 Fog Light	-	-	2.50 lb	-
XIL-OE10FR0P	9133515	Brackets, (4) XIL-OP110, Factory Integration Harness	10-14 Fog Light	6,880 lm	4,816 lm	5.74 lb	6.68A
XIL-OEB10FR	9887340	Bracket*, Factory Integration Harness	10-14 Bumper	-	-	3.00 lb	-
XIL-OEB10FRPX3610	9887357	Brackets, (1) XIL-PX3610, Factory Integration Harness	10-14 Bumper	17,748 lm	12,423 lm	12.58 lb	15A

\* Lights Sold Separately





**FORD F SERIES**  
**LIGHTING UPGRADES**

- Kits Available With Lights, Mounts and Wiring
- Available for 99-14 Ford F Series Models
- Drastically Increase Light Output
- Fits Directly into Factory Bumper



XIL-OEB09F150LPX15 Shown

**CHECK OUT MORE ON THE UTILITY MARKET LED ON PAGE 11**

**KIT MODELS**

ITEM #	PART #	INCLUDES	MOUNTING LOCATION	RAW LUMENS	EFFECTIVE LUMENS	WEIGHT	AMP DRAW
XIL-OEB09F150	9891057	Bracket*	09-14 Bumper	-	-	3.00 lb	-
XIL-OEB09F150PX36	9891156	Bracket, XIL-PX3610, Wiring Harness	09-14 Bumper	17,748 lm	12,423 lm	12.50 lb	15A
XIL-OEB09F150LPX15	9891163	Bracket, XIL-LPX1510, Wiring Harness	09-14 Bumper	7,395 lm	5,176 lm	8.50 lb	6.25A
XIL-OEB09F150ECO	9891170	Bracket, (2) XIL-PX610, Wiring Harness	09-14 Bumper	5,916 lm	4,140 lm	8.50 lb	5A
XIL-OE9913FSD	9891194	Bracket*, Plug & Play Connectors	99-14 Fog Light	-	-	1.00 lb	-
XIL-OE9913FSDDURA	9891200	Brackets, (2) DURA-410, Plug & Play Connectors	99-14 Fog Light	3,944 lm	2,760 lm	4.50 lb	3.34A

\* Lights Sold Separately



**DODGE RAM**  
**LIGHTING UPGRADES**

- Kits Available With Lights, Mounts and Wiring
- Available for 02-08 Dodge Ram Models
- Drastically Increase Light Output
- Fits Directly into Factory Bumper



XIL-OE0210DRUMX Shown

**CHECK OUT MORE ON THE UTILITY MARKET LED ON PAGE 11**

**KIT MODELS**

ITEM #	PART #	INCLUDES	MOUNTING LOCATION	RAW LUMENS	EFFECTIVE LUMENS	WEIGHT	AMP DRAW
XIL-OE0210DR	4002333	Brackets*, Plug & Play Connectors	02-08 Fog Light	-	-	1.20 lb	-
XIL-OE0210DRUMX	9133065	Brackets, (2) XIL-UMX4010, Plug & Play Connectors	02-08 Fog Light	6,902 lm	4,404 lm	6.06 lb	7.6A
XIL-OE0913DR	9889221	Brackets*, Plug & Play Connectors	09-14 Fog Light	-	-	1.20 lb	-
XIL-OE0913DROP	9888552	Brackets, (4) XIL-OP110, Plug & Play Connectors	09-14 Fog Light	6,880 lm	4,816 lm	13.20 lb	6.68A
XIL-OEB0913DR	9889238	Brackets*, Plug & Play Connectors	09-14 Bumper	-	-	3.00 lb	-
XIL-OEB0913DRPX3610	9889245	Brackets, XIL-PX3610, Wiring Harness	09-14 Bumper	17,748 lm	12,423 lm	12.58 lb	15A

\* Lights Sold Separately

**GMC SIERRA**  
**LIGHTING UPGRADES**

- Kits Available With Lights, Mounts and Wiring
- Available for 07-13 GMC Sierra Models
- Drastically Increase Light Output
- Fits Directly into Factory Bumper



XIL-OE0711GSUMX Shown

**CHECK OUT MORE ON THE UTILITY MARKET LED ON PAGE 11**

**KIT MODELS**

ITEM #	PART #	INCLUDES	MOUNTING LOCATION	RAW LUMENS	EFFECTIVE LUMENS	WEIGHT	AMP DRAW
XIL-OE0711GS	4002388	Bracket*	07-13 Fog Light	-	-	0.45 lb	-
XIL-OE0711GSUMX	9133157	Brackets, (2) XIL-UMX4010, T-Tap Connectors	07-13 Fog Light	6,902 lm	4,404 lm	5.31 lb	7.6A

\* Lights Sold Separately

**CHEVROLET SILVERADO**  
**LIGHTING UPGRADES**

- Kits Available With Lights, Mounts and Wiring
- Available for 07-13 Chevrolet Silverado
- Drastically Increase Light Output
- Fits Directly into Factory Bumper



XIL-OE0711CSS1100 Shown

**CHECK OUT MORE ON THE SOLO LED ON PAGE 14-15**

**KIT MODELS**

ITEM #	PART #	INCLUDES	MOUNTING LOCATION	RAW LUMENS	EFFECTIVE LUMENS	WEIGHT	AMP DRAW
XIL-OE0711CS	4002340	Brackets*, T-Tap Connectors	07-13 Fog Light	-	-	1.20 lb	-
XIL-OE0711CSS1100	9120829	Brackets, (4) XIL-S1100, T-Tap Connectors	07-13 Fog Light	6,902 lm	4,404 lm	4.24 lb	3.32A

\* Lights Sold Separately

**TOYOTA TUNDRA**  
**LIGHTING UPGRADES**

- Kits Available With Lights, Mounts and Wiring
- Available for 07-13 Toyota Tundra Models
- Drastically Increase Light Output
- Fits Directly into Factory Bumper



XIL-OE0711TTUMX Shown

**CHECK OUT MORE ON THE UTILITY MARKET LED ON PAGE 11**

**KIT MODELS**

ITEM #	PART #	INCLUDES	MOUNTING LOCATION	RAW LUMENS	EFFECTIVE LUMENS	WEIGHT	AMP DRAW
XIL-OE0711TT	4002296	Bracket*, Plug & Play Connectors	07-13 Fog Light	-	-	1.00 lb	-
XIL-OE0711TTUMX	9133249	Brackets, (2) XIL-UMX4010, Plug & Play Connectors	07-13 Fog Light	6,902 lm	4,404 lm	6.30 lb	7.6A

\* Lights Sold Separately




**XP HID**

**KEY FEATURES**

- 1200 Meters of Light for Unmatched Distance
- Reengineered Reflector and Lens
- All Internal Ballast and Starter
- Die-Cast Aluminum Housing
- Colored Covers Available
- Knurled Aiming Knobs



8.7" HID-8552XP Shown

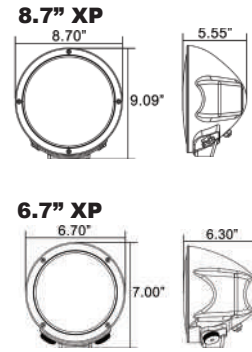

**LIGHT MODELS**


ITEM #	PART #	BEAM PATTERN	DIAMETER	DEPTH	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
HID-6552XP	4000483	Spot	6.70"	6.30"	5,000 lm	3,500 lm	9-32V DC	50	4.17A
HID-8550XP	9119922	Euro	8.70"	5.55"	5,000 lm	3,500 lm	9-32V DC	50	4.17A
HID-8552XP	4000490	Spot	8.70"	5.55"	5,000 lm	3,500 lm	9-32V DC	50	4.17A



**HID SERIES**

**KEY FEATURES**

- Euro Beam Models Are E-Mark Approved
- Weatherproof Deutsch Connector
- Internal Ballast and Starter
- Plug and Play Harness
- Knurled Aiming Knobs
- Covers Available

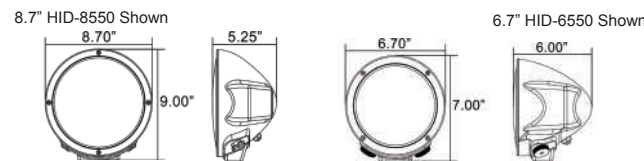


**LIGHT MODELS**

ITEM #	PART #	BEAM PATTERN	DIAMETER	DEPTH	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
HID-6500	4002821				3,500 lm	2,450 lm		35	2.92A
HID-6550	4003026	Euro	6.70"	6.00"	5,000 lm	3,500 lm	9-32V DC	50	4.17A
HID-6501	4002999				3,500 lm	2,450 lm		35	2.92A
HID-6551	4003064	Flood	6.70"	6.00"	5,000 lm	3,500 lm	9-32V DC	50	4.17A
HID-6502	4003002				3,500 lm	2,450 lm		35	2.92A
HID-6552	4003033	Spot	6.70"	6.00"	5,000 lm	3,500 lm	9-32V DC	50	4.17A
HID-8500	4002838				3,500 lm	2,450 lm		35	2.92A
HID-8550	4003071	Euro	8.70"	5.25"	5,000 lm	3,500 lm	9-32V DC	50	4.17A
HID-8502	4003057				3,500 lm	2,450 lm		35	2.92A
HID-8552	4003088	Spot	8.70"	5.25"	5,000 lm	3,500 lm	9-32V DC	50	4.17A



8.7" VX-8510 Shown

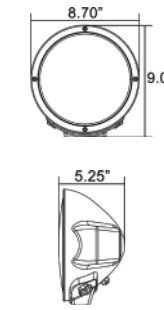

**8.7" HALOGEN**

**KEY FEATURES**


- Oversized Glass Bulb With Heavy Duty Filament
- Euro Beam Model E-Mark Approved
- Upgradable to HID

**LIGHT MODELS**

ITEM #	PART #	BEAM PATTERN	DIAMETER	DEPTH	RAW LUMENS	WATTS	AMP DRAW
VX-6510	4000636	Euro	6.70"	6.00"	1,800 lm	100	8.33A
VX-6511	4000650	Flood	6.70"	6.00"	1,800 lm	100	8.33A
VX-6512	4000674	Spot	6.70"	6.00"	1,800 lm	100	8.33A
VX-8510	4000698	Euro	8.70"	5.25"	1,800 lm	100	8.33A
VX-8512	4000711	Spot	8.70"	5.25"	1,800 lm	100	8.33A



8" VX-8010C Shown

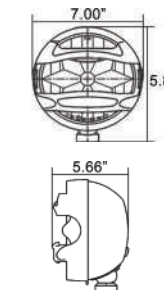

**8" HALOGEN**

**KEY FEATURES**


- Superwhite Bulb for Improved Performance
- Adjustable Single Stainless Stud Mount
- Wiring Harness Included
- Sold As Pair

**LIGHT MODELS**

ITEM #	PART #	BEAM PATTERN	HOUSING COLOR	INCLUDES	DIAMETER	DEPTH	WATTS	AMP DRAW
VX-6010	4000414	Euro	Black	Black X Cover	6.49"	4.20"	100	8.33A
VX-6010C	4000421	Euro	Chrome	Black X Cover	6.49"	4.20"	100	8.33A
VX-T9000B	4000537	Euro	Black	X Rock Guard	6.49"	4.20"	100	8.33A
VX-8010C	4000445	Euro	Chrome	X Rock Guard	7.00"	5.66"	100	8.33A



6.7" VX-6510 Shown

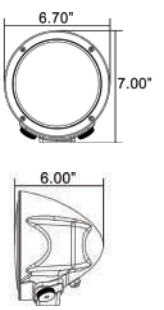


**6.7" HALOGEN**

**KEY FEATURES**

- Oversized Glass Bulb With Heavy Duty Filament
- Euro Beam Model E-Mark Approved
- Upgradable to HID



6" VX-6010C Shown

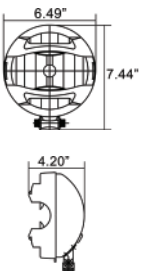

**6" HALOGEN**

**KEY FEATURES**

- Superwhite Bulb for Improved Performance
- Adjustable Single Stainless Stud Mount
- Wiring Harness Included
- Sold As Pair






XIL-7RD Shown  
Sold Individually

**LED HEADLIGHT REPLACEMENT**


**EXTENDED WARRANTY**

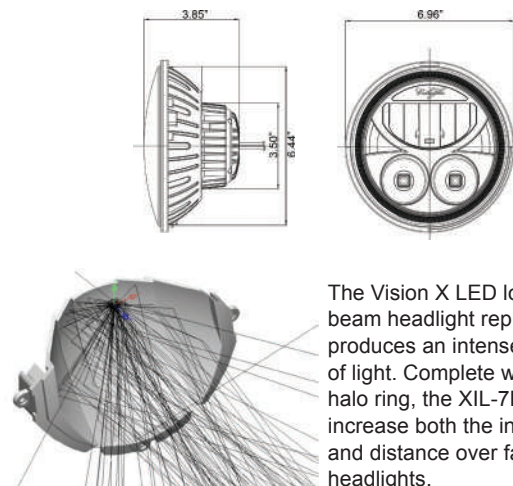

The Vision X LED low/high beam headlight replacement produces an intense blanket of light. Complete with a LED halo ring, the XIL-7RD will increase both the intensity and distance over factory headlights.

**HALOGEN HEADLIGHT REPLACEMENT**

**STANDARD WARRANTY**

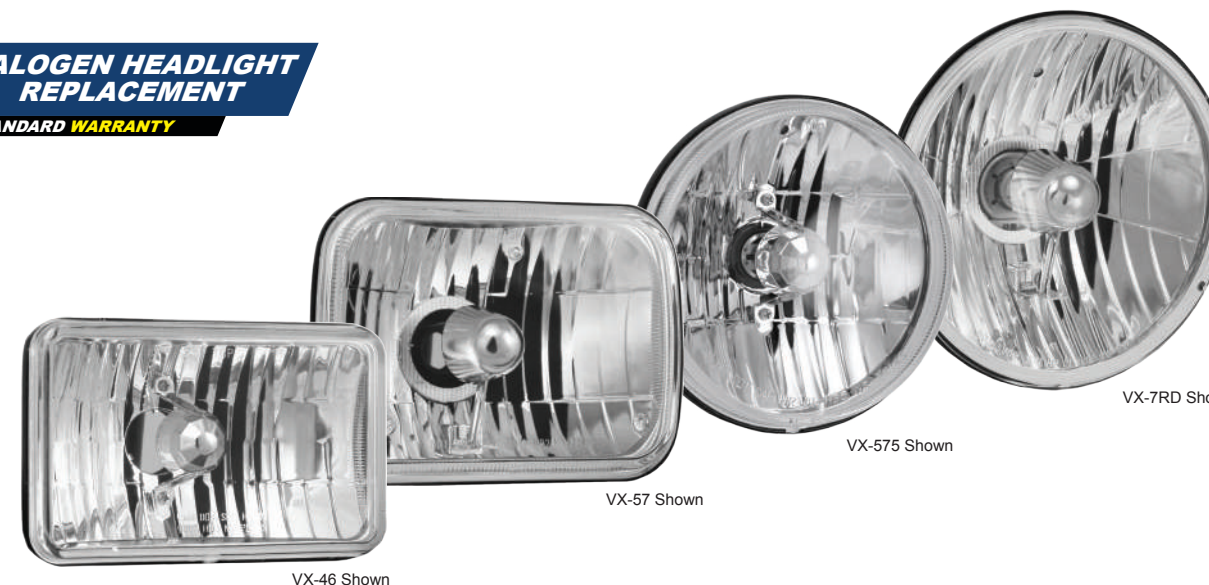

VX-46 Shown

VX-57 Shown

VX-575 Shown

VX-7RD Shown

**LED SEALED BEAMS**

**KEY FEATURES**

- Fits on Jeeps, Classic Cars and Motorcycles
- Multiple Wiring Connectors Available
- Polycarbonate Lens for Durability
- DOT Approved Lighting Fixture
- Halo LED Ring




**HALOGEN SEALED BEAMS**

**KEY FEATURES**

- Borosilicate Hardened Glass Lens for Durability
- Fits on Jeeps, Classic Cars and Motorcycles
- Plug-and-Play Bulbs Sold Separately
- DOT Approved Lighting Fixture

**LED COMPARISON**

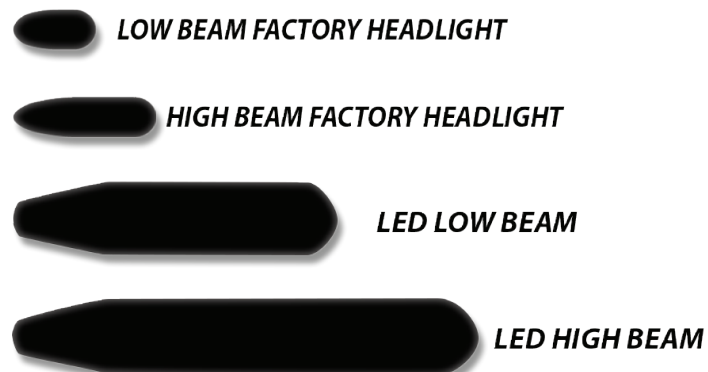

**HALOGEN BULBS**



**D Series Bulbs**

D Series DOT approved headlight bulbs from Vision X Lighting shine brighter, last longer and improve driver visibility. With simple plug and play integration, the VX-D9007 and VX-DH4 bulbs allow Vision X sealed beams to shine their brightest.

**CHECK OUT MORE ON THE D SERIES ON PAGE 30**



**LIGHT MODELS**

ITEM #	PART #	# OF LIGHTS	BULB TYPE	OEM CROSS REFERENCE	RAW LUMENS (LOW BEAM)	RAW LUMENS (HIGH BEAM)	WEIGHT	APPROVAL
XIL-7RD	9891217	1	Low: 13 Watt LED High: 2x 10 Watt LEDs	H6017 H6024	1,050 lm	1,720 lm	3.10 lb	DOT
XIL-7RDKIT	9891224	2	Low: 13 Watt LED High: 2x 10 Watt LEDs	H6017 H6024	2,100 lm	2,440 lm	6.20 lb	DOT

**LIGHT MODELS**

ITEM #	PART #	BULB TYPE	OEM CROSS REFERENCE	DIMENSIONS	WEIGHT	APPROVAL
VX-46*	4004016	VX-D9007	H4651/H4656	4.00" x 6.00" x 4.25"	2.00 lb	DOT
VX-57*	4004023	VX-DH4	H6054	5.00" x 7.00" x 4.50"	3.40 lb	DOT
VX-575*	4004030	VX-D9007	H5001/H5006	5.75" x 5.75" x 3.13"	1.50 lb	DOT
VX-7RD*	4004047	VX-DH4	H6017/H6024	7.00" x 7.00" x 4.00"	3.10 lb	DOT

\* Lights Sold In Pairs



**HALOGEN HEADLIGHT BULBS**  
 STANDARD WARRANTY

**HEADLIGHT BULBS**


**KEY FEATURES**

- Superwhite Beam Creates Natural White Light
- Increase Brightness 30% Over Factory Bulbs
- Better Depth Perception & Less Eye Fatigue
- 25% Further Distance Over Factory Bulbs
- Plug-and-Play Bulbs Into Factory Plug




**BULB MODELS**

ITEM #	PART #	WATTS	COLOR TEMPERATURE	APPROVAL
VX-D9004	4001527	45/65 Watt	4300K	DOT, E Mark
VX-D9005	4001534	65 Watt	4300K	DOT, E Mark
VX-D9006	4001558	55 Watt	4300K	DOT, E Mark
VX-D9007	4001572	55/65 Watt	4300K	DOT, E Mark
VX-DH1	4001589	55 Watt	4300K	DOT, E Mark
VX-DH3	4001596	66 Watt	4300K	DOT, E Mark
VX-DH4	4001602	55/60 Watt	4300K	DOT, E Mark
VX-DH7	4001619	55 Watt	4300K	DOT, E Mark
VX-DH10	4001633	42 Watt	4300K	DOT, E Mark
VX-DH11	4001657	55 Watt	4300K	DOT, E Mark
VX-DH13	4001664	55/60 Watt	4300K	DOT, E Mark

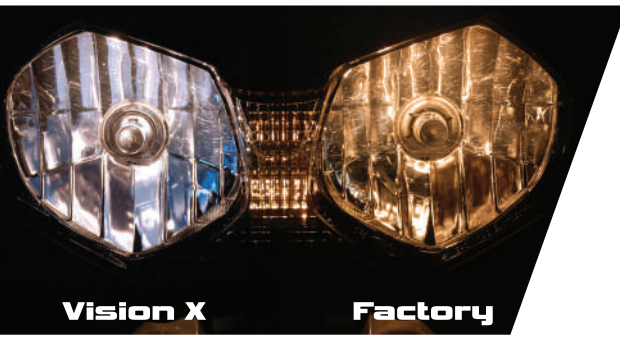

**D PREMIUM SERIES**

- |   |  |  |   |  |  |
|---|--|--|---|--|--|
| <b>VX-D9004</b>                                     | <b>VX-D9005</b>                                    | <b>VX-D9006</b>                                    | <b>VX-D9007</b>                                     | <b>VX-DH1</b>                                      | <b>VX-DH3</b>                                      |
| • Dual Filament<br>• Headlight Bulb<br>• 45/65 Watt | • Single Filament<br>• Headlight Bulb<br>• 65 Watt | • Single Filament<br>• Fog Light Bulb<br>• 55 Watt | • Dual Filament<br>• Headlight Bulb<br>• 55/65 Watt | • Single Filament<br>• Headlight Bulb<br>• 55 Watt | • Single Filament<br>• Headlight Bulb<br>• 66 Watt |

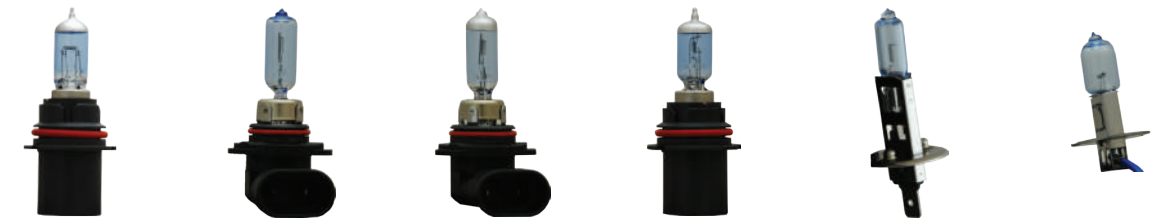

- |   |  |  |  |   |
|---|--|--|--|---|
| <b>VX-DH4</b>                                       | <b>VX-DH7</b>                                      | <b>VX-DH10</b>                                     | <b>VX-DH11</b>                                     | <b>VX-DH13</b>                                      |
| • Dual Filament<br>• Headlight Bulb<br>• 55/60 Watt | • Single Filament<br>• Headlight Bulb<br>• 55 Watt | • Single Filament<br>• Headlight Bulb<br>• 42 Watt | • Single Filament<br>• Headlight Bulb<br>• 55 Watt | • Dual Filament<br>• Headlight Bulb<br>• 55/60 Watt |



**FOUL WEATHER AND FOG LAMPS**  
 STANDARD WARRANTY



VX-2 Shown

**VX-2 FOG LIGHT**

**KEY FEATURES**

- 5" x 2" Foul Weather Lamp
- Die-Cast Aluminum Housing
- Wiring Harness Included
- Sold As Pair



VX-L3 Shown

**VX-L3 FOG LIGHT**

**KEY FEATURES**

- 3" Round Foul Weather Lamp
- Die-Cast Aluminum Housing
- Wiring Harness Included
- Sold As Pair



VX-F55 Shown

**VX-F55 FOG LIGHT**

**KEY FEATURES**

- 3.5" Round Foul Weather Lamp
- Die-Cast Aluminum Housing
- Wiring Harness Included
- Sold As Pair



VX-8 Shown

**VX-8 FOG LIGHT**

**KEY FEATURES**

- 4" x 2" Foul Weather Lamp
- Die-Cast Aluminum Housing
- Wiring Harness Included
- Sold As Pair

**LIGHT MODELS**

ITEM #	PART #	BEAM COLOR	DIMENSIONS	INPUT VOLTAGE	WEIGHT	WATTS	AMP DRAW
VX-2	4000117	Superwhite	5.00" x 2.00" x 3.43"	12V DC	1.50 lb	55	4.58A
VX-2ION	4000124	Ion	5.00" x 2.00" x 3.43"	12V DC	1.50 lb	55	4.58A
VX-L3	4000544	Superwhite	4.00" x 4.00" x 2.37"	12V DC	2.40 lb	55	4.58A
VX-F55	4000049	Superwhite	3.43" x 3.46" x 2.72"	12V DC	2.20 lb	55	4.58A
VX-8	4000179	Superwhite	4.10" x 1.80" x 3.40"	12V DC	1.30 lb	55	4.58A



**LED ROCK LIGHT KIT**

STANDARD WARRANTY



HIL-STB Shown

**TANTRUM LED KIT**

**KEY FEATURES**

- Multi-Speed Scanning and Flash Control
- Weatherproof Housing for All Conditions
- Cigarette Lighter Adapter Included
- No Ballasts or Bulbs to Break
- Wireless Remote



**COMPLETE CONTROL**



**Programmable Remote**  
 Control the Tantrum Kit from inside or outside of any vehicle with the easily programmable remote with varied setting controls.

**Multiple Colors Available**

Single Color and Multicolor Kits are available for all applications. The Multicolor Kit is programmable into different color and strobe patterns.




**LIGHT MODELS**

ITEM #	PART #	COLOR	EACH KIT INCLUDES	INPUT VOLTS	POD DIAMETER	AMP DRAW
HIL-STA	4005662	Amber	8 LED Pods Master Controller Wireless Remote Cigarette Lighter Adapter Mounting Hardware	12V DC	1.25"	0.67A
HIL-STB	4005372	Blue				
HIL-STG	4005396	Green				
HIL-STM	4005679	RGB				
HIL-STR	4005389	Red				
HIL-STW	4005419	White				

**STRIP LED LIGHTING**

STANDARD WARRANTY

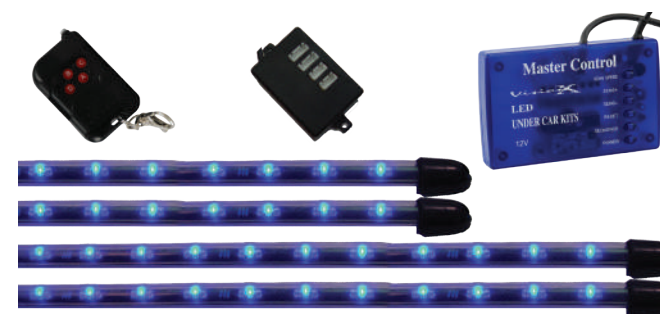

HIL-UBLUE Shown

**LIGHT MODELS**

ITEM #	PART #	COLOR	INCLUDES	INPUT VOLTS
HIL-UBLUE	4005020	Blue	(2) 3' Bars, (2) 4' Bars Master Controller Wireless Remote Cigarette Lighter Adapter Mounting Hardware	12V DC
HIL-UMULTI	4005013	RGB		
HIL-URED	4005037	Red		
HIL-UWHITE	4005624	White		

**UNIVERSAL LED LIGHT**

**KEY FEATURES**

- Sleek Design Fits Multiple Applications
- Simple 2 Wire Install
- Die-Cast Aluminum



XIL-ST12 Shown

**LIGHT MODELS**

ITEM #	PART #	MODE	LENGTH	HEIGHT	DEPTH	RAW LUMENS	WEIGHT	WATTS	AMP DRAW
XIL-ST7.5	9167626	Touch	7.4"	0.92"	0.59"	141 lm	0.1 lb	2	0.16A
XIL-ST12	9141701	Touch	11.9"	0.92"	0.59"	328 lm	0.2 lb	4.2	0.35A
XIL-SL7.5	9167534	Standard	7.4"	0.92"	0.59"	141 lm	0.1 lb	2	0.16A
XIL-SL12	9141794	Standard	11.9"	0.92"	0.59"	328 lm	0.2 lb	4.2	0.35A

**FLEX MOTION UNDERCAR**

**KEY FEATURES**

- Built-In Reflector Eliminates Spots
- For Use On Interior and Exterior
- No Glass Components to Break
- Wireless Remote

**COMPLETE CONTROL**



**Programmable Remote**  
 Control the Undercar Kit from inside or outside of any vehicle with the easily programmable remote with varied setting controls.







### LED PRO POD

#### KEY FEATURES

- Weatherproof Die Cast Aluminum Housing
- Impact Resistant Polycarbonate Lens
- 10' Cord With Simple 2 Wire Install

#### LIGHT MODELS

ITEM #	PART #	LED COLOR	RAW LUMENS	POD DIAMETER	INPUT VOLTAGE	WEIGHT	AMP DRAW
XIL-PDA	9136219	Amber	140 lm	1.76"	9-32V DC	0.20 lb	0.17A
XIL-PDB	9136301	Blue	140 lm	1.76"	9-32V DC	0.20 lb	0.17A
XIL-PDG	9136394	Green	140 lm	1.76"	9-32V DC	0.20 lb	0.17A
XIL-PDR	9136486	Red	140 lm	1.76"	9-32V DC	0.20 lb	0.17A
XIL-PDW	9136127	White	140 lm	1.76"	9-32V DC	0.20 lb	0.17A



XIL-PDW Shown



### LED POD

#### KEY FEATURES

- Weatherproof Housing For All Conditions
- 10' Cord With Simple 2 Wire Installation
- Impact Resistant Acrylic Lens

#### LIGHT MODELS

ITEM #	PART #	LED COLOR	RAW LUMENS	POD DIAMETER	INPUT VOLTAGE	WEIGHT	AMP DRAW
HIL-DA	4004078	Amber	1.25"	12V DC	0.30 lb	0.08A	0.17A
HIL-DB	4004139	Blue	1.25"	12V DC	0.30 lb	0.08A	0.17A
HIL-DG	4004146	Green	1.25"	12V DC	0.30 lb	0.08A	0.17A
HIL-DR	4004061	Red	1.25"	12V DC	0.30 lb	0.08A	0.17A
HIL-DW	4004054	White	1.25"	12V DC	0.30 lb	0.08A	0.17A



HIL-DW Shown



### BILLET POD MOUNTS

#### KEY FEATURES

- Use For Dome Light Or Indicator Lights
- Great For Roll Cages
- Easy Installation



HIL-DL3W Shown



HIL-DLFW Shown

#### BILLET MODELS

1 POD TUBE MOUNT			1 POD FLUSH MOUNT			3 POD TUBE MOUNT			3 POD FLUSH MOUNT		
ITEM #	PART #	LED COLOR	ITEM #	PART #	LED COLOR	ITEM #	PART #	LED COLOR	ITEM #	PART #	LED COLOR
HIL-DLA	4004849	Amber	HIL-DLFA	4004955	Amber	HIL-DL3A	4004788	Amber	HIL-DLF3A	4004894	Amber
HIL-DLB	4004856	Blue	HIL-DLFB	4004962	Blue	HIL-DL3B	4004795	Blue	HIL-DLF3B	4004900	Blue
HIL-DLG	4004863	Green	HIL-DLFG	4004979	Green	HIL-DL3G	4004801	Green	HIL-DLF3G	4004917	Green
HIL-DLR	4004887	Red	HIL-DLFR	4004993	Red	HIL-DL3R	4004825	Red	HIL-DLF3R	4004931	Red
HIL-DLW	4005839	White	HIL-DLFW	4005006	White	HIL-DL3W	4004832	White	HIL-DLF3W	4004948	White

### LED FLOOD LIGHT

#### KEY FEATURES

- Low Power Consumption At Only 0.5 Amps
- Flood Light For Any Use With 120° Beam
- Colored LEDs Available
- 32 Wide Angle LEDs



XIL-UF32 Shown

#### LIGHT MODELS

ITEM #	PART #	LED COLOR	RAW LUMENS	INPUT VOLTS	WEIGHT	AMP DRAW
XIL-UF32	4001824	White	500 lm	12-32V DC	0.41 lb	0.5 A
XIL-UF32A	9119298	Amber	500 lm	12-32V DC	0.41 lb	0.5 A
XIL-UF32B	9121185	Blue	500 lm	12-32V DC	0.41 lb	0.5 A
XIL-UF32G	9121277	Green	500 lm	12-32V DC	0.41 lb	0.5 A
XIL-UF32R	9121369	Red	500 lm	12-32V DC	0.41 lb	0.5 A

### LED BUGGY WHIP LIGHT

#### KEY FEATURES

- Integrated BA15S Mount & Power Base
- Built To Withstand Harsh Conditions
- 30,000 Hour Lifespan
- Polycarbonate Lens



CXA-BA15SW Shown


#### LIGHT MODELS

ITEM #	PART #	LED COLOR	HEIGHT	DIAMETER	RAW LUMENS	WEIGHT	AMP DRAW
CXA-BA15SA	9130279	Amber	3.49"	1.00"	150 lm	0.05 lb	0.13A
CXA-BA15SB	9130453	Blue	3.49"	1.00"	150 lm	0.05 lb	0.13A
CXA-BA15SG	9130811	Green	3.49"	1.00"	150 lm	0.05 lb	0.13A
CXA-BA15SR	9130545	Red	3.49"	1.00"	150 lm	0.05 lb	0.13A
CXA-BA15SW	9130637	White	3.49"	1.00"	150 lm	0.05 lb	0.13A

### TRUCK BED LED KIT

#### KEY FEATURES

- Sleek Design Fits Under Bed Rails or In Tool Boxes
- Wire To Courtesy Lights For Easy Operation
- Easy To Bend Fitting Any Contour
- No Glass Components To Break

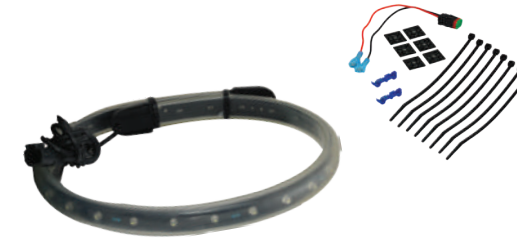

HIL-TRUCK3W Shown

#### LIGHT MODELS

ITEM #	PART #	LENGTH	INCLUDES	INPUT VOLTAGE
HIL-TRUCK3W	4008885	3.00'	6 Mounting Taps 8 Zip Ties	12V DC
HIL-TRUCK4W	4008892	4.00'	2 Power Taps 1 Power Connector 1 LED Light	





XIL-LICENSEPLPX910 Shown

**EASY AUTOMOTIVE LIGHT SOURCE**

STANDARD WARRANTY

**TOW HITCH MOUNT FOR LED PODS**

STANDARD WARRANTY



XIL-SRECEIVER Shown  
 Lights Not Included



**LICENSE PLATE MOUNT**

**KEY FEATURES**

- Mount Any LED Bar Up To 20" In Length
- Durable Powder Coated Steel Bracket
- Easily Installs Behind Licence Plate
- No Drill Installation

**RECEIVER MOUNT**

**KEY FEATURES**

- Light Can Be Adjusted For Precise Beam Placement
- Universal 2 Bolt Mount For Class 1 or 2 Hitches
- Attaches To Standard Receiver Hitches
- Machined 6061 Aluminum



**MOUNT MODELS**

ITEM #	PART #	INCLUDES	RAW LUMENS	WEIGHT	AMP DRAW
XIL-LICENSEP	4000308	Bracket*	-	3.35 lb	-
XIL-LICENSEPL910	4008557	Brackets, XIL-LP910, Wiring Harness	2,052 lm	6.19 lb	2.25A
XIL-LICENSEPLPX910	9887012	Bracket, XIL-LPX910, Wiring Harness	4,437 lm	6.19 lb	3.75A

\* Lights Sold Separately

**MOUNT MODELS**

ITEM #	PART #	COLOR	WEIGHT	FITS
XIL-SRECEIVER*	4000322	Black	2.10 lb	Class 1 & 2

\* Lights Sold Separately



**CHECK OUT MORE ON THE SOLO LED ON PAGE 14-15**



XIL-B175 Shown



XIL-PEMC Shown

**TUBE FRAME MOUNTS**


**KEY FEATURES**

- Machined Billet 6061 Aluminum
- Includes All Mounting Hardware
- Laser Engraved Vision X Logo
- Sold In Pairs

**END CAP MOUNTS**

**KEY FEATURES**

- End Cap Mounting for LED Light Bars
- Sold In Pairs

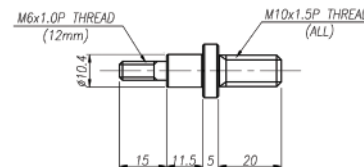

**MOUNT MODELS**

ITEM #	PART #	COLOR	FITS
XIL-B075	4006584	Black Anodized	0.75" Tubing
XIL-B100	4006591	Black Anodized	1.00" Tubing
XIL-B125	4006577	Black Anodized	1.25" Tubing
XIL-B150	4006522	Black Anodized	1.50" Tubing
XIL-B168	4006560	Black Anodized	1.6875" Tubing
XIL-B175	4006539	Black Anodized	1.75" Tubing
XIL-B200	4006546	Black Anodized	2.00" Tubing

**MOUNT MODELS**

ITEM #	PART #	FITS	THREAD
XIL-LPECM	9888811	Xmitter Low Profile	M10x1.5P 20mm
XIL-PECM	9889191	Xmitter Prime/Evo Prime	M10x1.5P 20mm
XIL-ECM	9888781	Xmitter	M10x1.5P 20mm

**RECHARGEABLE POWER SOURCE**

STANDARD WARRANTY



XPC-B22 Shown



XPC-B30 Shown



XPC-B65 Shown

**BATTERY PACKS**

**KEY FEATURES**

- Portable Power Packs For Universal Applications
- Weatherproof Deutsch Connector
- Rechargeable



**BATTERY MODELS**

ITEM #	PART #	CAPACITY	MAX LOAD	CHARGE TIME	VOLTAGE	WEIGHT	SWITCH	1 SOLO RUN TIME
XPC-B22	4009080	2.2Ah	5A	4 Hours	14.8V DC	1.15 lb	On Body	3 Hours
XPC-B30	9130095	3.1Ah	5A	3 Hours	14.8V DC	1.15 lb	On Body	5 Hours
XPC-B65	4009097	6.5Ah	8A	4 Hours	11.1V DC	1.00 lb	On Cord	6 Hours
XPC-B86	4003399	8.6Ah	10A	4.5 Hours	14.8V DC	2.00 lb	On Body	13 Hours





**POLYCARBONATE LIGHT COVERS**  
 STANDARD WARRANTY

6.7" Cannon Covers Shown



**LIGHT COVERS**

**KEY FEATURES**

- Colored Covers For Environmental Conditions
- Polycarbonate Covers Provide Protection
- Available On Select Bars And Lights

**COVERS EXPLAINED**

<p><b>RED</b> Better visibility in heavy dust or air particulate by reducing the light temperature and reducing glare back to the driver.</p> 	<p><b>YELLOW</b> Effectively penetrate fog by reducing the blue light. Moisture in the air reflects blue light waves back at the driver hindering visibility.</p> 	<p><b>BLUE</b> Increase lighting distance when used on snow-covered roads by reflecting the blue light off the snow to extend output.</p> 	<p><b>CLEAR</b> Unbreakable, dust resistant protection to protect the light from debris and particulate.</p> 
<p><b>EURO</b> Flat, horizontal beam designed to light peripherals while maintaining distance.</p> 	<p><b>FLOOD</b> Low-speed, vertical trail flood beam lights the road to the tree tops.</p> 	<p><b>WIDE FLOOD</b> Low-speed, horizontal flood beam gives wide blanket of light.</p> 	<p><b>ELLIPTICAL</b> Maintains distance and spread while limiting periphery lighting for driving with oncoming traffic.</p> 
<p><b>SPOT</b> Protection from debris and particulate.</p> 	<p><b>BLACK OUT</b> Street legal, black out protection.</p> 	<p><b>GLOW-IN-THE-DARK</b> Each 6.7" and 8.7" Cover has a glow-in-the-dark X outline.</p> 	



**COVER MODELS**

**Optimus Round**

ITEM #	PART #	COLOR	BEAM
PCV-OPR1	9889528	Clear	Spot
PCV-OPR1B	9889559	Blue	Spot
PCV-OPR1Y	9889740	Yellow	Spot
PCV-OPR1R	9889719	Red	Spot
PCV-OPR1EU	9889535	Clear	Euro
PCV-OPR1BEU	9889566	Blue	Euro
PCV-OPR1YEU	9889757	Yellow	Euro
PCV-OPR1REU	9889726	Red	Euro
PCV-OPR1FL	9889542	Clear	Flood
PCV-OPR1BFL	9889573	Blue	Flood
PCV-OPR1YFL	9889764	Yellow	Flood
PCV-OPR1RFL	9889733	Red	Flood
PCV-OPR1WF	9890944	Clear	Wide Flood
PCV-OPR1BWF	9890906	Blue	Wide Flood
PCV-OPR1YWF	9890968	Yellow	Wide Flood
PCV-OPR1RWF	9890937	Red	Wide Flood
PCV-OPR1EL	9890913	Clear	Elliptical
PCV-OPR1BEL	9890890	Blue	Elliptical
PCV-OPR1YEL	9890951	Yellow	Elliptical
PCV-OPR1REL	9890920	Red	Elliptical
PCV-OPR1BL	9889580	Black	Protective



**4.5" Cannon**

ITEM #	PART #	COLOR	BEAM
PCV-CP1	9151151	Clear	Spot
PCV-CP1B	9157184	Blue	Spot
PCV-CP1Y	9157726	Yellow	Spot
PCV-CP1R	9162492	Red	Spot
PCV-CP1EU	9151243	Clear	Euro
PCV-CP1BEU	9157276	Blue	Euro
PCV-CP1YEU	9157900	Yellow	Euro
PCV-CP1REU	9157542	Red	Euro
PCV-CP1FL	9151335	Clear	Flood
PCV-CP1BFL	9157368	Blue	Flood
PCV-CP1YFL	9157900	Yellow	Flood
PCV-CP1RFL	9157634	Red	Flood
PCV-CP1WF	9890562	Clear	Wide Flood
PCV-CP1BWF	9890654	Blue	Wide Flood
PCV-CP1YWF	9890586	Yellow	Wide Flood
PCV-CP1RWF	9890883	Red	Wide Flood
PCV-CP1EL	9890661	Clear	Elliptical
PCV-CP1BEL	9890647	Blue	Elliptical
PCV-CP1YEL	9890579	Yellow	Elliptical
PCV-CP1REL	9890678	Red	Elliptical
PCV-CP1BL	9157450	Black	Protective

**6.7" Cannon, HID-6500, Transporter**

ITEM #	PART #	COLOR	BEAM
PCV-6500	4003248	Clear	Spot
PCV-6500B	4003569	Blue	Spot
PCV-6500Y	4002784	Yellow	Spot
PCV-6500R	4004689	Red	Spot
PCV-6500EU	9888453	Clear	Euro
PCV-6500BEU	9888460	Blue	Euro
PCV-6500YEU	9888484	Yellow	Euro
PCV-6500REU	9888477	Red	Euro
PCV-6500FL	9888491	Clear	Flood
PCV-6500BFL	9888507	Blue	Flood
PCV-6500YFL	9888521	Yellow	Flood
PCV-6500RFL	9888514	Red	Flood
PCV-6500WF	9889771	Clear	Wide Flood
PCV-6500BWF	9889788	Blue	Wide Flood
PCV-6500YWF	9889801	Yellow	Wide Flood
PCV-6500RWF	9889795	Red	Wide Flood
PCV-6500EL	9890616	Clear	Elliptical
PCV-6500BEL	9890609	Blue	Elliptical
PCV-6500YEL	9890630	Yellow	Elliptical
PCV-6500REL	9890623	Red	Elliptical
PCV-6500BL	9160245	Black	Protective

**8.7" Cannon**

ITEM #	PART #	COLOR	BEAM
PCV-8500	4003255	Clear	Spot
PCV-8500B	4003583	Blue	Spot
PCV-8500Y	4002791	Yellow	Spot
PCV-8500R	4003576	Red	Spot
PCV-8500EU	9890128	Clear	Euro
PCV-8500BEU	9890098	Blue	Euro
PCV-8500YEU	9890470	Yellow	Euro
PCV-8500REU	9890432	Red	Euro
PCV-8500FL	9890135	Clear	Flood
PCV-8500BFL	9890104	Blue	Flood
PCV-8500YFL	9890487	Yellow	Flood
PCV-8500RFL	9890449	Red	Flood
PCV-8500WF	9890463	Clear	Wide Flood
PCV-8500BWF	9890111	Blue	Wide Flood
PCV-8500YWF	9890142	Yellow	Wide Flood
PCV-8500RWF	9890456	Red	Wide Flood
PCV-8500EL	9890081	Clear	Elliptical
PCV-8500BEL	9890869	Blue	Elliptical
PCV-8500YEL	9890159	Yellow	Elliptical
PCV-8500REL	9890425	Red	Elliptical
PCV-8500BL	9890876	Black	Protective

**Low Profile LED Bar**

ITEM #	PART #	FITS	COLOR	BEAM
PCV-LP3BL	9155296	XIL-LPX3*	Black	Protective
PCV-LP6BL	9155388	XIL-LPX6*	Black	Protective
PCV-LP9BL	9135946	XIL-LPX9	Black	Protective
PCV-LP15BL	9155470	XIL-LPX15*	Black	Protective
PCV-LP18BL	9135762	XIL-LPX18*	Black	Protective
PCV-LP24BL	9155654	XIL-LPX24*	Black	Protective
PCV-LP33BL	9155838	XIL-LPX33*	Black	Protective
PCV-LP36BL	9155920	XIL-LPX36*	Black	Protective
PCV-LP3Y	9165103	XIL-LPX3*	Yellow	Spot
PCV-LP6Y	9165196	XIL-LPX6*	Yellow	Spot
PCV-LP9Y	9136035	XIL-LPX9*	Yellow	Spot
PCV-LP15Y	9164564	XIL-LPX15*	Yellow	Spot
PCV-LP18Y	9135854	XIL-LPX18*	Yellow	Spot
PCV-LP24Y	9164748	XIL-LPX24*	Yellow	Spot
PCV-LP33Y	9164922	XIL-LPX33*	Yellow	Spot
PCV-LP36Y	9165011	XIL-LPX36*	Yellow	Spot

\* Compatible with all beam patterns

**Prime Xtreme LED Bar**

ITEM #	PART #	FITS	COLOR	BEAM
PCV-P6BL	9156019	XIL-PX6*	Black	Protective
PCV-P12BL	9156101	XIL-PX12*	Black	Protective
PCV-P18BL	9156194	XIL-PX18*	Black	Protective
PCV-P30BL	9156378	XIL-PX30*	Black	Protective
PCV-P36BL	9156460	XIL-PX36*	Black	Protective
PCV-P54BL	9156736	XIL-PX54*	Black	Protective
PCV-P72BL	9157009	XIL-PX72*	Black	Protective
PCV-P90BL	9888064	XIL-PX90*	Black	Protective
PCV-P6Y	9166186	XIL-PX6*	Yellow	Spot
PCV-P12Y	9165288	XIL-PX12*	Yellow	Spot
PCV-P18Y	9165370	XIL-PX18*	Yellow	Spot
PCV-P30Y	9165554	XIL-PX30*	Yellow	Spot
PCV-P36Y	9165646	XIL-PX36*	Yellow	Spot
PCV-P54Y	9165912	XIL-PX54*	Yellow	Spot
PCV-P72Y	9166278	XIL-PX72*	Yellow	Spot
PCV-P90Y	9887883	XIL-PX90*	Yellow	Spot

\* Compatible with all beam patterns