




**2015  
CATALOG**

**Vision**  
Global Lighting Systems



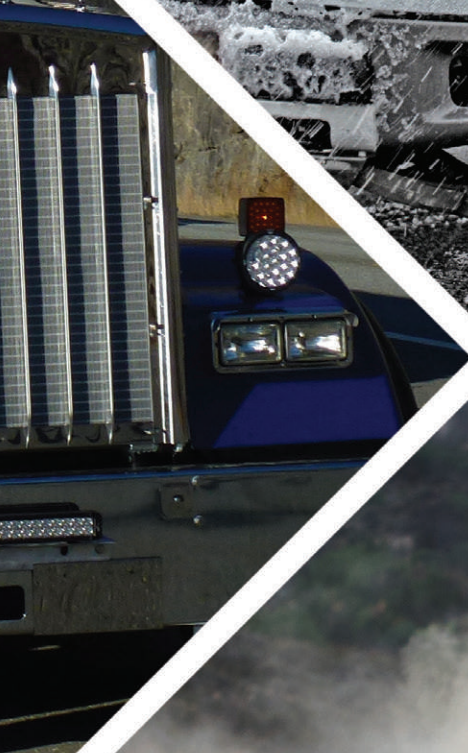



# VISION X LIGHTING

TESTED AND PROVEN IN THE TOUGHEST CONDITIONS



## CONTENTS

### LED LIGHTS

Lights	18
Pods	30
Light Bars	38
Vehicle Specific	50
Heavy Duty	58
Specialty	72

### HID LIGHTS

Off Road Lights	82
Work Lights	86

### HALOGEN LIGHTS

Off Road Lights	92
Fog Lights	94
Work Lights	96
Headlight Bulbs	100

### ACCESSORIES

Accent Lights	104
Rock Pods	106
Light Covers	110
Adapters	112
Batteries	114



# VISION X LIGHTING

WHAT WE'RE MADE OF

## MISSION STATEMENT

*Design, Manufacture and Deliver  
the Ultimate Lighting Solution*

## WORLDWIDE FACILITIES

Vision X Lighting operates state-of-the-art facilities. Our factory has received multiple awards for environmental sustainability as well as certifications for meeting ISO standards. At Vision X we ensure that both the products we deliver and the workers who manufacture the products are safe and up to standard.




**VISION X USA - SEATTLE, USA**  
Global Sales and Marketing  
Worldwide Distribution  
Product Design  
Engineering



**VISION X ASIA - SEOUL, S. KOREA**  
Product Development  
Product Engineering  
Manufacturing  
Testing

## INC 5000 LIST

Over the past 2 years Vision X Lighting has been featured on the INC 5000's list of fastest growing businesses in America. For the 2nd year in a row, Vision X Lighting has also been ranked the 10th fastest growing manufacturer in America. Commitment to customer service, quality product manufacturing and innovative development have all contributed to this success. We are dedicated to maintaining the highest quality standards in engineering, manufacturing and testing to ensure delivery of the best possible products.

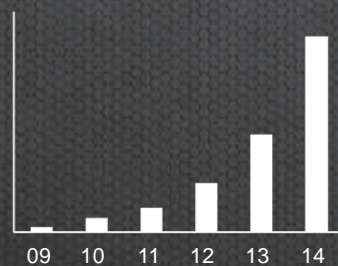

# VISION X LIGHTING

PRODUCT EVOLUTION

## PRODUCT INNOVATION

IMAGINING AND ENGINEERING "LIGHTING EVOLVED"



**1997**  
FOUL WEATHER  
LIGHTING

**2000**  
HID HEADLIGHT  
REPLACEMENTS

**2005**  
HID OFFROAD  
LIGHTS

**2008**  
XMITTER LED BAR  
LIGHTS

**2009**  
SOLSTICE SOLO  
LED POD

**2010**  
HEAVY DUTY LED  
SERIES

**2013**  
25 WATT SINGLE  
SOURCE LED

**2014**  
90 WATT SINGLE  
SOURCE LED



## INVENTING THE NEXT SOLUTION

Since 1997, Vision X has been providing the lighting solutions demanded by the market as well as innovating the next step for lighting. With the release of the HID series in late 2005, Vision X was the first to provide an HID internal ballast and starter to mass market, simplifying installation and reducing external components. Again in 2008 Vision X revolutionized lighting with the LED bar originally produced for NASA's Back to the Moon Mission. Since then, Vision X has continued innovation with the Solo Pod - which gives as many lumens as a headlight from a single 2" x 2" housing - and heavy duty LED lighting for use in mining, industrial and commercial applications. The newest addition to the Vision X product line, the LED Light Cannon, transforms a single LED into 1000 feet of usable light. At Vision X, we are constantly striving to live up to our company motto of "Lighting Evolved".

Vision X works with our customers around the world, our sponsorship partners and the world's leading LED manufacturers continuously to imagine new products for use in many applications. We strive to be the solution provider for any lighting need by continuously improving existing product and imagining new product.



# VISION X LIGHTING

NOT ACCEPTING ANYTHING BUT THE BEST

## QUALITY AS A PRIORITY

Our Customers Demand the Highest Quality.  
That's What We Deliver.

## PRODUCT TESTING

### Thermal Impact Rapid Temperature Change

Products are placed in a -40°C for 30 minutes, and then placed in a 80°C chamber for an additional 30 minutes. Products are then ran for 72 hours to ensure full operational status.

### Vibration 10GRMS Rating

Products are placed on the vibration shock table with a vibration range of 25.6G for 4 hours to test that they can withstand the rated vibration standard.

### Photometric Isolux Beam Pattern

Lights are tested in a the photometric machine to model the beam pattern and certify the overall light output.

### Ingress High Pressure IP69K

Products are sprayed from close distances with 80~100 BAR water pressure to verify the Ingress Protection rating, ensuring they are sealed properly.

### High Temperature & High Humidity Operational

Products are placed in a 60°C, 94% humidity chamber and left operational for 72 hours. Afterwards, products are inspected for moisture, water drops, damaged LEDs, flicking LEDs, and more.

### Long Term Durability

Products are then switched on and off 20,000 times repeatedly to ensure that they remain functional after all testing.

## HIGH LEVEL CERTIFICATIONS

Photo Biological  
Ensures that light output causes no harm to skin or eyes.

ROHS  
Ensures no use of restricted hazardous materials in products.

DOT  
US Department of Transportation certified for on road use.

E-mark  
European Regulatory certification for on highway use.

IEC  
62471

RoHS

DOT

E

IP Rating  
Ingress Protection rates protection against outside elements. First number is solids, second is liquids.

CE  
CE is a mandatory conformity mark for products in the European Economic Area.

UL  
UL Certification is recognized around the world as a way to ensure standards.

EMC  
EMC and EMI certifies that a product does not interfere with other electrical products. This includes CISPR 25 Certifications

IP-69K

CE

UL


emc

# VISION X LIGHTING

HOW WE DEVELOP A PRODUCT

## DEVELOPMENT PROCESS


After consulting with industry leaders, Vision X works to develop market-changing products to advance lighting technology forward. Our team of engineers is capable of transforming an idea to a prototype in just 60 days.

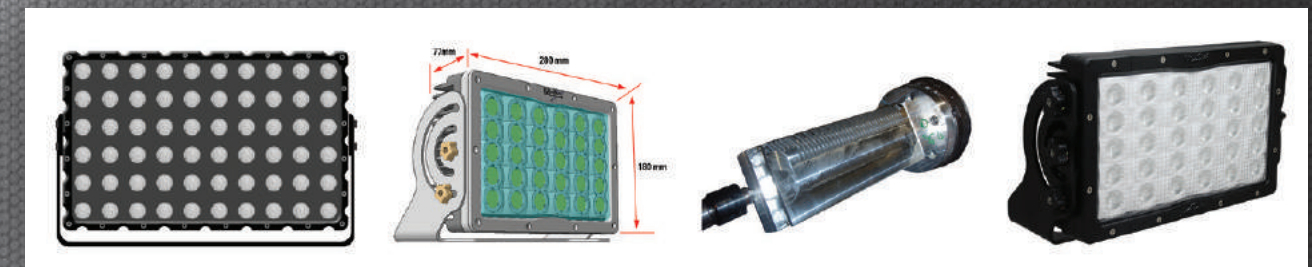

CONCEPT RENDERING PROTOTYPE PRODUCTION

## TRADEMARKS AND PATENTS

Vision X ensures the protection of our products by acquiring patents and trademarks worldwide. This gives us the ability to fight "knock-off" products worldwide so that our customers can be assured they are buying Vision X Genuine products.

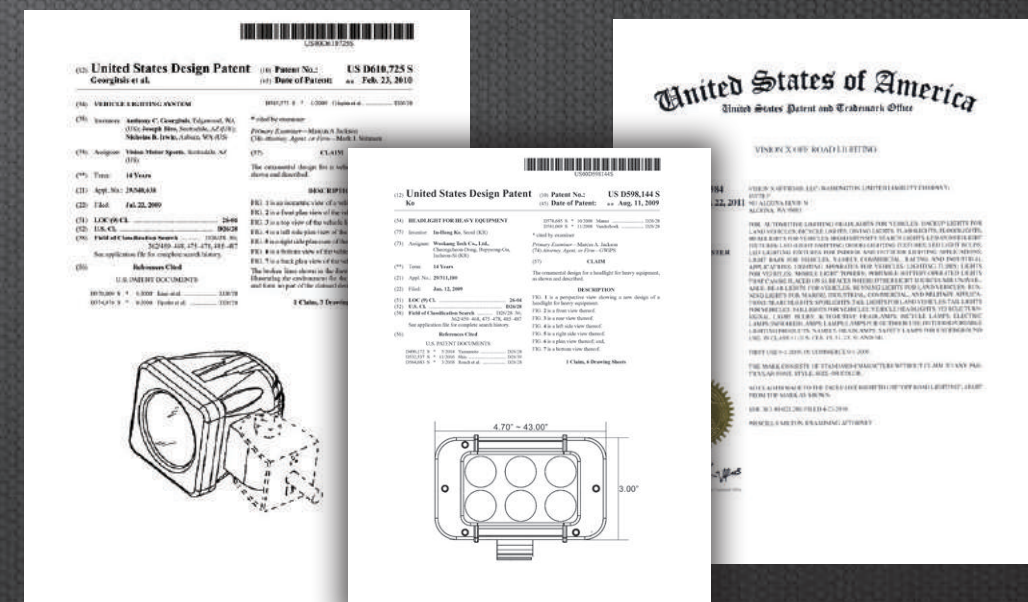



# LIGHTING EVOLVED



OFFROAD



TRANSPORT



OE



ATV / UTV



AUTOMOTIVE



MINING



STRUCTURAL



MARINE









# LED LIGHTING



## WHAT MAKES A VISION X LED?

### TOP BINNING

Not all LEDs are created equal. Each run of LEDs by the manufacturer is binned to classify the quality within that batch. Vision X uses only top-binned LEDs to ensure the highest quality.

### WEATHERPROOF DEUTSCH CONNECTORS

Each Vision X product features a weatherproof deutsch connector, ensuring the functionality of the light in harsh conditions. Vision X tests each batch of lights to make sure its resistant to weather.

### HIGH EFFICACY

Vision X products are engineered for the highest possible luminous efficacy - the ratio of lumens per watt.

### PULSE WIDTH MODULATION

When enabled, Pulse Width Modulation integrated circuitry flashes the LED faster than the human eye can see for reduced heat, prolonged LED life and dimming capabilities.

### ELECTRONIC THERMAL MANAGEMENT

Integrated Electronic Thermal Management automatically regulates heat levels by engaging ETM to prolong each LEDs lifespan to 50,000 hours.

### DIMMING CAPABILITY

Prime Drive includes dimming capability. Dimming works by engaging PWM to reduce power while maintaining steady output. Vision X offers push button and dial dimmer units.

## AVAILABLE LED SIZES

### 90 WATT LED

The new Light Cannon 8.7" housing features a new 90 Watt LED. Combined with IRIS Reflector Technology, this allows for 3,280 feet of usable light.

### 10 WATT LED

The benefits of the 10 watt LED are great intensity and bulk lighting. The 10 watt LED provides the greatest bulk lighting on the market.

### 50 WATT LED

The new Light Cannon 6.7" housing features a new 50 Watt LED. Combined with IRIS Reflector Technology, this allows unmatched distance and brightness from a single LED.

### 5 WATT LED

Utilizing the same footprint as the 3 watt LED, but at twice the output, the 5 watt LED combines the advantages of a tight LED footprint with the ultimate output.

### SMD LED

The Surface Mounted Diode (SMD) is used in the Shockwave fixture and UF32 to create an even, ultra-wide beam pattern for area lighting applications.

### 25 WATT

The 4.5" Light Cannon housing features a new 25 Watt LED. Combined with IRIS Reflector Technology, this allows 1,000 feet of usable light from a single LED.

### 3 WATT LED

The benefits of the 3 watt LED are great output and beam precision. The tight footprint allows for precision optical control.

## LED ITEM NUMBER SYSTEM

### LED CLASSES

CTL Commercial Truck Lighting  
MIL Mining Industrial Lighting  
XIL General LED  
XLS Incident Response Case  
XPI Xmitter Prime Iris  
XPR Xmitter Prime Iris R

### LED SERIES

CPZ Cannon Series  
EP Evo Prime  
EPX Explorer Prime Xtreme  
HPX Horizon Prime Xtreme  
LPX Xmitter Low Profile Xtreme  
MX Mini Solo  
OP Optimus Prime (Square)  
OPR Optimus Prime Round  
PMX PitMaster Xtreme  
PX Xmitter Prime Xtreme  
RXP Ripper Xtreme Prime  
S Solstice  
SP Solstice Prime  
SWD Shockwave Dual  
SWS Shockwave Single  
TPX Transporter Prime Xtreme  
UMX Utility Market Prime Xtreme

### BEAM PATTERN\*

10 10° Narrow  
20 20° Medium  
40 40° Wide  
60 60° Extra Wide  
90 90° Extreme Wide  
e3065 30° by 65° Elliptical

### IN SELECT MODELS

Original Xmitter  
0 Euro/Driving  
1 Flood

(Xtreme indicates 5 Watt LED)  
(Prime Indicates use of Prime Drive)





# LED LIGHTS

## POWERFUL OUTPUT STANDARD FORM FACTOR



### STANDARD FORM FACTOR

Replacing HID or Halogen fixtures with LED lights from Vision X will not alter the look and feel of the vehicle. Instead, all the benefit of LED, including 50,000 hour lifespan, low amperage draw and increased output are available in the standard form factors from HID and Halogen lighting. Vision X has created single source LED lighting for distance and multi-source LED lighting for beam spread and intensity ensuring a solution for any need.

### POWERFUL LEDS

With today's LED technology and innovative engineering, Vision X can now match and beat HID or Halogen lighting options. With lighting solutions using 3 watt all the way to 50 watt LEDs, Vision X has designed a product line that gives you every reason to move to LED lighting for off road, commercial and industrial use.

### IRIS REFLECTOR

Vision X has engineered the IRIS reflector technology to produce distances never before seen from a single source LED. Available inside the Cannon and Optimus Series Lights, the IRIS Reflector enables up to 3,280' of usable light on the Cannon 8.7" LED.

### PRIME DRIVE

Prime Drive enables enhanced reliability and output by utilizing more efficient circuitry and the use of electronic thermal management. Electronic Thermal Management works to prolong the life of the LED through Pulse Width Modulation (PWM). Prime Drive also gives you the capability to dim the LED using an external controller. PWM flashes the LED faster than the human eye can detect in order to reduce heat.

### STRENGTH AND DURABILITY

Featuring Die-Cast Aluminum housings, LED Lights from Vision X stand up to adverse environmental conditions. Engineered with a special sealing system combined with the strength of the aluminum housing, these Vision X LED Lights achieve an IP-68 rating, signifying that they are particulate (dust and road debris) proof, as well as water resistant up to 3 meters.



# UNMATCHED

**DISTANCE + VERSATILITY + VALUE**

When we released the 25 watt 4.5" LED Light Cannon, no one expected us to double the size shortly after being on the market for one year. Enter the 8.7" LED Light Cannon. This massive single source LED excels at long range distances, shining up to 3,280 feet of usable light all from a 90 watt Luminus Premium LED. With the addition of the 50 watt 6.7" Cannon, that boasts a respectable 2,500 feet of usable light, there's a Light Cannon option for everyone. With the available snap-on covers, you can easily turn any Cannon into 20 different lights.



**20 LIGHTS  
IN ONE!**



With Snap-On Covers





# LIGHT CANNON SERIES

Achieving the most distance on the market from a single source LED, the Light Cannon Series provides a powerful distance lighting solution with the advantages of LED. Vision X was able to combine powerful and innovative LED chips with the IRIS reflector technology to outshine and outlast.

### SINGLE SOURCE LED



Vision X LED Light Cannons create all of their light output from one single source LED. By using one LED, Cannons are able to produce a more focused beam pattern.

### IRIS REFLECTOR



Cannons are able to reach long distances because of the specially engineered IRIS Reflector technology that produces range never before seen from a single source LED.

### KITS AVAILABLE



Cannon Kits come with two lights and a wiring harness to easily set up the lights and get on the road, trail, dunes or anywhere else sooner.

### HYBRID ALUMINUM POLY CARBONATE HOUSING



Cannons were engineered to be lightweight and durable. Vision X was able to achieve this by combining Aluminum with Poly Carbonate to make a unique hybrid housing.

## POLYCARBONATE COVERS

MORE INFO  
Page 110

**SPOT**  
Protection from debris and particulate. Maintains regular beam pattern.

**EURO**  
Flat, horizontal beam designed to light peripherals while maintaining ultimate distance.

**ELLIPTICAL**  
Maintains distance and spread while limiting periphery lighting for driving with oncoming traffic.

**FLOOD**  
Low-speed, vertical trail flood beam lights the road to the tree tops.

**WIDE FLOOD**  
Increases lighting distance when used in snow conditions by reflecting the blue light off the snow.

**CLEAR**  
Unbreakable, dust resistant protection to protect the light from debris and particulate.

**RED**  
Reduces light temperature and glare back in order to enhance penetration in dust and air particulate.

**BLUE**  
Increases lighting distance when used in snow conditions by reflecting the blue light off the snow.

**YELLOW**  
Battles fog conditions by reducing the amount of blue light.

**BLACK OUT**  
Street legal, black out protection. Glow-in-the-dark at night time.



ITEM #: PCV-8500  
PART #: 4003255



ITEM #: PCV-8500EU  
PART #: 9890081



ITEM #: PCV-8500EL  
PART #: 9890081



ITEM #: PCV-8500FL  
PART #: 9890135



ITEM #: PCV-8500WF  
PART #: 9890463



ITEM #: PCV-8500R  
PART #: 4003576



ITEM #: PCV-8500REU  
PART #: 9890432



ITEM #: PCV-8500REL  
PART #: 9890425



ITEM #: PCV-8500RFL  
PART #: 9890449



ITEM #: PCV-8500RWF  
PART #: 9890456



ITEM #: PCV-8500B  
PART #: 4003583



ITEM #: PCV-8500BEU  
PART #: 9890098



ITEM #: PCV-8500BEL  
PART #: 9890869



ITEM #: PCV-8500BFL  
PART #: 9890104



ITEM #: PCV-8500BWF  
PART #: 9890111



ITEM #: PCV-8500Y  
PART #: 4002791



ITEM #: PCV-8500YEU  
PART #: 9890470




ITEM #: PCV-8500YEL  
PART #: 9890159



ITEM #: PCV-8500YFL  
PART #: 9890487



ITEM #: PCV-8500YWF  
PART #: 9890142



## CANNON 8.7"



ITEM #: CTL-CPZ810 Shown  
PART #: 9890852

90 WATT SINGLE SOURCE LED PRODUCES 3,280' OF USABLE LIGHT  
Lightweight Hybrid Housing | Single Bolt Mounting | Snap-On Covers Change Beam Pattern


BEAM PATTERNS  
10°

RAW LUMENS  
5,800 lm (ea)

KITS AVAILABLE  
Two Lights & Harness

WARRANTY  
Extended

MEASUREMENTS  
8.70" x 7.93" x 10.57"  
300mm x 300mm x 300mm  
10.36 lb / 4.7 kg



ITEM #	PART #	QTY	BEAM
CTL-CPZ810	9890852	EA	10°
CTL-CPZ810KIT	9890074	KIT	10°

\*Additional Technical Data On Page 28



## CANNON 6.7"



ITEM #: CTL-CPZ610 Shown  
PART #: 9888533

50 WATT SINGLE SOURCE LED PRODUCES 2,500' OF USABLE LIGHT  
Lightweight Hybrid Housing | Single Bolt Mounting | Snap-On Covers Change Beam Pattern


BEAM PATTERNS  
10°, 20°

RAW LUMENS  
3,200 lm (ea)

KITS AVAILABLE  
Two Lights & Harness

WARRANTY  
Extended

MEASUREMENTS  
6.70" x 6.30" x 8.82"  
170mm x 91.4mm x 224mm  
5.51 lb / 2.5 kg



ITEM #	PART #	QTY	BEAM
CTL-CPZ610	9888538	EA	10°
CTL-CPZ610KIT	9888545	KIT	10°
CTL-CPZ620	9891729	EA	20°
CTL-CPZ620KIT	9891743	KIT	20°

\*Additional Technical Data On Page 28

## CANNON 4.5"



ITEM #: CTL-CPZ110 Shown  
PART #: 9150970

25 WATT SINGLE SOURCE LED PRODUCES 1,000' OF USABLE LIGHT  
Lightweight Hybrid Housing | Single Bolt Mounting | Snap-On Covers Change Beam Pattern


BEAM PATTERNS  
10°

RAW LUMENS  
2,500 lm (ea)

KITS AVAILABLE  
Two Lights & Harness

WARRANTY  
Extended

MEASUREMENTS  
4.72" x 4.36" x 5.75"  
120mm x 110.7mm x 146mm  
2.02 lb / 920 g



ITEM #	PART #	QTY	BEAM
CTL-CPZ110	9150970	EA	10°
CTL-CPZ110KIT	9151069	KIT	10°

\*Additional Technical Data On Page 28



## TRANSPORTER SERIES

The Transporter series produces ultimate distance while maintaining a smooth and balanced beam pattern. Ideal for long-haul commercial vehicles, the Transporter series features an extruded 6061 aluminum housing. Attach a cover to change the beam patterns as well as colors, giving you the best light for any condition.

### ACCESSORIES



Easily adapt to any environment with the available polycarbonate covers which allow for changes in beam pattern and color with a snap.

### E-MARK APPROVAL



European Regulatory certification for on highway use within the EU available on the 9 LED Transporter Light with the 10° optic.

### TRANSPORTER IN ACTION



### TRANSPORTER 18



ITEM #: CTL-TPX1840 Shown  
PART #: 9111193


BEAM PATTERNS  
10°, 40°

RAW LUMENS  
9,504 lm (ea)

WATTAGE  
90W

WARRANTY  
Extended

MEASUREMENTS  
6.71" x 7.19" x 4.57"  
171mm x 182.5mm x 116mm  
6.17 lb / 2.8 kg



ITEM #	PART #	COLOR	BEAM
CTL-TPX1810	9111018	Black	10°
CTL-TPX1840	9111193	Black	40°

\*Additional Technical Data On Page 29

### TRANSPORTER 12



ITEM #: CTL-TPX1210 Shown  
PART #: 9110561


BEAM PATTERNS  
10°, 40°

RAW LUMENS  
6,336 lm (ea)

WATTAGE  
60W

WARRANTY  
Extended

MEASUREMENTS  
6.71" x 7.19" x 4.57"  
171mm x 182.5mm x 116mm  
5.95 lb / 2.7 kg



ITEM #	PART #	COLOR	BEAM
CTL-TPX1210	9110561	Black	10°
CTL-TPX1240	9110745	Black	40°

\*Additional Technical Data On Page 29

### TRANSPORTER 9



ITEM #: CTL-TPX910 Shown  
PART #: 9110110

BEAM PATTERNS  
10°, 40°

RAW LUMENS  
4,752 lm (ea)

WATTAGE  
45W

WARRANTY  
Extended

MEASUREMENTS  
6.71" x 7.19" x 4.57"  
171mm x 182.5mm x 116mm  
5.95 lb / 2.7 kg



ITEM #	PART #	COLOR	BEAM
CTL-TPX910	9110110	Black	10°
CTL-TPX940	9110295	Black	40°


\*Additional Technical Data On Page 29



## EXPLORER LIGHTING

The Explorer Lighting Series for truck and transport provides forward-projection lighting from a traditional form factor light. Available in both 9 and 11 LED configurations, this high-powered light is up to the challenge of area lighting or forward-projection for commercial and industrial vehicles.

### STANDARD FORM FACTOR



In commercial and trucking applications, the Explorer is a direct replacement of many HID and Halogen lights.

### E-MARK APPROVAL



European Regulatory certification for on highway use within the EU available on the 9 LED Explorer Light with the 10° optic.

### EXPLORER IN ACTION



### EXPLORER 11



ITEM #: CTL-EPX1110 Shown  
PART #: 9112183

### LIGHTWEIGHT BODY AND FOCUSED BEAM FOR TRUCK & TRANSPORT

Standard Form Factor | Lightweight Body | Commercial Build Quality


BEAM PATTERNS  
10°, 40°, 60°

RAW LUMENS  
5,808 lm (ea)

WATTAGE  
55W

WARRANTY  
Extended

MEASUREMENTS  
7.14" x 5.98" x 3.17"  
181.3mm x 152mm x 80.6mm  
4.52 lb / 2.05 kg



ITEM #	PART #	BEAM
CTL-EPX1110	9112183	10°
CTL-EPX1140	9112367	40°
CTL-EPX1160	9112459	60°

\*Additional Technical Data On Page 28

### EXPLORER 9



ITEM #: CTL-EPX910 Shown  
PART #: 9111735

### LIGHTWEIGHT BODY AND FOCUSED BEAM FOR TRUCK & TRANSPORT

Standard Form Factor | Lightweight Body | Commercial Build Quality


BEAM PATTERNS  
10°, 40°, 60°

RAW LUMENS  
4,752 lm (ea)

WATTAGE  
45W

WARRANTY  
Extended

MEASUREMENTS  
6.00" x 4.13" x 3.13"  
152.5mm x 105mm x 79.2mm  
3.09 lb / 1.4 kg



ITEM #	PART #	BEAM
CTL-EPX910	9111735	10°
CTL-EPX940	9111919	40°
CTL-EPX960	9112008	60°

\*Additional Technical Data On Page 28

### EXPLORER SERIES



TRUNNION BRACKET



### 105° ROTATION



MOUNTING

The Vision X Explorer Series comes equipped with a fully-adjustable 105° trunnion bracket. Easily tuned with the included 5mm allen wrench, Explorer lights can be perfectly positioned for the most direct and efficient light usage in order to get the job done. In addition, each bolt on the bracket uses isolated rubber shock absorbers to minimize vibration on the durable Die-Cast Aluminum housing.



## UTILITY MARKET XTREME SERIES

Serving as an OE upgrade for commercial and industrial applications, the Utility Market Series delivers increased output and spread over comparable halogen solutions. The Utility Market series is also used in a number of Vision X Vehicle Specific lighting upgrades.


### UMX ROUND



ITEM #: CTL-UMX4010 Shown  
PART #: 4004719

XTREME LIGHT OUTPUT OE UPGRADE FOR COMMERCIAL/INDUSTRIAL  
Aluminum Housing | Swivel Mount and Handle Available | Halogen Replacement

<b>BEAM PATTERNS</b> 10°, 40°, 60°	<b>WATTAGE</b> 35W	<b>MEASUREMENTS</b> 4.49" x 4.49" x 2.99"
<b>RAW LUMENS</b> 3,696 lm (ea)	<b>WARRANTY</b> Extended	114mm x 114mm x 79mm 2.65 lb / 1.2 kg



ITEM #	PART #	COLOR	BEAM
XIL-UMX4010	4004719	Black	10°
XIL-UMX4040	9118215	Black	40°
XIL-UMX4060	9118307	Black	60°

\*Additional Technical Data On Page 29


### UMX SQUARE



ITEM #: CTL-UMX4460 Shown  
PART #: 9118482

XTREME LIGHT OUTPUT OE UPGRADE FOR COMMERCIAL/INDUSTRIAL  
Aluminum Housing | Swivel Mount and Handle Available | Halogen Replacement

<b>BEAM PATTERNS</b> 10°, 40°, 60°	<b>WATTAGE</b> 35W	<b>MEASUREMENTS</b> 4.71" x 3.97" x 3.14"
<b>RAW LUMENS</b> 3,396 lm (ea)	<b>WARRANTY</b> Extended	119.56mm x 108.8mm x 80mm 2.43 lb / 1.1 kg



ITEM #	PART #	COLOR	BEAM
XIL-UMX4410	4004726	Black	10°
XIL-UMX4440	9118390	Black	40°
XIL-UMX4460	9118482	Black	60°

\*Additional Technical Data On Page 29

## DURALUX SERIES

The DURA series provides an economy LED light for 100 Watt halogen replacement. With a super low amp draw, 5 watt LED driven to 90% efficiency, and E-Mark approval on certain models, the DURA series is the perfect commercial, high-output light.

### DURA 6




ITEM #: DURA-660 Shown  
PART #: 9888385

NOW IN KITS!

HIGH PERFORMANCE LED WORK LIGHT & VEHICLE LIGHT  
Very Low Amp Draw | 150 Watt Halogen Comparable | Durable Housing

<b>BEAM PATTERNS</b> 10°, 40°, 60°	<b>KITS AVAILABLE</b> Two Lights & Harness	<b>MEASUREMENTS</b> 5.39" x 2.57" x 4.28"
<b>RAW LUMENS</b> 3,168 lm (ea)	<b>WARRANTY</b> Extended	136.7mm x 69mm x 106.5mm 2.10 lb / 0.95 kg



ITEM #	PART #	COLOR	BEAM
DURA-610	9891125	Black	10°
DURA-610KIT	9891309	Black	10°
DURA-640	9888378	Black	40°
DURA-660	9888385	Black	60°

\*Additional Technical Data On Page 29

### DURA 4




ITEM #: DURA-440 Shown  
PART #: 9141619

NOW IN KITS!

HIGH PERFORMANCE LED WORK LIGHT & VEHICLE LIGHT  
Very Low Amp Draw | 100 Watt Halogen Comparable | Durable Housing

<b>BEAM PATTERNS</b> 10°, 40°, 60°	<b>KITS AVAILABLE</b> Two Lights & Harness	<b>MEASUREMENTS</b> 3.94" x 2.57" x 4.24"
<b>RAW LUMENS</b> 2,112 lm (ea)	<b>WARRANTY</b> Extended	100mm x 65.5mm x 107.5mm 1.50 lb / 0.68 kg



ITEM #	PART #	COLOR	BEAM	WATTS
DURA-410	9891132	Black	10°	5
DURA-410KIT	9891187	Black	10°	5
DURA-440	9141619	Black	40°	5
DURA-460	9141527	Black	60°	5
DURA-e490	9888279	Black	90°	3

\*Additional Technical Data On Page 29

### UMX IN ACTION



### DURA IN ACTION





## VORTEX 7" LED HEADLIGHT

Not only is the new Vortex 7" LED Headlight from Vision X DOT approved, but it also features one of the brightest LED Halo rings on the road. Powerful LEDs tucked inside a durable polycarbonate lens, this headlight has a "superwhite" color, and is sure to be an eye-fearer going down the road.

### LED HALO RING

The Vortex LED Headlight features a bright halo ring that can be active without having the low beam or high beams on. Having a 7" halo on the front of your vehicle will not only turn heads, but also provide you with the optimal lighting options for the right conditions.



### JEEPS - CLASSIC CARS - MOTORCYCLES

Being 7 inches in diameter, the Vortex LED Headlight can replace any 7 inch factory headlight. Most Jeeps, Classic Cars and Motorcycles all use 7 inch round headlights, allowing you to easily upgrade your vehicles appearance and light output on the road.



DOT APPROVED 7" ROUND LED HEADLIGHT  
Multiple Wiring Connectors | Halo LED Ring | DOT Approved Lighting Fixture

**BEAMS**  
High, Low, Halo

**RAW LUMENS**  
4,210 lm (ea)

**KITS AVAILABLE**  
Two Lights & Harnesses

**WARRANTY**  
Extended

**MEASUREMENTS**  
7.00" x 7.00" x 3.9"  
176.8mm x 176.8mm x 97.8mm  
1.76 lb / 0.8 kg


**ITEM #**  
XIL-7RD  
XIL-7RDKIT

**PART #**  
9891217  
9891224

**BOX INCLUDES**  
One Vortex Headlight, Wiring Harness  
Two Vortex Headlights, Wiring Harness

*E-MARK And ADR  
Models Available*

*PAR 56 / H6016 / H6024  
Direct Replacement*

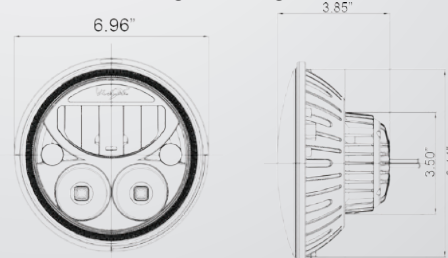

### VORTEX 7" HEADLIGHT

ITEM #	PART #	# OF LIGHTS	BULB TYPE	OEM CROSS REFERENCE	RAW LUMENS	EFFECTIVE LUMENS	WEIGHT	APPROVAL
XIL-7RD	9891217	1	Low: 13 Watt LED High: 2x 10 Watt LEDs	H6017 H6024	4,210 lm	2,947 lm	1.76 lb	DOT
XIL-7RDKIT	9891224	2	Low: 2x 13 Watt LED High: 4x 10 Watt LEDs	H6017 H6024	8,420 lm	5,894 lm	3.52 lb	DOT








### LIGHT CANNON

ITEM #	PART #	# OF LIGHTS	BEAM	WEIGHT	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
CTL-CPZ110	9150970	1	10°	2.02 lb	2,500 lm	1,750 lm	9-32V	25	2.08A
CTL-CPZ110KIT	9151069	2	10°	4.04 lb	5,000 lm	3,500 lm			4.17A
CTL-CPZ610	9888538	1	10°	5.51 lb	3,200 lm	2,240 lm	9-32V	50	4.17A
CTL-CPZ610KIT	9888545	2	10°	11.02 lb	6,400 lm	4,480 lm			8.34A
CTL-CPZ620	9891729	1	20°	5.51 lb	3,200 lm	2,240 lm	9-32V	50	4.17A
CTL-CPZ620KIT	9891743	2	20°	11.02 lb	6,400 lm	4,480 lm			8.34A
CTL-CPZ810	9890852	1	10°	10.36 lb	5,800 lm	4,060 lm	9-32V	90	7.5A
CTL-CPZ810KIT	9890074	2	10°	20.72 lb	11,600 lm	8,120 lm			15A


CTL-CPZ110 | 9150970 - 10° BEAM

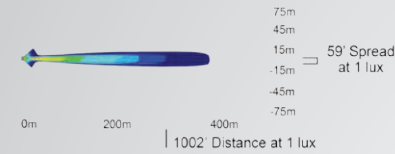

CTL-CPZ610 | 9888538 - 10° BEAM




CTL-CPZ810 | 9890852 - 10° BEAM

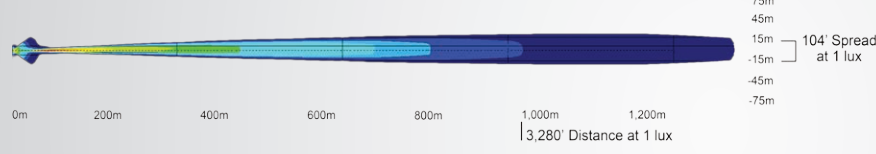


### TRANSPORTER

ITEM #	PART #	BEAM	LEDS	WEIGHT	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
CTL-TPX910	9110110	10°	9	5.95 lb	4,752 lm	3,330 lm	11-65V	45	3.75A
CTL-TPX940	9110295	40°	9	5.95 lb	4,752 lm	3,330 lm	11-65V	45	3.75A
CTL-TPX1210	9110561	10°	12	5.95 lb	6,336 lm	4,440 lm	11-65V	60	5A
CTL-TPX1240	9110745	40°	12	5.95 lb	6,336 lm	4,440 lm	11-65V	60	5A
CTL-TPX1810	9111018	10°	18	6.17 lb	9,504 lm	6,660 lm	11-65V	90	7.5A
CTL-TPX1840	9119748	40°	18	6.17 lb	9,504 lm	6,660 lm	11-65V	90	7.5A

CTL-TPX1810 | 9111018 - 10° BEAM

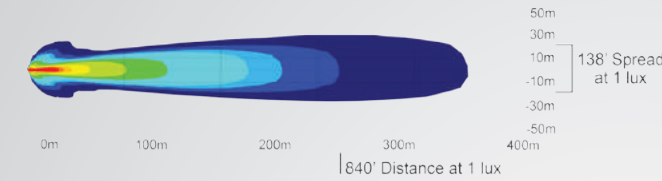


CTL-TPX1840 | 9119748 - 40° BEAM

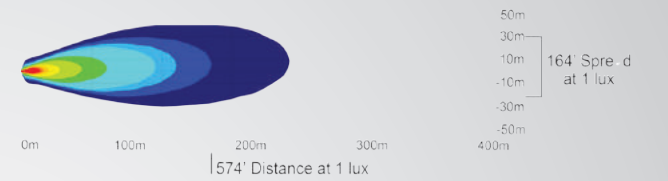


### UTILITY MARKET

ITEM #	PART #	BEAM	SHAPE	WEIGHT	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-UMX4010	4004719	10°	Round	2.65 lb	3,696 lm	2,590 lm	11-65V	70	3.8A
XIL-UMX4040	9118215	40°	Round	2.65 lb	3,696 lm	2,590 lm	11-65V	70	3.8A
XIL-UMX4060	9118307	60°	Round	2.65 lb	3,696 lm	2,590 lm	11-65V	70	3.8A
XIL-UMX4410	4004726	10°	Square	2.43 lb	3,696 lm	2,590 lm	11-65V	70	3.8A
XIL-UMX4440	9118390	40°	Square	2.43 lb	3,696 lm	2,590 lm	11-65V	70	3.8A
XIL-UMX4460	9118482	60°	Square	2.43 lb	3,696 lm	2,590 lm	11-65V	70	3.8A

XIL-UMX4410 | 4004726 - 10° BEAM

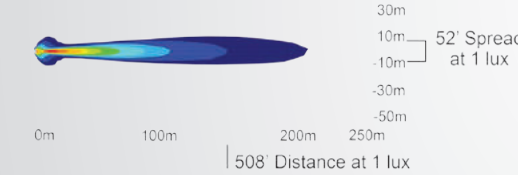


XIL-UMX4440 | 9118390 - 40° BEAM

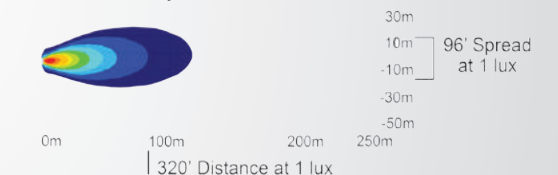


### EXPLORER

ITEM #	PART #	BEAM	LEDS	WEIGHT	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
CTL-EPX910	9111735	10°	9	3.09 lb	4,752 lm	3,330 lm	11-65V	45	3.8A
CTL-EPX940	9111919	40°	9	3.09 lb	4,752 lm	3,330 lm	11-65V	45	3.8A
CTL-EPX960	9112008	60°	9	3.09 lb	4,752 lm	3,330 lm	11-65V	45	3.8A
CTL-EPX1110	9112183	10°	11	4.52 lb	5,808 lm	4,070 lm	11-65V	55	4.6A
CTL-EPX1140	9112367	40°	11	4.52 lb	5,808 lm	4,070 lm	11-65V	55	4.6A
CTL-EPX1160	9112459	60°	11	4.52 lb	5,808 lm	4,070 lm	11-65V	55	4.6A


CTL-EPX910 | 9111735 - 10° BEAM

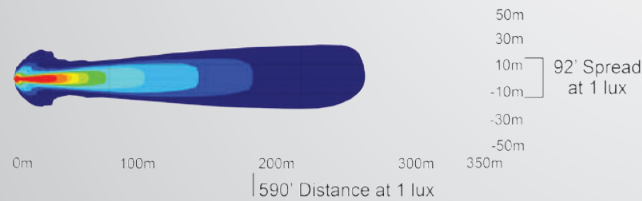

CTL-EPX940 | 9111919 - 40° BEAM

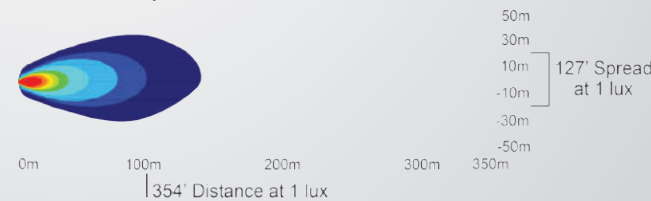

CTL-EPX1110 | 9112183 - 10° BEAM

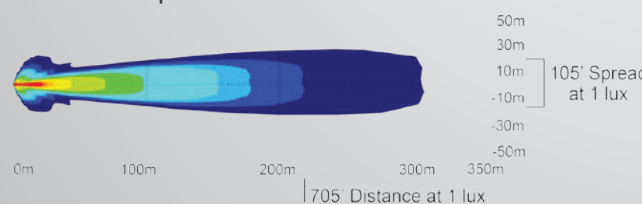


CTL-EPX1140 | 9112367 - 40° BEAM




### DURALUX

ITEM #	PART #	BEAM	# OF LIGHTS	LEDS	WEIGHT	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
DURA-410	9891132	10°	1	4	1.50 lb	2,112 lm	1,480 lm	11-65V	20	1.67A
DURA-410KIT	9891187		2	8	3.00 lb	4,224 lm	2,960 lm		40	3.34A
DURA-440	9141619	40°	1	4	1.50 lb	2,112 lm	1,480 lm	11-65V	20	1.67A
DURA-460	9141527	60°	1	4	1.50 lb	2,112 lm	1,480 lm	11-65V	20	1.67A
DURA-610	9891125	10°	1	6	2.10 lb	6,336 lm	2,220 lm	11-65V	30	2.5A
DURA-610KIT	9891309		2	12	4.20 lb	5,916 lm	4,440 lm		60	5.0A
DURA-640	9888378	40°	1	6	2.10 lb	6,336 lm	2,220 lm	11-65V	30	2.5A
DURA-660	9888385	60°	1	6	2.10 lb	6,336 lm	2,220 lm	11-65V	30	2.5A


DURA-410 | 9891132 - 10° BEAM

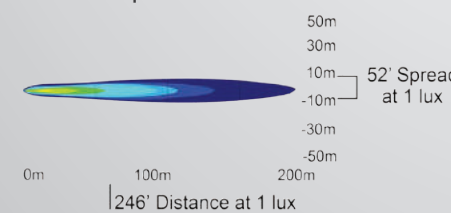

DURA-440 | 9141619 - 40° Beam

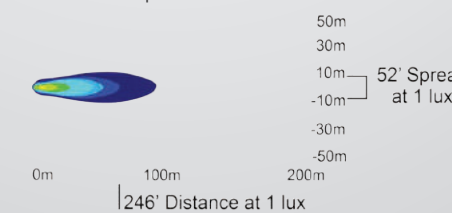

DURA-460 | 9141527 - 60° BEAM

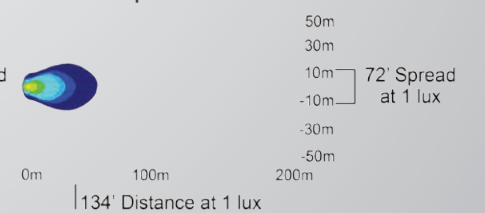





# LED POD LIGHTING

**ULTRA COMPACT FOR  
UNIVERSAL APPLICATION**



#### COMPACT HOUSING, POWERFUL OUTPUT

Vision X was the first to engineer the LED Light Pod. Since its release, the realization came that the applications for the LED Pod were endless. Utilizing top-grade aluminum, top-binned LEDs and innovative circuitry technology, Vision X continues to improve and advance LED Pod Technology.

#### OMNI-LINK INTERLOCKING SYSTEM

Available on the 2" Square Solo S1100 and Solo S1110, all 4 sides of the light have ports for accessories, mounts or interconnectivity links. Whether you want to add 2 lights together or 10, Omni-Link Interlocking System allows you to customize your perfect light bar.

#### PRIVE DRIVE

Available on the Solo Prime Pod, Prime Drive takes efficiency and light output to the next level. Prime Drive is centered around Pulse Width Modulation (PWM), the ability to flash the LED at a rate faster than the human eye can detect. From this technology stems Electronic Thermal Management which regulates the LED temperature and dimming capability by connecting a Vision X Dimming Controller to dim the pod.

#### DIE-CAST ALUMINUM HOUSING

Solo Pods are designed to go anywhere, even in the most extreme conditions. Featuring an Ingress Protection rating of IP-68, indicating particle-proof and water-resistance, Vision X Pods will not falter under tough environmental conditions. This is possible due to the durable die-cast aluminum housing.

#### IRIS REFLECTOR

Vision X has engineered the IRIS reflector technology to produce distances never before seen from a single source LED. Available inside the Cannon and Optimus Series Lights, the IRIS Reflector enables up to 3,280' of usable light on the Cannon 8.7" LED.



## OPTIMUS POD LIGHTING

The Optimus Lighting Series produces ultimate distance for its size using IRIS Reflector Technology for up to 972' of usable light. Perfect for A-Pillar, bumper, back-up, and any other number of mounting locations, the Optimus Series features a compact housing equipped with 10 Watt LEDs.

### ACCESSORIES



Easily adapt to any environment with the available polycarbonate covers which allow for changes in beam pattern and color with a snap.

### VEHICLE SPECIFIC KITS



XIL-OE1012JKV2OPR Shown

Available on a number of vehicles, with vehicle specific bracketry and Optimus Series Lighting, lighting distance can be increased up to 7x over factory lamps.

OPTIMUS SERIES



OPTIMUS HALO SERIES




## OPTIMUS HALO



ITEM #: XIL-OPH115 Shown  
PART #: 9891699

OPTIMUS HALO SERIES  
Compact Housing | High Strength Trunnion Mount | Covers Available

BEAM PATTERNS	KITS AVAILABLE	MEASUREMENTS
15°	Two Lights & Harness	2.99" x 3.79" x 3.14"
<b>RAW LUMENS</b> 1,052 lm (ea)	<b>WARRANTY</b> Extended	76mm x 96.5mm x 79.8mm 1.37 lb / 0.62 kg



ITEM #	PART #	SHAPE	BEAM	ITEM #	PART #	SHAPE	BEAM
XIL-OPH115	9891699	Square	15°	XIL-OPRH115	9891712	Round	15°
XIL-OPH115KIT	9891705	Square	15°	XIL-OPRH115KIT	9891729	Round	15°

\*Additional Technical Data On Page 36

## OPTIMUS IN ACTION




## OPTIMUS DUAL



ITEM #: XIL-OP210 Shown  
PART #: 9124605

UNIVERSAL LED DRIVING LIGHT PRODUCES ULTIMATE DISTANCE  
Compact Housing | High Strength Trunnion Mount | 883' Usable Light

BEAM PATTERNS	KITS AVAILABLE	MEASUREMENTS
10°, 20°, 60°	Two Lights & Harness	5.83" x 4.80" x 3.57"
<b>RAW LUMENS</b> 2,104 lm (ea)	<b>WARRANTY</b> Extended	148mm x 122mm x 90.8mm 2.25 lb / 1.02 kg



ITEM #	PART #	COLOR	BEAM	ITEM #	PART #	COLOR	BEAM
XIL-OP210	9124605	Black	10°	XIL-OP220KIT	9137834	Black	20°
XIL-OP210KIT	9125053	Black	10°	XIL-OP260	9136660	Black	60°
XIL-OP220	9139548	Black	20°	XIL-OP260KIT	9137742	Black	60°

\*Additional Technical Data On Page 36


## OPTIMUS SINGLE



ITEM #: XIL-OP110 Shown  
PART #: 9123882

UNIVERSAL LED DRIVING LIGHT PRODUCES ULTIMATE DISTANCE  
Compact Housing | High Strength Trunnion Mount | 883' Usable Light

BEAM PATTERNS	KITS AVAILABLE	MEASUREMENTS
10°, 20°, 60°	Two Lights & Harness	2.99" x 3.79" x 3.14"
<b>RAW LUMENS</b> 1,052 lm (ea)	<b>WARRANTY</b> Extended	76mm x 96.5mm x 79.8mm 1.37 lb / 0.62 kg



ITEM #	PART #	COLOR	BEAM	ITEM #	PART #	COLOR	BEAM
XIL-OP110	9123882	Black	10°	XIL-OP120KIT	9138015	Black	20°
XIL-OP110KIT	9124421	Black	10°	XIL-OP160	9124063	Black	60°
XIL-OP120	9130002	Black	20°	XIL-OP160KIT	9137926	Black	60°

\*Additional Technical Data On Page 36


## OPTIMUS ROUND



ITEM #: XIL-OPR110 Shown  
PART #: 9124421

UNIVERSAL LED DRIVING LIGHT PRODUCES ULTIMATE DISTANCE  
Compact Housing | High Strength Trunnion Mount | Covers Available

BEAM PATTERNS	KITS AVAILABLE	MEASUREMENTS
10°, 20°, 60°	Two Lights & Harness	3.74" x 3.79" x 3.74"
<b>RAW LUMENS</b> 1,052 lm (ea)	<b>WARRANTY</b> Extended	95mm x 96.5mm x 95mm 1.53 lb / 0.69 kg



ITEM #	PART #	COLOR	BEAM	ITEM #	PART #	COLOR	BEAM
XIL-OPR110	9140896	Black	10°	XIL-OPR120KIT	9141343	Black	20°
XIL-OPR110KIT	9141251	Black	10°	XIL-OPR160	9141169	Black	60°
XIL-OPR120	9141077	Black	20°	XIL-OPR160KIT	9141435	Black	60°

\*Additional Technical Data On Page 36



## SOLO POD LIGHTING

Compact yet powerful, the Solo Pod lineup provide intense lighting from a small package. Packing the punch of a car headlight all within a 2" housing, the Solo and Solo Prime pods provide lighting for almost any application. Mounts are available for handlebars, helmets, handles and more.

### ACCESSORIES



### OMNI-LINK CONNECTORS



With the Omni-Link Connector, simply connect Solo Pods together to create unique lengths and configurations, as well as add numerous accessories for various applications.

## SOLO PODS IN ACTION



## SOLO PRIME POD



ITEM #: XIL-SP110 Shown  
PART #: 9124421



**BEAM PATTERNS**  
10°, 20°, 40°

**RAW LUMENS**  
1,052 lm (ea)

**WATTAGE**  
10W

**WARRANTY**  
Extended

**MEASUREMENTS**  
2.16" x 2.36" x 3.33"  
55mm x 60mm x 84.5mm  
0.70 lb / 0.32 kg



ITEM #	PART #	COLOR	BEAM	ITEM #	PART #	COLOR	BEAM
XIL-SP110	4008830	Black	10°	XIL-SP110W	4008847	White	10° Beam
XIL-SP120	4009882	Black	20°	XIL-SP120W	4008854	White	20° Beam
XIL-SP140	4009899	Black	40°	XIL-SP140W	4008861	White	40° Beam

\*Additional Technical Data On Page 37

## SOLO POD



ITEM #: XIL-S1110 Shown  
PART #: 9888156

**BEAM PATTERNS**  
10°, 30°, 60°, 30°x65°

**RAW LUMENS**  
1,052 lm (ea)

**WATTAGE**  
10W

**WARRANTY**  
Extended

**MEASUREMENTS**  
2.16" x 3.33" x 2.36"  
55mm x 84.5mm x 60mm  
0.70 lb / 0.32 kg



ITEM #	PART #	COLOR	BEAM	ITEM #	PART #	COLOR	BEAM
XIL-S1110	9888156	Black	10°	XIL-S1110W	9888194	White	10°
XIL-S1130	9888163	Black	30°	XIL-S1130W	9888200	White	30°
XIL-S1160	9888170	Black	60°	XIL-S1160W	9888217	White	60°
XIL-S11e3065	9888187	Black	30°x65°	XIL-S11e3065W	9888224	White	30°x65°

\*Additional Technical Data On Page 37

## MINI SOLO POD



ITEM #: XIL-MX110 Shown  
PART #: 9117409



**BEAM PATTERNS**  
10°, 40°, 60°

**RAW LUMENS**  
528 lm (ea)

**WATTAGE**  
5W

**WARRANTY**  
Extended

**MEASUREMENTS**  
1.69" x 2.56" x 2.38"  
42.92mm x 64.77mm x 59.94mm  
0.40 lb / 0.18 kg



ITEM #	PART #	COLOR	BEAM
XIL-MX110	9113531	Black	10°
XIL-MX140	9113715	Black	40°
XIL-MX160	9113807	Black	60°


\*Additional Technical Data On Page 37





### OPTIMUS

ITEM #	PART #	BEAM	LIGHTS INCLUDED	SHAPE	HOUSING	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-OP210	9124605	10°	1	Square	Black	2,104 lm	1,472 lm	12-32V	20	1.67A
XIL-OP210C	9124698	10°	1	Square	Chrome	2,104 lm	1,472 lm	12-32V	20	1.67A
XIL-OP210W	9124964	10°	1	Square	White	2,104 lm	1,472 lm	12-32V	20	1.67A
XIL-OP210KIT	9125053	10°	2	Square	Black	4,208 lm	2,944 lm	12-32V	40	3.34A
XIL-OP220	9139548	20°	1	Square	Black	1,720 lm	1,472 lm	12-32V	20	1.67A
XIL-OP220C	9166636	20°	1	Square	Chrome	1,720 lm	1,472 lm	12-32V	20	1.67A
XIL-OP220W	9139630	20°	1	Square	White	1,720 lm	1,472 lm	12-32V	20	1.67A
XIL-OP220KIT	9137834	20°	2	Square	Black	4,208 lm	2,944 lm	12-32V	40	3.34A
XIL-OP260	9136660	60°	1	Square	Black	1,720 lm	1,472 lm	12-32V	20	1.67A
XIL-OP260C	9159348	60°	1	Square	Chrome	1,720 lm	1,472 lm	12-32V	20	1.67A
XIL-OP260W	9139722	60°	1	Square	White	1,720 lm	1,472 lm	12-32V	20	1.67A
XIL-OP260KIT	9137742	60°	2	Square	Black	4,208 lm	2,944 lm	12-32V	40	3.34A
XIL-OP110	9123882	10°	1	Square	Black	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OP110C	9124247	10°	1	Square	Chrome	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OP110W	9124513	10°	1	Square	White	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OP110KIT	9124421	10°	2	Square	Black	2,104 lm	1,472 lm	12-32V	20	3.34A
XIL-OP120	9130002	20°	1	Square	Black	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OP120C	9139098	20°	1	Square	Chrome	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OP120W	9139005	20°	1	Square	White	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OP120KIT	9138015	20°	2	Square	Black	2,104 lm	1,472 lm	12-32V	20	3.34A
XIL-OP160	9124063	60°	1	Square	Black	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OP160C	9139272	60°	1	Square	Chrome	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OP160W	9139364	60°	1	Square	White	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OP160KIT	9137926	60°	2	Square	Black	2,104 lm	1,472 lm	12-32V	20	3.34A
XIL-OPR110	9140896	10°	1	Round	Black	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OPR110C	9149080	10°	1	Round	Chrome	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OPR110W	9149172	10°	1	Round	White	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OPR110KIT	9141251	10°	2	Round	Black	2,104 lm	1,472 lm	12-32V	20	3.34A
XIL-OPR120	9141077	20°	1	Round	Black	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OPR120C	9149264	20°	1	Round	Chrome	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OPR120W	9149356	20°	1	Round	White	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OPR120KIT	9141343	20°	2	Round	Black	2,104 lm	1,472 lm	12-32V	20	3.34A
XIL-OPR160	9141169	60°	1	Round	Black	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OPR160C	9149448	60°	1	Round	Chrome	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OPR160W	9149530	60°	1	Round	White	1,052 lm	736 lm	12-32V	10	0.83A
XIL-OPR160KIT	9141435	60°	2	Round	Black	2,104 lm	1,472 lm	12-32V	20	3.34A

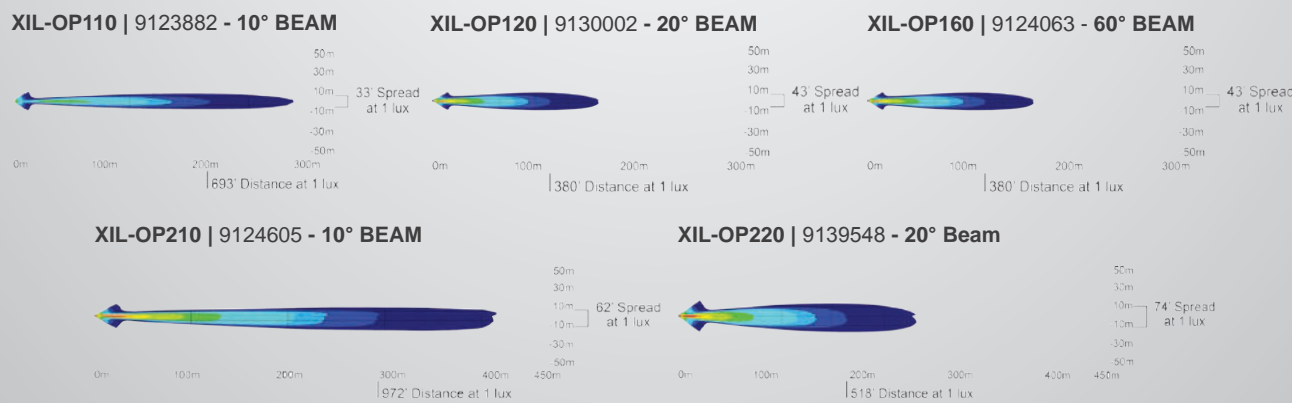

### SOLO PRIME

ITEM #	PART #	BEAM	SHAPE	HOUSING	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-SP110	4008830	10°	Round	Black	1,052 lm	736 lm	9-48V	10	0.83A
XIL-SP110W	4008847	10°	Round	White	1,052 lm	736 lm	9-48V	10	0.83A
XIL-SP120	4009882	20°	Round	Black	1,052 lm	736 lm	9-48V	10	0.83A
XIL-SP120W	4008854	20°	Round	White	1,052 lm	736 lm	9-48V	10	0.83A
XIL-SP140	4009899	40°	Round	Black	1,052 lm	736 lm	9-48V	10	0.83A
XIL-SP140W	4008861	40°	Round	White	1,052 lm	736 lm	9-48V	10	0.83A




### SOLO POD

ITEM #	PART #	BEAM	SHAPE	HOUSING	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-S1110	9888156	10°	Square	Black	1,052 lm	736 lm	9-48V	10	0.83A
XIL-S1110W	9888194	10°	Square	White	1,052 lm	736 lm	9-48V	10	0.83A
XIL-S1130	9888163	30°	Square	Black	1,052 lm	736 lm	9-48V	10	0.83A
XIL-S1130W	9888200	30°	Square	White	1,052 lm	736 lm	9-48V	10	0.83A
XIL-S1160	9888170	60°	Square	Black	1,052 lm	736 lm	9-48V	10	0.83A
XIL-S1160W	9888217	60°	Square	White	1,052 lm	736 lm	9-48V	10	0.83A
XIL-S11e3065	9888187	30°/65°	Square	Black	1,052 lm	736 lm	9-48V	10	0.83A
XIL-S11e3065W	9888224	30°/65°	Square	White	1,052 lm	736 lm	9-48V	10	0.83A



### MINI SOLO

ITEM #	PART #	BEAM	SHAPE	HOUSING	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-MX110	9113531	10°	Round	Black	493 lm	365 lm	9-48V	5	0.42A
XIL-MX140	9113715	20°	Round	Black	493 lm	365 lm	9-48V	5	0.42A
XIL-MX160	9113807	60°	Round	Black	493 lm	365 lm	9-48V	5	0.42A

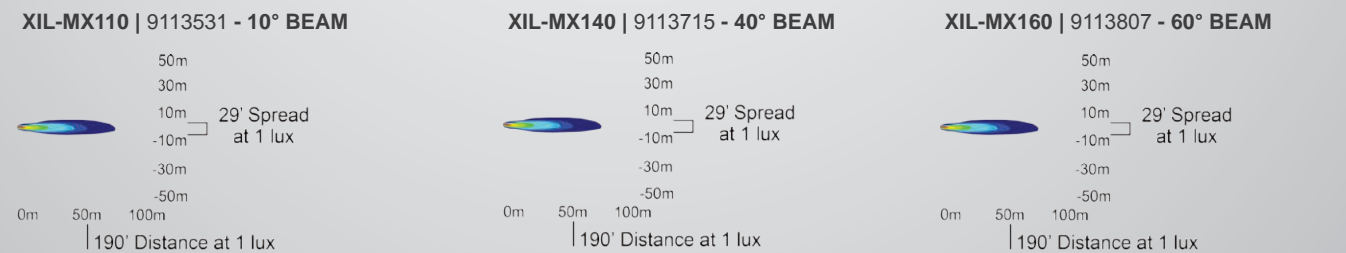





# LED LIGHT BARS

## POWERFUL DISTANCE



### TRUSTED EVERYWHERE

Vision X LED Light Bars are well-known for being the most dependable light bars on the market. With multiple light bar series used by reputable organizations like NASA, the United States Border Patrol, Polaris and other industry leaders.

### MULTIPLE MOUNTING OPTIONS

When it comes to mounting a light bar to a vehicle, Vision X offers several different options. With patented feet mounts, you can easily mount your bar in an ideal position. Additionally, end cap mounts are available as well as billet clamps for mounting to surfaces like roll cages.

### SMOOTH BEAM PATTERNS

By placing each LED at a precise angle, Vision X light bars have the optimal beam spread. When having an LED light bar, it is important to have a solid beam pattern, as well as being able to shine far distances. Series like the XPI and XPR feature an IRIS Reflector for further beam penetration while maintaining an even spread.

### LIGHT BAR COVERS

Vision X offers durable polycarbonate covers for many of our light bar series. Amber covers change the color of the LED to a warmer tone, which helps penetrate the light through dust and other foul conditions. The blackout covers feature a Vision X logo and are beneficial to have when your light bar needs to be protected or doesn't need to be operational.

END CAP MOUNTS AVAILABLE  
SEE PAGE 113



BILLET MOUNTS AVAILABLE  
SEE PAGE 113






## XMITTER PRIME XTREME SINGLE STACK

The Xmitter Prime Xtreme LED Bar packs the most advanced technology into a light bar for ultimate output and reliability. Featuring Prime Drive, controlling internal temperature and dimming, along with patented mounting technology and advanced 5 watt LEDs, the Xmitter Prime Xtreme outshines the competition.

### BRIGHTEST LIGHT BAR ON THE MARKET

- Polycarbonate Lens
- Plug and Play Harness Included
- PWM Integrated Dimming Circuitry
- 90% Efficiency Next Generation LED
- Electronic Thermal Management & Dimming

HEIGHT 3.75" / 95.25mm	WIDTH 3.31" / 84.07mm
WARRANTY Extended	
US PATENT # 7,950,821 B1	

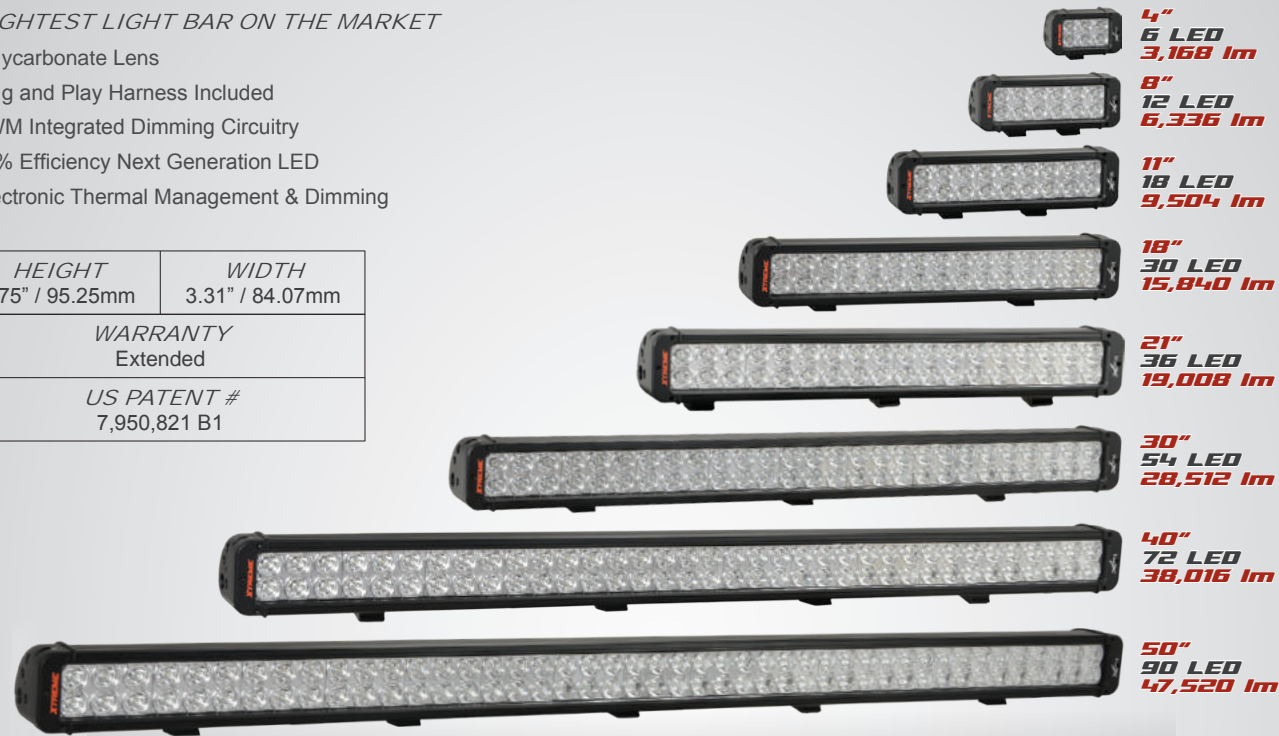

ITEM #	PART #	LENGTH	BEAM	ITEM #	PART #	LENGTH	BEAM
XIL-PX610	9117409	4.70"/120mm	10° Beam	XIL-PX3610	9117041	20.60"/525mm	10° Beam
XIL-PX640	9117492	4.70"/120mm	40° Beam	XIL-PX3640	9117133	20.60"/525mm	40° Beam
XIL-PX1210	9115603	7.90"/201mm	10° Beam	XIL-PX5410	9117225	30.20"/768mm	10° Beam
XIL-PX1240	9115696	7.90"/201mm	40° Beam	XIL-PX5440	9117317	30.20"/768mm	40° Beam
XIL-PX1810	9115788	11.10"/282mm	10° Beam	XIL-PX7210	9117584	39.80"/1,011mm	10° Beam
XIL-PX1840	9115870	11.10"/282mm	40° Beam	XIL-PX7240	9117676	39.80"/1,011mm	40° Beam
XIL-PX3010	9116860	17.50"/444mm	10° Beam	XIL-PX9010	9887036	49.37"/1,254mm	10° Beam
XIL-PX3040	9116952	17.50"/444mm	40° Beam	XIL-PX9040	9887043	49.37"/1,254mm	40° Beam

\*Additional Technical Data On Page 48

### PX SINGLE IN ACTION





## XMITTER PRIME XTREME DOUBLE STACK

The Xmitter Prime Xtreme Double Stack LED Bar increases output while including all the same technology of the single stack. By bundling Prime Drive with an extra stack of advanced 5 watt LEDs, the Xmitter Prime Xtreme Double Stack is able to turn heads as well as exert powerful light output.

### DOUBLE STACK XTREME OUTPUT LIGHT BAR

- Double Stack Housing
- Plug and Play Harness Included
- PWM Integrated Dimming Circuitry
- 90% Efficiency Next Generation LED
- Electronic Thermal Management & Dimming

HEIGHT 4.84" / 123.1mm	WIDTH 3.30" / 83.8mm
WARRANTY Extended	
US PATENT # 7,950,821 B1	



ITEM #	PART #	LENGTH	BEAM	ITEM #	PART #	LENGTH	BEAM
XIL-PX2.610	9116686	4.70"/120mm	10° Beam	XIL-PX2.1840	9116235	11.20"/282mm	40° Beam
XIL-PX2.640	9116778	4.70"/120mm	40° Beam	XIL-PX2.3010	9116327	17.50"/444mm	10° Beam
XIL-PX2.1210	9115962	7.90"/201mm	10° Beam	XIL-PX2.30400	9116419	17.50"/444mm	40° Beam
XIL-PX2.1240	9116051	7.90"/201mm	40° Beam	XIL-PX2.3610	9116501	20.60"/525mm	10° Beam
XIL-PX2.1810	9116143	11.10"/282mm	10° Beam	XIL-PX2.3640	9116594	20.60"/525mm	40° Beam

\*Additional Technical Data On Page 48

### PX DOUBLE IN ACTION








## XPR 10 WATT

The XPR Bar is a more powerful version of the popular XPI bar, featuring IRIS Reflector Technology coupled with 10 Watt LEDs. With dual mounting options of both end-cap mounting and patented mounting feet, this affordable light bar is the ultimate lighting solution for baja racers and offroad enthusiasts alike.

### IRIS REFLECTORS FOR ULTIMATE DISTANCE

- Dual Mounting Standard
- Plug And Play Harness Included
- Twice The Output Of XPI Light Bar
- IRIS Reflector Technology With 10 Watt LED
- New Lifespan-Boosting Heat Sink Technology

HEIGHT 3.15" / 80.01mm	WIDTH 3.19" / 81.02mm
WARRANTY Extended	
US PATENT # 7,950,821 B1	



ITEM #	PART #	LENGTH	BEAM
XPR-6	9891613	11.50"/292.1mm	Straight
XPR-12M	9891637	24.00"/609.6mm	Tilted
XPR-15M	9891644	29.40"/746.76mm	Tilted
XPR-18M	9891651	34.70"/881.38mm	Tilted
XPR-21M	9891668	40.00"/1,016.00mm	Tilted
XPR-24M	9891675	45.30"/1,150.62mm	Tilted
XPR-27M	9891682	50.60"/1,285.24mm	Tilted

\*Additional Technical Data On Page 48

### XPR IN ACTION



## XPI 5 WATT

The XPI Bar features IRIS Reflector Technology along with 5 watt LEDs for long-distance light projection. With dual mounting options of both end-cap mounting and patented mounting feet, this affordable light bar is the ultimate lighting solution for your truck, Jeep, UTV and any other application requiring long distance projection.

### IRIS REFLECTORS FOR ULTIMATE DISTANCE

- Dual Mounting Standard
- Long Distance Projection
- Plug And Play Harness Included
- IRIS Reflector Technology With 5 Watt LED
- New Lifespan-Boosting Heat Sink Technology

HEIGHT 3.15" / 80.01mm	WIDTH 3.19" / 81.02mm
WARRANTY Extended	
US PATENT # 7,950,821 B1	



ITEM #	PART #	LENGTH	BEAM
XPI-6	9889399	11.50"/292.1mm	Straight
XPI-12M	9889405	24.00"/609.6mm	Tilted
XPI-15M	9889443	29.40"/746.76mm	Tilted
XPI-18M	9889412	34.70"/881.38mm	Tilted
XPI-21M	9890500	40.00"/1,016.00mm	Tilted
XPI-24M	9889429	45.30"/1,150.62mm	Tilted
XPI-27M	9889436	50.60"/1,285.24mm	Tilted

\*Additional Technical Data On Page 49

### XPI IN ACTION





## HORIZON PRIME EXTREME

The Horizon Bar was designed specifically with truck and transport applications in mind. With a 60 point locking trunnion mount, precision aiming is easily achieved. With a reduced profile and Prime Drive Technology, the HPX is perfect for long trucking routes, area lighting or precision aiming applications.


### PRECISION ADJUSTABLE TRUNNION LIGHT BAR

- Single Stack Housing
- 60 Point Locking Trunnion Mount
- CTL-HPX910 Model is E-Mark Approved
- Electronic Thermal Management & Dimming
- Advanced Optics Enhance Distance and Depth

HEIGHT 2.36" / 60mm	WIDTH 3.11" / 79mm
WARRANTY Extended	



60 POINT LOCKING AIMING SYSTEM



ITEM #	PART #	LENGTH	BEAM
CTL-HPX910	9111469	13.86"/352.2mm	10° Beam
CTL-HPX940	9119830	13.86"/352.2mm	40° Beam
CTL-HPX1210	9111551	17.64"/448.2mm	10° Beam
CTL-HPX1240	9119656	17.64"/448.2mm	40° Beam
CTL-HPX1810	9111643	25.20"/640.2mm	10° Beam
CTL-HPX1840	9119748	25.20"/640.2mm	40° Beam

\*Additional Technical Data On Page 49


### HORIZON IN ACTION



## LOW PROFILE XMITTER PRIME XTREME

The Xmitter Low Profile Prime Xtreme LED Bar excels at mounting onto tight spots where normal bars won't cut it. By having a shallow mounting depth, the Low Profile Xmitter is able to provide powerful light output without being too bulky or distracting when mounted on your vehicle.

- 4" 3 LED 1,584 lm
- 8" 6 LED 3,168 lm
- 11" 9 LED 4,752 lm
- 18" 15 LED 7,920 lm
- 21" 24 LED 12,672 lm
- 30" 27 LED 14,256 lm
- 40" 33 LED 17,424 lm
- 50" 39 LED 20,592 lm

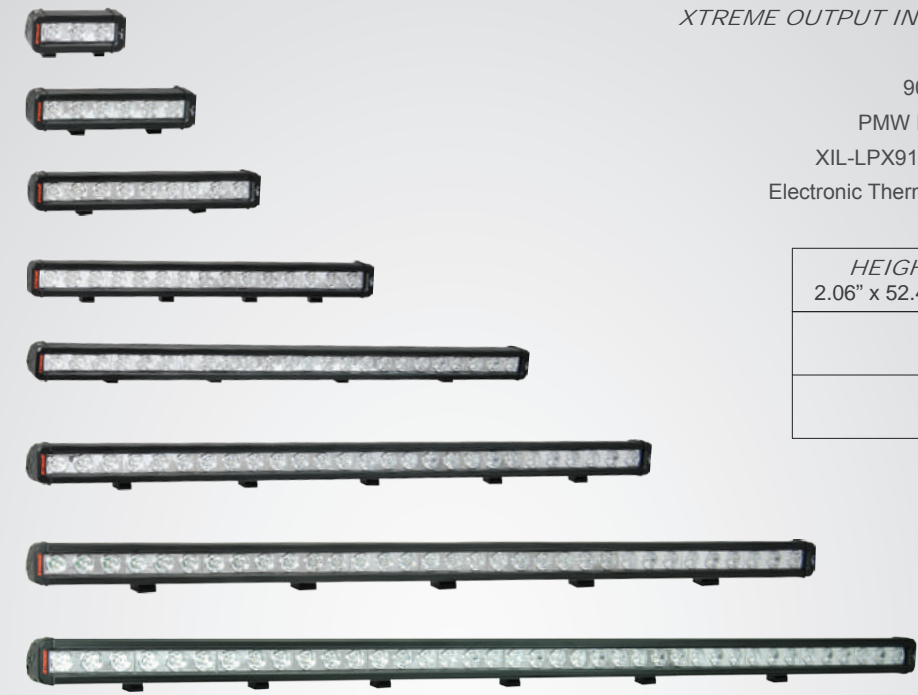

### XTREME OUTPUT IN A COMPACT LIGHT BAR

- Sleek Low Profile Design
- 90% Efficiency Next Gen LED
- PMW Integrated Dimming Circuitry
- XIL-LPX910 Model is E-Mark Approved
- Electronic Thermal Management & Dimming

HEIGHT 2.06" x 52.40mm	WIDTH 2.45" / 62.30mm
WARRANTY Extended	
US PATENT # 7,950,821 B1	



ITEM #	PART #	LENGTH	BEAM	ITEM #	PART #	LENGTH	BEAM
XIL-LPX310	4000759	4.65"/118mm	10° Beam	XIL-LPX2410	9121901	31.11"/790mm	10° Beam
XIL-LPX340	4000766	4.65"/118mm	40° Beam	XIL-LPX2440	9132884	31.11"/790mm	40° Beam
XIL-LPX610	9118758	8.43"/214mm	10° Beam	XIL-LPX2710	9114972	34.89"/886mm	10° Beam
XIL-LPX640	9120737	8.43"/214mm	40° Beam	XIL-LPX2740	9115061	34.89"/886mm	40° Beam
XIL-LPX910	4000773	12.21"/310mm	10° Beam	XIL-LPX3310	9115153	42.44"/1,078mm	10° Beam
XIL-LPX940	4000780	12.21"/310mm	40° Beam	XIL-LPX3340	9115245	42.44"/1,078mm	40° Beam
XIL-LPX1510	9114613	19.77"/502mm	10° Beam	XIL-LPX3910	9128115	52.00"/1,270mm	10° Beam
XIL-LPX1540	9114705	19.77"/502mm	40° Beam	XIL-LPX3940	9132976	52.00"/1,270mm	40° Beam

\*Additional Technical Data On Page 49

### LPX IN ACTION







# XMITTER

The Original LED Bar with a seamless beam pattern, the Xmitter is used by the United States Border Patrol, Baja Offroad Racers and NASA. Great for enthusiasts to professionals, the Xmitter emits intense light to shine brighter and last longer.

## ORIGINAL LIGHT BAR WITH SEAMLESS BEAM

- Seamless Beam Pattern
- Plug and Play Harness Included
- Weatherproof Deutsch Connector
- Used by NASA, Border Patrol, Pro Racers
- Infrared, Amber, Red, Blue and Green Available

<b>HEIGHT</b> 2.76" x 69mm	<b>WIDTH</b> 3.00" / 76.25mm
<b>WARRANTY</b> Extended	
<b>US PATENT #</b> 7,950,821 B1	

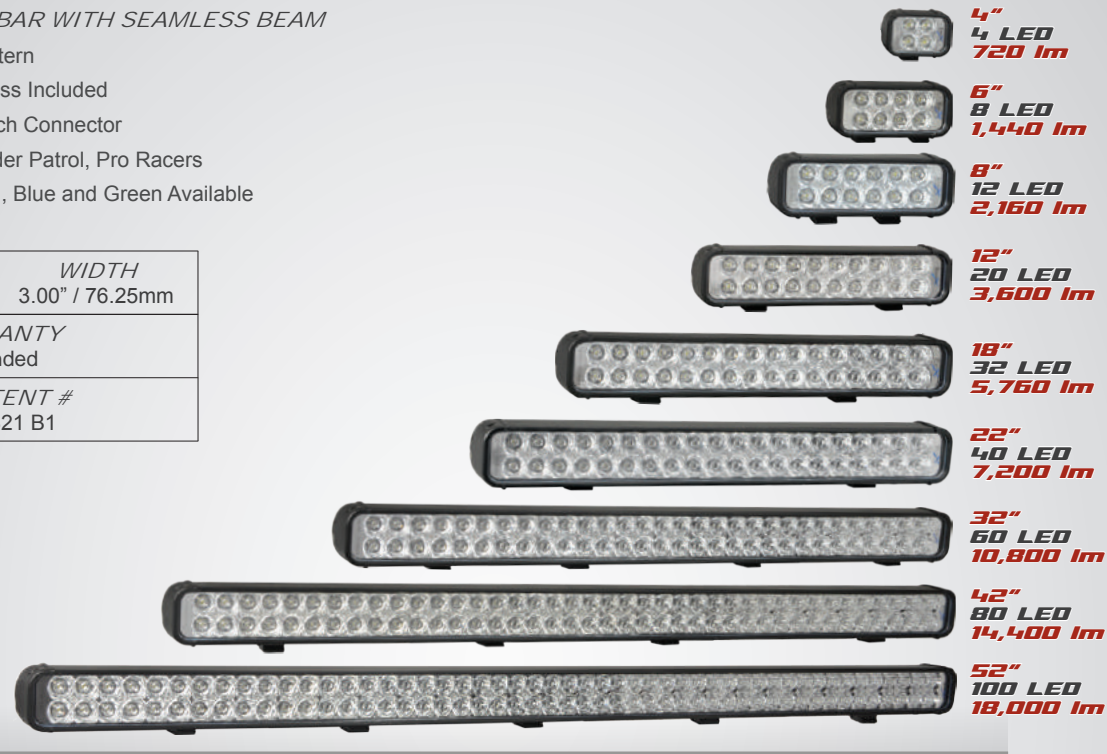

ITEM #	PART #	LENGTH	BEAM	ITEM #	PART #	LENGTH	BEAM
XIL-40	4006270	4.00"/101.6mm	Euro	XIL-321	4007482	17.60"/446mm	Flood
XIL-41	4007529	4.00"/101.6mm	Flood	XIL-400	4006324	21.70"/550mm	Euro
XIL-80	4006287	5.80"/147.6mm	Euro	XIL-401	4007505	21.70"/550mm	Flood
XIL-81	4007581	5.80"/147.6mm	Flood	XIL-600	4006331	31.80"/808mm	Euro
XIL-120	4006294	7.80"/198.4mm	Euro	XIL-601	4007543	31.80"/808mm	Flood
XIL-121	4007369	7.80"/198.4mm	Flood	XIL-800	4006348	41.80"/1,062mm	Euro
XIL-200	4006300	11.80"/300mm	Euro	XIL-801	4007567	41.80"/1,062mm	Flood
XIL-201	4007468	11.80"/300mm	Flood	XIL-1000	4006355	51.80"/1,316mm	Euro
XIL-320	4006317	17.60"/446mm	Euro	XIL-1001	4007345	51.80"/1,316mm	Flood
XIL-321	4007482	17.60"/446mm	Flood				

## XMITTER IN ACTION




## USED BY NASA



## XMITTER

ITEM #	PART #	BEAM	LEDS	LENGTH	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-40	4006270	Euro Flood	4	4.00"/101.6mm	720 lm	396 lm	9-42V	12	1A
XIL-80	4006287	Euro Flood	8	5.80"/147.6mm	1,440 lm	792 lm	9-42V	24	2A
XIL-120	4006294	Euro Flood	12	7.80"/198.4mm	2,160 lm	1,188 lm	9-42V	36	3A
XIL-200	4006300	Euro Flood	20	11.80"/300mm	3,600 lm	1,980 lm	9-42V	60	5A
XIL-320	4006317	Euro Flood	32	17.60"/446mm	5,760 lm	3,168 lm	9-42V	96	8A
XIL-400	4006324	Euro Flood	40	21.70"/550mm	7,200 lm	3,960 lm	9-42V	120	10A
XIL-600	4006331	Euro Flood	60	31.80"/808mm	10,800 lm	5,940 lm	9-42V	180	15A
XIL-800	4006348	Euro Flood	80	41.80"/1,062mm	14,400 lm	7,920 lm	9-42V	240	20A
XIL-1000	4006355	Euro Flood	100	51.80"/1,316mm	18,000 lm	9,900 lm	9-42V	300	25A

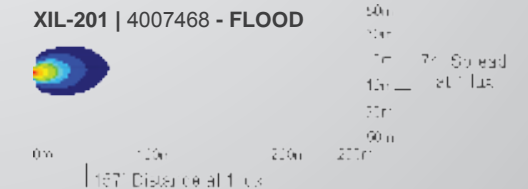




**XMITTER PRIME XTREME SINGLE**

ITEM #	PART #	BEAM	LEDS	LENGTH	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-PX610 XIL-PX640	9117409 9117492	10° 40°	6	4.70"/120mm	3,168 lm	2,220 lm	9-32V DC	30	2.5A
XIL-PX1210 XIL-PX1240	9115603 9115696	10° 40°	12	7.90"/201mm	6,336 lm	4,440 lm	9-32V DC	60	5A
XIL-PX1810 XIL-PX1840	9115788 9115870	10° 40°	18	11.10"/282mm	9,504 lm	6,660 lm	9-32V DC	90	7.5A
XIL-PX3010 XIL-PX3040	9116860 9116952	10° 40°	30	17.50"/444mm	15,840 lm	11,100 lm	9-32V DC	150	12.5A
XIL-PX3610 XIL-PX3640	9117041 9117133	10° 40°	36	20.60"/525mm	19,008 lm	13,320 lm	9-32V DC	180	15A
XIL-PX5410 XIL-PX5440	9117225 9117317	10° 40°	54	30.20"/768mm	28,512 lm	19,980 lm	9-32V DC	270	22.5A
XIL-PX7210 XIL-PX7240	9117584 9117676	10° 40°	72	39.80"/1,011mm	38,016 lm	26,640 lm	9-32V DC	360	30A
XIL-PX9010 XIL-PX9040	9887036 9887043	10° 40°	90	49.37"/1,254mm	47,520 lm	33,300 lm	9-32V DC	450	37.5A

**XIL-PX1810 | 9115788 - 10° BEAM**

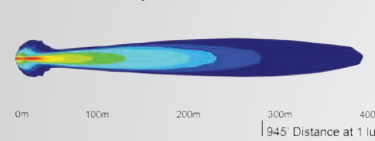


**XIL-PX1840 | 9115870 - 40° BEAM**




**XMITTER PRIME XTREME DOUBLE**

ITEM #	PART #	BEAM	LEDS	LENGTH	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-PX2.610 XIL-PX2.640	9116686 9116778	10° 40°	12	4.70"/120mm	6,336 lm	4,440 lm	9-32V DC	60	2A
XIL-PX2.1210 XIL-PX2.1240	9115962 9116051	10° 40°	24	7.90"/201mm	12,672 lm	8,880 lm	9-32V DC	120	10A
XIL-PX2.1810 XIL-PX2.1840	9116143 9116235	10° 40°	36	11.10"/282mm	19,008 lm	13,320 lm	9-32V DC	180	15A
XIL-PX2.3010 XIL-PX2.3040	9116327 9116419	10° 40°	60	17.50"/444mm	31,680 lm	22,200 lm	9-32V DC	300	25A
XIL-PX2.3610 XIL-PX2.3640	9116501 9116594	10° 40°	72	20.60"/525mm	38,016 lm	26,640 lm	9-32V DC	350	30A

**XIL-PX2.1810 | 9116143 - 10° BEAM**

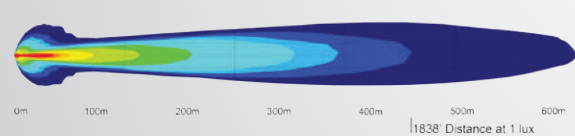


**XIL-PX2-1840 | 9116235 - 40° BEAM**

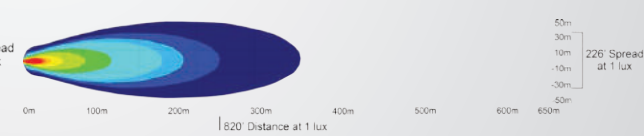

**XPR**

ITEM #	PART #	BEAM	LEDS	LENGTH	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XPR-6	9891613	Straight	6	11.50"/292.1mm	6,474 lm	4,531 lm	11-32V	60	5A
XPR-12M	9891637	Tilted LEDs	12	24.00"/609.6mm	12,948 lm	9,064 lm	11-32V	120	10A
XPR-15M	9891644	Tilted LEDs	15	29.40"/746.76mm	16,185 lm	11,330 lm	11-32V	150	12.5A
XPR-18M	9891651	Tilted LEDs	18	34.70"/881.38mm	19,422 lm	13,595 lm	11-32V	180	15A
XPR-21M	9891668	Tilted LEDs	21	40.00"/1,016.00mm	22,659 lm	15,861 lm	11-32V	210	17.5A
XPR-24M	9891675	Tilted LEDs	24	45.30"/1,150.62mm	25,896 lm	18,127 lm	11-32V	240	20A
XPR-27M	9891682	Tilted LEDs	27	50.60"/1,285.24mm	29,133 lm	20,393 lm	11-32V	270	22.5A


**12" XPR-6 | 9889399 - Straight Beam**



**XPI**

ITEM #	PART #	BEAM	LEDS	LENGTH	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XPI-6	9889399	Straight	6	11.50"/292.1mm	3,168 lm	2,218 lm	11-32V	60	2.5A
XPI-12M	9889405	Tilted LEDs	12	24.00"/609.6mm	6,336 lm	4,436 lm	11-32V	120	5A
XPI-15M	9889443	Tilted LEDs	15	29.40"/746.76mm	7,920 lm	5,545 lm	11-32V	150	6.25A
XPI-18M	9889412	Tilted LEDs	18	34.70"/881.38mm	9,504 lm	6,654 lm	11-32V	180	7.5A
XPI-21M	9890500	Tilted LEDs	21	40.00"/1,016.00mm	11,088 lm	7,762 lm	11-32V	210	8.75A
XPI-24M	9889429	Tilted LEDs	24	45.30"/1,150.62mm	12,672 lm	8,872 lm	11-32V	240	10A
XPI-27M	9889436	Tilted LEDs	27	50.60"/1,285.24mm	14,256 lm	9,981 lm	11-32V	270	11.25A

**12" XPI-6 | 9889399 - STRAIGHT BEAM**

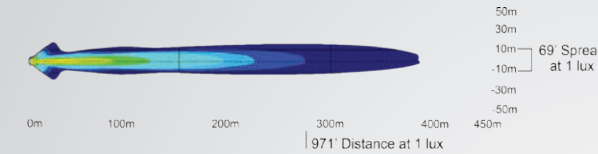

**HORIZON PRIME XTREME**

ITEM #	PART #	BEAM	LEDS	LENGTH	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
CTL-HPX910 CTL-HPX940	9111469 9119830	10° 40°	9	13.87"/352.2mm	4,752 lm	3,330 lm	9-32V DC	45	3.75A
CTL-HPX1210 CTL-HPX1240	9111551 9119656	10° 40°	12	17.64"/448.2mm	6,336 lm	4,440 lm	9-32V DC	60	5A
CTL-HPX1810 CTL-HPX1840	9111643 9119748	10° 40°	18	25.20"/640.2mm	9,504 lm	6,660 lm	9-32V DC	90	7.5A

**CTL-HPX1810 | 9111643 - 10° BEAM**




**CTL-HPX1840 | 9119748 - 40° BEAM**




**LOW PROFILE XTREME**

ITEM #	PART #	BEAM	LEDS	LENGTH	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-LPX310 XIL-LPX340	4000759 4000766	10° 40°	3	4.65"/118mm	1,584 lm	1,110 lm	9-32V	15	1.25A
XIL-LPX610 XIL-LPX640	9118758 9120737	10° 40°	6	8.43"/214mm	3,168 lm	2,220 lm	9-32V	30	2.5A
XIL-LPX910 XIL-LPX940	4000773 4000780	10° 40°	9	12.21"/310mm	4,752 lm	3,330 lm	9-32V	45	3.75A
XIL-LPX1510 XIL-LPX1540	9114613 9114705	10° 40°	15	19.77"/502mm	7,920 lm	5,550 lm	9-32V	75	6.25A
XIL-LPX2410 XIL-LPX2440	9121901 9132884	10° 40°	24	31.11"/790mm	12,672 lm	8,880 lm	9-32V	120	10A
XIL-LPX2710 XIL-LPX2740	9114972 9115061	10° 40°	27	34.89"/886mm	14,256 lm	9,990 lm	9-32V	135	11.25A
XIL-LPX3310 XIL-LPX3340	9115153 9115245	10° 40°	33	42.44"/1,078mm	17,424 lm	12,210 lm	9-32V	165	13.75A
XIL-LPX3910 XIL-LPX3940	9128115 9132976	10° 40°	39	50.00"/1,270mm	20,592 lm	14,430 lm	9-32V	195	16.25A

**XIL-LPX910 | 4000773 - 10° BEAM**

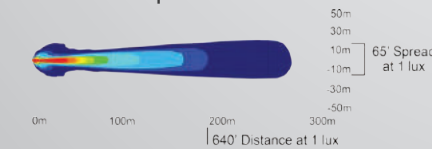

**XIL-LPX940 | 4000780 - 40° BEAM**

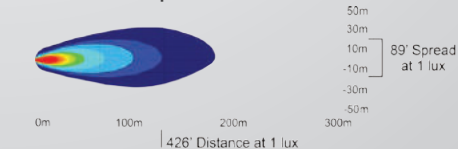





# VEHICLE SPECIFIC

**LIGHT UP THE ROAD  
EASY TO INSTALL KITS**



#### VARIETY OF VEHICLES

Vision X offers aftermarket kits for many different vehicles from all popular manufacturers. Currently, Vision X has kits for the following line-up of vehicles; Jeep JK, Ford Raptor, Ford Superduty, Ford F Series, GMC Sierra, Dodge Ram, Toyota Tundra and Chevrolet Silverado.

#### EASY INSTALLATION

All Vision X vehicle specific kits are simple to install, and do not require any advanced tooling.

#### NO DRILLING REQUIRED

Most Vision X vehicle specific kits do not require any drilling, and can simply be attached to factory drilled holes. This allows for simple installation, and saves you from having to pay installation fees.

#### STEP BY STEP INSTRUCTIONS

Each Vision X vehicle specific kit comes packaged with a set of step by step instructions that include images, tips and tricks, as well as other important and useful documents.



## JEEP JK KITS

Adding custom lighting takes any Jeep to the next level. Vision X makes easy to install custom kits for Jeep JK vehicles. All custom kits feature no-drilling requirements, and are easily installed in a matter of minutes. Each kit can be purchased with Vision X Light products, ultimately brightening your Jeep JK.



VORTEX 7" LED HEADLIGHT  
PAGE 26

Check out the Vortex 7" LED Headlight featuring an intense halo ring on page 26 and 27. This powerful headlight is the perfect addition to any customized Jeep.

### FACTORY FOG LIGHT UPGRADE KIT

Lights, Mounts, Wiring | 7x Brighter Than Headlight | Direct Fit In Factory Bumper



ITEM #: XIL-OE1012JKV2OPR Shown  
PART #: 9154756

ITEM #	PART #	FITS	KIT INCLUDES
XIL-OE0709JKV2	9145662	07-09 Jeep JK	Brackets, Connectors
XIL-OE1012JKV2	9154664	10-13 Jeep JK	Brackets, Connectors
XIL-OE0709JKV2OPR	9145754	07-09 Jeep JK	Brackets, (2) XIL-OPR110, Connectors
XIL-OE1012JKV2OPR	9154756	10-13 Jeep JK	Brackets, (2) XIL-OPR110, Connectors
XIL-OE13JKX	9891064	13-14 Jeep JK	Brackets, Connectors

### WINDSHIELD MOUNT FOR LIGHT BARS

No Drilling Necessary | Mount LED Light Bars Up to 52" | Updated Design



ITEM #: XIL-OEW0713JKV2 Shown  
PART #: 9888422

ITEM #	PART #	FITS	KIT INCLUDES
XIL-OEW0713JKV2	9888422	07-14 Jeep JK	Brackets

### HOOD MOUNT FOR LIGHT BARS

No Drilling Necessary | Fits up to a 20" LED Light Bar | Add Up to 17,748 Lumens



ITEM #: XIL-OEH0713PX36 Shown  
PART #: 9891002

ITEM #	PART #	FITS	KIT INCLUDES
XIL-OEH0713PX36	9891002	07-14 Jeep JK	Brackets, (1) XIL-PX3610, Harness
XIL-OEH0713XPI12	9891019	07-14 Jeep JK	Brackets, (1) XPI-12M

### A PILLAR LIGHT MOUNT

No Drilling Necessary | Perfect for Optimus or Cannon Series | Add Up to 5,000 Lumens



ITEM #: XIL-OEA0713JKCPZ1 Shown  
PART #: 9888415

ITEM #	PART #	FITS	KIT INCLUDES
XIL-OEA0713JK	9888392	07-14 Jeep JK	Brackets
XIL-OEA0713JKOPR	9888408	07-14 Jeep JK	Brackets, (2) XIL-OPR110, Harness
XIL-OEA0713JKCPZ1	9888415	07-14 Jeep JK	Brackets, (2) CTL-CPZ110, Harness

\*Additional Technical Data On Page 56

## FORD RAPTOR KITS

### FACTORY FOG LIGHT UPGRADE KIT

Lights, Mounts, Wiring | 7x Brighter Than Headlight | Direct Fit In Factory Opening



ITEM #: XIL-OE10FR0P Shown  
PART #: 9160870

ITEM #	PART #	FITS	KIT INCLUDES
XIL-OE10FR	9160870	07-09 Ford Raptor	Bracket, Factory Integration Harness
XIL-OE10FR0P	9133515	10-13 Ford Raptor	Brackets, (4) XIL-OP110, Integrated Harness

### BUMPER MOUNT FOR LIGHT BARS

Lights, Mounts, Wiring | Fits Directly into Factory Bumper | Add Up to 17,748 Lumens



ITEM #: XIL-OEB10FRX3610 Shown  
PART #: 9887357

ITEM #	PART #	FITS	KIT INCLUDES
XIL-OEB10FR	9887340	10-14 Ford Raptor	Bracket*, Factory Integration Harness
XIL-OEB10FRPX3610	9887357	10-14 Ford Raptor	Brackets, (1) XIL-PX3610, Integrated Harness

\*Additional Technical Data On Page 56

### RAPTOR KITS IN ACTION



## FORD F SERIES

### FACTORY FOG LIGHT UPGRADE KIT

Drastically Increase Light Output | 99-14 Ford Super Duty Models | Direct Fit In Factory Bumper



ITEM #: XIL-OE9913FSDDURA Shown  
PART #: 9891200

ITEM #	PART #	FITS	KIT INCLUDES
XIL-OE9913FSD	9891194	99-14 Ford Super Duty	Bracket, Connectors
XIL-OE9913FSDDURA	9891200	99-14 Ford Super Duty	Brackets, (2) DURA-410, Connectors

### BUMPER MOUNT FOR LIGHT BARS

EcoBoost Edition Available | Add Up To 17,748 Lumens | Direct Fit In Factory Bumper



ITEM #: XIL-OEB10FRX3610 Shown  
PART #: 9887357

ITEM #	PART #	FITS	KIT INCLUDES
XIL-OEB09F150	9891057	09-14 F150	Bracket
XIL-OEB09F150PX36	9891156	09-14 F150	Bracket, XIL-PX3610, Wiring Harness
XIL-OEB09F150LPX15	9891163	09-14 F150	Bracket, XIL-LPX1510, Wiring Harness
XIL-OEB09F150ECO	9891170	09-14 F150	Bracket, (2) XIL-PX610, Wiring Harness

\*Additional Technical Data On Page 56

### F SERIES KITS IN ACTION





## DODGE RAM KITS

### FACTORY FOG LIGHT UPGRADE KIT

Lights, Mounts, Wiring | Available for 02-08 Dodge Ram Models | Direct Fog Light Replacement



ITEM #: XIL-OE0210DRUMX Shown  
PART #: 9133065

ITEM #	PART #	FITS	KIT INCLUDES
XIL-OE0210DR	4002333	02-08 Dodge Ram	Brackets, Plug & Play Connectors
XIL-OE0210DRUMX	9133065	02-08 Dodge Ram	Brackets, (2) XIL-UMX4010, Connectors
XIL-OE0913DR	9889221	09-14 Dodge Ram	Brackets, Connectors
XIL-OE0913DROP	9888552	09-14 Dodge Ram	Brackets, (4) XIL-OP110, Connectors

### BUMPER MOUNT FOR LIGHT BARS

Lights, Mounts, Wiring | Add Up to 17,748 Lumens | Direct Fit In Factory Bumper



ITEM #: XIL-OEB0913DRPX3610 Shown  
PART #: 9889245

ITEM #	PART #	FITS	KIT INCLUDES
XIL-OEB0913DR	9889238	10-14 Dodge Ram	Brackets, Connectors
XIL-OEB0913DRPX3610	9889245	10-14 Dodge Ram	Brackets, XIL-PX3610, Wiring Harness

\*Additional Technical Data On Page 56

### RAM KITS IN ACTION



## GMC SIERRA KITS

### FACTORY FOG LIGHT UPGRADE KIT

Lights, Mounts, Wiring | Bolts Directly To Factory Mounting | 7x Brighter Than Headlight




ITEM #: XIL-OE0111GSUMX Shown  
PART #: 9133157

ITEM #	PART #	FITS	KIT INCLUDES
XIL-OE0711GS	4002388	07-13 GMC Sierra	Bracket
XIL-OE0711GSUMX	9133157	07-13 GMC Sierra	Brackets, (2) XIL-UMX4010, Integrated Harness

\*Additional Technical Data On Page 56

### SIERRA KITS IN ACTION

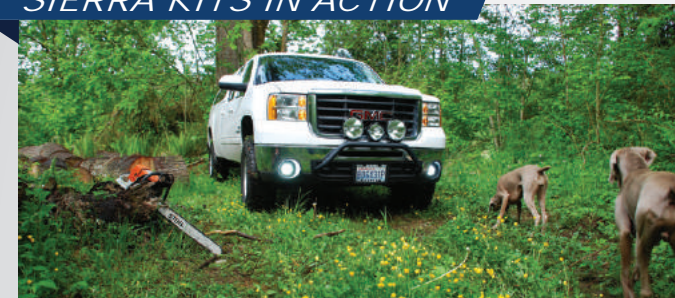

## TOYOTA TUNDRA SERIES

### FACTORY FOG LIGHT UPGRADE KIT

Lights, Mounts, Wiring | 7x Brighter Than Headlight | Direct Fog Light Replacement



ITEM #: XIL-OE0711TTUMX Shown  
PART #: 91336249

ITEM #	PART #	FITS	KIT INCLUDES
XIL-OE0711TT	4002296	07-13 Tundra	Bracket, Connectors
XIL-OE0711TTUMX	9133249	07-13 Tundra	Brackets, (2) XIL-UMX4010, Connectors

\*Additional Technical Data On Page 56

### TUNDRA KITS IN ACTION



## CHEVROLET SILVERADO SERIES

### FACTORY FOG LIGHT UPGRADE KIT

Lights, Mounts, Wiring | Bolts Directly To Factory Mounting | 7x Brighter Than Headlight



ITEM #: XIL-OE0711CSS1100 Shown  
PART #: 9120829

ITEM #	PART #	FITS	KIT INCLUDES
XIL-OE0711CS	4002340	07-13 Silverado	Brackets*, T-Tap Connectors
XIL-OE0711CSS1100	9120829	07-13 Silverado	Brackets, (4) XIL-S1100, T-Tap Connectors

\*Additional Technical Data On Page 56

### SILVERADO KITS IN ACTION







### JEEP JK KITS

ITEM #	PART #	INCLUDES	MOUNTING LOCATION	RAW LUMENS	EFFECTIVE LUMENS	WEIGHT	AMP DRAW
XIL-OE0709JKV2	9145662	Brackets*, Plug & Play Connectors	07-09 Fog Light	-	-	4.06 lb	-
XIL-OE1012JKV2	9154664	Brackets*, Plug & Play Connectors	10-13 Fog Light	-	-	4.06 lb	-
XIL-OE0709JKV2OPR	9145754	Brackets, (2) XIL-OPR110, Plug & Play Connectors	07-09 Fog Light	2,104 lm	1,472 lm	7.12 lb	3.34A
XIL-OE1012JKV2OPR	9154756	Brackets, (2) XIL-OPR110, Plug & Play Connectors	10-13 Fog Light	2,104 lm	1,472 lm	7.12 lb	3.34A
XIL-OE13JKX	9891064	Brackets*, Plug & Play Connectors	13-14 Fog Light**	-	-	1.00 lb	-
XIL-OEW0713JKV2	9888422	Brackets*	07-14 Windshield	-	-	-	-
XIL-OEH0713JK	9890975	Brackets*	07-14 Hood Mount	-	-	3.00 lb	-
XIL-OEH0713JKPX36	9891002	Brackets, (1) XIL-PX3610, Harness	07-14 Hood Mount	17,748 lm	12,423 lm	13.50 lb	15A
XIL-OEH0713JKXPI12	9891019	Brackets, (1) XPI-12M	07-14 Hood Mount	6,336 lm	4,436 lm	12.00 lb	6.25A
XIL-OEA0713JK	9888392	Brackets*	07-14 A Pillar	-	-	1.40 lb	-
XIL-OEA0713JKOPR	9888408	Brackets, (2) XIL-OPR110, Harness	07-14 A Pillar	2,104 lm	1,472 lm	4.46 lb	3.34A
XIL-OEA0713JKCPZ1	9888415	Brackets, (2) CTL-CPZ110, Harness	07-14 A Pillar	5,000 lm	3,500 lm	5.44 lb	4.16A

### FORD RAPTOR KITS

ITEM #	PART #	INCLUDES	MOUNTING LOCATION	RAW LUMENS	EFFECTIVE LUMENS	WEIGHT	AMP DRAW
XIL-OE10FR	9160870	Bracket*, Factory Integration Harness	10-14 Fog Light	-	-	2.50 lb	-
XIL-OE10FROP	9133515	Brackets, (4) XIL-OP110, Factory Integration Harness	10-14 Fog Light	6,880 lm	4,816 lm	5.74 lb	6.68A
XIL-OEB10FR	9887340	Bracket*, Factory Integration Harness	10-14 Bumper	-	-	3.00 lb	-
XIL-OEB10FRPX3610	9887357	Brackets, (1) XIL-PX3610, Factory Integration Harness	10-14 Bumper	17,748 lm	12,423 lm	12.58 lb	15A

### DODGE RAM KITS

ITEM #	PART #	INCLUDES	MOUNTING LOCATION	RAW LUMENS	EFFECTIVE LUMENS	WEIGHT	AMP DRAW
XIL-OE0210DR	4002333	Brackets*, Plug & Play Connectors	02-08 Fog Light	-	-	1.20 lb	-
XIL-OE0210DRUMX	9133065	Brackets, (2) XIL-UMX4010, Plug & Play Connectors	02-08 Fog Light	6,902 lm	4,404 lm	6.06 lb	7.6A
XIL-OE0913DR	9889221	Brackets*, Plug & Play Connectors	09-14 Fog Light	-	-	1.20 lb	-
XIL-OE0913DROP	9888552	Brackets, (4) XIL-OP110, Plug & Play Connectors	09-14 Fog Light	4,208 lm	4,816 lm	13.20 lb	6.68A
XIL-OEB0913DR	9889238	Brackets*, Plug & Play Connectors	09-14 Bumper	-	-	3.00 lb	-
XIL-OEB0913DRPX3610	9889245	Brackets, XIL-PX3610, Wiring Harness	09-14 Bumper	17,748 lm	12,423 lm	12.58 lb	15A

### TOYOTA TUNDRA KITS

ITEM #	PART #	INCLUDES	MOUNTING LOCATION	RAW LUMENS	EFFECTIVE LUMENS	WEIGHT	AMP DRAW
XIL-OE0711TT	4002296	Brackets	02-08 Fog Light	-	-	5.35 lb	-
XIL-OE0711TTUMX	9133249	Brackets, (2) XIL-UMX4010, Plug & Play Connectors	02-08 Fog Light	6,902 lm	4,404 lm	6.06 lb	5.83A

### GMC SIERRA KITS

ITEM #	PART #	INCLUDES	MOUNTING LOCATION	RAW LUMENS	EFFECTIVE LUMENS	WEIGHT	AMP DRAW
XIL-OE0711GS	4002388	Bracket*	07-13 Fog Light	-	-	0.45 lb	-
XIL-OE0711GSUMX	9133157	Brackets, (2) XIL-UMX4010, Factory Integration Harness	07-13 Fog Light	6,902 lm	4,404 lm	5.31 lb	7.6A

### CHEVROLET SILVERADO KITS

ITEM #	PART #	INCLUDES	MOUNTING LOCATION	RAW LUMENS	EFFECTIVE LUMENS	WEIGHT	AMP DRAW
XIL-OE0711CS	4002340	Brackets*, T-Tap Connectors	07-13 Fog Light	-	-	1.20 lb	-
XIL-OE0711CSS1100	9120829	Brackets, (4) XIL-S1100, T-Tap Connectors	07-13 Fog Light	6,902 lm	4,404 lm	4.24 lb	3.32A







# HEAVY DUTY LIGHTS

## INDUSTRIAL GRADE LED



### PITMASTER SERIES

The PitMaster replaces HPS and Metal Halide with a more powerful light with a lower power consumption and low startup current draw to reduce wear on associated components. Even more, 6000k light temperature helps to make conditions safer for operators to reduce fatigue and accidents on the job.

### RIPPER SERIES

The Ripper gets its name from its first application, the Ripper Mount on a dozer. Engineered with a suspension mount featuring isolated rubber shock absorbers paired with a trunnion mount, the Ripper is vibration rated up to 60G RMS for the high vibration environments.

### SOLSTICE PRIME SERIES

The Solstice Prime acts as a direct HID replacement for vehicle lighting. Featuring a trunnion mount, the Solstice Prime series is optimized for controlling vibration. The Solstice Prime is available in both a 5 and 7 LED configuration.

### SHOCKWAVE SERIES

The Shockwave industrial LED replacement fixture for fluorescent lighting is the first of its kind. Using SMD LED technology, an even, ultra wide beam is produced.





## PITMASTER SERIES

The PitMaster is a superior replacement to HPS and Metal Halide lights due to its more powerful light output, lower power consumption and lower startup current draw. For use on heavy duty equipment to structural lighting to oil and gas rigs, the PitMaster increases visibility and reduces risk for operators and workers.

### PITMASTER 60

Direct 1 for 1 replacement for 800-1000 Watt HPS lighting featuring for a 70% reduction in power consumption while increasing effective output by 30%. Twin redundant circuit boards and inverters in the 60 LED model completely remove unscheduled maintenance allowing the light to function even if half the system fails.


### PITMASTER 30

Direct 1 for 1 replacement for 400-500 Watt HPS lighting featuring for a 70% reduction in power consumption while increasing effective output by 30%.

### PITMASTER IN ACTION




### PITMASTER 60

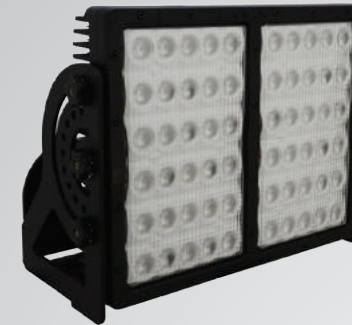

ITEM #: MIL-PMX6060 Shown  
PART #: 9113357

1000 WATT METAL HALIDE REPLACEMENT LIGHT  
Increases Operator Safety | 360° Fully Adjustable Mounting System | Prime Drive Equipped

<b>BEAM PATTERNS</b> 10°, 25°, 40°, 60°, 90°, 30°x65°	<b>WATTAGE</b> 300W	<b>MEASUREMENTS</b> 14.21" x 11.54" x 6.87" 361mm x 293mm x 174.5mm 26.46 lb / 12 kg
<b>RAW LUMENS</b> 31,680 lm (ea)	<b>WARRANTY</b> Extended	



ITEM #	PART #	BEAM	ITEM #	PART #	BEAM
MIL-PMX6010	9113081	10°	MIL-PMX6060	9113357	60°
MIL-PMX6025	9113173	25°	MIL-PMX6090	9139906	90°
MIL-PMX6040	9113265	40°	MIL-PMX60e3065	9113449	30/65°

\*Additional Technical Data On Page 62


### PITMASTER 30



ITEM #: MIL-PMX3040 Shown  
PART #: 9112817

500 WATT METAL HALIDE REPLACEMENT LIGHT  
Increases Operator Safety | 360° Fully Adjustable Mounting System | Prime Drive Equipped

<b>BEAM PATTERNS</b> 10°, 25°, 40°, 60°, 90°, 30°x65°	<b>WATTAGE</b> 150W	<b>MEASUREMENTS</b> 11.69" x 7.09" x 4.94" 297mm x 180mm x 125.5mm 12.34 lb / 5.6 kg
<b>RAW LUMENS</b> 15,840 lm (ea)	<b>WARRANTY</b> Extended	



ITEM #	PART #	BEAM	ITEM #	PART #	BEAM
MIL-PMX3010	9112633	10°	MIL-PMX3060	9112909	60°
MIL-PMX3025	9112725	25°	MIL-PMX3090	9138107	90°
MIL-PMX3040	9112817	40°	MIL-PMX30e3065	9112992	30/65°

\*Additional Technical Data On Page 62

## PITMASTER LED METAL HALIDE REPLACEMENT

#### PRIME DRIVE TECHNOLOGY

Prime Drive on the PitMaster Series integrates key features such as electronic thermal management (ETM), Pulse Width Modulation circuitry (PWM) dimming capabilities. ETM actively monitors heat to control internal temperature and extend the LED lifespan.

#### REDUNDANT CIRCUIT DESIGN


The PitMaster 60 is unique in that it features a redundant circuit design, allowing the light to function 100% in the case that one component should fail. This is part of the effort by Vision X to ensure that the PitMaster exceeds half engine life on mining vehicles.

#### INDUSTRIAL GRADE BUILD

The combination of a die-cast 6061 aluminum housing, unbreakable polycarbonate lens, integrated deutsch connector, reinforced gasketed bezel and a strengthened trunion bracket create a one-of-a-kind, high-powered light that will outshine and outlast the competition.

#### MOUNTING AND POWER SUPPLIES

The PitMaster line comes with mounting solutions and power supplies to integrate into any project. Mounts are available for hanging, flush mounting street mounting applications. Power supplies are available for high voltage and AC to DC applications.

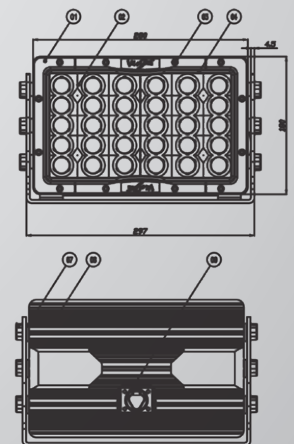





### PITMASTER

ITEM #	PART #	BEAM	LEDS	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	VIBRATION RATING	WATTS	AMP DRAW (12V)
MIL-PMX6010	9113081	10° Narrow	60	31,680 lm	22,200 lm	11-65V DC	15.6G <sub>RMS</sub>	300	25A
MIL-PMX6025	9113173	25° Medium	60	31,680 lm	22,200 lm	11-65V DC	15.6G <sub>RMS</sub>	300	25A
MIL-PMX6040	9113265	40° Wide	60	31,680 lm	22,200 lm	11-65V DC	15.6G <sub>RMS</sub>	300	25A
MIL-PMX6060	9113357	60° Extra Wide	60	31,680 lm	22,200 lm	11-65V DC	15.6G <sub>RMS</sub>	300	25A
MIL-PMX6090	9139906	90° Xtreme Wide	60	31,680 lm	22,200 lm	11-65V DC	15.6G <sub>RMS</sub>	300	25A
MIL-PMX60e3065	9113449	30x65° Elliptical	60	31,680 lm	22,200 lm	11-65V DC	15.6G <sub>RMS</sub>	300	25A
MIL-PMX3010	9112633	10° Narrow	30	15,840 lm	11,100 lm	11-65V DC	15.6G <sub>RMS</sub>	150	12.5A
MIL-PMX3025	9112725	25° Medium	30	15,840 lm	11,100 lm	11-65V DC	15.6G <sub>RMS</sub>	150	12.5A
MIL-PMX3040	9112817	40° Wide	30	15,840 lm	11,100 lm	11-65V DC	15.6G <sub>RMS</sub>	150	12.5A
MIL-PMX3060	9112909	60° Extra Wide	30	15,840 lm	11,100 lm	11-65V DC	15.6G <sub>RMS</sub>	150	12.5A
MIL-PMX3090	9138107	90° Xtreme Wide	30	15,840 lm	11,100 lm	11-65V DC	15.6G <sub>RMS</sub>	150	12.5A
MIL-PMX30e3065	9112992	30x65° Elliptical	30	15,840 lm	11,100 lm	11-65V DC	15.6G <sub>RMS</sub>	150	12.5A

#### MIL-PMX6040 | 9113265 - Wide Beam

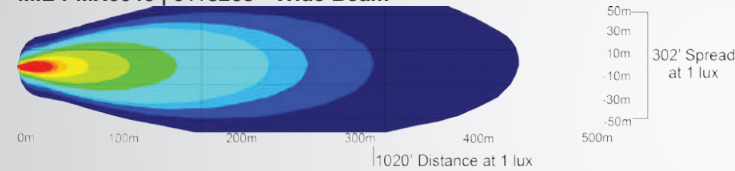


#### MIL-PMX3040 | 9112817 - Wide Beam

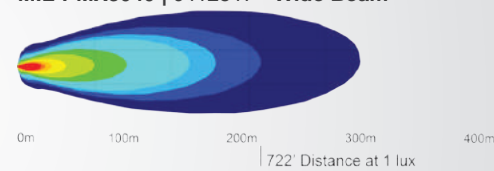

#### MIL-PMX6060 | 9113357 - Extra Wide Beam



#### MIL-PMX3060 | 9112909 - Extra Wide Beam

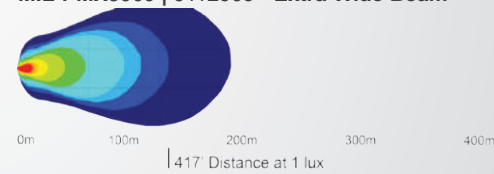

### OPTIONAL POWER SUPPLIES

ITEM #	PART #	INPUT VOLTAGE	OUTPUT VOLTAGE	WATTAGE	MAX AMP DRAW
XPC-PS150-24	9145846	100-277V AC	24V DC	150	6.25A
XPC-PS150-HV-24	9887371	180-480V AC	24V DC	150	6.25A



### OPTIONAL PITMASTER MOUNTS

ITEM #	PART #	MOUNT TYPE	APPLICATION
P-PMX30FLUSHMOUNT	9131085	Flush Mount	Low Bay
P-PMX30HANGINGMOUNT	9131177	Hanging Mount	Hanging
P-PMX30COBRAHEADMOUNT	9130996	Cobra Head	Street Lighting

### OPTIONAL JUNCTION BOXES

ITEM #	PART #	DESCRIPTION	FITS
P-JBOXPSE	9132617	Fully Enclosed Junction Box	XPC-PS150-24
P-JBOXAC	9129822	AC Wiring Junction Box	XPC-PS150-24/PS185-24
P-JBOX1B	9147826	P-JBOXPSE Mounting Bracket	PitMaster 30 Mount
P-JBOX2B	9147918	P-JBOXPSE Mounting Bracket	PitMaster 60 Mount



### PITMASTER PACKAGES

ITEM #	PART #	DESCRIPTION	PARTS INCLUDED	VOLTAGE
CXA-PMX3060HPS	9887388	30 LED PIT MASTER MINING INDUSTRIAL LIGHT 60° FLOOD HANGING MOUNT W/ MOUNTED POWER SUPPLY	MIL-PMX3060 X 1 XPC-PS150-24 X 1 111P-PMX30HANGINGMOUNT X 1 P-JBOXAC X 1	90-277 AC
CXA-PMX3060FPS	9887395	30 LED PIT MASTER MINING INDUSTRIAL LIGHT 60° FLOOD FLUSH MOUNT W/ MOUNTED POWER SUPPLY	MIL-PMX3060 X 1 XPC-PS150-24 X 1 P-PMX30FLUSHMOUNT X 1 P-JBOXAC X 1	90-277V AC
CXA-PMX3060CPS	9887401	30 LED PIT MASTER MINING INDUSTRIAL LIGHT 60° FLOOD COBRA HEAD MOUNT W/ MOUNTED POWER SUPPLY	MIL-PMX3060 X 1 XPC-PS150-24 X 1 P-PMX30COBRAHEADMOUNT X 1 P-JBOXAC X 1	90-277V AC
CXA-PMX3060PS	9887418	30 LED PIT MASTER MINING INDUSTRIAL LIGHT 60° FLOOD W/ MOUNTED POWER SUPPLY	MIL-PMX3060 X 1 XPC-PS150-24 X 1 P-JBOXAC X 1	90-277V AC
CXA-PMX6060HPS	9887425	60 LED PIT MASTER MINING INDUSTRIAL LIGHT 60° FLOOD W/ MOUNTED POWER SUPPLIES	MIL-PMX6060 X 1 XPC-PS150-24 X 2 P-PMX60HPLATE X 1 P-JBOXAC X 2	90-277 AC
CXA-PMX6060PS	9887432	60 LED PIT MASTER MINING INDUSTRIAL LIGHT 60° FLOOD W/ MOUNTED POWER SUPPLIES	MIL-PMX6060 X 1 XPC-PS150-24 X 2 P-JBOXAC X 2	90-277 AC

### PITMASTER APPLICATIONS

MACHINE	PLACEMENT	MODEL	BEAM
LARGE ROPE SHOVELS (P&H 4100XPC with 1000W OE HPS LAMPS)	Direct replacement of 1000 watt HPS lighting, 1 for 1	MIL-PMX6060	60°
LARGE ROPE SHOVELS (P&H 2300 & 2800 with 500W OE HPS LAMPS)	Direct replacement of 500 watt HPS lighting, 1 for 1	MIL-PMX3060	60°
JUMBOS, BOLTERS LIGHT PLANTS	Direct replacement of 400-500 watt HPS lighting, 1 for 1	MIL-PMX3060	60°
DRAG LINES	Lower boom lights - direct replacement 1 for 1 for all lower lights	MIL-PMX6060	60°
	Upper boom lights - direct replacement 1 for 1 for upper 2 lights	MIL-PMX6025	25°
DRILL RIGS (With 400W-500W HPS)	Direct replacement of 400-500 watt HPS lighting, 1 for 1	MIL-PMX3060	60°
BUILDING LIGHTING	Warehouse lighting - direct replacement of 400-500 watt HPS lighting, 1 for 1	CXA-PMX3060HPS	60°
	Low bay lighting - direct replacement of 400-500 watt HPS lighting, 1 for 1	CXA-PMX3060FPS	60°
STREET LIGHTING	Direct street light module replacement with mount, light components	CXA-PMX3060CPS	60°

\* Beam patterns are suggestions and may change based on specific project specifications



# RIPPER SERIES

Named for its first application - the ripper mount on a dozer - the Ripper series stands up to vibration of up to 60G<sub>RMS</sub> in the harshest conditions. Featuring a dual mounting system, both with a trunnion and a rubber shock absorber supported suspension mount, the Ripper is a direct replacement for HID and Halogen lighting.

Vibration Ready

Ripper Series Usage Guide

Need a high vibration light? The Ripper series combines solid internal components with a dual mounting system to withstand the vibration of heavy machinery.

Direct 1 for 1 replacement for HID Lighting on vehicles. The 60° beam allows for flood lighting on vehicle while the 40° beam allows for spot and low beam lighting.

## RIPPER IN ACTION



## RIPPER 20




ITEM #: MIL-RXP2060T Shown  
PART #: 9114439

60 G<sub>RMS</sub> RATED FOR HIGH VIBRATION APPLICATIONS  
Dual Mounting System | High Vibration Light | OE Upgrade

**BEAM PATTERNS**  
10°, 25°, 40°, 60°, 90°, 30°x65°  
**RAW LUMENS**  
10,560 lm (ea)

**WATTAGE**  
100W  
**WARRANTY**  
Extended

**MEASUREMENTS**  
8.26" x 6.25" x 4.05"  
209.8mm x 158.5mm x 102.8mm  
7.50 lb / 3.4 kg



ITEM #	PART #	BEAM	ITEM #	PART #	BEAM
MIL-RXP2010T	9114163	10°	MIL-RXP2060T	9114439	60°
MIL-RXP2025T	9114255	25°	MIL-RXP2090T	9138640	90°
MIL-RXP2040T	9114347	40°	MIL-RXP20e3065T	9114521	30/65°

\*Additional Technical Data On Page 70

## RIPPER 12




ITEM #: MIL-RXP1240T Shown  
PART #: 4009981

60 G<sub>RMS</sub> RATED FOR HIGH VIBRATION APPLICATIONS  
Dual Mounting System | High Vibration Light | OE Upgrade

**BEAM PATTERNS**  
10°, 25°, 40°, 60°, 90°, 30°x65°  
**RAW LUMENS**  
6,336 lm (ea)

**WATTAGE**  
60W  
**WARRANTY**  
Extended

**MEASUREMENTS**  
6.06" x 6.26" x 4.05"  
153.8mm x 159.5mm x 102.8mm  
5.51 lb / 2.5 kg



ITEM #	PART #	BEAM	ITEM #	PART #	BEAM
MIL-RXP1210T	4009974	10°	MIL-RXP1260T	4009998	60°
MIL-RXP1225T	4008618	25°	MIL-RXP1290T	9138558	90°
MIL-RXP1240T	4009981	40°	MIL-RXP12e3065T	9122809	30/65°

\*Additional Technical Data On Page 70

## INCLUDED



TRUNNION MOUNT



DUAL MOUNTING



SUSPENSION MOUNT

Vision X Ripper Series lights were designed to operate during intense amounts of vibration. The Ripper Series can endure up to 60G<sub>RMS</sub> without skipping a beat by utilizing dual mounts. The Trunnion bracket handles severe vibration, and the Suspension mount uses isolated rubber shock absorbers to minimize vibration on the durable Die-Cast Aluminum housing.



## SOLSTICE PRIME SERIES

Combining traditional form factor with the power of LED, the Solstice Prime Series is the OE upgrade option for HID and Halogen replacement that improves reliability and lighting output. Available in a 5 or 7 LED model, the Solstice Prime includes Prime Drive for thermal management and dimming ability built in.

105° Mounting Bracket

Solstice Prime Usage Guide

The Solstice Prime Series light is equipped with a durable trunnion mount with 105° of adjustment to mount securely and aim easily for your application.

Direct 1 for 1 replacement for HID Lighting on vehicles. The 40° beam allows for flood lighting on vehicle while the 20° beam allows for spot lighting.

### SOLSTICE PRIME IN ACTION



### SOLSTICE PRIME 7




ITEM #: XIL-SP720 Shown  
PART #: 4009868

OE UPGRADE FOR HEAVY COMMERCIAL/INDUSTRIAL  
105° Adjustable Trunnion | Vertical Fins Maximize Heat Dissipation | PWM Integrated Dimming

BEAM PATTERNS  
20°, 40°  
RAW LUMENS  
7,364 lm (ea)

WATTAGE  
10W  
WARRANTY  
Extended

MEASUREMENTS  
7.14" x 5.98" x 3.17"  
181.3mm x 152mm x 80.6mm  
4.52 lb / 2.05 kg



ITEM #	PART #	BEAM
XIL-SP720	4009868	20°
XIL-SP740	4009875	40°

\*Additional Technical Data On Page 70

### SOLSTICE PRIME 5




ITEM #: XIL-SP520 Shown  
PART #: 4009844

OE UPGRADE FOR HEAVY COMMERCIAL/INDUSTRIAL  
105° Adjustable Trunnion | Vertical Fins Maximize Heat Dissipation | PWM Integrated Dimming

BEAM PATTERNS  
20°, 40°  
RAW LUMENS  
5,260 lm (ea)

WATTAGE  
10W  
WARRANTY  
Extended

MEASUREMENTS  
6.00" x 4.13" x 3.13"  
152.5mm x 105mm x 79.2mm  
3.09 lb / 1.4 kg



ITEM #	PART #	BEAM
XIL-SP520	4009844	20°
XIL-SP540	4009851	40°

\*Additional Technical Data On Page 70

### SOLSTICE PRIME



TRUNNION BRACKET

SOLSTICE  
PRIME

### 105° ROTATION



MOUNTING

The Vision X Solstice Prime Series comes equipped with a fully-adjustable 105° trunnian bracket. Easily tuned with a 5mm allen wrench, the Solstice Prime can be perfectly positioned for the most direct and efficient light usage in order to get the job done. In addition, each bolt on the bracket uses isolated rubber shock absorbers to minimize vibration on the durable Die-Cast Aluminum housing.



# SHOCKWAVE SERIES

The Vision X Shockwave series excels at being a durable fluorescent upgrade for flat mount applications. Ideal for lighting on heavy commercial and industrial machinery, each model has the option of using Frosted or Clear lens, depending on the intensity of light that you desire.

### Low Bay Fluorescent Replacement

Fluorescent tubes break and need regular replacement. With the Shockwave series, save on unscheduled maintenance with 50,000 hours of LED life for a brighter, longer-lasting light.

### Shockwave Series Usage Guide

Interior house lights and track lights for shovels, draglines and harsh building environments. Replaces T8 fluorescent fixture available from 1' to 4' designed specifically for harsh environments.

## SHOCKWAVES IN ACTION



## SHOCKWAVE DUAL





ITEM #: MIL-SWD1220 Shown  
PART #: 9125954

MODULAR LED UPGRADE FOR FLUORESCENT LIGHTS  
Fluorescent Replacement | Frosted or Clear Lenses | Multiple Mounting Options

**BEAM PATTERNS**  
Ultra Wide 150°  
**RAW LUMENS**  
1,750-7,000 lm (ea)

**WATTAGE**  
20-80W  
**WARRANTY**  
Extended

**MEASUREMENTS**  
14.48-49.88" x 7.43" x 1.91"  
39-127mm x 18.9mm x 4.85mm  
5.80-22.60 lb / 2.6-10.25 kg



ITEM #	PART #	LENGTH	ITEM #	PART #	LENGTH
MIL-SWD1220	9125954	11.81"/300mm	MIL-SWD3660	9126135	35.43"/900mm
MIL-SWD1220F	9150253	11.81"/300mm	MIL-SWD3660F	9150437	35.43"/900mm
MIL-SWD2440	9126043	23.62"/600mm	MIL-SWD4880	9126227	47.24"/1200mm
MIL-SWD2440F	9150345	23.62"/600mm	MIL-SWD4880F	9150529	47.24"/1200mm

\*Additional Technical Data On Page 71

## SHOCKWAVE SINGLE





ITEM #: MIL-SWS1210F Shown  
PART #: 9150611

MODULAR LED UPGRADE FOR FLUORESCENT LIGHTS  
Fluorescent Replacement | Frosted or Clear Lenses | Multiple Mounting Options

**BEAM PATTERNS**  
Ultra Wide 120°  
**RAW LUMENS**  
875-3,500 lm (ea)

**WATTAGE**  
10-40W  
**WARRANTY**  
Extended

**MEASUREMENTS**  
11.81-47.24" x 5.71" x 1.91"  
30-120mm x 14.5mm x 4.85mm  
3.10-12.2 lb / 1.4-5.53 kg



ITEM #	PART #	LENGTH	ITEM #	PART #	LENGTH
MIL-SWS1210	9125596	11.81"/300mm	MIL-SWS3630	9125770	35.43"/900mm
MIL-SWS1210F	9150611	11.81"/300mm	MIL-SWS3630F	9150796	35.43"/900mm
MIL-SWS2420	9125688	23.62"/600mm	MIL-SWS4840	9125862	47.24"/1200mm
MIL-SWS2420F	9150703	23.62"/600mm	MIL-SWS4840F	9150888	47.24"/1200mm


\*Additional Technical Data On Page 71

## AC POWER MOUNTS

The Shockwave Series has available Power Supply mounts, allowing you to easily mount the light while supplying it with up to 480V of AC power input. The high voltage inverters contain 500 Watts, and outputs 24V of DC power.



SINGLE AC MOUNT

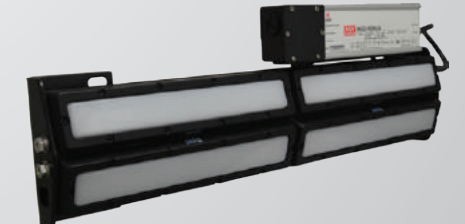

DUAL AC MOUNT

ITEM #	PART #	APPLICATIONS	ITEM #	PART #	APPLICATIONS
P-SWS12ACMOUNT	9143590	12" Shockwave Single	P-SWD12ACMOUNT	9143774	12" Shockwave Dual
P-SWSACMOUNT	9143682	24"-48" Shockwave Single	P-SWDACMOUNT	9143866	24"-48" Shockwave Dual






### RIPPER

ITEM #	PART #	BEAM	LEDS	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW (12V)
MIL-RXP2010T	9114163	10° Narrow	20	9,860 lm	6,220 lm	11-65V DC	100	8.34A
MIL-RXP2025T	9114255	25° Medium	20	9,860 lm	6,220 lm	11-65V DC	100	8.34A
MIL-RXP2040T	9114347	40° Wide	20	9,860 lm	6,220 lm	11-65V DC	100	8.34A
MIL-RXP2060T	9114439	60° Extra Wide	20	9,860 lm	6,220 lm	11-65V DC	100	8.34A
MIL-RXP2090T	9138640	90° Xtreme Wide	20	9,860 lm	6,220 lm	11-65V DC	100	8.34A
MIL-RXP20e3065T	9114521	30x65° Elliptical	20	9,860 lm	6,220 lm	11-65V DC	100	8.34A
MIL-RXP1210T	4009974	10° Narrow	12	5,916 lm	3,575 lm	11-65V DC	60	5A
MIL-RXP1225T	4008618	25° Medium	12	5,916 lm	3,575 lm	11-65V DC	60	5A
MIL-RXP1240T	4009981	40° Wide	12	5,916 lm	3,575 lm	11-65V DC	60	5A
MIL-RXP1260T	4009998	60° Extra Wide	12	5,916 lm	3,575 lm	11-65V DC	60	5A
MIL-RXP1290T	9138558	90° Xtreme Wide	12	5,916 lm	3,575 lm	11-65V DC	60	5A
MIL-RXP12e3065T	9122809	30x65° Elliptical	12	5,916 lm	3,575 lm	11-65V DC	60	5A


MIL-RXP2010T | 9114163 - 10° Beam

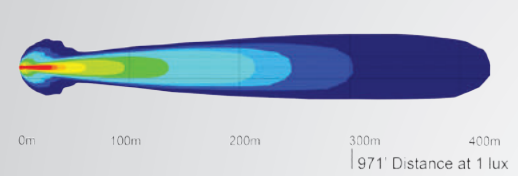


MIL-RXP2060T | 9114439 - 60° Beam



MIL-RXP1210T | 4009974 - 10° Beam

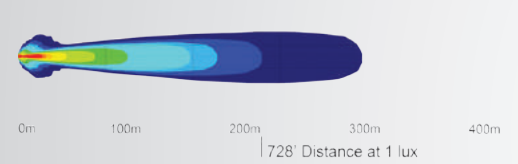


MIL-RXP1060T | 4009998 - 60° Beam

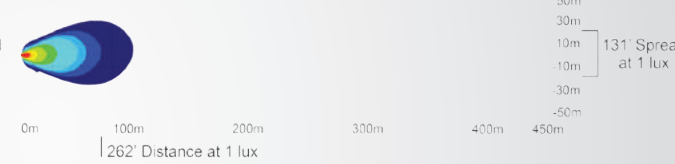


### SOLSTICE PRIME

ITEM #	PART #	BEAM	LEDS	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW (12V)
XIL-SP720	4009868	20°	7	6,020 lm	4,214 lm	11-65V DC	70	5.84A
XIL-SP740	4009875	40°	7	6,020 lm	4,214 lm	11-65V DC	70	5.84A
XIL-SP520	4009844	20°	5	4,300 lm	3,010 lm	11-65V DC	50	4.15A
XIL-SP540	4009851	40°	5	4,300 lm	3,010 lm	11-65V DC	50	4.15A


XIL-SP720 | 4009868 - 20° Beam

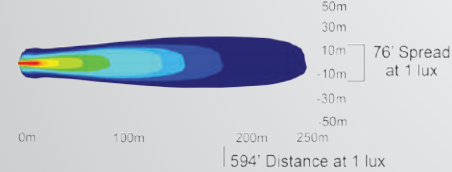


XIL-SP740 | 4009875 - 40° Beam

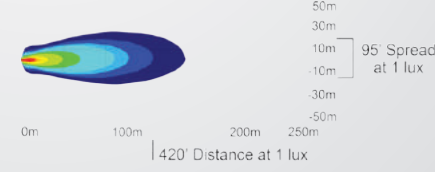

XIL-SP520 | 4009844 - 20° Beam

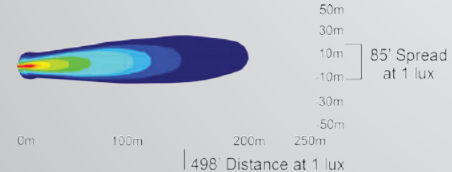

XIL-SP540 | 4009851 - 20° Beam

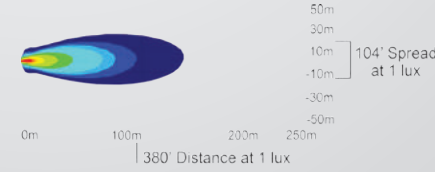

### SHOCKWAVE DUAL

ITEM #	PART #	LENS	LENGTH	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW (12V)
MIL-SWD1220	9125954	Clear	11.81"/300 mm	1,750 lm	~1,225 lm	9-32V DC	20	1.67A
MIL-SWD1220F	9150253	Frosted	11.81"/300 mm	1,750 lm	~1,225 lm	9-32V DC	20	1.67A
MIL-SWD2440	9126043	Clear	23.62"/600 mm	3,500 lm	~2,450 lm	9-32V DC	40	3.34A
MIL-SWD2440F	9150345	Frosted	23.62"/600 mm	3,500 lm	~2,450 lm	9-32V DC	40	3.34A
MIL-SWD3660	9126135	Clear	35.43"/900 mm	5,250 lm	~3,675 lm	9-32V DC	60	5A
MIL-SWD3660F	9150437	Frosted	35.43"/900 mm	5,250 lm	~3,675 lm	9-32V DC	60	5A
MIL-SWD4880	9126227	Clear	47.24"/1200 mm	7,000 lm	~4,900 lm	9-32V DC	80	6.67A
MIL-SWD4880F	9150529	Frosted	47.24"/1200 mm	7,000 lm	~4,900 lm	9-32V DC	80	6.67A

### SHOCKWAVE SINGLE

ITEM #	PART #	LENS	LENGTH	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW (12V)
MIL-SWS1210	9125596	Clear	11.81"/300 mm	875 lm	~613 lm	9-32V DC	10	0.42A
MIL-SWS1210F	9150611	Frosted	11.81"/300 mm	875 lm	~613 lm	9-32V DC	10	0.42A
MIL-SWS2420	9125688	Clear	23.62"/600 mm	1,750 lm	~1,225 lm	9-32V DC	20	0.83A
MIL-SWS2420F	9150703	Frosted	23.62"/600 mm	1,750 lm	~1,225 lm	9-32V DC	20	0.83A
MIL-SWS3630	9125770	Clear	35.43"/900 mm	2,625 lm	~1,838 lm	9-32V DC	30	1.25A
MIL-SWS3630F	9150796	Frosted	35.43"/900 mm	2,625 lm	~1,838 lm	9-32V DC	30	1.25A
MIL-SWS4840	9125862	Clear	47.24"/1200 mm	3,500 lm	~2,450 lm	9-32V DC	40	1.67A
MIL-SWS4840F	9150888	Frosted	47.24"/1200 mm	3,500 lm	~2,450 lm	9-32V DC	40	1.67A

### SHOCKWAVE PACKAGES

ITEM #	PART #	BEAM	LENGTH
CXA-SWD1220PS (Clear)	9887449	SHOCKWAVE DUAL MINING INDUSTRIAL LIGHT	XPC-PS150-24 X 1, P-SWD12ACMOUNT x1, P-JBOXAC x1
CXA-SWD1220FPS (Frosted)	9887456	12" LENGTH 20 WATT	
CXA-SWD2440PS (Clear)	9887463	SHOCKWAVE DUAL MINING INDUSTRIAL LIGHT	XPC-PS150-24 X 1, P-SWDACMOUNT X 1, P-JBOXAC x1
CXA-SWD2440FPS (Frosted)	9887470	24" LENGTH 40 WATT	
CXA-SWD3660PS (Clear)	9887487	SHOCKWAVE DUAL MINING INDUSTRIAL LIGHT	XPC-PS150-24 X 1, P-SWDACMOUNT X 1, P-JBOXAC x1
CXA-SWD3660FPS (Frosted)	9887494	36" LENGTH 60 WATT	
CXA-SWD4880PS (Clear)	9887500	SHOCKWAVE DUAL MINING INDUSTRIAL LIGHT	XPC-PS150-24 X 1, P-SWDACMOUNT X 1, P-JBOXAC x1
CXA-SWD4880FPS (Frosted)	9887517	48" LENGTH 80 WATT	
CXA-SWS1210PS (Clear)	9887524	SHOCKWAVE SINGLE MINING INDUSTRIAL LIGHT	XPC-PS150-24 X 1, P-SWS12ACMOUNT X 1, P-JBOXAC x1
CXA-SWS1210FPS (Frosted)	9887531	12" LENGTH 10 WATT	
CXA-SWS2420PS (Clear)	9887548	SHOCKWAVE SINGLE MINING INDUSTRIAL LIGHT	XPC-PS150-24 X 1, P-SWSACMOUNT X 1, P-JBOXAC x1
CXA-SWS2420FPS (Frosted)	9887555	24" LENGTH 20 WATT	
CXA-SWS3630PS (Clear)	9887562	SHOCKWAVE SINGLE MINING INDUSTRIAL LIGHT	XPC-PS150-24 X 1, P-SWSACMOUNT X 1, P-JBOXAC x1
CXA-SWS3630FPS (Frosted)	9887579	36" LENGTH 30 WATT	
CXA-SWS4840PS (Clear)	9887586	SHOCKWAVE SINGLE MINING INDUSTRIAL LIGHT	XPC-PS150-24 X 1, P-SWSACMOUNT X 1, P-JBOXAC x1
CXA-SWS4840FPS (Frosted)	9887593	48" LENGTH 40 WATT	

### OPTIONAL POWER SUPPLIES

ITEM #	PART #	INPUT VOLTAGE	OUTPUT VOLTAGE	WATTAGE	MAX AMP DRAW
XPC-PS150-24	9145846	100-277V AC	24V DC	150	6.25A
XPC-PS150-HV-24	9887371	180-480V AC	24V DC	150	6.25A



XPC-PS150-24 Shown  
4008236





# ***SPECIALTY LED LIGHTING***

***LIGHTING TO MATCH  
THE OCCASION***





## SPECIALTY LED LIGHTING

When normal light just won't cut it, Vision X has a wide selection of special lighting for many different applications. Each specialty LED light was developed to run on a low amp draw, while still producing quality light. Be it underwater, in tight spots, or in areas where safety is key, Vision X lights will exceed the expectation.

### UTILITY FLOOD





ITEM #: XIL-UF32 Shown  
PART #: 4001824



#### 120° FLOOD FOR UNIVERSAL APPLICATIONS

Wide Beam Pattern | Produces 500 lm with only 0.5A Amp Draw | Colored LEDs

BEAM PATTERNS	COLORS	MEASUREMENTS
Ultra Wide 120°	White, Amber, Blue, Green, Red	3.4" x 1.91" x 0.91"
<b>RAW LUMENS</b> 500 lm (ea)	<b>WARRANTY</b> Extended	86mm x 49mm x 23mm 0.41 lb / 0.19 kg



ITEM #	PART #	COLOR	BEAM
XIL-UF32	4001824	White	120°
XIL-UF32A	9119298	Amber	120°
XIL-UF32B	9121185	Blue	120°
XIL-UF32G	9121277	Green	120°
XIL-UF32R	9121369	Red	120°

\*Additional Technical Data On Page 78

### UTILITY BEACON





ITEM #: XIL-UBW Shown  
PART #: 4001831

#### LIGHTWEIGHT STROBE FOR UNIVERSAL APPLICATIONS

Magnetic Base Standard | 18 LEDs for a 360° Pattern | Shatterproof Construction

BEAM PATTERNS	COLORS	MEASUREMENTS
360°	Amber, Blue, Green, Red, White	5.25" x 3.81" x 2.86"
<b>RAW LUMENS</b> 252 lm (ea)	<b>WARRANTY</b> Extended	133mm x 97mm x 73mm 0.44 lb / 0.2 kg




ITEM #	PART #	COLOR	BEAM	ITEM #	PART #	COLOR	BEAM
XIL-UBA	4002111	Amber	360°	XIL-UBR	4002135	Red	360°
XIL-UBB	4002128	Blue	360°	XIL-UBW	4001831	White	360°
XIL-UBG	4002289	Green	360°				

\*Additional Technical Data On Page 78

### UTILITY LIGHTS IN ACTION





### SUBAQUA



ITEM #: XIL-U40W Shown  
PART #: 4008687

UNDERWATER LED MODULE FOR OE TRANSOM INTEGRATION  
Transom LED Light | Submersible To 100 Feet | Multiple Colors Available

SUBMERSIBLE	COLORS	MEASUREMENTS
100 Feet	White, Amber, Blue, Green, Red	3.4" x 1.91" x 0.91"
<b>RAW LUMENS</b> 720 lm (ea)	<b>WARRANTY</b> Extended	86mm x 49mm x 23mm 0.41 lb / 0.19 kg



ITEM #	PART #	COLOR	BEAM	ITEM #	PART #	COLOR	BEAM
XIL-U40A	4008724	Amber	Euro	XIL-U41A	4008731	Amber	Flood
XIL-U40B	4008649	Blue	Euro	XIL-U41B	4008656	Blue	Flood
XIL-U40G	4008700	Green	Euro	XIL-U41G	4008717	Green	Flood
XIL-U40R	4008663	Red	Euro	XIL-U41R	4008670	Red	Flood
XIL-U40W	4008687	White	Euro	XIL-U41W	4008694	White	Flood

\*Additional Technical Data On Page 78

### SUBAQUA IN ACTION



### STRIP LIGHT



ITEM #: XIL-ST7.5 Shown  
PART #: 9167626



ITEM #: XIL-ST12 Shown  
PART #: 9141701

TOUCH ACTIVATED OR STANDARD COMMERCIAL DESIGN  
Universal Application | Touch Activated Model Available | Compact Design


LENGTHS	COLORS	HEIGHT
7.4", 11.9"	White, Amber, Blue, Green, Red	0.92"/23mm
<b>RAW LUMENS</b> 141-328 lm (ea)	<b>WARRANTY</b> Standard	<b>DEPTH</b> 0.59"/15mm



ITEM #	PART #	MODE	LENGTH	ITEM #	PART #	MODE	LENGTH
XIL-ST7.5	9167626	Touch	7.4"/189 mm	XIL-SL7.5	9167534	Standard	7.4"/189 mm
XIL-ST12	9141701	Touch	11.9"/303 mm	XIL-SL12	9141794	Standard	11.9"/303 mm

\*Additional Technical Data On Page 79

### STRIP LIGHT IN ACTION

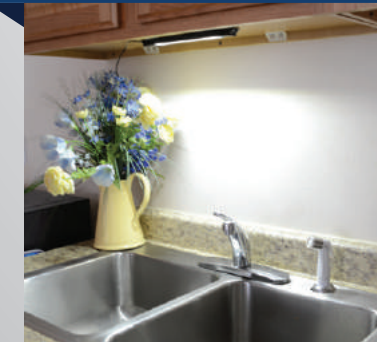



## INCIDENT RESPONSE CASES

The Incident Response case from Vision X Lighting is a self-contained lighting solution for portable lighting. The incident response cases are the perfect lighting solution for emergency response, flagging stations, roadside assistance, scene lighting and other portable lighting scenarios.

### LONG LASTING

Up to 8.5 hours of light from one charge. Easily recharge the case's battery using a 110V AC wall charger, cigarette lighter outlet, or standard jumper cables.



### SELF-CONTAINED POWER

The built in battery ensures it is easier than ever to respond quickly and safely without multiple components and parts, letting you react quickly and properly.

## XLS CASES IN ACTION



## XLS CASE



ITEM #: XLS-4S1101BP Shown  
PART #: 4008816

### PORTABLE EMERGENCY SCENE LIGHTING

Fast Deployment | Self-Contained Power Cell | Long-Lasting Battery

<b>POLE LENGTH</b> 96"/2.44m	<b>CHARGE TIME</b> 10 Hours	<b>MEASUREMENTS</b> 22" x 13.81" x 9" 559mm x 351mm x 229mm 48 lb / 21.77 kg		
<b>RUN TIME</b> Up To 8.5 Hours	<b>WARRANTY</b> Standard			
<b>ITEM #</b> XLS-26BP XLS-4S1101BP	<b>PART #</b> 4008786 4008816	<b>LIGHTS INCLUDED</b> 2 x XIL-80 4 x XIL-S1101	<b>RAW LUMENS</b> 2,880 lm 3,600 lm	<b>RUN TIME</b> 8 Hours 8.5 Hours

\*Additional Technical Data On Page 79



## MINI XLS CASE



ITEM #: XLS-M2DURA460BP Shown  
PART #: 9891026

### MINI INCIDENT RESPONSE SERIES

Lightweight Body | Self-Contained Power Cell | 50% More Battery Capacity

<b>POLE LENGTH</b> 96"/2.44m	<b>CHARGE TIME</b> 10 Hours	<b>MEASUREMENTS</b> 17.5" x 8" x 25" 445mm x 203mm x 635mm 42 lb / 19.05 kg		
<b>RUN TIME</b> Up To 12 Hours	<b>WARRANTY</b> Standard			
<b>ITEM #</b> XLS-M2DURA460BP XLS-M4S1160BP XLS-M2UMX4460BP	<b>PART #</b> 9891026 9891033 9891040	<b>LIGHTS INCLUDED</b> 2 x DURA-460 4 x XIL-S1160 2 x XIL-UMX4460	<b>RAW LUMENS</b> 5,916 lm 1,720 lm 6,902 lm	<b>RUN TIME</b> 12 Hours 12 Hours 7.5 Hours

\*Additional Technical Data On Page 79






**UM FLOOD**

ITEM #	PART #	COLOR	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-UF32	4001824	Amber	500 lm	456 lm	12-32V DC	6	0.5A
XIL-UF32A	9119298	Blue	500 lm	456 lm	12-32V DC	6	0.5A
XIL-UF32B	9121185	Green	500 lm	456 lm	12-32V DC	6	0.5A
XIL-UF32G	9121277	Red	500 lm	456 lm	12-32V DC	6	0.5A
XIL-UF32R	9121369	White	500 lm	456 lm	12-32V DC	6	0.5A

**XIL-UF32 | 4001824 - 120° BEAM**




**UM FLOOD**

ITEM #	PART #	COLOR	RAW LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-UBA	4002111	Amber	252 lm	12-32V DC	3.6	0.3A
XIL-UBB	4002128	Blue	252 lm	12-32V DC	3.6	0.3A
XIL-UBG	4002289	Green	252 lm	12-32V DC	3.6	0.3A
XIL-UBR	4002135	Red	252 lm	12-32V DC	3.6	0.3A
XIL-UBW	4001831	White	252 lm	12-32V DC	3.6	0.3A


**SUBAQUA**

ITEM #	PART #	BEAM	COLOR	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-U40A	4008724	Euro	Amber	720 lm	396 lm	11-32V	12	1.0A
XIL-U40B	4008649	Euro	Blue	720 lm	396 lm	11-32V	12	1.0A
XIL-U40G	4008700	Euro	Green	720 lm	396 lm	11-32V	12	1.0A
XIL-U40R	4008663	Euro	Red	720 lm	396 lm	11-32V	12	1.0A
XIL-U40W	4008687	Euro	White	720 lm	396 lm	11-32V	12	1.0A
XIL-U41A	4008731	Flood	Amber	720 lm	396 lm	11-32V	12	1.0A
XIL-U41B	4008656	Flood	Blue	720 lm	396 lm	11-32V	12	1.0A
XIL-U41G	4008717	Flood	Green	720 lm	396 lm	11-32V	12	1.0A
XIL-U41R	4008670	Flood	Red	720 lm	396 lm	11-32V	12	1.0A
XIL-U41W	4008694	Flood	White	720 lm	396 lm	11-32V	12	1.0A

**XIL-U40A | 4008724 - EURO BEAM**

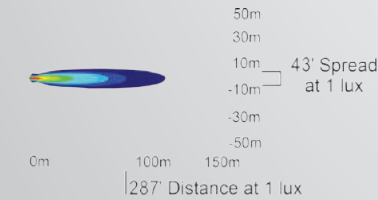

**XIL-U41A | 4008731 - FLOOD BEAM**

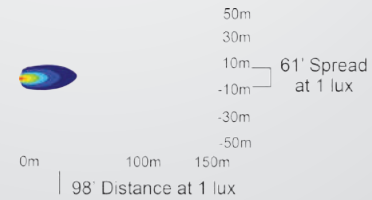

**STRIP LIGHT**

ITEM #	PART #	TYPE	RAW LUMENS	EFFECTIVE LUMENS	INPUT VOLTS	WATTS	AMP DRAW
XIL-ST7.5	9167626	Touch	141 lm	129 lm	9-32V DC	2	0.16A
XIL-ST12	9141701	Touch	328 lm	300 lm	9-32V DC	4.2	0.35A
XIL-SL7.5	9167534	Standard	141 lm	129 lm	9-32V DC	2	0.16A
XIL-SL12	9141794	Standard	328 lm	300 lm	9-32V DC	4.2	0.35A

**INCIDENT RESPONSE**

ITEM #	PART #	INCLUDED LIGHTS	BATTERY	RAW LUMENS	CHARGING INPUT VOLTS	WATTS	RUN TIME
XLS-26BP	4008786	2 x XIL-80	22Ah	2,880 lm	12V DC or 110-220V AC	48	8 Hours
XLS-4S1101BP	4008816	4 x XIL-S1101	22Ah	3,600 lm	12V DC or 110-220V AC	40	8.5 Hours

**MINI INCIDENT RESPONSE**

ITEM #	PART #	INCLUDED LIGHTS	BATTERY	RAW LUMENS	CHARGING INPUT VOLTS	WATTS	RUN TIME
XLS-M2DURA460BP	9891026	2x DURA-460	35Ah	3,944 lm	12V DC or 110-220V AC	40	12 Hours
XLS-M4S1160BP	9891033	4x XIL-S1160	35Ah	3,440 lm	12V DC or 110-220V AC	40	12 Hours
XLS-M2UMX4460BP	9891040	2x XILUMX4460	35Ah	6,902 lm	12V DC or 110-220V AC	70	7.5 Hours





# HID LIGHTING



## WHAT MAKES A VISION X HID?

### INTERNAL BALLAST & STARTER

The ballast takes the standard 12V input power and increases this to the 32,000V the bulb operates at and the starter is used to ignite the bulb. Vision X uses all internal components for an all-in-one package

### VARIABLE INPUT VOLTAGE

Vision X HID lighting takes a variable input voltage of 9 to 32 volts for use in work application or on vehicles with fluctuating voltage to avoid harming internal or associated components.

### 15° ADJUSTABLE MOUNTS

Knurled aiming knobs create an easily adjustable mounting system with up to 15° of adjustability for aiming the light beam to fit the desired application.

### LONG LASTING BULB

High quality engineering of Vision X HID bulbs provides a lifespan of up to 2,500 hours.

### SINGLE STUD MOUNT

Single stud mounting provides easy, single bolt mounting. The HID Series comes with nylock nuts to ensure vibration does not cause loosening over time.

### HARDENED BOROSILICATE GLASS

Hardened borosilicate glass defends against oncoming debris and rocks while cutting down on lost stray light for protection and efficiency

## AVAILABLE HID BULBS

### 35 Watt HID

The 35 Watt HID Series features a 35 Watt Ballast for 3,500 lumens of raw light. The 35 Watt Series has a startup amp draw of 4.8 Amps and a running amp draw of 2.92 amps, much lower than the 8.3 Amps of a standard halogen light (H3 100 Watt Bulb).

### 50 Watt HID

The 50 Watt HID Series features a 50 Watt Ballast for 5,000 lumens of raw light. The 50 Watt Series has a startup amp draw of 6.85 Amps and a running amp draw of 4.17 Amps, all still contained within the housing of the HID Light.

### 50 Watt HID Xtreme Performance

The Xtreme Performance line produces the furthest distance offered by any light. The 1200 meters of light is achieved with a reengineered reflector that projects the light further combined with a polycarbonate lens to reduce stray light and add lightweight protection.

## AVAILABLE HID BULBS



**DIE-CAST ALUMINUM**  
Die-Cast 6061 Aluminum Housings are found on the Vision X HID Offroad Light Series. This housing provides unmatched strength and durability.



**HIGH IMPACT NYLON**  
High Impact Nylon Housings are found on the Vision X HID Work Light Series. This housing provides a lightweight, economical housing that provides strength and durability.

## HID ITEM NUMBER SYSTEM

HID CLASSES	SERIES	WATTAGE	BEAM PATTERN	UPGRADE
HID	High Intensity Discharge	85	0	XP
		66	1	Xtreme
		65	2	Performance
	8.5" Round Offroad	35		
	6.6" Square Work	50		
	6.5" Round Offroad	70		
	5"x7" Rectangle Offroad			
	5.5" Round Work			
	4.5" Round Offroad			
	4" Square Work			



## HID XTREME PERFORMANCE SERIES

The Xtreme Performance HID was engineered with input from Baja 1000 winning racers to further enhance the race proven Vision X HID series. Each light includes a weatherproof Deutsch Connector with Plug-and-Play Harness and features a durable lightweight polycarbonate lens.

### HID XP KEY FACTS

**Xtreme Distance:** The XP Series produces up to 1,200 meters of usable light in the 8.7" model and 1,000 meters in the 6.7".  
**50 Watt Ballast:** Each light utilizes a 50 Watt Ballast which increases the light output to achieve 5,000 raw lumens.  
**Polycarbonate Lens:** Features a durable lens which reduces weight and adds protection against oncoming rocks and debris.  
**Race Inspired Design:** Racers asked for a light that would shine further and weigh less, we listened.

### HID XP IN ACTION



### 8.7" HID XP



ITEM #: HID-8550XP Shown  
PART #: 9119922

1200 METERS OF LIGHT FOR UNMATCHED DISTANCE  
Polycarbonate Lens | Die-Cast Aluminum Housing | Internal Ballast & Starter


BEAM PATTERNS  
Spot, Euro

RAW LUMENS  
5,000 lm (ea)

WATTAGE  
50W

WARRANTY  
Extended


MEASUREMENTS  
8.7" x 9.09" x 5.55"  
221mm x 231mm x 141mm  
6.20 lb / 2.81 kg



ITEM #	PART #	BEAM
HID-8550XP	9119922	Euro
HID-8552XP	4000490	Spot

\*Additional Technical Data On Page 88

### HID XP EXAMPLES

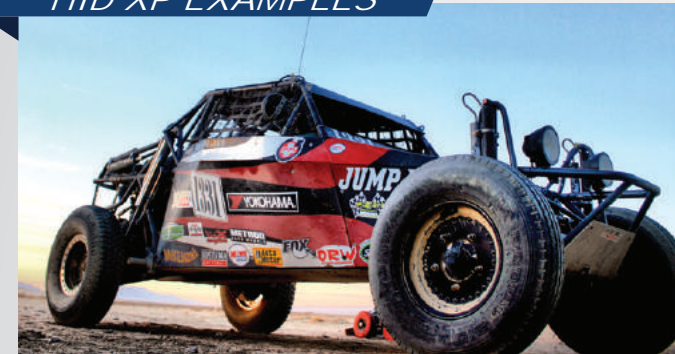

### 6.7" HID XP



ITEM #: HID-6552XP Shown  
PART #: 4000483

1000 METERS OF USABLE LIGHT  
Polycarbonate Lens | Die-Cast Aluminum Housing | Internal Ballast & Starter



BEAM PATTERN  
Spot

RAW LUMENS  
5,000 lm (ea)

WATTAGE  
50W

WARRANTY  
Extended

MEASUREMENTS  
6.7" x 7.00" x 6.30"  
170mm x 178mm x 160mm  
4.00 lb / 1.81 kg



ITEM #	PART #	BEAM
HID-6552XP	4000483	Spot

\*Additional Technical Data On Page 88

### HID XP IN ACTION





## HID OFFROAD LIGHT SERIES

Trusted by racers and race enthusiasts alike, the HID Series from Vision X won the 1000 its first time out, and hasn't looked back since. Pair with 6.7" or 8.7" polycarbonate lens covers to provide even greater protection and unsurpassed visibility in even the toughest of conditions.


### 8.7" HID LIGHT



ITEM #: HID-8550 Shown  
PART #: 4003071

OFFROAD HID LIGHT WITH INTERNAL BALLAST AND STARTER  
Borosilicate Hardened Lens | Weatherproof Deutsch Connector | E-Mark Approved Euro Beam

<b>BEAM PATTERNS</b> Spot, Euro <b>RAW LUMENS</b> 3,500/5,000 lm (ea)	<b>WATTAGE</b> 35W, 50W <b>WARRANTY</b> Extended	<b>MEASUREMENTS</b> 8.7" x 9.00" x 5.25" 221mm x 229mm x 133mm 6.60 lb / 2.99 kg
--	---	---



ITEM #	PART #	WATTS	BEAM
HID-8550	4003071	50	Euro
HID-8552	4003088	50	Spot
HID-8500	4002838	35	Euro
HID-8502	4003057	35	Spot

\*Additional Technical Data On Page 88


### 6.7" HID LIGHT



ITEM #: HID-6550 Shown  
PART #: 4003026

OFFROAD HID LIGHT WITH INTERNAL BALLAST AND STARTER  
Borosilicate Hardened Lens | Weatherproof Deutsch Connector | Street Legal Cover Included

<b>BEAM PATTERNS</b> Spot, Euro, Flood <b>RAW LUMENS</b> 3,500/5,000 lm (ea)	<b>WATTAGE</b> 35W, 50W <b>WARRANTY</b> Extended	<b>MEASUREMENTS</b> 6.7" x 7.00" x 6.00" 170mm x 178mm x 152mm 4.40 lb / 2.00 kg
---	---	---



ITEM #	PART #	WATTS	BEAM	ITEM #	PART #	WATTS	BEAM
HID-6550	4003026	50	Euro	HID-6500	4002821	35	Euro
HID-6551	4003064	50	Flood	HID-6501	4002999	35	Flood
HID-6552	4003033	50	Spot	HID-6502	4003002	35	Spot

\*Additional Technical Data On Page 88

### HID LIGHTS IN ACTION



### 5" HID LIGHT



ITEM #: HID-4500 Shown  
PART #: 4004542

OFFROAD HID LIGHT WITH INTERNAL BALLAST AND STARTER  
Borosilicate Hardened Lens | Weatherproof Deutsch Connector | Street Legal Cover Included

<b>BEAM PATTERNS</b> Spot, Euro, Flood <b>RAW LUMENS</b> 3,500 lm (ea)	<b>WATTAGE</b> 35W <b>WARRANTY</b> Extended	<b>MEASUREMENTS</b> 5.13" x 5.63" x 4.25" 130mm x 143mm x 108mm 3.55 lb / 1.61 kg
---	--	--



ITEM #	PART #	WATTS	BEAM
HID-4500	4004542	35	Euro
HID-4501	4004559	35	Flood
HID-4502	4004566	35	Spot

\*Additional Technical Data On Page 88

### HID LIGHTS IN ACTION





## HID WORK LIGHT SERIES

The Vision X HID Work Light series is ideal for commercial and industrial usage. With up to 3,500 raw lumens, HID Work Lights from Vision X bring more to your job site. Having quality lighting will not only increase safety on the work site, but also increase productivity and production.


### 5.5" HID LIGHT



ITEM #: HID-5500 Shown  
PART #: 4003729

*HID WORK LIGHT WITH INTERNAL BALLAST AND STARTER*  
Borosilicate Hardened Lens | Weatherproof Deutsch Connector | Hi-Impact Nylon Housing

BEAM PATTERNS	WATTAGE	MEASUREMENTS
Spot, Euro, Flood	35W	5.50" x 6.56" x 5.25"
<b>RAW LUMENS</b> 3,500 lm (ea)	<b>WARRANTY</b> Extended	139.7mm x 166.6mm x 133.3mm 1.90 lb / 0.86 kg



ITEM #	PART #	WATTS	BEAM
HID-5500	4003729	35	Euro
HID-5501	4003392	35	Flood
HID-5502	4003743	35	Spot

\*Additional Technical Data On Page 89


### 4" HID LIGHT



ITEM #: HID-4400 Shown  
PART #: 4003217

*HID WORK LIGHT WITH INTERNAL BALLAST AND STARTER*  
Borosilicate Hardened Lens | Weatherproof Deutsch Connector | Hi-Impact Nylon Housing

BEAM PATTERNS	WATTAGE	MEASUREMENTS
Spot, Euro, Flood	35W	4.72" x 5.75" x 5.67"
<b>RAW LUMENS</b> 3,500 lm (ea)	<b>WARRANTY</b> Extended	120mm x 146mm x 144mm 1.80 lb / 0.82 kg



ITEM #	PART #	WATTS	BEAM
HID-4400	4003217	35	Euro
HID-4401	4003224	35	Horizontal Flood
HID-4411	4003866	35	Wide Flood
HID-4402	4003231	35	Spot

\*Additional Technical Data On Page 89


### 4" X 6" HID LIGHT



ITEM #: HID-4601 Shown  
PART #: 4003385

*HID WORK LIGHT WITH INTERNAL BALLAST AND STARTER*  
Borosilicate Hardened Lens | Weatherproof Deutsch Connector | Hi-Impact Nylon Housing

BEAM PATTERNS	WATTAGE	MEASUREMENTS
Flood	35W	6.38" x 6.69" x 5.5"
<b>RAW LUMENS</b> 3,500 lm (ea)	<b>WARRANTY</b> Extended	162mm x 170mm x 140mm 1.40 lb / 0.64 kg



ITEM #	PART #	WATTS	BEAM
HID-4601	4003385	35	Flood

\*Additional Technical Data On Page 89


### 6" HID LIGHT



ITEM #: HID-6601 Shown  
PART #: 4003408

*HID WORK LIGHT WITH INTERNAL BALLAST AND STARTER*  
Borosilicate Hardened Lens | Weatherproof Deutsch Connector | Hi-Impact Nylon Housing

BEAM PATTERNS	WATTAGE	MEASUREMENTS
Flood	50W, 70W	6.38" x 7.75" x 8.25"
<b>RAW LUMENS</b> 5,000/6,500 lm (ea)	<b>WARRANTY</b> Extended	162mm x 197mm x 210mm 1.80 lb / 0.82 kg



ITEM #	PART #	WATTS	BEAM
HID-6601	4003408	50	Flood
HID-6601.70W	4002401	70	Flood

\*Additional Technical Data On Page 89

### HID LIGHTS IN ACTION







**8.7" HID XP LIGHT**

ITEM #	PART #	RAW LUMENS	EFFECTIVE LUMENS	WATTAGE	LIFESPAN	DIMENSIONS	INPUT VOLTAGE	AMP DRAW
HID-8550XP	9119922	5,000 lm	3,500 lm	50W	2,500 Hours	8.70" x 9.09" x 5.55" 221 mm x 231 mm x 141 mm	9-32V DC	4.17A
HID-8552XP	4000490	5,000 lm	3,500 lm	50W	2,500 Hours	8.70" x 9.09" x 5.55" 221 mm x 231 mm x 141 mm	9-32V DC	4.17A

**HID-8550XP | 9119922 - EURO BEAM**




**HID-8552XP | 4000490 - SPOT BEAM**



**6.7" HID XP LIGHT**

ITEM #	PART #	RAW LUMENS	EFFECTIVE LUMENS	WATTAGE	LIFESPAN	DIMENSIONS	INPUT VOLTAGE	AMP DRAW
HID-6552XP	4000483	5,000 lm	3,500 lm	HID 50W	2,500 Hours	6.70" x 7.00" x 6.30" 170 mm x 178 mm x 160 mm	9-32V DC	4.17A


**HID-6552XP | 4000483 - SPOT BEAM**



**8.7" HID LIGHT**

ITEM #	PART #	RAW LUMENS	EFFECTIVE LUMENS	WATTAGE	LIFESPAN	DIMENSIONS	INPUT VOLTAGE	AMP DRAW
HID-8550	4003071	5,000 lm	3,500 lm	50W	2,500 Hours	8.70" x 9.00" x 5.25" 221 mm x 229 mm x 133 mm	9-32V DC	4.17A
HID-8552	4003088	3,500 lm	2,450 lm	50W	2,500 Hours	8.70" x 9.00" x 5.25" 221 mm x 229 mm x 133 mm	9-32V DC	2.92A
HID-8500	4002838	5,000 lm	3,500 lm	35W	2,500 Hours	8.70" x 9.00" x 5.25" 221 mm x 229 mm x 133 mm	9-32V DC	4.17A
HID-8502	4003057	3,500 lm	2,450 lm	35W	2,500 Hours	8.70" x 9.00" x 5.25" 221 mm x 229 mm x 133 mm	9-32V DC	2.92A

**HID-8500 | 4002838 - EURO BEAM**




**HID-8502 | 4003057 - SPOT BEAM**



**6.7" HID LIGHT**

ITEM #	PART #	RAW LUMENS	EFFECTIVE LUMENS	WATTAGE	LIFESPAN	DIMENSIONS	INPUT VOLTAGE	AMP DRAW
HID-6550	4003026	5,000 lm	3,500 lm	HID 50W	2,500 Hours	6.70" x 7.00" x 6.00" 170 mm x 178 mm x 152 mm	9-32V DC	4.17A
HID-6500	4002821	3,500 lm	2,450 lm	HID 35W	2,500 Hours	6.70" x 7.00" x 6.00" 170 mm x 178 mm x 152 mm	9-32V DC	2.92A
HID-6551	4003064	5,000 lm	3,500 lm	HID 50W	2,500 Hours	6.70" x 7.00" x 6.00" 170 mm x 178 mm x 152 mm	9-32V DC	4.17A
HID-6501	4002999	3,500 lm	2,450 lm	HID 35W	2,500 Hours	6.70" x 7.00" x 6.00" 170 mm x 178 mm x 152 mm	9-32V DC	2.92A
HID-6552	4003033	5,000 lm	3,500 lm	HID 50W	2,500 Hours	6.70" x 7.00" x 6.00" 170 mm x 178 mm x 152 mm	9-32V DC	4.17A
HID-6502	4003002	3,500 lm	2,450 lm	HID 35W	2,500 Hours	6.70" x 7.00" x 6.00" 170 mm x 178 mm x 152 mm	9-32V DC	2.92A

**HID-6500 | 4002821 - EURO BEAM**



**HID-6501 | 4002999 - SPOT BEAM**



**5" HID LIGHT**

ITEM #	PART #	RAW LUMENS	EFFECTIVE LUMENS	WATTAGE	LIFESPAN	DIMENSIONS	INPUT VOLTAGE	AMP DRAW
HID-4500	4004542	3,500 lm	2,450 lm	HID 35W	2,500 Hours	5.13" x 5.63" x 4.25" 130 mm x 143 mm x 108 mm	9-32V DC	4.17A
HID-4501	4004559	3,500 lm	2,450 lm	HID 35W	2,500 Hours	5.13" x 5.63" x 4.25" 130 mm x 143 mm x 108 mm	9-32V DC	4.17A
HID-4502	4004566	3,500 lm	2,450 lm	HID 35W	2,500 Hours	5.13" x 5.63" x 4.25" 130 mm x 143 mm x 108 mm	9-32V DC	4.17A

**HID-4500 | 4004542 - EURO BEAM**



**HID-4502 | 4004566 - SPOT BEAM**




**HID WORK LIGHTS**

ITEM #	PART #	RAW LUMENS	EFFECTIVE LUMENS	WATTAGE	LIFESPAN	DIMENSIONS	INPUT VOLTAGE	AMP DRAW
HID-5500	4003729	3,500 lm	2,450 lm	HID 35W	2,500 Hours	6.70" x 7.00" x 6.00" 170 mm x 178 mm x 152 mm	9-32V DC	2.92A
HID-5501	4003392	3,500 lm	2,450 lm	HID 35W	2,500 Hours	6.70" x 7.00" x 6.00" 170 mm x 178 mm x 152 mm	9-32V DC	2.92A
HID-5502	4003743	3,500 lm	2,450 lm	HID 35W	2,500 Hours	6.70" x 7.00" x 6.00" 170 mm x 178 mm x 152 mm	9-32V DC	2.92A
HID-4400	4003217	3,500 lm	2,450 lm	HID 35W	2,500 Hours	4.72" x 5.75" x 5.67" 120 mm x 146 mm x 144 mm	9-32V DC	2.92A
HID-4401	4003224	3,500 lm	2,450 lm	HID 35W	2,500 Hours	4.72" x 5.75" x 5.67" 120 mm x 146 mm x 144 mm	9-32V DC	2.92A
HID-4411	4003866	3,500 lm	2,450 lm	HID 35W	2,500 Hours	4.72" x 5.75" x 5.67" 120 mm x 146 mm x 144 mm	9-32V DC	2.92A
HID-4402	4003231	3,500 lm	2,450 lm	HID 35W	2,500 Hours	4.72" x 5.75" x 5.67" 120 mm x 146 mm x 144 mm	9-32V DC	2.92A
HID-4601	4003385	3,500 lm	2,450 lm	HID 35W	2,500 Hours	6.38" x 6.69" x 5.5" 162 mm x 170 mm x 140 mm	9-32V DC	2.92A
HID-6601	4003408	3,500 lm	2,450 lm	HID 35W	2,500 Hours	6.38" x 7.75" x 8.25" 162 mm x 197 mm x 210 mm	9-32V DC	2.92A
HID-6601.70W	4003401	7,000 lm	4,900 lm	HID 70W	2,500 Hours	6.38" x 7.75" x 8.25" 162 mm x 197 mm x 210 mm	9-32V DC	5.84A





# HALOGEN LIGHTING

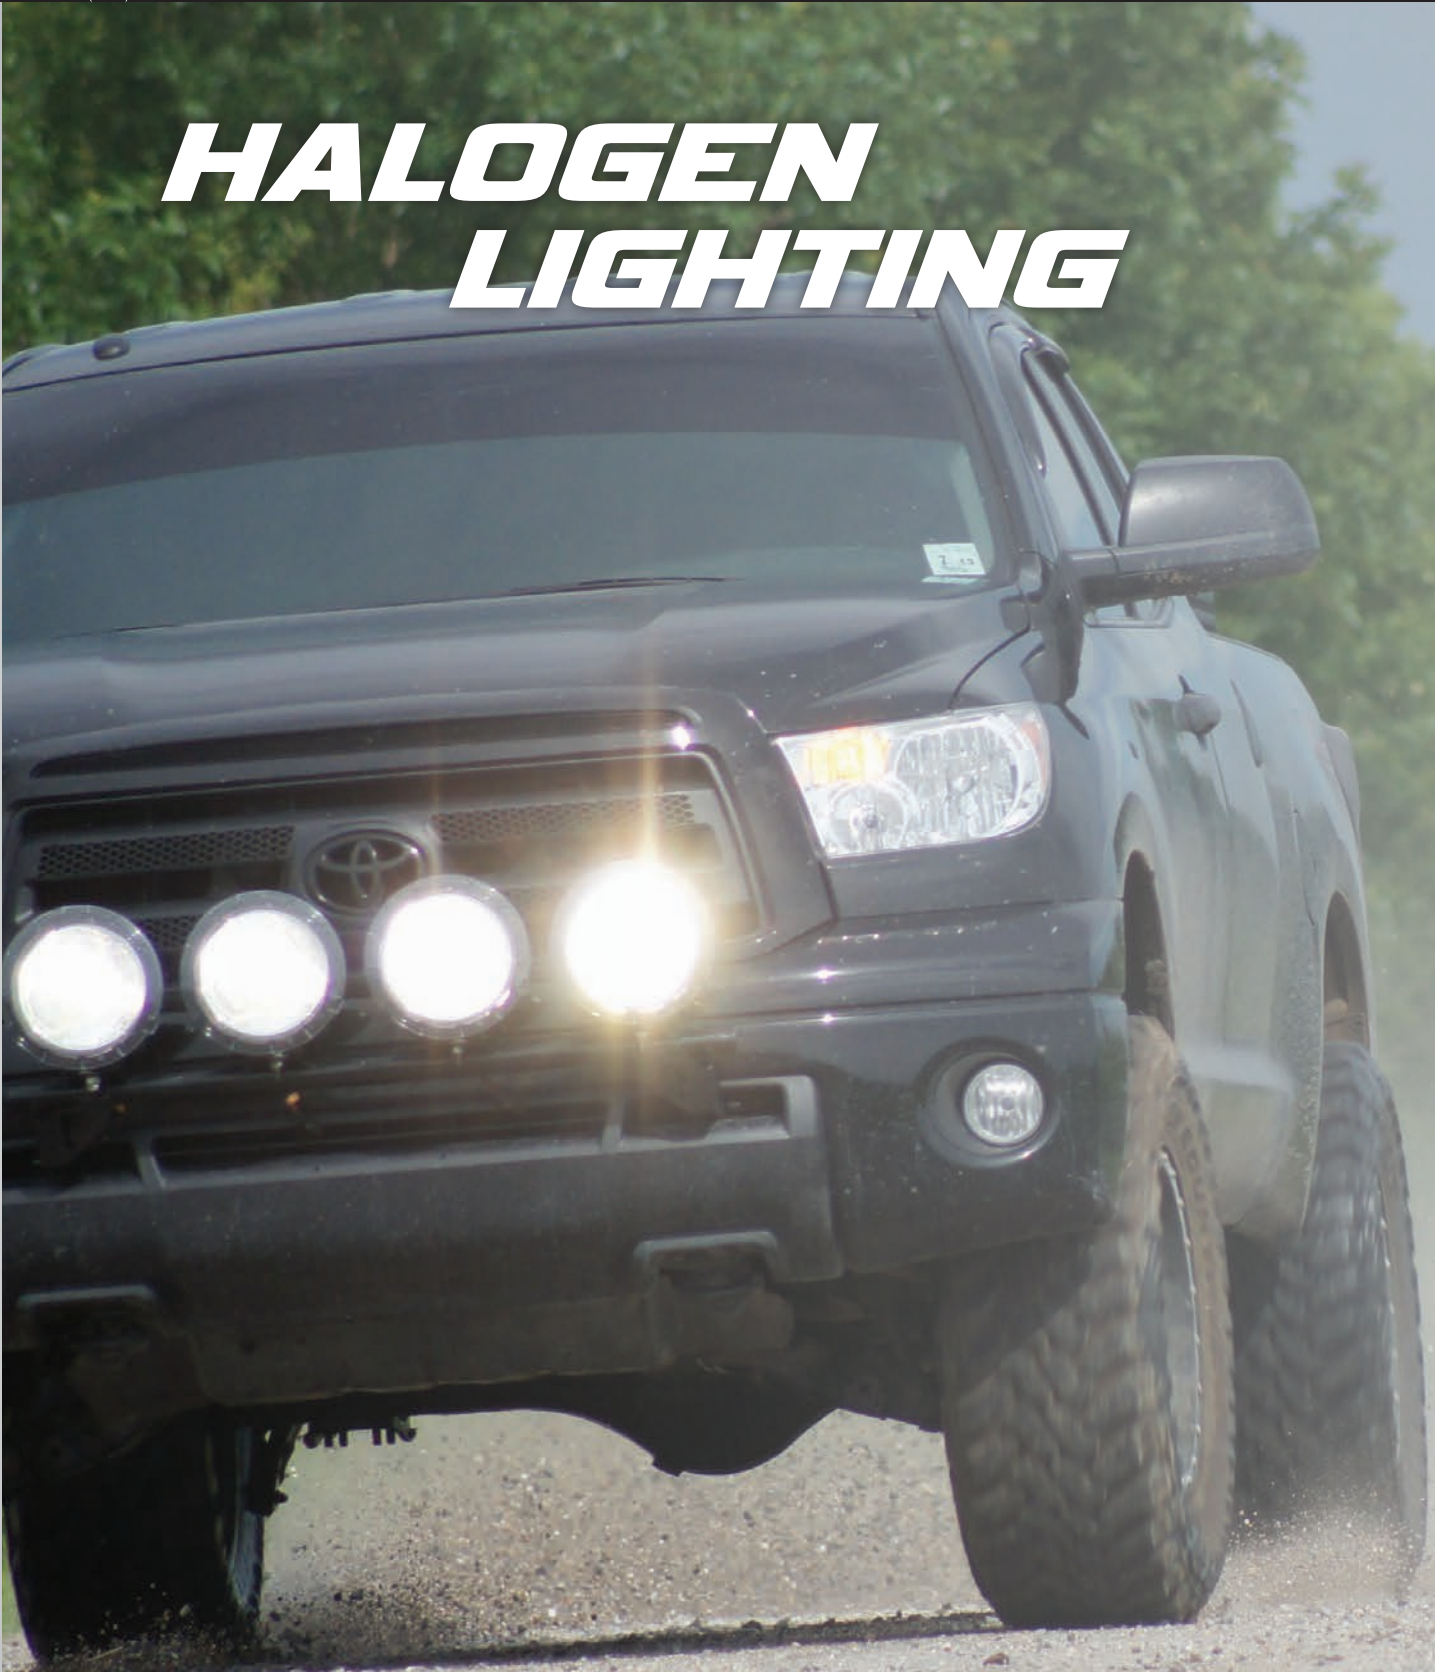

## VISION X HALOGEN LIGHTING

Vision X offers a line-up of Halogen Lighting options for Offroad, Work, Fog Lighting, and replacement headlights. Each Vision X Halogen Light features a hardened borosilicate lens, adding extra protection and durability to the light. These lights shine at a 3000k temperature, giving them a soft yellow color. The Tungsten-Halogen series uses an oversized globe and specially engineered filament to enhance light output.

### OFFROAD LIGHTING

**6061 ALUMINUM**  
The Offroad Tungsten-Halogen Series features rugged 6061 die-cast aluminum housings protects against corrosion and provides unmatched strength.

**HARDENED BOROSILICATE GLASS**  
Hardened borosilicate glass defends against oncoming debris and rocks while cutting down on lost stray light for protection and efficiency.

**OVERSIZED GLASS GLOBE**  
The oversized glass globe used in the proprietary Vision X Tungsten-Halogen bulb provides better light output while dissipating heat better for a longer lifespan.

### WORK LIGHTING

**HIGH-IMPACT NYLON**  
High-Impact Nylon housings provide for economical, lightweight housings on all Vision X Tungsten-Halogen work lighting that ensures strength and longevity.

**HARDENED BOROSILICATE GLASS**  
Hardened borosilicate glass defends against oncoming debris and rocks while cutting down on lost stray light for protection and efficiency.

**WEATHERPROOF DEUTSCH CONNECTORS**  
The use of weatherproof deutsch connectors ensures a durable and resilient connector for the work light series..

### FOG LIGHTS

**REDUCE GLARE**  
Vision X Halogen Fog Lights reduce glare back at the driver in foul weather conditions. Where headlight beams cut straight into the horizon, fog lighting is lower and lights up the road without danger.

**WIDE BEAM**  
Vision X Halogen Fog Lights feature an extra wide beam to fully light the periphery for increased visibility and safety.

**UNIVERSAL WIRING**  
Each fog light kit comes standard with a universal wiring harness and mounting hardware, which is not vehicle specific. This ensures easy wiring and install.

### HEADLIGHTS

**INCREASED BRIGHTNESS**  
Increase brightness by up to 50% with the Vision X headlight series. Vision X headlights provide a superwhite, more natural light for increased visibility and safety.

**MULTIPLE SERIES**  
Vision X offers three lines of Halogen bulbs for the perfect mix of cost and performance for any driver. Each series varies in color temperature, wattage, distance and spread.

## HALOGEN ITEM NUMBER SYSTEM

CLASSES	SERIES	BEAM PATTERN
VX	85	0 Euro/Driving
	80	1 Flood
	65	2 Spot
	60	
	55	
	45	
	44	
	8	
	5	
	2	
	119	
	F55	
	L3	



## HALOGEN OFFROAD LIGHT SERIES

Featuring Vision X Tungsten Halogen Bulbs, the Vision X Halogen Offroad Lighting Series provides ample lighting in a compact housing. The rugged 6061 die-cast aluminum protects against corrosion and provides unmatched strength.



Vision X  
Tungsten Halogen Bulb



Standard H3 Bulb

### DURABLE LIGHTING

Vision X Halogen Offroad Lights offer an affordable way to add lighting to your offroad vehicle. Sturdy mounting equipment and borosilicate lens create a durable light even in foul weather environments.

### OVERSIZED BULB

Vision X uses an oversized tungsten halogen bulb which reduces heat output helping the bulb last longer and shine brighter.

## 8.7" HALOGEN LIGHT

### 8.7" TUNGSTEN HALOGEN OFFROAD LIGHT

Euro Beam E-Mark Approved | Weatherproof Deutsch Connector | Die-Cast Aluminum Housing





ITEM #: VX-8510 Shown  
PART #: 4000698

**BEAM PATTERNS**  
Euro, Spot  
**RAW LUMENS**  
1,800 lm (ea)

**WATTAGE**  
100W  
**WARRANTY**  
Extended

**MEASUREMENTS**  
8.70" x 9.00" x 5.25"  
221mm x 229mm x 133mm  
6.25 lb / 2.83 kg



ITEM #	PART #	BEAM
VX-8510	4000698	Euro
VX-8512	4000711	Spot

\*Additional Technical Data On Page 98

## 6.7" HALOGEN LIGHT

### 6.7" TUNGSTEN HALOGEN OFFROAD LIGHT

Euro Beam E-Mark Approved | Weatherproof Deutsch Connector | Die-Cast Aluminum Housing




ITEM #: VX-6510 Shown  
PART #: 4000636

**BEAM PATTERNS**  
Euro, Flood, Spot  
**RAW LUMENS**  
1,800 lm (ea)

**WATTAGE**  
100W  
**WARRANTY**  
Extended

**MEASUREMENTS**  
6.70" x 7.00" x 6.00"  
170mm x 178mm x 152mm  
4.05 lb / 1.84 kg



ITEM #	PART #	BEAM
VX-6510	4000636	Euro
VX-6511	4000650	Flood
VX-6512	4000674	Spot

\*Additional Technical Data On Page 98

## 5" HALOGEN LIGHT

### 5" TUNGSTEN HALOGEN OFFROAD LIGHT

Die-Cast Aluminum Housing | Weatherproof Connector | Euro Beam E-Mark Approved




ITEM #: VX-4510 Shown  
PART #: 4000551

**BEAM PATTERNS**  
Euro, Flood, Spot  
**RAW LUMENS**  
1,800 lm (ea)

**WATTAGE**  
100W  
**WARRANTY**  
Extended

**MEASUREMENTS**  
5.13" x 5.63" x 4.25"  
130mm x 143mm x 108mm  
3.2 lb / 1.45 kg



ITEM #	PART #	BEAM
VX-4510	4000551	Euro
VX-4511	4000735	Flood
VX-4512	4000568	Spot

\*Additional Technical Data On Page 98

## HALOGEN LIGHTS IN ACTION



## HALOGEN LIGHTS IN ACTION





## HALOGEN BUMPER LIGHTING

For years, Vision X has supplied high-quality Halogen bumper lighting for on-road and off-road enthusiasts alike. Easily mounted to standard and aftermarket bumpers, Vision X Halogen lights offer the highest quality and most effective output for your dollar.

### 8" HALOGEN LIGHT



ITEM #: VX-8010C Shown  
PART #: 4000698

8" HALOGEN BUMPER LIGHT KIT  
Superwhite Bulb | Weatherproof Deutsch Connector | X Rock Guard

HOUSING Chrome	WATTAGE 100W	MEASUREMENTS 7.00" x 5.87" x 5.66" 178mm x 149mm x 144mm 3.10 lb / 1.41 kg
RAW LUMENS 1,800 lm (ea)	WARRANTY Standard	

ITEM #	PART #	HOUSING
VX-8010C	4000445	Chrome

\*Additional Technical Data On Page 98

### 6" HALOGEN LIGHT



ITEM #: VX-6010C Shown  
PART #: 4000414

6" HALOGEN BUMPER LIGHT KIT  
Superwhite Bulb | Weatherproof Deutsch Connector | X Rock Guard

HOUSING Chrome	WATTAGE 100W	MEASUREMENTS 6.49" x 7.44" x 4.20" 165mm x 189mm x 107mm 1.50 lb / 0.68 kg
RAW LUMENS 1,800 lm (ea)	WARRANTY Standard	

ITEM #	PART #	HOUSING
VX-6010	4000414	Black
VX-6010C	4000421	Chrome
VX-T9000B	4000537	Black with Rock Guard

\*Additional Technical Data On Page 98

### HALOGEN LIGHTS IN ACTION



## HALOGEN FOG LIGHTING

Vision X Halogen Fog Lights are designed to meet the demands of the on-road market with tough die-cast aluminum housings, borosilicate hardened glass lenses, multi-surface reflectors for 30% more light output than conventional reflectors and high output 55 watt quartz halogen bulbs.

### 4" FOG LIGHT



VX-L3

- Die-Cast Aluminum Housing
- Wiring Harness Included
- Sold As Pair

ITEM #	PART #	HOUSING	BULB
VX-L3	4000544	Black	Superwhite

### 3" FOG LIGHT



VX-5B

- Die-Cast Aluminum Housing
- Wiring Harness Included
- Sold As Pair

ITEM #	PART #	HOUSING	BULB
VX-5	4000148	Chrome	Superwhite
VX-B	4000292	Black	Superwhite

### 4" X 2" FOG LIGHT



VX-8

- Die-Cast Aluminum Housing
- Wiring Harness Included
- Sold As Pair

ITEM #	PART #	HOUSING	BULB
VX-8	4000179	Black	Superwhite

### 6" X 2" DUAL LIGHT



VX-119

- Die-Cast Aluminum Housing
- Wiring Harness Included
- Sold As Pair

ITEM #	PART #	HOUSING	BULB
VX-119	4000186	Black	Superwhite

### HALOGEN LIGHTS IN ACTION





## HALOGEN WORK LIGHTING

When it comes to working on the job site, Vision X understands that safety comes first. Our Halogen work lights were developed to be brighter, more durable, and more efficient than standard work lighting. With easy to replace bulbs, Halogen lighting may be the right choice for your job site.

### DURABLE WORK LIGHTING

Vision X Halogen Work Lights offer an affordable way to add lighting to your work vehicle. Sturdy mounting equipment and nylock nuts create stable mounting even in environments prone to vibration.

### LONGER LIFESPAN

When compared to other halogen on the market, Vision X Halogen Work Lighting last longer with a lifespan of 400 hours. This is over 60% longer than traditional H3 halogen bulbs.




Vision X  
Tungsten Halogen Bulb

### 5" TUNGSTEN HALOGEN WORK LIGHT

Heavy Duty Filament | Weatherproof Connector | Hi-Impact Nylon Housing

BEAM PATTERNS	WATTAGE	MEASUREMENTS
Euro, Flood, Spot	100W	5.50" x 6.56" x 5.25"
<b>RAW LUMENS</b> 1,800 lm (ea)	<b>WARRANTY</b> Extended	140mm x 167mm x 133mm 1.50 lb / 0.68 kg



ITEM #	PART #	BEAM
VX-5510	4000506	Euro
VX-5511	4003859	Flood
VX-5512	4004580	Spot

\*Additional Technical Data On Page 98



ITEM #: VX-5510 Shown  
PART #: 4000506

### HALOGEN WORK LIGHTING



### 4" HALOGEN LIGHT




ITEM #: VX-4410 Shown  
PART #: 4004009

### 4" TUNGSTEN HALOGEN WORK LIGHT

Borosilicate Hardened Lens | Weatherproof Connector | Hi-Impact Nylon Housing

BEAM PATTERNS	WATTAGE	MEASUREMENTS
Euro, Flood, Spot	100W	6.38" x 6.69" x 5.50"
<b>RAW LUMENS</b> 1,800 lm (ea)	<b>WARRANTY</b> Extended	162mm x 170mm x 140mm 1.55 lb / 0.70 kg



ITEM #	PART #	BEAM
VX-4410	4004009	Euro
VX-4401	4003828	Vertical Flood
VX-4411	4003835	Horizontal Flood
VX-4412	4004573	Spot

\*Additional Technical Data On Page 98

### 4" X 6" HALOGEN LIGHT




ITEM #: VX-4611 Shown  
PART #: 4003842

### 4"x6" TUNGSTEN HALOGEN WORK LIGHT

Heavy Duty Filament | Weatherproof Connector | Hi-Impact Nylon Housing

BEAM PATTERNS	WATTAGE	MEASUREMENTS
Flood	100W	6.38" x 6.69" x 5.50"
<b>RAW LUMENS</b> 1,800 lm (ea)	<b>WARRANTY</b> Extended	162mm x 170mm x 140mm 1.55 lb / 0.70 kg



ITEM #	PART #	BEAM
VX-4611	4003842	Flood

\*Additional Technical Data On Page 98

### HALOGEN WORK LIGHTING







### HALOGEN OFFROAD LIGHTS

ITEM #	PART #	RAW LUMENS	WEIGHT	WATTAGE	BULB LIFESPAN	DIMENSIONS	INPUT VOLTAGE	AMP DRAW
VX-8510	4000698	1,800 lm	6.25 lb 2.83 kg	100	400 Hours	8.70" x 9.00" x 5.25" 221 mm x 229 mm x 133 mm	12V DC	8.33A
VX-8512	4000711	1,800 lm	6.25 lb 2.83 kg	100	400 Hours	8.70" x 9.00" x 5.25" 221 mm x 229 mm x 133 mm	12V DC	8.33A
VX-6510	4000636	1,800 lm	4.05 lb 1.84 kg	100	400 Hours	6.70" x 7.00" x 6.00" 170 mm x 178 mm x 152 mm	12V DC	8.33A
VX-6511	4000650	1,800 lm	4.05 lb 1.84 kg	100	400 Hours	6.70" x 7.00" x 6.00" 170 mm x 178 mm x 152 mm	12V DC	8.33A
VX-6512	4000674	1,800 lm	4.05 lb 1.84 kg	100	400 Hours	6.70" x 7.00" x 6.00" 170 mm x 178 mm x 152 mm	12V DC	8.33A
VX-5710	4000575	1,800 lm	4.85 lb 2.20 kg	100	400 Hours	7.00" x 5.50" x 4.75" 178 mm x 140 mm x 121 mm	12V DC	8.33A
VX-5711	4000599	1,800 lm	4.85 lb 2.20 kg	100	400 Hours	7.00" x 5.50" x 4.75" 178 mm x 140 mm x 121 mm	12V DC	8.33A
VX-5712	4000612	1,800 lm	4.85 lb 2.20 kg	100	400 Hours	7.00" x 5.50" x 4.75" 178 mm x 140 mm x 121 mm	12V DC	8.33A
VX-4510	4000551	1,800 lm	5.13 lb 1.45 kg	100	400 Hours	5.13" x 5.63" x 4.25" 130 mm x 143 mm x 108 mm	12V DC	8.33A
VX-4511	4000735	1,800 lm	5.13 lb 1.45 kg	100	400 Hours	5.13" x 5.63" x 4.25" 130 mm x 143 mm x 108 mm	12V DC	8.33A
VX-4512	4000568	1,800 lm	5.13 lb 1.45 kg	100	400 Hours	5.13" x 5.63" x 4.25" 130 mm x 143 mm x 108 mm	12V DC	8.33A
VX-6504	4002975	1,800 lm	6.25 lb 2.83 kg	100	400 Hours	6.70" x 7.00" x 6.00" 170 mm x 178 mm x 152 mm	12V DC	8.33A

### HALOGEN FOG LIGHTS

ITEM #	PART #	BEAM	WEIGHT	WATTAGE	BULB LIFESPAN	DIMENSIONS	INPUT VOLTAGE	AMP DRAW
VX-L3	4000544	Superwhite	2.40 lb 1.09 kg	55	250 Hours	4.00" x 4.00" x 2.37" 104 mm x 102 mm x 61 mm	12V DC	4.58A
VX-5	4000148	Superwhite	0.90 lb 0.41 kg	55	250 Hours	3.00" x 2.50" x 2.70" 76 mm x 64 mm x 69 mm	12V DC	4.58A
VX-5B	4000292	Superwhite	0.90 lb 0.41 kg	55	250 Hours	3.00" x 2.50" x 2.70" 76 mm x 64 mm x 69 mm	12V DC	4.58A
VX-8	4000179	Superwhite	1.30 lb 0.59 kg	55	250 Hours	4.10" x 1.80" x 3.40" 104 mm x 46 mm x 86 mm	12V DC	4.58A
VX-119	4000186	Superwhite	2.20 lb 1.00 kg	55	250 Hours	6.00" x 2.40" x 2.80" 152 mm x 61 mm x 71 mm	12V DC	4.58A



### HALOGEN BUMPER LIGHTS

ITEM #	PART #	RAW LUMENS	WEIGHT	WATTAGE	BULB LIFESPAN	DIMENSIONS	INPUT VOLTAGE	AMP DRAW
VX-8010C	4000445	1,800 lm	3.10 lb 1.41 kg	100	250 Hours	8.70" x 9.00" x 5.25" 221 mm x 229 mm x 133 mm	12V DC	8.33A
VX-6010	4000414	1,800 lm	1.50 lb 0.68 kg	100	250 Hours	8.70" x 9.00" x 5.25" 221 mm x 229 mm x 133 mm	12V DC	8.33A
VX-6010C	4000421	1,800 lm	1.50 lb 0.68 kg	100	250 Hours	6.70" x 7.00" x 6.00" 170 mm x 178 mm x 152 mm	12V DC	8.33A
VX-T9000B	4000537	1,800 lm	1.50 lb 0.68 kg	100	250 Hours	6.70" x 7.00" x 6.00" 170 mm x 178 mm x 152 mm	12V DC	8.33A

### HALOGEN WORK LIGHTS

ITEM #	PART #	RAW LUMENS	WEIGHT	WATTAGE	BULB LIFESPAN	DIMENSIONS	INPUT VOLTAGE	AMP DRAW
VX-5510	4000506	1,800 lm	3.10 lb 1.41 kg	100	250 Hours	5.50" x 6.56" x 5.25" 140 mm x 167 mm x 133 mm	12V DC	8.33A
VX-5511	4003859	1,800 lm	1.50 lb 0.68 kg	100	250 Hours	5.50" x 6.56" x 5.25" 140 mm x 167 mm x 133 mm	12V DC	8.33A
VX-5512	4004580	1,800 lm	1.50 lb 0.68 kg	100	250 Hours	5.50" x 6.56" x 5.25" 140 mm x 167 mm x 133 mm	12V DC	8.33A
VX-4611	4003842	1,800 lm	1.55 lb 0.70 kg	100	250 Hours	6.38" x 6.69" x 5.50" 162 mm x 170 mm x 140 mm	12V DC	8.33A
VX-4410	4004009	1,800 lm	1.55 lb 0.70 kg	100	250 Hours	6.38" x 6.69" x 5.50" 162 mm x 170 mm x 140 mm	12V DC	8.33A
VX-4401	4003828	1,800 lm	1.55 lb 0.70 kg	100	250 Hours	6.38" x 6.69" x 5.50" 162 mm x 170 mm x 140 mm	12V DC	8.33A
VX-4411	4003835	1,800 lm	1.55 lb 0.70 kg	100	250 Hours	6.38" x 6.69" x 5.50" 162 mm x 170 mm x 140 mm	12V DC	8.33A
VX-4412	4004573	1,800 lm	1.55 lb 0.70 kg	100	250 Hours	6.38" x 6.69" x 5.50" 162 mm x 170 mm x 140 mm	12V DC	8.33A



## HALOGEN HEADLIGHT BULBS


Over time, headlight begin to dim long before they actually burn out. Vision X provides three lines of headlight replacement bulbs to best suit your needs. Our bulbs are superwhite, not the standard yellow color that you see on majority of vehicles.

### DIRECT REPLACEMENT

Increase brightness by up to 50% with the Vision X headlight bulbs. Vision X headlight bulbs provide a superwhite, more natural light for increased visibility and safety. With three lines to chose from, we offer the perfect mix of cost and performance for any driver.



## D SERIES HALOGEN BULBS

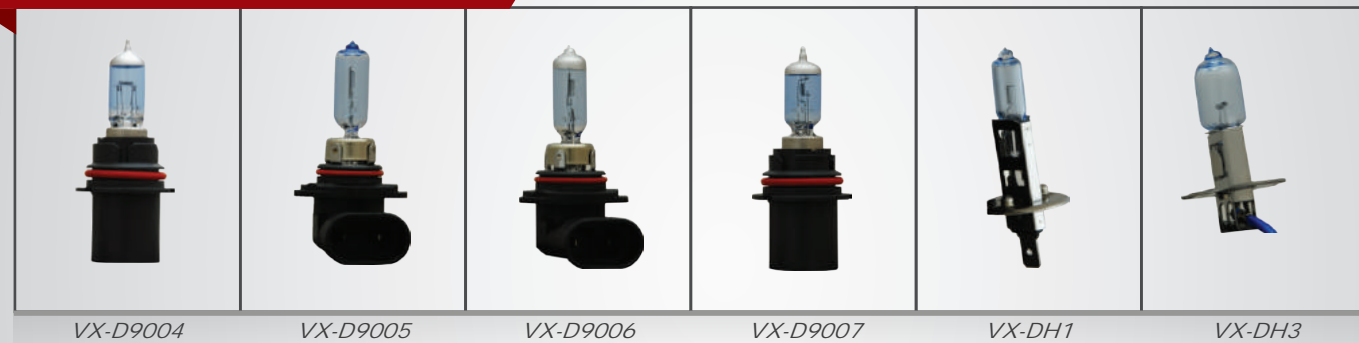

## HALOGEN BULBS IN ACTION



## HIGH WATT SERIES



## LOW WATT SERIES



## D SERIES

ITEM #	PART #	REPLACES	WATTS	FILAMENT
VX-D9004	4001527	9004	65/45	DUAL
VX-D9005	4001534	9005	65	SINGLE
VX-D9006	4001558	9006	55	SINGLE
VX-D9007	4001572	9007	65/55	DUAL
VX-DH1	4001589	H1	55	SINGLE
VX-DH3	4001596	H3	66	SINGLE
VX-DH4	4001602	H4	60/55	DUAL
VX-DH7	4001619	H7	55	SINGLE
VX-DH10	4001633	H10	42	SINGLE
VX-DH11	4001657	H11	55	SINGLE
VX-DH13	4001664	H13	55/60	DUAL

## LOW WATT SUPERWHITE

ITEM #	PART #	REPLACES	WATTS	FILAMENT
VX-L9004	4001053	9004	55/65	DUAL
VX-L9005	4001060	9005	65	SINGLE
VX-L9005XS	4001091	9005XS	65	SINGLE
VX-L9006	4001077	9006	55	SINGLE
VX-L9006XS	4001107	9006XS	55	SINGLE
VX-L9007	4001084	9007	55/65	DUAL
VX-L880	4001206	880	27	SINGLE
VX-L881	4001213	881	27	SINGLE
VX-L893	4001220	893	37.5	SINGLE
VX-LH1	4001015	H1	55	SINGLE
VX-LH3	4001022	H3	55	SINGLE
VX-LH4	4001039	H4	55/65	DUAL
VX-LH7	4001046	H7	55	SINGLE
VX-LH8	4001367	H8	55	SINGLE
VX-LH9	4001343	H9	55	SINGLE
VX-LH10	4001237	H10	42	SINGLE
VX-LH11	4001190	H11	55	SINGLE
VX-LH13	4001244	H13	55/65	DUAL

## HIGH WATT SUPERWHITE

ITEM #	PART #	REPLACES	WATTS	FILAMENT
VX-H9004	4001152	9004	80/100	DUAL
VX-H9005	4001169	9005	100	SINGLE
VX-H9006	4001176	9006	80	SINGLE
VX-H9007	4001183	9007	80/100	DUAL
VX-H880	4001398	880	50	SINGLE
VX-H881	4001404	881	50	SINGLE
VX-H893	4001411	893	50	SINGLE



# ACCESSORIES

## VISION X LIGHTING ACCESSORIES

From snap-on polycarbonate covers to sure-grip handles for the Optimus series, Vision X provides a full line-up of accessories that can bring more applications to each light. In addition to optional attachments, Vision X also offers Accenting Lighting options such as rock lights, pro pod lighting, and strip lighting. With so many options, there's something for every driver.

### ACCENT LIGHTING OPTIONS



**TANTRUM LED KITS**  
LED lighting for undercarriage or accent lighting for strobe or rock lighting applications. Available in multiple colors along with a cigarette lighter adapter.



**FLEX-MOTION LED KITS**  
Undercarriage lighting in a variety of colors with strobe functionality and remote control for interior or exterior usage. Cigarette lighter adapter and remote included.



**LED PRO PODS**  
Rugged LED Pro Pod with an upgraded durable housing for professional grade applications and increased light output. Now available in kits with four lights.

### POLYCARBONATE COVERS



**CANNON COVERS**  
Turn your LED Light Cannon into 20 different lights with the addition of snap-on covers. Each color is ideal for different conditions, and can also change your beam pattern to produce the right beam for the right occasion.




**OPTIMUS ROUND COVERS**  
Vision X offers polycarbonate covers for the Optimus Round series. Each cover has the capability of changing the lights beam pattern as well as color, providing the right option for the right condition.



**LED LIGHT BAR COVERS**  
Available on all lengths of Low Profile Xtreme and Xmitter light bars, Vision X has snap-on amber and black covers. Amber polycarbonate covers are ideal in heavy dust conditions.

### BATTERIES & MOUNTS



**RECHARGEABLE POWER SOURCE**  
Turn Vision X Lighting portable. With a variety of options, battery packs make lighting on the go a possibility for any 12V Vision X product.



**LICENSE PLATE MOUNT**  
The license plate mount is the simplest way to add a light bar to your truck or car without having to drill any holes. Simply install behind your plates and attach a light bar.



**TOW HITCH MOUNT**  
Ideal for use with Solo Prime Pods, the tow hitch adapter brings light to important areas on your vehicle. Universal 2 bolt mount for Class 1 or 2 hitches.



## LED UNDERCARRIAGE LIGHTING

Well known as the go-to rock and undercarriage lighting, the Vision X Tantrum LED Pod Kits are unbeatable. Perfect for rock lighting applications, accent lighting, strobe lighting or undercarriage lighting, the Tantrum Kit gives you the option to hard wire, or power via a cigarette adapter for head-turning lighting on the go.

### TANTRUM LED KIT

#### RUGGED LED STROBE OR ROCK LIGHT KIT

Wireless Remote | Multi-Speed Scanning and Flash Control | Cigarette Lighter Adapter Included



ITEM #: HIL-STB Shown  
PART #: 4005372

COLORS	KIT INCLUDES	MEASUREMENTS
Amber, Blue Green, Multi Red, White	8 Pods, Wireless Remote Master Controller, Microphone Mounting Hardware	1.25" Diameter 31.75mm Diameter

ITEM #	PART #	COLOR	ITEM #	PART #	COLOR
HIL-STA	4005662	Amber	HIL-STM	4005679	RGB
HIL-STB	4005372	Blue	HIL-STR	4005389	Red
HIL-STG	4005396	Green	HIL-STW	4005419	White

### FLEX-MOTION LED KIT

#### UNDER CARRIAGE LED ACCENT LIGHTING

Wireless Remote | Reflectors for Spotless Illumination | No Glass Components



ITEM #: HIL-UBLUE Shown  
PART #: 4005020

COLORS	KIT INCLUDES	MEASUREMENTS
Blue, Multi Red, White	2 x 3' Bars & 2 x 4' Bars Master Controller, Remote Cigarette Lighter Adapter	2.00' - 4.00' 609.6mm - 1,219.2mm

ITEM #	PART #	COLOR	ITEM #	PART #	COLOR
HIL-UBLUE	4005020	Blue	HIL-URED	4005037	Red
HIL-UMULTI	4005013	RGB	HIL-UWHITE	4005624	White

### TANTRUM LIGHTING IN ACTION



### MINI MOTION LED KIT

#### ACCENT TUBE LIGHTING

No Bulbs or Lens | Multi-Speed Scanning and Flash Control | Cigarette Lighter Adapter Included



ITEM #: HIL-M6G Shown  
PART #: 4005136

COLORS	LED TYPE	MEASUREMENTS
Blue, Green, Multi, Red	5mm	6" - 12"
HOUSING Acrylic	WARRANTY Standard	152mm - 305mm

ITEM #	PART #	COLOR	ITEM #	PART #	COLOR
HIL-M6B	4005112	Blue	HIL-M12B	4005068	Blue
HIL-M6G	4005136	Green	HIL-M12G	4005082	Green
HIL-M6M	4005150	RBG	HIL-M12M	4005105	RBG
HIL-M6R	4005129	Red	HIL-M12R	4005075	Red

### FLEX-MOTION BAR KIT

#### ACCENT TUBE LIGHTING

No Bulbs or Lens | Multi-Speed Scanning and Flash Control | Cigarette Lighter Adapter Included



ITEM #: HIL-FM12M Shown  
PART #: 4005617

COLORS	LED TYPE	MEASUREMENTS
Blue, Green, Multi, Red, White	5mm	6" - 12"
HOUSING Acrylic	WARRANTY Standard	152mm - 305mm

ITEM #	PART #	COLOR	ITEM #	PART #	COLOR
HIL-FM6B	4005525	Blue	HIL-FM12B	4005570	Blue
HIL-FM6G	4005549	Green	HIL-FM12G	4005594	Green
HIL-FM6M	4005563	RBG	HIL-FM12M	4005617	RBG
HIL-FM6R	4005532	Red	HIL-FM12R	4005587	Red
HIL-FM6W	4005921	White	HIL-FM12W	4005945	White

### TRUCK BED LED LIGHT

#### LED ACCENT LIGHTING FOR TRUCK BEDS

Multiple Applications | Easily Bendable Light Strip | No Glass Components



ITEM #: HIL-TRUCK3W Shown  
PART #: 4008892

COLOR	KIT INCLUDES	MEASUREMENTS
White	Mounting Tabs	36" - 48"
HOUSING Acrylic	8 Zip Ties, 2 Power Taps 1 Power Connect, 1 LED	914mm - 1,219mm

ITEM #	PART #	LENGTH	COLOR
HIL-TRUCK3W	4008885	3'/914mm	White
HIL-TRUCK4W	4008892	4'/1219mm	White

### BUGGY WHIP LIGHT

#### UPGRADED DURABLE WHIP LIGHT REPLACEMENT

BA15S Mounting | Built to Withstand Harsh Environments | 30,000 Hour Lifespan



ITEM #: CXA-BA15SA Shown  
PART #: 9130279

COLORS	WATTAGE	MEASUREMENTS
Amber, Blue, Green, Red, White	1.5W	3.49" x 1.00" x 1.00"
RAW LUMENS 150 lm (ea)	WARRANTY Extended	89mm x 25mm x 25mm

ITEM #	PART #	COLOR	ITEM #	PART #	COLOR
CXA-BA15SA	9130279	Amber	CXA-BA15SR	9130545	Red
CXA-BA15SB	9130453	Blue	CXA-BA15SW	9130637	White
CXA-BA15SG	9130811	Green			



## LED POD ACCENT LIGHTING

Vision X offers a diverse line of accent pod lighting. Easily attract attention to your vehicle with the wide variety of colors. Each durable pod weighs in at one pound and features a strong black housing. Ideal for professional grade applications and weekend enthusiasts alike.

### SOLID-STATE KITS

Vision X Pro Pods are available in kits, featuring four universal pods each attached to a 10' cord. Pro Pods feature solid-state electronics, giving you a durable long lasting product.



### REINFORCED MOUNTING

Vision X Pro Pod LEDs each feature four equally distant mounting holes, allowing the light to be securely fastened to a large variety of surfaces letting you put the light where it needs to be.

## UNIVERSAL PRO PODS

### LED LIGHTING FOR ANY APPLICATION

Impact Resistant Lens | Weatherproof Housing for All Conditions | 10' Cord



ITEM #: XIL-PDW Shown  
PART #: 9136127

COLORS			HOUSING			MEASUREMENTS		
Amber, Blue, Green, Red, White			Aluminum			1.76" Diameter		
<b>RAW LUMENS</b> 140 lm (ea)			WARRANTY Extended			44.7mm Diameter		
ITEM #	PART #	COLOR	ITEM #	PART #	COLOR	ITEM #	PART #	COLOR
XIL-PDA	9136219	Amber	XIL-PDR	9136486	Red	XIL-PDW	9136127	White
XIL-PDB	9136301	Blue						
XIL-PDG	9136394	Green						

## UNIVERSAL PODS

### LED LIGHTING FOR ANY APPLICATION

Impact Resistant Acrylic Lens | Weatherproof Housing for All Conditions | 10' Cord



ITEM #: HIL-TRUCK3W Shown  
PART #: 4004054

COLORS			HOUSING			MEASUREMENTS		
Amber, Blue, Green, Red, White			Aluminum			1.25" Diameter		
			WARRANTY Standard			31.75mm Diameter		
ITEM #	PART #	COLOR	ITEM #	PART #	COLOR	ITEM #	PART #	COLOR
HIL-DA	4004078	Amber	HIL-DR	4004061	Red	HIL-DW	4004054	White
HIL-DB	4004139	Blue						
HIL-DG	4004146	Green						

## ACCENT LIGHTING



## LED BILLET MOUNT PODS

Vision X Single and Triple Pods come with the option of flush mounting for flat surfaces, or billet mounts for clamping directly to tubes. Great for roll cages, dome lights or indicator lights, the Vision X Billet Pods are the perfect addition for anything that needs extra auxiliary or accent lighting.

### SINGLE POD BILLETS



ITEM #: HIL-DLFW Shown  
PART #: 4005006

ACCENT BILLET MOUNT POD LIGHTING					
Flush or Tube Mounting   Use for Dome Light or Indicator Lights   Great for Roll Cages					
COLORS		LED TYPE		MEASUREMENTS	
Amber, Blue, Green, Red, White		5mm		1.25" Diameter	
MOUNT TYPES		WARRANTY		31.75mm Diameter	
Tube, Billet		Standard			
ITEM #	PART #	COLOR	ITEM #	PART #	COLOR
HIL-DLA	4004849	Amber	HIL-DLFA	4004955	Amber
HIL-DLB	4004856	Blue	HIL-DLFB	4004962	Blue
HIL-DLG	4004863	Green	HIL-DLFG	4004979	Green
HIL-DLR	4004887	Red	HIL-DLFR	4004993	Red
HIL-DLW	4004839	White	HIL-DLFW	4005006	White

### TUBE MOUNT

### FLUSH MOUNT

### TRIPLE POD BILLETS



ITEM #: HIL-DLFW3 Shown  
PART #: 4004948

ACCENT BILLET MOUNT POD LIGHTING					
Flush or Tube Mounting   Use for Dome Light or Indicator Lights   Great for Roll Cages					
COLORS		LED TYPE		MEASUREMENTS	
Amber, Blue, Green, Red, White		5mm		1.25" Diameter	
MOUNT TYPES		WARRANTY		31.75mm Diameter	
Tube, Billet		Standard			
ITEM #	PART #	COLOR	ITEM #	PART #	COLOR
HIL-DL3A	4004788	Amber	HIL-DLF3A	4004894	Amber
HIL-DL3B	4004795	Blue	HIL-DLF3B	4004900	Blue
HIL-DL3G	4004801	Green	HIL-DLF3G	4004917	Green
HIL-DL3R	4004825	Red	HIL-DLF3R	4004931	Red
HIL-DL3W	4004832	White	HIL-DLF3W	4004948	White

### TUBE MOUNT

### FLUSH MOUNT

## LED BILLET MOUNTS





## LED WORK LIGHTS & FLASHLIGHTS

Featuring rubberized sure grip handles, Vision X Flashlights are the perfect addition to anyone's tool belt. Durable, rugged, bright and long lasting, the Vision X Flashlights will constantly perform job after job. With special features such as an integrated hook, you'll be able to see more and work faster.

### LED WORK LIGHT



XIL-WL

- 120° LED Beam for Illuminating Wide Areas
- Rubberized Sure Grip - No Roll Handle
- Shock Resistant - Drop Proof

ITEM #	PART #	COLOR
XIL-WL	4006553	BLACK

### LED WORK LIGHT



HIL-WL

- Cigarette Lighter & Wall Charger Included
- Acrylic Body & Rubberized Handle
- Integrated Hook For Hanging

ITEM #	PART #	COLOR
HIL-WL	4005822	BLACK

### TWO LED FLASHLIGHTS SET


Durable Aluminum Housing | Simple On-Off Operation | Cool To The Touch

ITEM #	PART #	COLOR
HIL-FLTB	4005815	Black
HIL-FLTC	4005808	Chrome

### LED FLASHLIGHT



### LED AUXILIARY BULBS



HIL-194  
194 Bulb  
Replacement



HIL-D4/6  
Dome Light  
Replacement



HIL-1156/7  
1156/7 Bulb  
Replacement



HIL-3056/7  
3056/7 Bulb  
Replacement



HIL-7440/3  
7440/3 Bulb  
Replacement

LED AUTOMOTIVE BULBS  
Direct Replament | Extremely Low Power Consumption | Easy Installation

ITEM #	PART #	COLOR
HIL-194A	4005358	Amber
HIL-194R	4005341	Red
HIL-194W	4005365	White
HIL-D4B	4005716	Amber
HIL-D4R	4005723	Red
HIL-D4W	4005709	White
HIL-D6B	4005761	Blue
HIL-D6R	4005778	Red
HIL-D6W	4005754	White
HIL-1156A	4005174	Amber
HIL-1156R	4005167	Red
HIL-1156W	4005181	White
HIL-1157A	4005204	Blue
HIL-1157R	4005198	Red
HIL-1157W	4005211	White
HIL-3056A	4005235	Amber
HIL-3056R	4005228	Red
HIL-3056W	4005242	White
HIL-3057A	4005266	Blue
HIL-3057R	4005259	Red
HIL-3057W	4005273	White
HIL-7440A	4005297	Amber
HIL-7440R	4005280	Red
HIL-7440W	4005303	White
HIL-7443A	4005327	Blue
HIL-7443R	4005310	Red
HIL-7443W	4005334	White



## TJ FLORES

CHAMPION TROPHY TRUCK DRIVER





## POLYCARBONATE LIGHT COVERS


Vision X polycarbonate translucent covers not only protect your light, but they also improving vision in dust, fog or snow. Another benefit of adding a cover is the capability to change your beam pattern. Each cover is finished with a glow in the dark printed "X" for a unique look at night when the lights are off.




### COLORED COVERS



ITEM #: PCV-8500YWF & PCV-8500B Shown  
PART #: 9890142 / 4003583

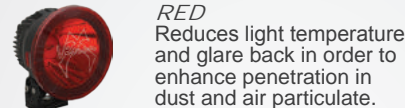

**RED**  
Reduces light temperature and glare back in order to enhance penetration in dust and air particulate.

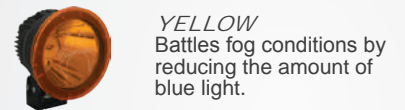

**YELLOW**  
Battles fog conditions by reducing the amount of blue light.



**BLUE**  
Increases lighting distance when used in snow conditions by reflecting the blue light off the snow.



**CLEAR**  
Unbreakable, dust resistant protection to protect the light from debris and particulate.

### BEAM COVERS



**EURO**  
Flat, horizontal beam designed to light peripherals while maintaining distance.



**WIDE FLOOD**  
Low-speed, horizontal flood beam gives wide blanket of light.



**SPOT**  
Protection from debris and particulate. Maintains original beam pattern.



**FLOOD**  
Low-speed, vertical trail flood beam lights the road to the tree tops.




**ELLIPTICAL**  
Maintains distance and spread while limiting periphery lighting for driving in traffic.



**BLACK OUT**  
Street legal, black out protection.



### CANNON COVERS IN ACTION

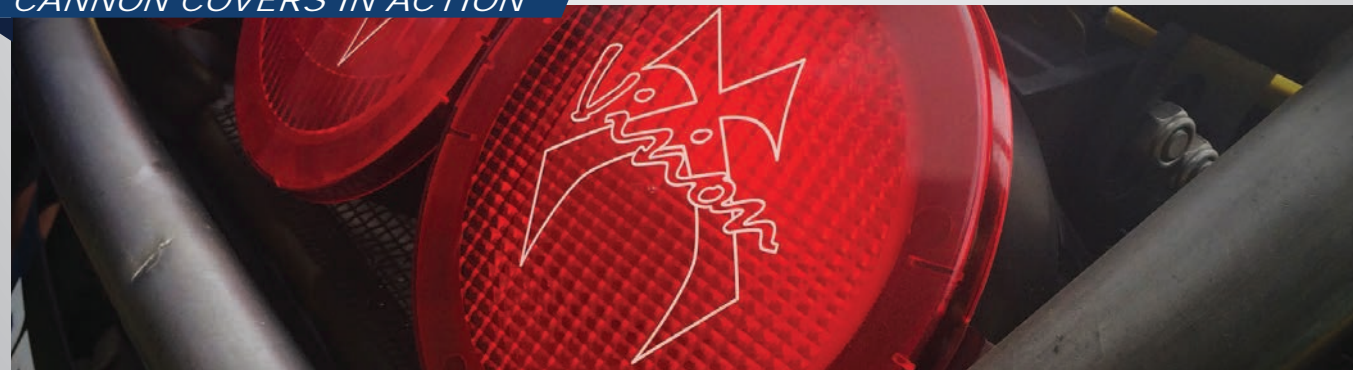

### FITS OPTIMUS ROUND COVERS

ITEM #	PART #	FITS	COLOR	BEAM
PCV-OPR1	9889528	XIL-OPR1*	Clear	Spot
PCV-OPR1B	9889559	XIL-OPR1*	Blue	Spot
PCV-OPR1Y	9889740	XIL-OPR1*	Yellow	Spot
PCV-OPR1R	9889719	XIL-OPR1*	Red	Spot
PCV-OPR1EU	9889535	XIL-OPR110	Clear	Euro
PCV-OPR1BEU	9889566	XIL-OPR110	Blue	Euro
PCV-OPR1YEU	9889757	XIL-OPR110	Yellow	Euro
PCV-OPR1REU	9889726	XIL-OPR110	Red	Euro
PCV-OPR1FL	9889542	XIL-OPR110	Clear	Flood
PCV-OPR1BFL	9889573	XIL-OPR110	Blue	Flood
PCV-OPR1YFL	9889764	XIL-OPR110	Yellow	Flood
PCV-OPR1RFL	9889733	XIL-OPR110	Red	Flood
PCV-OPR1WF	9890944	XIL-OPR110	Clear	Wide Flood
PCV-OPR1BWF	9890906	XIL-OPR110	Blue	Wide Flood
PCV-OPR1YWF	9890968	XIL-OPR110	Yellow	Wide Flood
PCV-OPR1RWF	9890937	XIL-OPR110	Red	Wide Flood
PCV-OPR1EL	9890913	XIL-OPR110	Clear	Elliptical
PCV-OPR1BEL	9890890	XIL-OPR110	Blue	Elliptical
PCV-OPR1YEL	9890951	XIL-OPR110	Yellow	Elliptical
PCV-OPR1REL	9890920	XIL-OPR110	Red	Elliptical
PCV-OPR1BL	9889580	XIL-OPR1*	Black	Protective

\* Compatible with all beam patterns



### 4.5" CANNON

ITEM #	PART #	COLOR	BEAM
PCV-CP1	9151151	Clear	Spot
PCV-CP1B	9157184	Blue	Spot
PCV-CP1Y	9157726	Yellow	Spot
PCV-CP1R	9162492	Red	Spot
PCV-CP1EU	9151243	Clear	Euro
PCV-CP1BEU	9157276	Blue	Euro
PCV-CP1YEU	9157900	Yellow	Euro
PCV-CP1REU	9157542	Red	Euro
PCV-CP1FL	9151335	Clear	Flood
PCV-CP1BFL	9157368	Blue	Flood
PCV-CP1YFL	9157900	Yellow	Flood
PCV-CP1RFL	9157634	Red	Flood
PCV-CP1WF	9890562	Clear	Wide Flood
PCV-CP1BWF	9890654	Blue	Wide Flood
PCV-CP1YWF	9890586	Yellow	Wide Flood
PCV-CP1RWF	9890883	Red	Wide Flood
PCV-CP1EL	9890661	Clear	Elliptical
PCV-CP1BEL	9890647	Blue	Elliptical
PCV-CP1YEL	9890579	Yellow	Elliptical
PCV-CP1REL	9890678	Red	Elliptical
PCV-CP1BL	9157450	Black	Protective

### 6.7" CANNON

ITEM #	PART #	COLOR	BEAM
PCV-6500	4003248	Clear	Spot*
PCV-6500B	4003569	Blue	Spot*
PCV-6500Y	4002784	Yellow	Spot*
PCV-6500R	4004689	Red	Spot*
PCV-6500EU	9888453	Clear	Euro
PCV-6500BEU	9888460	Blue	Euro
PCV-6500YEU	9888484	Yellow	Euro
PCV-6500REU	9888477	Red	Euro
PCV-6500FL	9888491	Clear	Flood
PCV-6500BFL	9888507	Blue	Flood
PCV-6500YFL	9888521	Yellow	Flood
PCV-6500RFL	9888514	Red	Flood
PCV-6500WF	9888771	Clear	Wide Flood
PCV-6500BWF	9889788	Blue	Wide Flood
PCV-6500YWF	9889801	Yellow	Wide Flood
PCV-6500RWF	9889795	Red	Wide Flood
PCV-6500EL	9890616	Clear	Elliptical
PCV-6500BEL	9890609	Blue	Elliptical
PCV-6500YEL	9890630	Yellow	Elliptical
PCV-6500REL	9890623	Red	Elliptical
PCV-6500BL	9160245	Black	Protective*

\* Also compatible with Transporter and HID-6500

### 8.7" CANNON

ITEM #	PART #	COLOR	BEAM
PCV-8500	4003255	Clear	Spot*
PCV-8500B	4003583	Blue	Spot*
PCV-8500Y	4002791	Yellow	Spot*
PCV-8500R	4003576	Red	Spot*
PCV-8500EU	9890128	Clear	Euro
PCV-8500BEU	9890098	Blue	Euro
PCV-8500YEU	9890470	Yellow	Euro
PCV-8500REU	9890432	Red	Euro
PCV-8500FL	9890165	Clear	Flood
PCV-8500BFL	9890104	Blue	Flood
PCV-8500YFL	9890487	Yellow	Flood
PCV-8500RFL	9890449	Red	Flood
PCV-8500WF	9890463	Clear	Wide Flood
PCV-8500BWF	9890111	Blue	Wide Flood
PCV-8500YWF	9890142	Yellow	Wide Flood
PCV-8500RWF	9890456	Red	Wide Flood
PCV-8500EL	9890081	Clear	Elliptical
PCV-8500BEL	9890869	Blue	Elliptical
PCV-8500YEL	9890159	Yellow	Elliptical
PCV-8500REL	9890425	Red	Elliptical
PCV-8500BL	9890876	Black	Protective*

\* Also compatible with HID-8500

### FITS LOW PROFILE BAR

ITEM #	PART #	FITS	COLOR	BEAM
PCV-LP3BL	9155296	XIL-LPX3*	Black	Protective
PCV-LP6BL	9155388	XIL-LPX6*	Black	Protective
PCV-LP9BL	9135946	XIL-LPX9*	Black	Protective
PCV-LP15BL	9155470	XIL-LPX15*	Black	Protective
PCV-LP18BL	9135762	XIL-LPX18*	Black	Protective
PCV-LP24BL	9155654	XIL-LPX24*	Black	Protective
PCV-LP33BL	9155838	XIL-LPX33*	Black	Protective
PCV-LP36BL	9155920	XIL-LPX36*	Black	Protective
PCV-LP3Y	9165103	XIL-LPX3*	Yellow	Spot
PCV-LP6Y	9165196	XIL-LPX6*	Yellow	Spot
PCV-LP9Y	9136035	XIL-LPX9*	Yellow	Spot
PCV-LP15Y	9164564	XIL-LPX15*	Yellow	Spot
PCV-LP18Y	9135854	XIL-LPX18*	Yellow	Spot
PCV-LP24Y	9164748	XIL-LPX24*	Yellow	Spot
PCV-LP33Y	9164922	XIL-LPX33*	Yellow	Spot
PCV-LP36Y	9165011	XIL-LPX36*	Yellow	Spot

\* Compatible with all beam patterns

### FITS PRIME XTREME BAR

ITEM #	PART #	FITS	COLOR	BEAM
XIL-P6BL	9156019	XIL-PX6*	Black	Protective
XIL-P12BL	9156101	XIL-PX12*	Black	Protective
XIL-P18BL	9156194	XIL-PX18*	Black	Protective
XIL-P30BL	9156378	XIL-PX30*	Black	Protective
XIL-P36BL	9156460	XIL-PX36*	Black	Protective
XIL-P54BL	9156736	XIL-PX54*	Black	Protective
XIL-P72BL	9157009	XIL-PX72*	Black	Protective
XIL-P90BL	9888064	XIL-PX90*	Black	Protective
XIL-P6Y	9166186	XIL-PX6*	Yellow	Spot
XIL-P12Y	9165288	XIL-PX12*	Yellow	Spot
XIL-P18Y	9165370	XIL-PX18*	Yellow	Spot
XIL-P30Y	9165554	XIL-PX30*	Yellow	Spot
XIL-P36Y	9165646	XIL-PX36*	Yellow	Spot
XIL-P54Y	9165912	XIL-PX54*	Yellow	Spot
XIL-P72Y	9166278	XIL-PX72*	Yellow	Spot
XIL-P90Y	9887883	XIL-PX90*	Yellow	Spot

\* Compatible with all beam patterns



## LED MOUNTING SOLUTIONS

Vision X offers a variety of mounts and adapters to help you put lights in more places. Each adapter allows you to add lights to spots that are normally out-of-bounds, and can bring light to clutch areas around your vehicle. For extra mounting options with light bars, pods and more, we've got the right solution for you.



### LICENSE PLATE MOUNT

Holds Any LED Bar Up To 20" | Easily Installs Behind License Plate | Powder Coated

### LICENSE PLATE MOUNT



ITEM #: XIL-LICENSEPLPX910 Shown  
PART #: 4008243

ITEM #	PART #	INCLUDED
XIL-LICENSEP	4000315	Bracket
XIL-LICENSEPLP910	9887777	Bracket, XIL-LP910 LED Bar & Harness
XIL-LICENSEPLPX910	4008243	Bracket, XIL-LPX910 LED Bar & Harness

### TOW HITCH MOUNT

### TOW HITCH MOUNT

Machined 6061 Aluminum | 2 Bolt Mount for Class 1 or 2 Hitches | Use With Solo Pods



ITEM #: XIL-SRECEIVER Shown  
PART #: 4000322  
Lights Not Included

ITEM #	PART #	COLOR
XIL-SRECEIVER	4000322	Black

### BACKUP LIGHT RECEIVER ADAPTER

Attaches to tow hitch for no-drill installation with Solo Pods for a combined 1800 lumens.

### HITCH MOUNT IN ACTION



### BILLET TUBE MOUNTS



Various Billet Mounts Shown

### 360° TUBE FRAME MOUNT SYSTEM

Includes All Hardware | Machined Billet 6061 Aluminum | Sold in Pairs

ITEM #	PART #	DIAMETER	COLOR
XIL-B075	4006584	0.75" Tubing	BLACK
XIL-B100	4006591	1.0" Tubing	BLACK
XIL-B125	4006577	1.25" Tubing	BLACK
XIL-B150	4006522	1.5" Tubing	BLACK
XIL-B075	4006560	1 11/16" Tubing	BLACK
XIL-B075	4006539	1.75" Tubing	BLACK
XIL-B075	4006546	2.0" Tubing	BLACK

### SOLO FLUSH MOUNT



ITEM #: XIL-SFLUSHV2 Shown  
PART #: 9887777

### 4" FLUSH MOUNT FOR SOLSTICE SOLO POD

Install Flush Into A 2.75" Hole | Ideal for Ceiling Mounts | Black Anodized Finish

ITEM #	PART #	DIAMETER	COLOR
XIL-SFLUSH	4000315	3.68"/93.47 mm	BLACK
XIL-SFLUSHV2	9887777	3.68"/93.47 mm	BLACK
XIL-SFLUSH.4	4008243	4.00"/101.6 mm	BLACK

### MAGNETIC BASE



ITEM #: P-UMB Shown  
PART #: 4006225  
Lights Not Included

### UNIVERSAL TEMPORARY LIGHT MOUNT

Install Flush Into A 2.75" Hole | Ideal for Ceiling Mounts | Holds up to 2.5 lb

ITEM #	PART #	PULL FORCE	INCLUDED
P-UMB.95	4009127	95 lb/43.09 kg	Magnet & Sleeve
P-UMB.65	4009110	65 lb/29.48 kg	Magnet & Sleeve
P-UMB	4006225	75 lb/34.02 kg	Magnet & Rubber Boot

### END CAP MOUNTS

### END CAP MOUNTS FOR LIGHT BARS

M10x1.5P 20mm Thread | Sold In Pairs | Fits Xmitter Family



ITEM #: XIL-PECM Shown  
PART #: 9889191

ITEM #	PART #	FITS
XIL-LPECM	9888811	Xmitter Low Profile
XIL-PECM	9889191	Xmitter Prime
XIL-ECM	9888781	Xmitte





### PRIME DIMMER

*PUSH BUTTON OR DIAL DIMMER FOR PRIME LIGHTS*  
Push Button Dimmer | Designed for Prime Drive Lights | Dial Knob Dimmer




ITEM #: XIL-PDIMMER Shown  
PART #: 4009257

ITEM #	PART #	CONTROL	DIMMER RANGE	CORD LENGTH
XIL-PDIMMER	4009257	Dial Knob	50%-100%	5.50"/139.7mm
XIL-PDIMMERB	4009264	Button Knob	50% & 100%	5.50"/139.7mm

### BATTERY PACKS

*RECHARGEABLE POWER SOURCE FOR VISION X LIGHTS*  
Long Life Battery | Compatible with 12V Lights | Compact & Lightweight



ITEM #: XPC-B30 Shown  
PART #: 9130095

ITEM #	PART #	MAX LOAD	CAPACITY	SOLO RUN TIME	WEIGHT
XPC-B22	4009080	5A	2.2Ah	3 Hours	1.15 lb
XPC-B30	9130095	5A	3.1Ah	5 Hours	1.15 lb
XPC-B65	4009097	8A	6.5Ah	6 Hours	1.00 lb
XPC-B86	4003392	10A	8.6Ah	13 Hours	2.00 lb

### 12V SMART CHARGER

*BATTERY MAINTENANCE PULSE CHARGER*

Push Button Dimmer | Can Charge Battery Via Cigarette Lighter | Spark & Polarity Protection



ITEM #: XPC-B30 Shown  
PART #: 9130095

ITEM #	PART #	INPUT VOLT	OUTPUT VOLT	WEIGHT
XPC-C120	4009073	110V AC	12V DC	1.00 lb
XPC-120.220V	9130187	220V AC	12V DC	1.00 lb

### UNIVERSAL HARNESS

*UNIVERSAL WIRING HARNESS*

30A 12V Relay Included | Heavy Duty Toggle Switch | Weatherproof Deutsch Connectors



ITEM #: P-HARNESS.2XIL Shown  
PART #: 4006201

ITEM #	PART #	CONNECTORS	APPLICATION	LENGTH
P-HARNESS.2XIL	4006201	Terminals	2 Light Harness	10'/3.05 m
P-HARNESS.XIL	4006195	Terminals	1 Light Harness	10'/3.05 m
P-HARNESS.HO	9888354	Terminals	High Amp 1 Light Harness	10'/3.05 m
P-DY2M1F	4006263	Deutsch DT Series	Y Adapter	10'/3.05 m
P-UCA	4006218	Cigarette Adapter	Cigarette Power Cord	10'/3.05 m

### OPTIMUS HANDLE

*OPTIMUS HANDLE FOR PORTABLE APPLICATIONS*

Sure-Grip form | Convenient Handle for use with Optimus Series | Portable Application



ITEM #: XIL-OP2HANDLE Shown  
PART #: 9887098

ITEM #	PART #	FITS	COLOR
XIL-OP1HANDLE	9144498	Optimus Single & Optimus Round	Black
XIL-OP2HANDLE	9887098	Optimus Dual	Black

### XIL-UM HANDLE

*UTILITY MARKET LIGHT ACCESSORY FOR ADDITIONAL APPLICATIONS*  
Sure-Grip form | Convenient Handle for use with UM Series | Portable Application



ITEM #: P-UM40HANDLE Shown  
PART #: 9144498

ITEM #	PART #	FITS	COLOR
P-UM40HANDLE	9144498	Optimus Single & Optimus Round	Black
P-UMHANDLE	9887098	Optimus Dual	Black

### SOLO MOUNTS

*SOLO MOUNTS*

Combine with Vision X Battery Packs | Portable On-The-Go Lighting | Extends Applications



Various Solo Mounts Shown

ITEM #	PART #	USE	COLOR
XIL-SHANDLE	4002685	Pistol Grip Handle	Black
XIL-SHELMET	4002753	Helmets	Black
XIL-SHANDLEBAR	4002746	Bicycle Handlebars	Black
XIL-SCLAMP	9117942	Tube Mounting 0.75"-1.25"	Black
XIL-SCOMBO	4002739	Helmets + Handlebars	Black

### MINI SOLO MOUNTS

*MINI SOLO MOUNTS*

Combine with Vision X Battery Packs | Portable On-The-Go Lighting | Extends Applications



Various Mini Solo Mounts Shown

ITEM #	PART #	USE	COLOR
XIL-MXHANDLEBAR	9145570	Bicycle Handlebars, etc.	Black
XIL-MXHELMET	9145488	Helmets	Black
XIL-MXCOMBO	9145396	Helmets + Handlebars	Black
XIL-MXCLAMP	9119205	Tube Mounting 0.75"-1.25"	Black